PRODUCT BLUEPRINT · ANALYSIS ONLY, NOTHING BUILT

Recording a property, and keeping it right

Twenty-three screens a clerk uses to make, find, change, move and retire a property or a unit — walked in the running product, redrawn, and layered so the work can be taken from it without reading the argument.

READ AT	PRODUCT NOW	PROPERTIES · UNITS	SCREENS REDRAWN	SPECIFICATIONS
2.233.0 · bd6a2997	2.233.0 · bd6a2997	673 · 1,109	23	55

ABSENCES RESOLVED
81

STALENESS — READ THIS BEFORE TRUSTING AN “AS BUILT” SENTENCE

Every statement about what the code does today was true at 2.233.0 · bd6a2997, on 8 September 2026, and must be re-verified before it is acted on. The product and this reading are on the same version and the same commit, so nothing here is known to have moved — but that is a statement about one branch on one day.

What I could not check, said plainly: this repository has **no default branch.** `origin/HEAD` is not set and there are **47 remote branches.** So I cannot tell you whether some other branch has already moved past 2.233.0 · bd6a2997; I can only tell you that the branch this was read from has not. I did not quietly refresh anything to cover that.

One statement I already know to be false, corrected rather than deleted: an earlier draft of the walkthrough said the *Unit ID* column on the property's Units tab was a database id breaking the no-ids rule. It is `unit_no`, a printed reference from the tenant's own series. The correction is printed on P5 and U1 where the claim was made.

What this warning does NOT apply to. Rulings do not go stale. Section 06 and Appendix D record decisions, and a decision stays decided until another decision supersedes it — not until the code changes. The same holds for the out-of-scope column of the absence register: those are rulings, not observations.

DESCRIPTION — GREY RAIL

A statement about what the code does today, including an honest statement that something is missing. **It commits nobody to anything.**

COMMITMENT — ACCENT CARD

A change specification: a named piece of work, what it waits on, the screens it changes, and what a person would be able to do and see once it is done.

If a thing is not in a commitment card, nobody has undertaken to build it.

01 How to read this

This is the walkthrough of Premises & Units with three layers added: a commitment card for every piece of work, a register of every absence the document states, and an appendix dense enough to build from without reading the argument.

Nothing was removed. All twenty-three screens, their amber blocks, their wireframes and their detail tables are here exactly as they were. What is new is the scaffolding around them.

Inside a screen, the three blocks mean what they always did:

An **amber block** is what a clerk hits today. I met every one of them myself, doing the job. A **bordered grey frame** is the screen as it should be — layout, wording and controls, drawn to the same rules the product already binds itself to. A **teal block** underneath says what moved and why.

A screen with no amber block above it needed no change and is shown because the journey passes through it.

The four state chips

Every screen carries one, and there are only four.

CHIP	WHAT IT MEANS	HOW MANY
EXISTS BEHIND	The screen is in the product and works; the specifications on it change what it shows or asks.	19
NEW READ	A new read-only view over data the product already holds.	0
NEW BUILD	The screen does not exist. Four of them: taking a property out of service, the add-units review, editing a unit, and taking a unit out of service.	4
BLOCKED	Held on a decision nobody has taken.	0

Beside it sits a commitment chip naming the specifications that touch that screen. **A screen with a dashed NO COMMITMENT chip is a finding, not an oversight** — it means the document draws a screen nobody has undertaken to change.

02 The two journeys

Everything here serves one of two jobs.

THE JOB	WHAT IT PASSES THROUGH
A building has just been connected. Record it and its units so each can take service.	The property list → add a property, three steps → the property's page → add its units → each unit's page
Something about a property is wrong, or has changed. Fix it.	Find it → the property's page → edit it, or change its status → the unit's page → its meters

The first job is the one that costs the most today: **five screens and twelve clicks**, and my first attempt was refused at the last one.

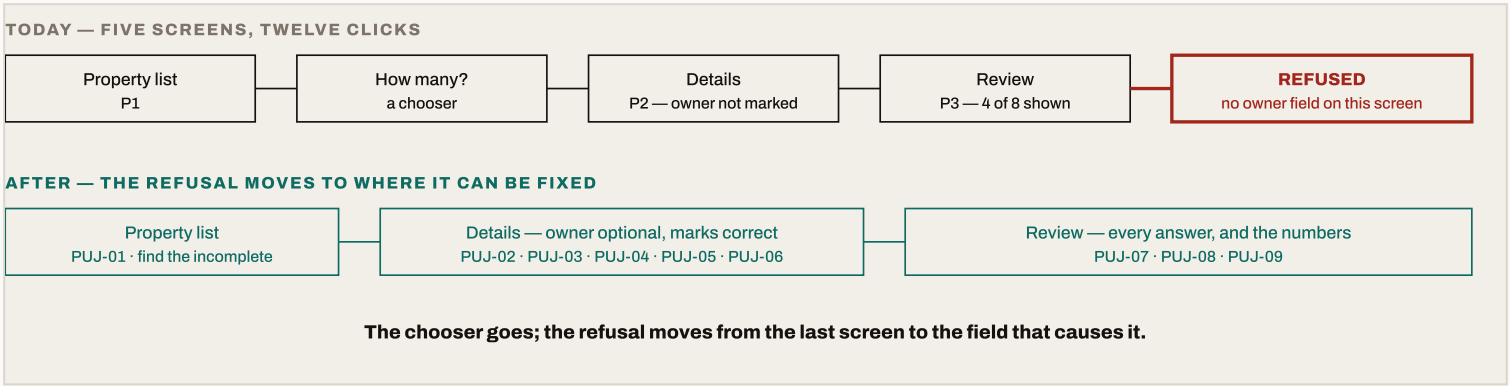


Figure 1 · The first journey is refused at the screen that cannot fix it. Measured by doing the job: five screens, twelve clicks, and the create was refused at the last one for an owner the form never marked as required. Nine specifications move the refusal to the field that causes it and delete the chooser in front.

03 Part one · a property

Finding it, creating it, reading it, changing it, and taking it out of service. A property is the thing an address belongs to; everything else in this module hangs off one.

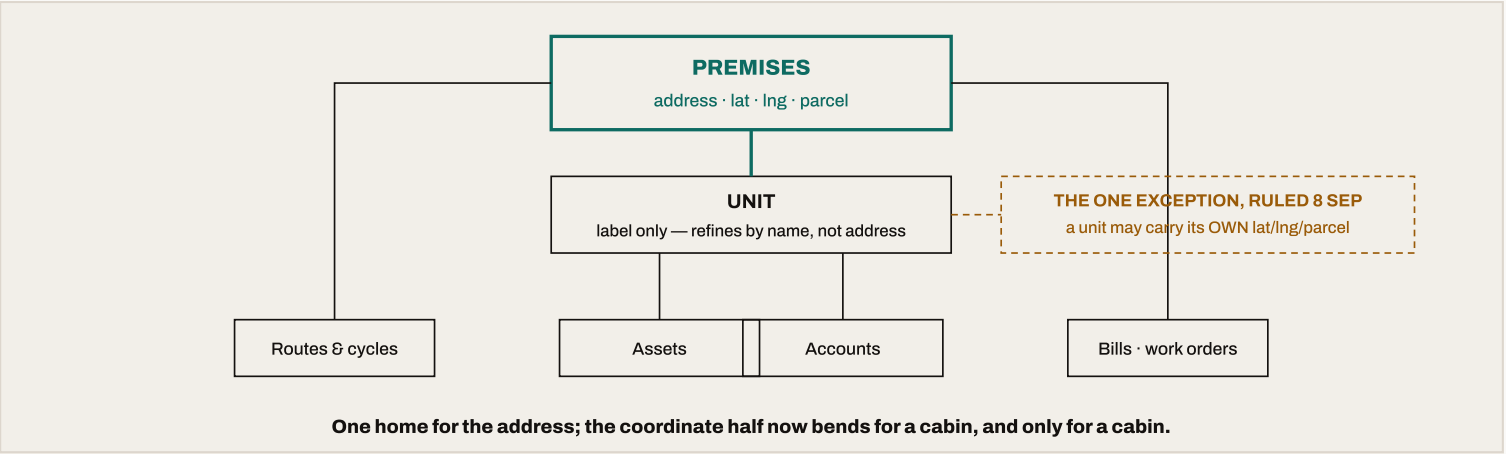


Figure 2 · An address has one home, and exactly one field of it now bends. Everything that needs an address walks to the premises. The 8 September ruling lets a unit carry its own latitude, longitude and parcel — and only those — because a cabin is somewhere its site office is not. The address half is untouched, which is why a map and an envelope still cannot disagree.

P1 EXISTS BEHIND COMMITMENT PUJ-01

P1 The property list S14 · PRM-01

The question: *where is the property I am thinking of, and which ones still need work?*

`Premises → Premises`

WHAT A CLERK HITS TODAY

The list itself is good — its search covers address, town, property number and owner, and it found what I asked for every time. What it cannot tell you is which properties are **incomplete**. 657 of 673 properties

carry map coordinates and 16 do not, and nothing on this screen distinguishes them. There is no way to work through the ones that need fixing.

PREMISES & UNITS

Premises

Every property that takes service, and the units inside them.

↑ Import + New premise

Premises | Units | Imports

Search premises... ALL + Filter Columns

Premise	Address	Type	Units	Services	Owner	On the map	Status
P-00080	**412 Cypress Row** Silver Creek, TX 78611	Apartment complex	4	E W S T	Creekside Holdings	CHECKED	Active
P-00081	**18 Quarry Hill Ct** Silver Creek, TX 78611	Single-family	1	E W	Owner-occupier	NOT PLACED	Active
P-00082	**2201 Cane Island Pkwy** Silver Creek, TX 78611	Mixed-use	12	E W S	Cane Island LP	PLACED, UNCHECKED	Active

Showing 1–50 of 673 · Rows per page 50 ⇤ ← Page 1 of 14 → ⇥

WHAT CHANGED

- **One new column — *On the map*** — reading **Checked**, **Placed, unchecked** or **Not placed**, and it is filterable. Three states, not two, because a point that arrived from an address lookup and a point a person has seen against the city map are different degrees of confidence. That turns the sixteen unplaced properties and every unchecked one into a morning's work with an end to it.
- **The address is one cell, not four.** Street on the first line, town and postcode beneath, so the eye reads a place rather than a row of fragments.
- Everything else is untouched. The toolbar, the sorting, the row-action icons and the pagination footer are already what the rules ask for.

FOR	A clerk who has an address in their head and needs the record behind it — and, once a month, whoever is working through the properties nobody has placed on a map.
HOW YOU GET HERE	The Premises tab in the left rail. It is the first screen of the module and the one every other premises screen returns to.
PRIMARY ACTION	**+ New premise.** One filled button. *↑ Import* sits beside it, outlined, because a portfolio arrives once and a single property arrives every week.
WHAT CHANGED · ONE NEW COLUMN	*On the map*, reading **Located** or **Not placed**, and filterable. 657 of 673 properties already carry a point and 16 do not, and until now nothing distinguished them. That column turns an invisible fact into a morning's work with an end to it.
WHAT CHANGED · THE ADDRESS IS ONE CELL	Street on the first line, town and postcode beneath in the muted tone. It was four columns of fragments; the eye reads a place now, and the table lost three columns without losing a word.
WHAT DID NOT CHANGE	The toolbar, the sorting, the row-action icons, the column selector and the pagination footer. They already do what the conventions ask. This screen was the least wrong thing in the module and it is treated that way.

COGNITIVE LOAD	Nine columns, one search box, one filter row. No prose on the screen at all — a list explains itself or it is the wrong list.	
STATES	**Nothing yet**	The empty state names what is missing and offers the two ways to fill it — add one, or import a list.
	Filtered to Not placed	The chip reads *Not placed ×* and the count in the footer is the size of the job.
	Read-only role	Every figure, no buttons. The refusal names the role, never the screen.
COMPONENTS	`DataTable` `FilterBar` `RowActions` `StatusPill` `ListExportButton` `OwnerMatchingPanel` `InlineLinkTo`	
RULES	Table type is one size throughout. Row actions are icons with tooltips, never text links, two visible and the rest behind an overflow. A pagination footer on every list. A property number a clerk reads down the phone is a printed reference and is shown; a database id never is.	

P2 EXISTS BEHIND COMMITMENT PUJ-02 COMMITMENT PUJ-03 COMMITMENT PUJ-04 COMMITMENT PUJ-05 COMMITMENT PUJ-06 COMMITMENT PUJ-18 COMMITMENT PUJ-20

P2 Add a property · Details S16 · PRM-07

The question: *what do you need from me to put this building on the books?*

`Premises → New premise → step 2`

WHAT A CLERK HITS TODAY

The owner is required and the form does not say so. Only *Street address* carries an asterisk. You find out at the very last screen, twelve clicks later, and that screen has no owner field on it to put right. *Ruled 8*

September: it should not be required at all.

The address box already calls a city mapping service on every keystroke, and that service is not connected. Every lookup comes back refused and the clerk is told nothing at all — no message, no marker, no "address lookup unavailable".

Nowhere to record where the building is. No coordinates, no parcel number, no map — on a screen whose whole purpose is to say where a property is.

PREMISES & UNITS

Add a premise

Cancel | Save draft & exit

One property, with its first unit if you want one.

✓ One premise · 2 Details · 3 Review & save

WHERE IS IT?

Street address *

412 Cypress Row

Start typing and we will look it up.

Town / city: Silver Creek

State: TX

ZIP: 78611

✓ Found on the city map

Parcel	**R-114-0082-004**
Point	**30.752104, –98.238391**
Checked against GIS	*Not checked yet* Mark checked

Change these

WHAT KIND OF PROPERTY IS IT?

Property type *

Apartment complex

Inside city limits *

Inside

These two decide which taxes and which rate the units here will be billed on.

Utility services

Add a service this property can take…

ELECTRIC × WATER × SEWER × TRASH ×

Type to filter all eleven. Only what this utility sells is offered.

WHO LOOKS AFTER IT?

Owner

Search by name, or leave it for later…

Creekside Holdings LP · Landlord

Already owns 3 properties · master account A-10442

Change

Managed by

Cane Island Property Co

Only if different.

Area

North Silver Creek

The district.

Sub-area

Cypress Row

Narrowed to that district.

READING AND BILLING optional

Read route

Route 12 — North Silver Creek

Who reads the meters here.

Billing cycle

Cycle 3 — bills on the 12th

When it bills.

WHAT IS INSIDE IT?


How many units?

4

Unit type

Residential

Common areas

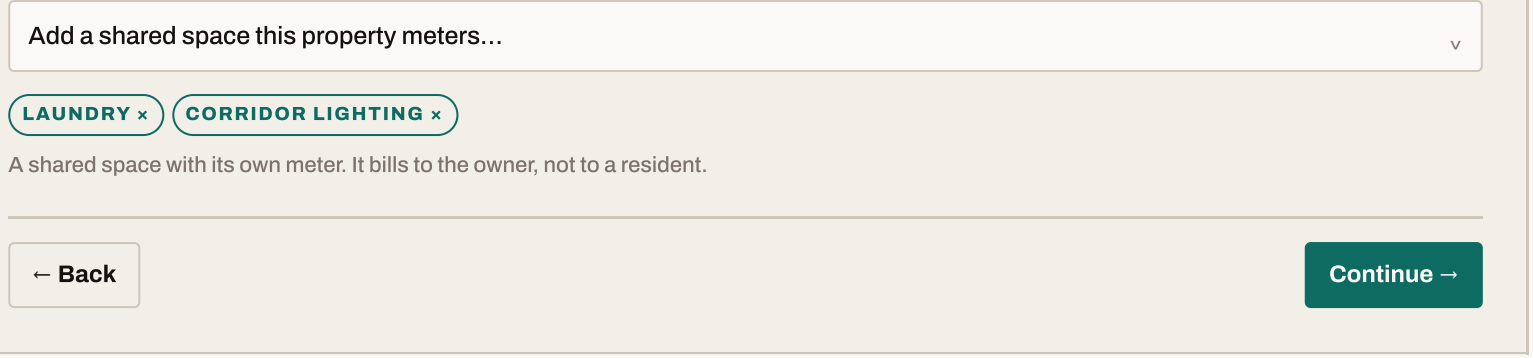

WHAT CHANGED

- **The owner becomes optional, and a search.** Today the server refuses a property without one and the form never says so; the ruling of 8 September reverses that. You search by name rather than scrolling a list, and a property saved without an owner joins the *Needs an owner* list the product already keeps for exactly this — so the fact is captured rather than demanded.
- **Choosing an owner tells you what they already own.** *Creekside Holdings LP · Landlord — already owns 3 properties, master account A-10442.* That is how a clerk notices they are about to create a second record for a landlord who is already here.
- **Everything the server still insists on carries an asterisk** — the property type and whether it is inside the city limits. Nothing is discovered at the end any more.
- **Services become *Utility services*, a searchable multi-select:** one control, type to filter all eleven, chosen ones sitting beneath as chips you can take off. Only what this utility sells is offered.
- **A GIS-checked flag, which the database has carried all along and no screen has ever set.** It is *Not checked yet* on a new property, and it records who checked it and when. Changing the figures clears it, because the point it vouched for has changed. It is set on none of the 673 properties today — a column that exists, means something, and has never been used.
- **A new block, *Where it is*,** with the parcel number, the two coordinates and a map you can drag. It fills itself in from the address lookup and says so. When the lookup cannot answer, the block says so plainly instead of failing in silence, and you can still place the pin by hand.
- **The boxes are the size of what goes in them.** The street address is one wide field; town, state and postcode share a row with the state and postcode small. Seventeen identical boxes tell a person nothing about which answers matter.

- **What the lookup found is a confirmation, not four more boxes.** Parcel, point and the GIS flag arrive as a green *Found on the city map* panel with one *Change these* control. A clerk reads them; they only edit them when the lookup is wrong.
- **The sections are questions, not categories** — *Where is it? · What kind of property is it? · Who looks after it? · What is inside it?* A person filling a form is answering questions, and a heading that asks one is easier to answer than a heading that names a database table.
- **The optional section says it is optional**, on the heading, so a clerk in a hurry knows what they may skip without reading four help lines to find out.
- **Area and sub-area are two controls, not one.** That is what the product already builds — two selects, the second narrowed by the first, and one column stored: the sub-area when one is chosen, otherwise the area. This drawing had collapsed them into a single box reading *North Silver Creek · Cypress Row*, which is a display of the answer, not a way to give it. **Sub-area is drawn on all three screens.** It is on the real create form and on the edit form today, and the property's page shows it — but it is easy to leave out of a drawing, and leaving it out is how a field quietly stops being asked for. It narrows the area and it decides which route reads the property, so it belongs wherever the area is.
- **A finished step says what you chose, not what it asked.** The rail read ✓ *How many* after you had answered it; it now reads ✓ *One premise*. A tick means the step is done — and a done step should be able to remind you what you did.
- **"Also create a unit automatically" becomes "How many units?"** — a four-flat building is recorded in one pass instead of one flat plus three trips through a pattern generator.
- **Common areas can be recorded here, and could not be recorded anywhere.** The property's page has a Common areas tab and every new building arrives at it reading *None on this property*, because the create flow never asked. A laundry, a corridor light or a car park is a shared space with its own meter that bills to the owner — for an apartment block it is usually the first meter installed, and until now it could only be added after the fact by a route a clerk had to already know.
- The fields are the same fields. They are grouped by the question they answer instead of arriving in storage order.

FOR	A clerk recording a building that has just been connected. In a new utility this is the first screen in Premises & Units that can be finished — a unit cannot exist until a

	property owns it, and a meter cannot be assigned until a unit does.
HOW YOU GET HERE	Premises → *+ New premise* → *One premise*. Also from the account opening flow, which offers *Address not on the system? Add it* → and returns you here.
PRIMARY ACTION	**Continue** →. One filled button. *Save draft & exit* sits in the header rather than the footer, because parking a half-finished property is leaving, not advancing.
WHAT CHANGED · THE OWNER	It was required and unmarked, and the refusal arrived twelve clicks later on a screen with no owner field on it. Ruled on 8 September: **not required at all**. It is a search now, and a property saved without one joins the *Needs an owner* list the product already keeps for the properties that predate typed owners. The fact is captured rather than demanded.
WHAT CHANGED · THE OWNER TELLS YOU WHAT THEY OWN	Choosing one shows *already owns 3 properties, master account A-10442*. That single line is how a clerk notices they are about to create a second record for a landlord who is already here — the duplicate-owner problem solved by saying something rather than by adding a check.
WHAT CHANGED · UTILITY SERVICES	A searchable multi-select: one control, type to filter all eleven, and the chosen ones sit beneath as chips you can take off. Only what this utility sells is offered. It is the field that decides what a unit can inherit and what a meter must match, so it is asked here and not later.
WHAT CHANGED · WHERE IT IS	A new block. Parcel number, latitude, longitude and a draggable map, filled in from the address lookup and saying so. When the lookup cannot answer — and today it never can, because the city service is not connected — the block says so plainly and the pin can still be placed by hand.
WHAT CHANGED · HOW MANY UNITS	*Also create a unit automatically*, a tick-box, becomes *How many units?*, a number. A four-flat building is recorded in one pass instead of one flat plus three trips through a pattern generator.
WHAT CHANGED · THE STEP RAIL	A finished step said ✓ *How many* — the question, after it had been answered. It reads ✓ *One premise* now. A tick means done, and a done step should remind you

what you did.

WHAT CHANGED · THE LAYOUT

Seventeen equal boxes in a single stack became grouped rows at the width of what goes in them. Field widths now match their content, the lookup's answer is a confirmation panel rather than four more inputs, and every section heading is a question rather than a category. The optional section is labelled optional.

WHAT CHANGED · AREA AND SUB-AREA ARE TWO BOXES

PO, this session: *"these should be 2 input fileds - Area · sub-area - not 1"*. **The product already does this** — two selects, the second narrowed by the first, ruled on 2026-08-17 in the words *"when we add premises you should allow to select areas and sub areas on premises"*, with one column stored: the sub-area when one is chosen, otherwise the area. This drawing had shown them as a single box reading *North Silver Creek · Cypress Row*, which is how the answer READS once given, not how it is given. Corrected on create and on edit; the property's page already listed them as two rows.

COGNITIVE LOAD

Fifteen inputs in five named groups, four lines of help. Help appears only where it prevents a refusal or explains a consequence; *Town / city* gets none, because its label is the whole of it.

STATES

The lookup answers	The two figures fill in and *Placed by* reads *The address lookup*.
The lookup is unavailable	One line in the block: address lookup unavailable. The figures stay open and can be typed by hand.
The point is changed	*Placed by* changes to *A person*, so the next reader knows the point was checked rather than guessed.
No owner chosen	Saves. The property appears on the *Needs an owner* list, and its vacant-unit charges have nowhere to go until one is linked.

COMPONENTS

`WizardFrame` `FindTheAddress` `JurisdictionField` `OwnerField` `OwnerNameCheck` `ServicesAvailableField` `RefusalStrip` `Panel` `Note`

RULES	Required fields carry the asterisk on the label, and only the ones the server will actually insist on. A multiple choice is chips plus an add control, never a wall of tick-boxes, and five or more options are searchable. Colour is never the only signal — every state carries its word. Built in the shared utility classes, adding nothing to a stylesheet.

P3 EXISTS BEHIND COMMITMENT PUJ-02 COMMITMENT PUJ-04 COMMITMENT PUJ-05 COMMITMENT PUJ-07 COMMITMENT PUJ-08 COMMITMENT PUJ-09

P3 Add a property · Review & save S16 · PRM-07

The question: *is this right, before it becomes real?*

`Premises → New premise → step 3`

WHAT A CLERK HITS TODAY

I entered eight things and the review named four. The property type I had chosen and whether the building sits inside the city limits were both missing — and those two decide how it gets billed. The last look before committing showed neither.

When the save was refused, the failure appeared here, on a screen with no field to fix it, offering *Retry*, *Cancel*, and a button called *Download error report* that belongs to the bulk-upload flow.



Unit numbers	U-01144 to U-01147 · four, from the unit series
Address	412 Cypress Row, Silver Creek, TX 78611
Parcel	R-114-0082-004
On the map	30.752104, –98.238391 · placed by the address lookup
Checked against GIS	*Not checked yet*
Property type	Apartment complex
City limits	Inside · city tax and the inside-city rate apply
Area	North Silver Creek
Sub-area	Cypress Row
Read route	Route 12 — North Silver Creek
Billing cycle	Cycle 3 — bills on the 12th
Utility services	Electric · Water · Sewer · Trash
Owner	Creekside Holdings LP
Managed by	Cane Island Property Co
Units	4 — labelled 1, 2, 3, 4 · Residential
Common areas	Laundry · Corridor lighting · both bill to the owner

WHAT THIS WILL DO

One property, four units and two common areas are created. Each unit can then take service, and nothing is billed until an account is opened on it. The four units start vacant, and base charges on a vacant unit reach the owner — as do both common areas, always.

← Back

Create premise ✓

Recorded in the audit log by the server: who, when, and what.

WHAT CHANGED

- **The review shows everything you entered** — all ten answers, including the two that decide the billing. If it was a question on the form, it is an answer here.
- **And the numbers this property and its units are about to be given**, from the utility's own series in Settings. A clerk needs the property number the moment the record exists — it is what they read down the phone — and until now the first place it appeared was after the save. If the series has not been set up, this row says so by name and offers the way to set it; it never invents a number and never quietly leaves one out.
- **The map comes with it**, so the last check before committing includes *is this the right building*, not just *is this the right text*.
- **A "what this will do" box**, which the rules already require of any form that changes service state. It says what the four units will and will not do — including that a vacant unit's base charges reach the owner, which is the single fact a clerk is most often asked about afterwards.
- **A refusal never lands here.** Required fields are marked and checked on the step that asks them, so the last screen commits or does nothing. The bulk-upload's *Download error report* button is gone from a one-property form.

FOR	The same clerk, one moment before the property becomes real. This is the last screen at which a mistake is free.
HOW YOU GET HERE	Step 2 → *Continue* →. The numbered rail above is clickable back to any finished step.
PRIMARY ACTION	**Create premise ✓**. The tick is the grammar for a commit — this is the press that writes.

WHAT CHANGED · IT SHOWS EVERYTHING	It named four of the eight answers entered. The property type and the city-limits setting were both missing, and those two decide which taxes and which rate apply. If it was a question on the form, it is an answer here.
WHAT CHANGED · THE MAP COMES WITH IT	The last check before committing now includes *is this the right building*, not only *is this the right text*. An address can be typed perfectly and still be the wrong place.
WHAT CHANGED · WHAT THIS WILL DO	A consequence box, which the conventions already require of any form that changes service state. It says the four units start vacant and that base charges on a vacant unit reach the owner — the fact a clerk is most often asked about a month later.
WHAT CHANGED · A REFUSAL NEVER LANDS HERE	Every required field is checked on the step that asks it, so this screen either commits or does nothing. The bulk-upload's *Download error report* button is gone from a one-property form, where it never belonged.
COGNITIVE LOAD	Ten rows, one map, one consequence box, two buttons. Nothing is editable, which is the point — reading and changing are different acts and this screen only does one of them.
STATES	**Everything answered** — Ten rows, no gaps. **Something optional left blank** — The row is drawn in the absent style — italic and grey — never as an empty cell, so *not set* and *zero* cannot be confused. **The write fails** — The failure names the field and the step it lives on, and the rail takes you straight there. It does not offer an error report.
COMPONENTS	`WizardFrame` `PlainTable` `Panel` `Note`
RULES	A consequence preview before any commit that changes service state. Money at two decimals on screen and four in store. An absence is drawn as an absence and never as a zero.

P4 EXISTS BEHIND COMMITMENT PUJ-04 COMMITMENT PUJ-06 COMMITMENT PUJ-10 COMMITMENT PUJ-11 COMMITMENT PUJ-20

P4 Property → Overview PRM-02

The question: *what is this place, who is responsible for it, and what is on it?*


`Premises → a premise`

WHAT A CLERK HITS TODAY

The page cannot say where the property is. No coordinates, no parcel, no map — on the one screen whose subject is a place.

The status can be seen and not changed. The header shows *Active*. The buttons are *Edit*, *+ New unit* and the tabs. There is no way to take a demolished building out of service from here or from anywhere else.

The same fact is told twice. A tile at the top reads *Master account — None yet* and cannot be clicked; the Owner row below says the same thing and has a working *Find* button. Only one of them is any use.

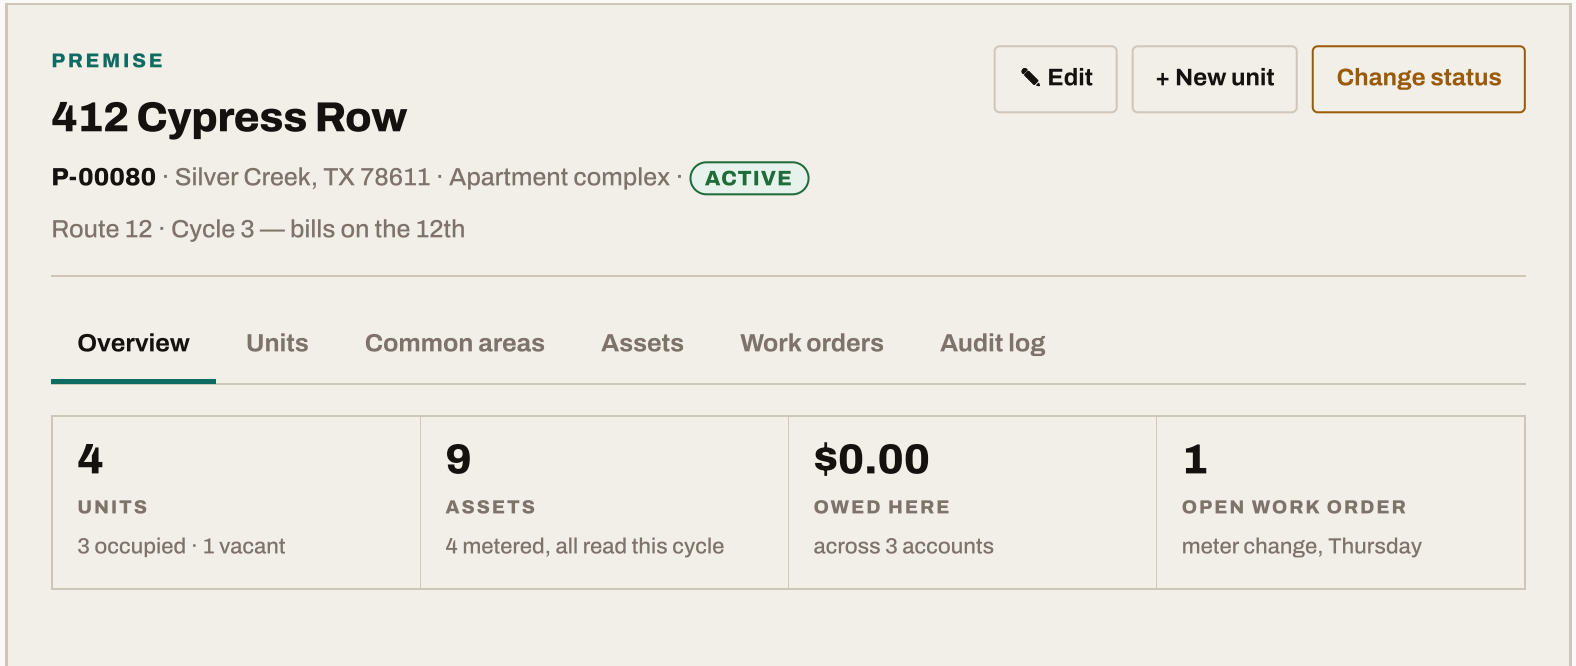

Address	412 Cypress Row, Silver Creek, TX 78611
Parcel	R-114-0082-004
On the map	30.752104, −98.238391 · placed by the address lookup, 8 Sep 2026
Checked against GIS	CHECKED · D. Whitfield, 8 Sep 2026
City limits	Inside
Area	North Silver Creek
Sub-area	Cypress Row
Read route	Route 12 — North Silver Creek · read on the 8th
Billing cycle	Cycle 3 · bills on the 12th
Utility services	Electric · Water · Sewer · Trash
Owner	Creekside Holdings LP · Landlord Master account A-10442 · **Open it →**
Managed by	Cane Island Property Co
Common areas	*None on this property*

WHAT CHANGED

- **The header is four lines, each one a thing a person would say out loud.** *Premise* · the address as the title · then the number, the town, what it is and its state · then its route and cycle. The property number leads the identity line rather than sitting in the kicker beside the word *Premise*, where it was competing with the address for the reader's first glance. It appears once, in the header, and not again in the facts below.
- **Where it is, on the page** — parcel, coordinates, a map, and when the point was placed and by what. When a property has no point, this row says *Not placed yet* in the absent style and offers to place it.

- **Change status is a real control**, in the danger tier the rules reserve for anything that takes a thing out of service.
- **The owner and the master account become one row.** One place to look, one link that goes somewhere. The unclickable tile is gone, and the tile it frees up now carries *Owed here*, which is what a clerk opening a landlord's building actually wants.
- **The tiles answer questions instead of counting rows** — occupancy, whether the meters have been read, what is owed across the building, and what work is booked.
- The six tabs stay exactly as they are. *Assets* is called *Meters*, because that is what is on them.

FOR	Anyone who has been handed an address — a clerk taking a call, a supervisor before sending a crew, a finance user chasing a landlord. It is the busiest read screen in the module.
HOW YOU GET HERE	The property list, the global search, a unit's page, a work order, an account, and a meter. More things link here than link to any other premises screen, which is why it has to answer several different questions at once.
PRIMARY ACTION	✎ **Edit.** *+ New unit* and *Change status* sit beside it, and only *Change status* is in the danger tier.
WHAT CHANGED · WHERE IT IS	Parcel, coordinates, when the point was placed and by what, and whether a person has checked it against GIS — on the one screen whose subject is a place, and which until now could not say where that place was.
WHAT CHANGED · STATUS IS CHANGEABLE	The badge said *Active* and nothing could change it. There is a control now, in the danger tier the conventions reserve for taking a thing out of service.
WHAT CHANGED · THE OWNER AND THE ACCOUNT ARE ONE ROW	The same fact was told twice: an unclickable tile reading *Master account — None yet*, and the Owner row below it saying the same thing with a working link. One row now, one link, and the freed tile carries *Owed here* — which is what a person opening a landlord's building actually came for.

WHAT CHANGED · THE TILES ANSWER QUESTIONS	They counted rows. They answer *is anyone in it*, *have the meters been read*, *what is owed across the whole building* and *is anyone due to visit*.
WHAT DID NOT CHANGE	Six tabs, in the same order. *Assets* reads *Meters*, because that is what is on them.
COGNITIVE LOAD	Four tiles, nine facts, one map, six tabs. One sentence of description in the whole screen, on the sub-meter block, where the arithmetic genuinely needs explaining.
STATES	**No point recorded** — The row reads *Not placed yet* and offers to place it. Sixteen properties are in this state today. **Placed but not checked** — The point shows with *Not checked yet* beside it, so a reader knows how much to trust it. **No owner** — The row reads *Needs an owner* in the absent style with a *Find* control, never an empty cell. **Owner with no account** — *No account is linked to this owner yet*, and *Find* opens the search. This already works today and is untouched.
COMPONENTS	`PageHeader` `KPIStrip` `OwnerAccountBlock` `MasterAccountKpiValue` `PlainTable` `StatusPill` `CommonAreasTab` `WorkOrdersTab` `PremisesEditModal` `InlineLinkTo`
RULES	One page header. The danger tier for anything that takes a thing out of service. An absence is italic and grey and never a zero or an empty cell. Colour is never the only signal — every pill carries its word. A printed property number is shown; a database id never is.

P5 EXISTS BEHIND COMMITMENT PUJ-12

P5 Property → Units PRM-02

The question: *what is inside this building, and is any of it empty?*

`Premises → a premise → Units`

WHAT A CLERK HITS TODAY

The columns are *Unit ID · Unit · Type · Meters · Occupancy · Status*, and **there is no money on the tab at all** — so the question a landlord actually rings about, *which of my flats owes something*, cannot be answered here.

⚠ **An earlier draft of this page called that first column a database id and said it broke your no-ids rule. That was wrong, and it is corrected here.** The column is the unit's number from your own series — as legitimate on screen as a property number. What is worth changing is its *weight*: it leads and sorts by default, ahead of the label a person actually says out loud.

PREMISE

412 Cypress Row

Edit | + New unit | Change status

P-00080 · Silver Creek, TX 78611 · Apartment complex · ACTIVE

Route 12 · Cycle 3 — bills on the 12th

Overview | Units | Common areas | Assets | Work orders | Audit log

4	9	$0.00	1
UNITS	ASSETS	OWED HERE	OPEN WORK ORDER
3 occupied · 1 vacant	4 metered, all read this cycle	across 3 accounts	meter change, Thursday

Search units... | ALL | + Filter | + New unit

Unit	Type	Floor	Meters	Occupant	Owed	Status
1 U-	Residential	Ground	E · W	M. Alvarez A-10517	61.40	OCCUPIED

Unit	Type	Floor	Meters	Occupant	Owed	Status	
01144							
2 U-01145	Residential	Ground	E · W	T. Okafor A-10518	0.00	OCCUPIED	…
3 U-01146	Residential	First	E · W	R. Vance A-10519	118.05	OCCUPIED	…
4 U-01147	Residential	First	*none yet*	*Vacant — base charges bill to the owner*	0.00	VACANT	…

Showing 4 of 4 · 3 occupied, 1 vacant

⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **The label leads and the unit number sits under it**, quiet, in the same cell — the shape the units list uses. Both are shown, because a clerk reads the number down the phone and says the label to a resident; what changes is which of the two the eye meets first, and what the table sorts by.
- **An *Owed* column**, right-aligned and tabular, so a landlord's question is answered by looking rather than by opening four units.
- **Occupant instead of occupancy** — a name and its account, not a state word. The state is in the status pill where it belongs.
- **A vacant unit says what that costs**: *base charges bill to the owner*, never a dash. A dash on that row reads as *nothing is billed*, which is the opposite of true.
- **Floor is shown**, because it is recorded and it is how a person finds a flat in a building.

FOR	A clerk with a building in front of them and a question about one flat in it, and a landlord's own agent asking which of theirs is empty.

HOW YOU GET HERE	The property's page → Units. Also the module's Units tab, filtered to this property.
PRIMARY ACTION	**+ New unit**, which goes straight to the add-units screen with this building already the subject.
WHAT CHANGED · WEIGHT, NOT REMOVAL	⚠ An earlier draft of this page called the first column a database id and said it broke B14 rule 31. **That was a mistake and is corrected.** It is `unit_no`, the number from the tenant's own series — a printed reference, as legitimate as a property number. It keeps its place in the cell and loses its place in the eye: the label leads, the number sits beneath it, and the default sort moves to the label.
WHAT CHANGED · MONEY IS ON THE TAB	A property page that cannot say what is owed sends a person to four other screens to add it up.
COGNITIVE LOAD	Eight columns, one search, no prose.
STATES	**No units** — The empty state offers to add them, and says a property with no units bills nothing. **All vacant** — Every row carries the owner-billing sentence; the tab's own count says how many.
COMPONENTS	`DataTable` `FilterBar` `RowActions` `StatusPill` `MoneyCell` `UnitCell` `InlineLinkTo`
RULES	A printed reference from the tenant's own series is shown; a database id never is. Money right-aligned, two decimals, tabular. An absence is drawn as an absence.

P6 EXISTS BEHIND COMMITMENT PUJ-05 COMMITMENT PUJ-13

P6 Property → Common areas PRM-02

The question: *what shared space does this building meter, and who pays for it?*

`Premises → a premise → Common areas`

WHAT A CLERK HITS TODAY

Every new building arrives here reading **None on this property**, because nothing in the create flow ever offered to add one. There is no *+ Add* on the tab either — so the only route to a common area is one a clerk has to already know.

PREMISE

412 Cypress Row

✎ Edit | + New unit | Change status

P-00080 · Silver Creek, TX 78611 · Apartment complex · ACTIVE

Route 12 · Cycle 3 — bills on the 12th

Overview | Units | **Common areas** | Assets | Work orders | Audit log

4	9	$0.00	1
UNITS	ASSETS	OWED HERE	OPEN WORK ORDER
3 occupied · 1 vacant	4 metered, all read this cycle	across 3 accounts	meter change, Thursday

Search common areas...

+ Add a common area

Common area	What it is	Meters	Billed to	Owed	Status
Laundry	Shared room	E · W	Creekside Holdings LP A-10442	34.90	ACTIVE 👁 ✎ …
Corridor lighting	Shared lighting	E	Creekside Holdings LP A-10442	12.10	ACTIVE 👁 ✎ …

Showing 2 of 2 · both bill to the owner's account

⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **An *+ Add a common area* button**, on the tab that is about them. It was reachable only through the units route.
- **A *Billed to* column** naming the owner's account, because *who pays for the corridor light* is the only question this tab exists to answer.
- **What it is, in words** — shared room, shared lighting, car park — rather than a type code.
- **The empty state says what a common area is for** and offers to add one, instead of stating an absence and stopping.

FOR	A clerk working out why a landlord's account has a charge on it, and anyone setting up a block for the first time.
HOW YOU GET HERE	The property's page → Common areas.
PRIMARY ACTION	**+ Add a common area.**
WHAT CHANGED · IT CAN BE FILLED FROM HERE	The tab reported an absence it gave no way to fix.
WHAT CHANGED · WHO PAYS	Named, with the account, on every row.
COGNITIVE LOAD	Seven columns, no prose beyond the empty state.
STATES	**None** — Says what a common area is — a shared space with its own meter, billed to the owner — and offers to add one. **No owner on the property** — *Billed to* reads *Needs an owner* and links to it, because a common area with nobody to bill is a real problem, not a blank cell.
COMPONENTS	`CommonAreasTab` `DataTable` `StatusPill` `MoneyCell` `InlineLinkTo`

RULES	Every list has an empty state that says what is missing and offers the action that fills it. No database id on screen.

P7 EXISTS BEHIND COMMITMENT PUJ-14 COMMITMENT PUJ-15

P7 Property → Assets PRM-02

The question: *what of ours is on this building, and has it all been read?*

`Premises → a premise → Assets`

WHAT A CLERK HITS TODAY

⚠ **An earlier draft of this page proposed renaming this tab from *Assets* to *Meters*. That was wrong and is reversed here.** A property carries far more than meters, and the product already knows it: this tenant's catalogue holds **thirteen asset types in three families** — *Meter* and *Net meter*; *Sub-meter*; and behind the meter, *Backflow preventer · Battery storage · Comms endpoint · Container / Cart · EV charger · Fire service line · Generator · Modem / CPE · PV / solar · Transformer*. Narrowing the tab to meters would have hidden ten of the thirteen.

What is genuinely wrong is the columns: *Asset # · Asset type · Meter type · Read method · Assigned to · Installed · Status* — **three of the seven describe what kind of thing it is and none says when it was last read.** A cart and a meter are drawn identically, so a clerk cannot tell at a glance which rows are billable and which are just things we own.

And *Fire service line* is missing from three of the ten tenants — `brazosbend`, `oak-ridge` and `silver-creek-water2` hold nine behind-the-meter types where the rest hold ten. Fire is a live service for a customer being onboarded, so a tenant without the type cannot tag a fire line at all.

PREMISE

412 Cypress Row

✎ Edit + New unit Change status

P-00080 · Silver Creek, TX 78611 · Apartment complex · ACTIVE

Route 12 · Cycle 3 — bills on the 12th

Overview | Units | Common areas | **Assets** | Work orders | Audit log

4	9	$0.00	1
UNITS	ASSETS	OWED HERE	OPEN WORK ORDER
3 occupied · 1 vacant	4 metered, all read this cycle	across 3 accounts	meter change, Thursday

Search by number, type or where it is… | METERS & SUB-METERS | BEHIND THE METER | + Filter | Columns

Asset ⇅	What it is	Service	Size	Where	Installed	Last read	Status
METERS AND SUB-METERS · 4 · THESE ARE WHAT BILL							
MTR-40990	Meter	Water	2"	*the property itself*	1 Jun 2026	28 Aug · 96 kgal	MASTER
MTR-40218	Sub-meter	Electric	Class 200	Unit 1	1 Jun 2026	28 Aug · 4,182 kWh	IN SERVICE
MTR-40219	Sub-meter	Water	5/8"	Unit 1	1 Jun 2026	28 Aug · 14 kgal	IN SERVICE
MTR-40402	Sub-meter	Electric	Class 200	Laundry	1 Jun 2026	28 Aug · 611 kWh	IN SERVICE
BEHIND THE METER · 5 · WE OWN THEM, THEY ARE NOT READ							
FIR-00311	Fire service line	Fire	6"	*the property*	1 Jun 2026	*not read — billed on size*	IN SERVICE

Asset ⇅	What it is	Service	Size	Where	Installed	Last read	Status	
				itself				…
CRT-08820	Container / Cart	Trash	96 gal	Unit 1	1 Jun 2026	*not read — billed per cart*	IN SERVICE	…
ERT-51204	Comms endpoint	*serves the water meter*	—	Unit 1	1 Jun 2026	*not read itself*	IN SERVICE	…
BFP-00742	Backflow preventer	Water	2"	*the property itself*	1 Jun 2026	*not read — tested yearly*	TEST DUE 30 SEP	…
PV-00119	PV / solar	Solar	7.2 kW	Unit 4	14 Jul 2026	*read through the net meter*	IN SERVICE	…

Showing 9 of 9 · 4 read this cycle, 5 not read by design

⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **It stays *Assets*, and it holds all thirteen types.** Meters, sub-meters, carts, comms endpoints, fire lines, backflow preventers, PV, batteries, EV chargers, generators, transformers and modems are all tagged to a property or to a unit here. The earlier proposal to call it *Meters* is withdrawn.
- **Two groups, headed in the table.** *Meters and sub-meters — these are what bill*, then *behind the meter — we own them, they are not read*. One glance separates the rows that produce a bill line from the rows that are inventory standing on a customer's property.
- **A last-read column that can say *not read* and why.** A fire line bills on its size, a cart bills per cart, a comms endpoint reports for a meter and is never read itself. An empty cell would read as an overdue reading on every one of them.
- **Three type columns become two** — what it is, and the service it belongs to — which is how a person describes any of these out loud.

- *Where* **says which unit, common area or the property itself**, in words, rather than leaving a blank that reads as unassigned.
- **A status that is not only in-service or not.** A backflow preventer's yearly test is the one date on this tab that has a deadline attached, and it had nowhere to appear.

FOR	A clerk checking whether a building's readings are in, a supervisor before a change-out, and anybody answering *what of ours is on that property* — which is an inventory question, not a metering one.
HOW YOU GET HERE	The property's page → Assets. Also from the assets module's own registry, filtered to this property.
PRIMARY ACTION	None. This is a read tab; an asset is assigned from the unit that holds it, where the consequence is understood.
WHAT CHANGED · IT IS ASSETS AND IT STAYS ASSETS	PO, this session: *"this should be assets - it will ahve all meter, sub meters, cart, ERu, fire - all kind of assets will be tagged here"*. ⚠ **This reverses a proposal of ours.** An earlier draft renamed the tab to *Meters* on the argument that *asset* was inventory language. The tenant's catalogue holds **thirteen types in three families** and only three of them are meters, so the rename would have hidden ten. The product had it right; the drawing did not.
WHAT CHANGED · TWO GROUPS, ONE TABLE	Meters and sub-meters first, behind-the-meter second, each with a heading row saying what the group is FOR. Nine rows on the sample property split four and five.
WHAT CHANGED · WHEN IT WAS LAST READ	Absent, on the tab where it is the commonest question — and for the five that are never read, the cell says so and says why, rather than reading as five overdue meters.
COGNITIVE LOAD	Nine columns, two group headings, one search, no prose.
STATES	

	Nothing installed	Says the property cannot bill any service until a meter is on a unit, and links to the units.
	Overdue reads	The count leads the footer and the rows sort to the top; only the metered group can be overdue.
	No behind-the-meter assets	The second group is absent entirely rather than drawn empty.
	The type is not in this tenant's catalogue	Fire service line is missing from three tenants. The row cannot exist, so the empty state links to Settings → Asset types rather than leaving a clerk to wonder.
COMPONENTS	`DataTable` `FilterBar` `StatusPill` `RowActions` `DateCell` `InlineLinkTo`	
RULES	Consumption always carries its unit. An absence is drawn as an absence and says why. Colour is never the only signal. Row actions are icons with tooltips.	

P8 EXISTS BEHIND COMMITMENT PUJ-16

P8 Property → Work orders PRM-02

The question: *is anybody due to visit, and what for?*

`Premises → a premise → Work orders`

WHAT A CLERK HITS TODAY

The tab exists and I did not find work on the sample property to judge it by, so nothing here is claimed as a fault. What is drawn is what the journey needs: a person on the phone to a resident wants *when is somebody coming*, and that is a date and a name.

PREMISE

✎ Edit + New unit Change status

412 Cypress Row

P-00080 · Silver Creek, TX 78611 · Apartment complex · ACTIVE

Route 12 · Cycle 3 — bills on the 12th

Overview | Units | Common areas | Assets | **Work orders** | Audit log

4	9	$0.00	1
UNITS	ASSETS	OWED HERE	OPEN WORK ORDER
3 occupied · 1 vacant	4 metered, all read this cycle	across 3 accounts	meter change, Thursday

Search work… | OPEN | + Filter | Raise work here

Work	What	Where	Crew	Booked	Status
WO-4822	Meter change	Unit 4	K. Osei	Thu 11 Sep, am	SCHEDULED
WO-4610	Leak investigation	Laundry	—	*Not booked yet*	WAITING

Showing 2 open · 7 done in the last year

⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **Booked, in words a person can repeat down the phone** — *Thursday 11 September, morning* — and *Not booked yet* in the absent style when there is no date, never an empty cell.
- **Where, within the building**, so a resident can be told whether it is their flat.
- **Raise work here**, with the property already the subject, using the raise-work icon the conventions already assign.
- **The footer counts what is done as well as what is open**, because *is this building always breaking* is a real question.

FOR	A clerk on the phone to a resident or an owner, and a supervisor planning a round.
HOW YOU GET HERE	The property's page → Work orders. Also from the Work module, filtered here.
PRIMARY ACTION	⚡ **Raise work here.**
WHAT CHANGED	Drawn to the journey rather than to the table. I did not have work on the sample property to walk, and that is said above rather than dressed up as a finding.
COGNITIVE LOAD	Seven columns, one filter chip, no prose.
STATES	**Nothing open** — Says so, and offers to raise work — an empty list here is good news and should read like it. **Unbooked** — *Not booked yet* in the absent style, never a blank date.
COMPONENTS	`WorkOrdersTab` `DataTable` `StatusPill` `DateCell` `RowActions`
RULES	An absence is drawn as an absence. Row actions are icons with tooltips. Button grammar: ⚡ raises work.

P9 EXISTS BEHIND COMMITMENT PUJ-17

P9 Property → Audit log PRM-02

The question: *who changed this, and what did it say before?*

`Premises → a premise → Audit log`

WHAT A CLERK HITS TODAY

The columns are *When · Actor · Action*, and the action is one phrase with an *Expand* control. The thing a person actually needs — **what the value was before** — is behind a press, one row at a time.

PREMISE

412 Cypress Row

✎ Edit + New unit Change status

P-00080 · Silver Creek, TX 78611 · Apartment complex · ACTIVE

Route 12 · Cycle 3 — bills on the 12th

Overview Units Common areas Assets Work orders **Audit log**

4	9	$0.00	1
UNITS	ASSETS	OWED HERE	OPEN WORK ORDER
3 occupied · 1 vacant	4 metered, all read this cycle	across 3 accounts	meter change, Thursday

Search this history... ALL + Filter

When	Who	What changed	From	To	
8 Sep 2026, 15:42	D. Whitfield	Property added	—	412 Cypress Row	…
8 Sep 2026, 15:44	D. Whitfield	Checked against GIS	*Not checked*	Checked	…
8 Sep 2026, 16:02	D. Whitfield	Read route	*None*	Route 12	…
8 Sep 2026, 16:02	D. Whitfield	Units created	—	1, 2, 3, 4	…

Showing 4 of 4 ⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **From and To as columns**, so a history is read down the page instead of expanded row by row. That is the whole use of an audit log: seeing what a field used to say.

- *Actor* **becomes** *Who*, and shows a person's name.
- **An absent previous value is drawn as an absence** — a property that had no route now says *None → Route 12*, which is a different fact from a route being changed.
- **Searchable and filterable**, because the question is usually about one field.

FOR	Anybody answering *why does this say that* — a supervisor, an auditor, or a clerk who has just been told the address is wrong.
HOW YOU GET HERE	The property's page → Audit log. The unit has its own.
PRIMARY ACTION	None. It is a record and nothing on it can be changed, which is the point.
WHAT CHANGED · THE OLD VALUE IS A COLUMN	It was behind an expand control, one row at a time, so comparing two changes meant two presses and a memory.
COGNITIVE LOAD	Six columns, one search. No prose at all.
STATES	**Only the creation** — One row. A new property's history is one line and should look like one, not like an error. **Retention reached** — Says plainly that older entries have been removed on the retention schedule, rather than implying nothing happened.
COMPONENTS	`AuditEventCell` `DataTable` `DateCell` `FilterBar`
RULES	Every money or service action is recorded with who, when and what. No database id on screen. An absence is drawn as an absence.

P10 EXISTS BEHIND COMMITMENT PUJ-18 COMMITMENT PUJ-19 COMMITMENT PUJ-20

P10 **Edit a property** PRM-02

The question: *this is wrong, or it has changed — let me fix it.*

Premises → a premise → Edit

WHAT A CLERK HITS TODAY

Editing works, and an owner *can* be linked after the fact — that part is fine. But the form offers twelve fields and **none of them is a coordinate.** A property placed on the wrong side of the street can never be corrected, because there is nothing to correct it with.

The reference field is called *External / GIS ref.* It is empty on all 673 properties, and no clerk could tell from that label what belongs in it.

PREMISE

Edit this premise

Cancel

Changes take effect at once. Everything is recorded.

WHERE IS IT?

Street address *

412 Cypress Row

Town / city

Silver Creek

State

TX

ZIP

78611

CHANGING AN ADDRESS

Four units, four meters, one route and two open work orders read this address. All of them follow it. The envelopes for the three open accounts change with the next bill run.

✓ On the city map

Parcel	R-114-0082-004

Point	**30.752104, –98.238391** · placed by the address lookup
Checked against GIS	CHECKED · D. Whitfield, 8 Sep 2026

Change these

Changing the figures clears the checked flag, because the point it vouched for has changed.

WHAT KIND OF PROPERTY IS IT?

Property type *

Apartment complex

Inside city limits *

Inside

These two decide which taxes and which rate the units here are billed on.

Utility services

Add a service this property can take…

ELECTRIC × WATER × SEWER × TRASH ×

Removing one is refused while a unit here still meters it.

WHO LOOKS AFTER IT?

Owner

Search by name, or clear it…

Creekside Holdings LP · Landlord
Owns 3 properties · master account A-10442

Change

Clearing it puts this property on the *Needs an owner* list.

Managed by

Cane Island Property Co

Only if different.

Area

North Silver Creek

The district.

Sub-area

Cypress Row

Narrowed to that district.

READING AND BILLING optional

Read route

Route 12 — North Silver Creek

Changing it moves the property to another reader's round.

Billing cycle

Cycle 3 — bills on the 12th

Takes effect at the next run, never mid-cycle.

Cancel

Save changes ✓

WHAT CHANGED

- **It is the create screen, in the same order.** Same five question-headings, same groups, same field widths, same confirmation panel for what the lookup found. A clerk who has created a property already knows this screen — which is the whole reason to make two screens match rather than merely both be tidy.
- **The coordinates and the parcel are editable here.** A property put down in the wrong place can now be moved, and changing the figures clears the GIS-checked flag.
- ***External / GIS ref* becomes *Parcel number*** — the assessor's number, said in words a clerk recognises. It is empty on every property today, so nothing is lost by renaming it.
- **A consequence box on the address**, because changing an address moves the meters, the route, the work orders and the envelopes with it. The rules already require this of any form that changes service state; the address is exactly that.
- Same fields, same order of importance, grouped by question rather than by column.

FOR	A clerk correcting a record that is already live — a mistyped street, a property that was placed on the wrong side of the road, an owner who has sold up.
HOW YOU GET HERE	The property's page → ✎ *Edit*. Also from the list's row action, which opens the same form.
PRIMARY ACTION	**Save changes ✓**. The tick is the commit grammar.
WHAT CHANGED · THE POINT CAN BE CORRECTED	The form offered twelve fields and none of them was a coordinate, so a property placed wrongly could never be moved. It can now, by typing the figures, and

	Placed by changes to *A person* so the next reader knows it was checked rather than guessed.
WHAT CHANGED · THE REFERENCE IS NAMED	*External / GIS ref* becomes **Parcel number** — the assessor's number for the plot, said in words a clerk recognises. It is empty on all 673 properties, so the rename costs nothing.
WHAT CHANGED · THE OWNER IS OPTIONAL HERE TOO	Clearing it is allowed and puts the property on the *Needs an owner* list, which is where the properties that predate typed owners already sit. The two routes to that list are now the same route.
WHAT CHANGED · A CONSEQUENCE BOX ON THE ADDRESS	Changing an address moves the meters, the route, the work orders and the envelopes with it. Four units, four meters, one route and two open work orders read this one address; the box says so, with the counts, before the save.
WHAT CHANGED · IT MATCHES THE CREATE SCREEN	Same five question-headings in the same order, the same grouped rows, the same widths, the same confirmation panel. Two screens that ask for the same things should look the same, or a clerk relearns the form every time they correct one.
COGNITIVE LOAD	Fifteen fields in four named groups, one confirmation panel, one consequence box. The same fields as today, grouped by the question they answer.
STATES	**Already billed** — The address stays editable — a wrong address on an issued bill is exactly what wants correcting — and the consequence box says which bills carry the old one. **The point is changed** — The GIS-checked flag clears, because the point it vouched for has changed. **Read-only role** — Every value, no save. The refusal names the role.
COMPONENTS	`PremisesEditModal` `FindTheAddress` `JurisdictionField` `OwnerField` `ServicesAvailableField` `FormModal` `RefusalStrip`

RULES	A consequence preview before any commit that changes service state, and an address is exactly that. Required asterisks only where the server insists. A multiple choice is chips plus an add control.

P11 NEW BUILD COMMITMENT PUJ-21

P11 Take a property out of service PRM-02 · PRM-03

The question: *this building is gone. Take it off the books — but don't let me break anything.*

`Premises → a premise → Change status · Premises → Units → a unit → Change status`

WHAT A CLERK HITS TODAY

There is no way to do this. Both pages show a status and neither offers a control that changes it — and the unit page advises deactivating as if a button existed.

PREMISE

Change status

Cancel

Currently Active.

New status * Inactive — no longer takes service

From * 09/30/2026

Why * Demolished — permit 2026-1184

NOT WHILE THESE ARE LIVE

3 units are still active	**Show them →**
2 accounts are still open	**Show them →**
4 meters are still on this property	**Show them →**

Close the accounts, remove the meters and deactivate the units first. Then this can be done.

Cancel

Deactivate premise

Held: 3 units still active.

WHAT CHANGED

- **The control exists**, on both the property and the unit, in the same place with the same words and in the danger tier.
- **It refuses while anything is live** — your ruling, drawn: a property with active units, meters on it, or open accounts cannot be shut down. The refusal is short and each blocked thing links to the list that clears it, so the answer to *"why not?"* is also the route to *"then do this first"*.
- **It asks when and why**, because a status change on a place is a thing somebody will be asked about a year later.
- A unit's version is the same screen with one row: whether an account is open on it.

FOR	A clerk closing a record — a demolished building, a flat merged into its neighbour, a property sold out of the service area. Rare, consequential, and irreversible enough to be worth a screen of its own.
HOW YOU GET HERE	The property's page or the unit's page → *Change status*. There is no other route, deliberately: this is not something to stumble into from a list.

PRIMARY ACTION	**Deactivate premise**, in the danger tier — outlined, filling on hover, never the standard primary.
WHAT CHANGED · THE CONTROL EXISTS	Neither page had one. Both showed a status badge and offered no way to change it, and the unit page advised deactivating as though a button existed. Same place, same words, on both.
WHAT CHANGED · IT REFUSES WHILE ANYTHING IS LIVE	Your ruling of 8 September: active units, meters still attached, or open accounts each block a property; an open account blocks a unit. The refusal is the screen, not a toast — each blocked thing is a row with a count and a link to the list that clears it, so *why not* is also the route to *then do this first*.
WHAT CHANGED · IT ASKS WHEN AND WHY	A status change on a place is a thing somebody will be asked about a year later. The date and the reason are required and go into the record.
COGNITIVE LOAD	Three inputs, one refusal panel, two buttons. Nothing else is on the screen.
STATES	**Blocked** — The three counts, each linked. The commit is held and the held line names the first blocker in five words. **Clear** — The refusal panel is replaced by the consequence: what stops billing, what happens to the meters, and what the record will read afterwards. **Already inactive** — The control offers reactivation instead, with the same date and reason. **Read-only role** — The button is absent, not greyed. A control a person may never press is not a control.
COMPONENTS	`ConfirmDialog` `FormModal` `PlainTable` `StatusPill` `RefusalStrip` `InlineLinkTo`
RULES	The danger tier for destructive commits. A refusal caps at five or six words. A consequence preview before the commit. Every money-or-service action is

recorded with who, when and what.

Commitments in this section

Twenty-one specifications change a property screen. Every one is UNVERIFIED: engineering fills that column in from the code, one row at a time, and several are expected to come back already done.

PUJ-01 UNVERIFIED

A property list that can find the incomplete ones

WAITS ON	Nothing. The server already knows which properties carry a point.
SCREENS	P1
DONE LOOKS LIKE	A clerk opens the property list, presses the **Needs a location** filter, and the footer reads **16 of 673** with those sixteen rows on screen, each showing *Not placed* in the absence style.

PUJ-02 UNVERIFIED

The owner becomes optional, and every required field is marked

WAITS ON	PO ruling, 8 Sep 2026 — reverses `metering.premises.owner_required` on create.
SCREENS	P2 · P3
DONE LOOKS LIKE	A clerk fills in **412 Cypress Row** with no owner, presses **Create premise ✓**, and the property is created — with a chip on the property list reading **Needs an owner**.

PUJ-03 UNVERIFIED

The address lookup says when it cannot answer

WAITS ON	Nothing. The 409 already comes back; nothing renders it.

SCREENS P2

DONE LOOKS LIKE A clerk types **412 Cyp**, the lookup is refused, and a grey line under the box reads **Address lookup unavailable — type the town, state and ZIP** instead of nothing at all.

PUJ-04 UNVERIFIED

Coordinates, parcel and a GIS-checked flag are captured when a property is created

WAITS ON `premises.lat/lng` exist; `gis_unchecked` exists and is set on none of the 673.

SCREENS P2 · P3 · P4

DONE LOOKS LIKE After the lookup answers, the create form shows **Parcel R-114-0082-004** and **30.752104, −98.238391**, with **Checked against GIS · Not checked yet** and a **Mark checked** control that stamps **D. Whitfield, 8 Sep 2026**.

PUJ-05 UNVERIFIED

Common areas can be recorded while a property is being created

WAITS ON Nothing. Common areas are units with `is_common_area`.

SCREENS P2 · P3 · P6

DONE LOOKS LIKE A clerk adds **Laundry** and **Corridor lighting** on the create form, and the review reads **Common areas · Laundry · Corridor lighting · both bill to the owner**.

PUJ-06 UNVERIFIED

Route and cycle are settable at creation, and always shown

WAITS ON Nothing. Both are optional foreign keys that already exist.

SCREENS P2 · P4

DONE LOOKS LIKE A clerk picks **Route 12** and **Cycle 3** on the create form, and the property header afterwards reads **Route 12 · Cycle 3 — bills on the 12th**; a property with neither

reads **No route yet**.

PUJ-07 UNVERIFIED

The review shows every answer, including the ones left blank

WAITS ON	Nothing.
SCREENS	P3
DONE LOOKS LIKE	The review lists all sixteen answers — **Property type · Apartment complex** and **City limits · Inside** among them — with **Checked against GIS · Not checked yet** drawn as an absence rather than omitted.

PUJ-08 UNVERIFIED

The numbers the series will allocate are named before the save

WAITS ON	`core.numbering` already allocates them.
SCREENS	P3 · U3
DONE LOOKS LIKE	The review reads **Premise number · P-00080 · the next in this utility's series** and **Unit numbers · U-01144 to U-01147**; where no series is set up it says so and links to Settings, and the create is held.

PUJ-09 UNVERIFIED

A refused save is fixable where it happens

WAITS ON	Nothing.
SCREENS	P3
DONE LOOKS LIKE	A refused create shows **Street address is already recorded at 412 Cypress Row** above the button with that field focused — no **Retry**, and no **Download error report** borrowed from the bulk upload.

PUJ-10 UNVERIFIED

The property's page says where the property is

WAITS ON	`premises.lat/lng` and the parcel field exist and are served.
SCREENS	P4
DONE LOOKS LIKE	The Overview reads **Parcel R-114-0082-004**, **On the map 30.752104, −98.238391** and **Checked against GIS · Checked · D. Whitfield, 8 Sep 2026** as three rows of the fact list.

PUJ-11 UNVERIFIED

The master-account tile leads somewhere or stops being a tile

WAITS ON	Nothing.
SCREENS	P4
DONE LOOKS LIKE	The property header shows **Creekside Holdings LP · master account A-10442** as a link that opens the account; where there is none it reads **Needs an owner** with a **Find** control, and no dead tile is drawn.

PUJ-12 UNVERIFIED

The property's units tab carries what each unit owes

WAITS ON	The figure is already computed for the account screen.
SCREENS	P5
DONE LOOKS LIKE	The Units tab shows **Unit 1 · 61.40**, **Unit 4 · 0.00 · Vacant — base charges bill to the owner**, right-aligned and tabular, with the label leading and **U-01144** beneath it.

PUJ-13 UNVERIFIED

Common areas can be added from the tab that reports their absence

WAITS ON Nothing.

SCREENS P6

DONE LOOKS LIKE The Common areas tab carries **+ Add a common area**, and its empty state reads **None on this property** with that control beside it rather than a bare dash.

PUJ-14 UNVERIFIED

The assets tab groups what bills and what does not, and says when each was read

WAITS ON Nothing. All thirteen types are already served.

SCREENS P7 · U5

DONE LOOKS LIKE The Assets tab shows **Meters and sub-meters · 4 · these are what bill** over four rows, then **Behind the meter · 5 · we own them, they are not read**, where **FIR-00311** reads **not read — billed on size** and **CRT-08820** reads **not read — billed per cart**.

PUJ-15 UNVERIFIED

Fire service line is seeded for every tenant that sells fire

WAITS ON `DEF-AST-4690`. Three of ten tenants hold nine behind-the-meter types where seven hold ten.

SCREENS P7 · U5

DONE LOOKS LIKE On `brazosbend`, a clerk opens **+ Assign from inventory**, filters to **Fire**, and **Fire service line** is one of the types offered — as it already is on `pine-hill`.

PUJ-16 UNVERIFIED

The work-orders tab answers when somebody is coming

WAITS ON Not walked — no work existed on the sample property.

SCREENS P8

DONE LOOKS LIKE — The Work orders tab shows **Meter change · Thursday 10 Sep · A. Reyes** with its unit and its status, so a person on the phone can answer *when is somebody coming* without leaving the property.

PUJ-17 UNVERIFIED

An audit row shows what the value was before, without a press

WAITS ON — Nothing. The old value is already in `audit_log`.

SCREENS — P9 · U9

DONE LOOKS LIKE — The Audit log reads **Owner · none → Creekside Holdings LP** on the row itself, for every row, rather than one phrase and an **Expand** control.

PUJ-18 UNVERIFIED

Edit a property matches create, section for section

WAITS ON — PO ruling, 8 Sep 2026.

SCREENS — P10 · P2

DONE LOOKS LIKE — The edit form carries the same six headings in the same order as the create form — **Where is it?** through **What is inside it?** — with the same labels and the same required marks.

PUJ-19 UNVERIFIED

A property's point can be corrected

WAITS ON — `PUJ-04` for the field itself.

SCREENS — P10

DONE LOOKS LIKE — A clerk opens the edit form for a property placed on the wrong side of the street, changes **30.752104, −98.238391**, saves, and the map pin moves with it.

PUJ-20 UNVERIFIED

External / GIS ref becomes *Parcel ID*

WAITS ON	PO ruling, 8 Sep 2026. Empty on all 673 properties, so nothing is overwritten.
SCREENS	P2 · P4 · P10
DONE LOOKS LIKE	The field is labelled **Parcel ID** on create, edit and the property's page, and holds **R-114-0082-004**.

PUJ-21 UNVERIFIED

A property can be taken out of service

WAITS ON	PO ruling, 8 Sep 2026: active units, attached meters or open accounts each block it.
SCREENS	P11
DONE LOOKS LIKE	A clerk presses **Change status**, sees **4 active units · 9 attached assets · 3 open accounts** each linked, and the commit is held reading **Close the accounts first**; with all three clear, the date and reason are required and the property goes inactive.

04 Part two · a unit

A unit is what actually takes service — it holds the meters and everything else of ours, the plan and the account. A property with no units bills nothing at all. These screens are the same five acts as part one, for the smaller thing: find, create, read, change, retire.

U1 EXISTS BEHIND COMMITMENT PUJ-22 COMMITMENT PUJ-50

U1 **The units list** S15 · PRM-01U


The question: *which flat is this, and is anything owed on it?*

Premises → Units

WHAT A CLERK HITS TODAY

The columns are *Select · Unit ID · Premise · Unit · Type · Services · Meters · Occupant / Account · Status · Actions*. The first sortable column is the unit's number from your series — legitimate, but not what a person scans by — and *Premise* is a property code rather than an address. **So the two columns a person would look for, the street and the flat, are the third and fourth things they meet.**

There is no money on the list at all across 1,109 units.

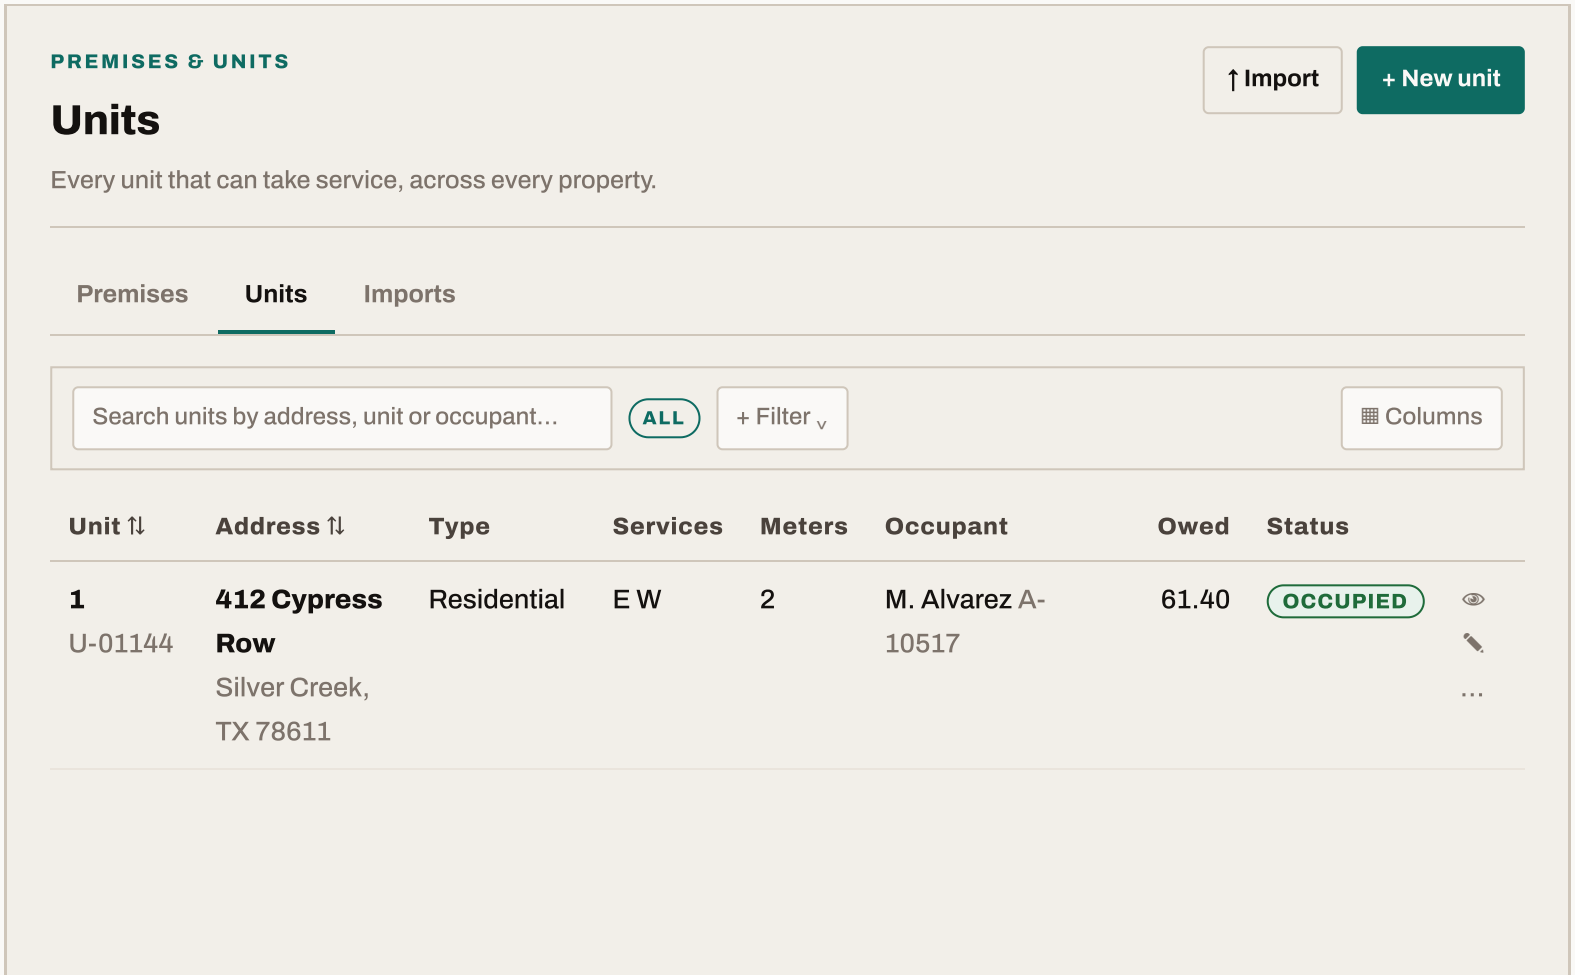

Unit ⇅	Address ⇅	Type	Services	Meters	Occupant	Owed	Status	
4 U-01147	**412 Cypress Row** Silver Creek, TX 78611	Residential	E W	*none*	*Vacant — base charges bill to the owner*	0.00	VACANT	👁 ✎ …
Laundry U-01148	**412 Cypress Row** Silver Creek, TX 78611	Common area	E W	2	Creekside Holdings A-10442	34.90	ACTIVE	👁 ✎ …

Showing 1–50 of 1,109 · Rows per page 50 ⇤ ← Page 1 of 23 → ⇥

WHAT CHANGED

- **The address is a column, not a code.** A unit is found by where it is; *Premise* showed a property reference a clerk would have to look up first.
- **The unit label leads and its number sits under it**, quiet, and the default sort moves to the label. Both are shown — a clerk reads the number down the phone — but only one of them is what a person scans by.
- **An *Owed* column**, right-aligned and tabular. A list of 1,109 units with no money on it cannot answer the question it is most often opened for.
- **A vacant unit says what that costs** instead of showing a dash.
- **Common areas appear in the list**, marked as such, because they are units and they are billed.

FOR	A clerk who has been given a flat and no property, and anyone sweeping for vacancies or unmetered units.
HOW YOU GET HERE	Premises → the Units tab. It shares its frame with the property list, which is why the two must read alike.

PRIMARY ACTION	**+ New unit**, which asks for the building first.
WHAT CHANGED · SCAN BY ADDRESS	The two columns a person scans by were third and fourth, behind the unit number and a property code. Neither is removed; both move out of the way.
WHAT CHANGED · MONEY ON THE LIST	Absent across 1,109 units.
WHAT CHANGED · ONE TAB ROW	An earlier draft of this page drew the *unit's* six tabs — Overview, Meters, Plan, Account, Occupancy, audit log — above the list's own three. They belong to one unit and there is no unit here yet. Only *Premises · Units · Imports* remains.
COGNITIVE LOAD	Nine columns, one search, no prose.
STATES	**Nothing yet** — Says a property must exist first, and links to the property list. **Filtered to vacant** — The footer count is the size of the job, and every row carries the owner-billing sentence.
COMPONENTS	`DataTable` `FilterBar` `RowActions` `StatusPill` `MoneyCell` `MoveUnitModal` `InlineLinkTo`
RULES	A printed reference from the tenant's own series is shown; a database id never is. Money right-aligned, two decimals, tabular. A pagination footer on every list. Search placeholders name what is searched.

U2 EXISTS BEHIND COMMITMENT PUJ-23 COMMITMENT PUJ-24 COMMITMENT PUJ-25

U2 Add units · Details S16 · PRM-07


The question: *three more flats went in. Which building, and add them.*

Premises → + New unit → step 1 · from a property, or from the units list

WHAT A CLERK HITS TODAY

Pressing "+ New unit" on a building forgets the building. It lands you at the front of the four-way *"How many?"* chooser; after choosing again you reach a pattern generator whose first required box is *Premise* — empty. The property you were standing on is not carried across.

The only route to units from a building is a floors-times-units generator with token syntax — *{floor}*, *{seq}*, *{seq:00}* — to add three flats. And it explains itself with *"the generator never creates a premise"*, which is a sentence about the tool, not about the job.

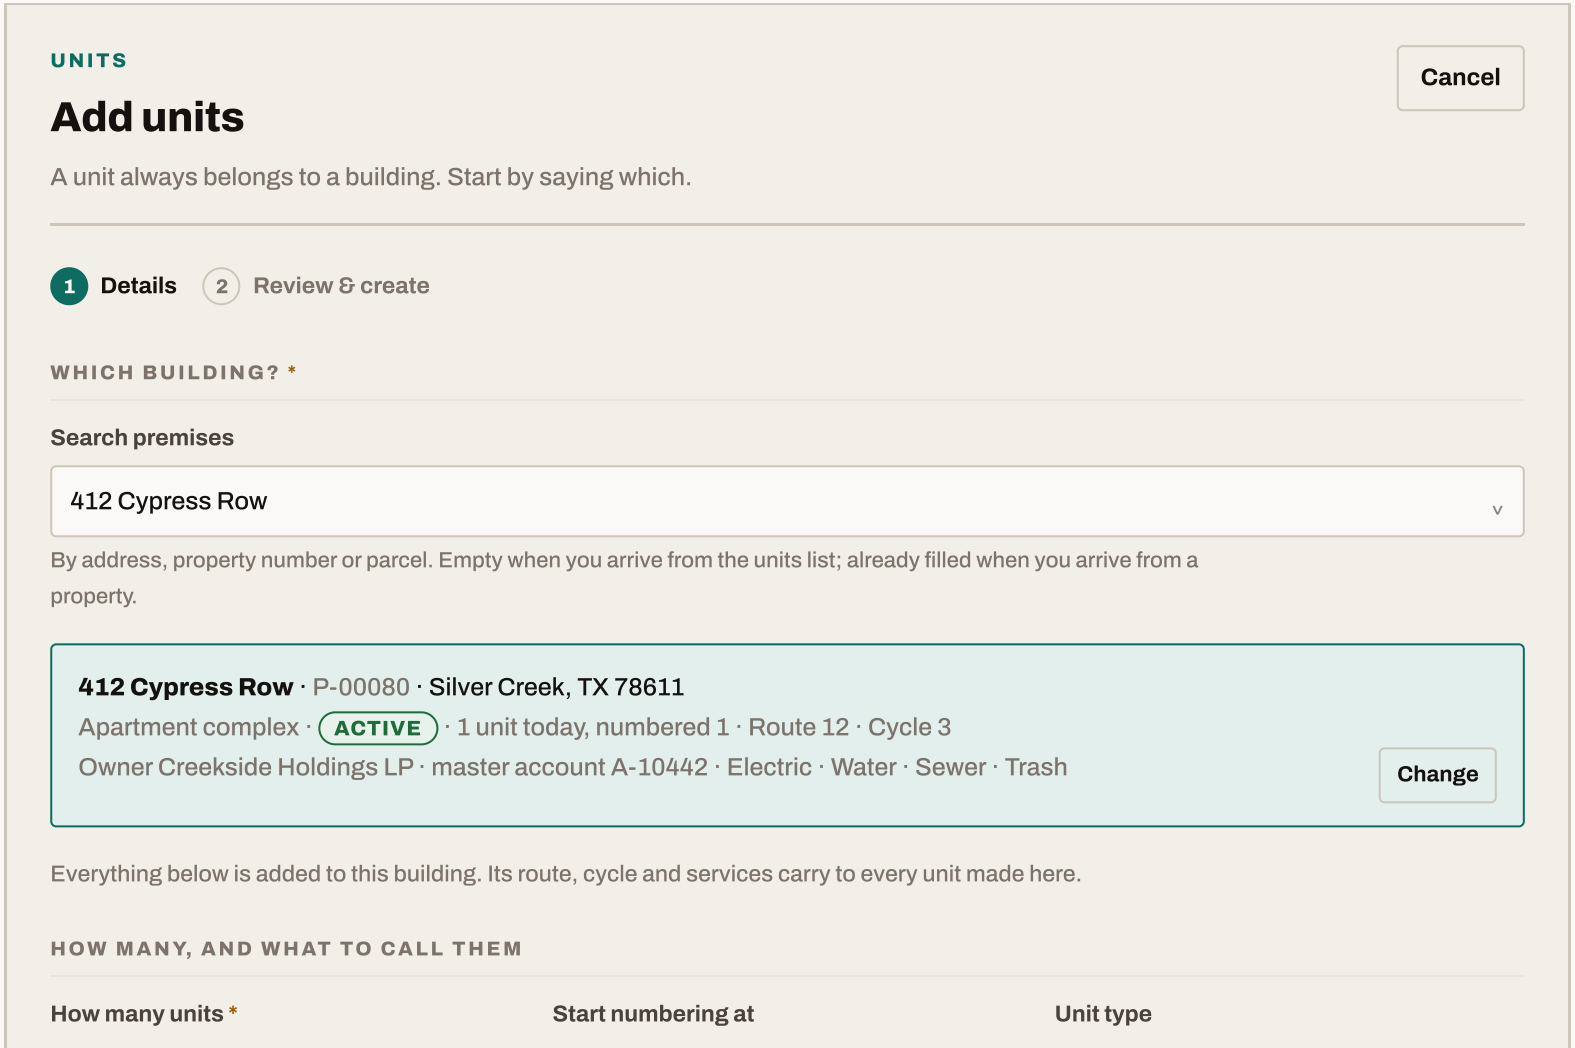

3

2

1 is taken.

Residential

Floor

Not recorded

Unit numbers

From the series — U-01145 onward

Or type a pattern of your own.

Or add a common area instead

Laundry · Corridor · Car park · Pool · Lift · Landscape irrigation…

A shared space with its own meter, billed to the owner rather than to a resident.

WHAT THEY WILL BE CHARGED ON optional

Plan

Residential Standard

Type to filter. Only plans this building's services can be billed on are offered.

Starts

The day the unit is created

Or a date you choose. Never mid-cycle.

Or leave it for later

Set the plan when somebody moves in

A unit with no plan is created and cannot be billed until one is set. Its Plan tab says so.

▶ **Uneven layout? Name them by a pattern instead**

Cancel

Continue →

WHAT CHANGED

- **The building is the first thing the form asks, and the only thing it insists on.** There are two doors into this screen and they need opposite things. From a property, the building is already chosen and the search box shows it — nothing to type. From the units list there is no building at all, so a clerk must be able to find one here rather than be told to go somewhere else and come back.

- **Choosing one shows the building, not just its name.** Address, property number, type, status, how many units it has today and what they are numbered, its route and cycle, its owner and its services — enough to know at a glance that this is the right building before three flats are created on the wrong one.
- **What carries down is said out loud.** The route, the cycle and the services belong to the building and reach every unit made here; a clerk should not have to know that from experience.
- **The common case is the plain case.** "How many units" and "start numbering at" — pre-filled so the next three are 2, 3, 4. The pattern generator is still here, folded away, for the buildings that need it.
- **No chooser.** Pressing *+ New unit* on a building goes to this screen, not to the front of a wizard that also offers to upload a spreadsheet.
- **A common area can be added from here too**, from the same screen and the same list of shared spaces, because the moment a clerk is adding units is the moment they remember the laundry.
- **A plan can be attached here, and it is optional.** Three flats in a block are almost always on the same plan, and setting it three times afterwards on three separate tabs is the version of this job nobody enjoys. Leaving it blank is a real answer and the screen says what it costs: the unit exists and cannot be billed until a plan is set.
- **It says what it will make** before it makes it — the label, **the unit number the series is about to allocate**, the type, and the state each one starts in.
- **The unit number is shown at creation, and it was not.** A unit's number comes from this utility's own series in Settings, exactly as a property's does, and until now the first place it appeared was after the save. A clerk needs it to write on a work order or read down the phone, and the pattern generator's own field for it said only *leave blank to let the numbering series allocate* — which tells you a series exists without ever telling you what it produced.

FOR	A clerk who is standing on a building and has three more flats to record. It is the second most common job in the module after creating the property itself.
HOW YOU GET HERE	**Two doors.** The property's page → *+ New unit*, where the building is already chosen. And the units list → *+ New unit*, where there is none — that door exists, it is the one a clerk uses when they have been given a flat and not a building, and neither should pass through a chooser.

PRIMARY ACTION	**Continue** →. An arrow navigates; nothing is written on this step. The commit is on step 2 and it says *Create 3 units* ✓, with the count in the button so the press and its consequence are one sentence.
WHAT CHANGED · THE FORM STARTS WITH THE BUILDING	PO, this session: *"firs form should start with Search premises - there is no premsies and on search you should show premises details - summary"*. The first section is *Which building?* and it is the one required thing on the screen. Arriving from a property fills it and there is nothing to type; arriving from the units list leaves it empty and a clerk searches by address, property number or parcel. Either way the same summary appears underneath.
WHAT CHANGED · THE SUMMARY, NOT JUST THE NAME	A chosen building shows its address, its number *P-00080*, its type, its status, that it holds **1 unit today numbered 1**, its route and cycle, its owner and its four services. That is what makes the difference between confirming a building and merely recognising an address — two properties on the same street will not be told apart by a name alone.
WHAT CHANGED · THE OLD FORM DROPPED IT ENTIRELY	*+ New unit* opened the four-way *How many?* chooser and then a generator whose first required box was *Premise*, empty — so the property a clerk was standing on was lost, and the door with no property gave a bare box with no way to see what it had chosen.
WHAT CHANGED · THE PLAIN CASE IS PLAIN	Two numbers — how many, and where to start — pre-filled so the next three are 2, 3 and 4. The floors-by-units pattern generator with its `{floor}` and `{seq}` tokens is still here for the buildings that need it, folded away behind one line.
WHAT CHANGED · COMMON AREAS	A laundry, a corridor light or a car park can be added from the same screen, because the moment a clerk is adding units is the moment they remember the laundry.
WHAT CHANGED · A PLAN, ATTACHED HERE	PO, this session: *"youa re not allowing to add plan here from drop down - we shuld attached plans and it should be options, when I edit it later you should allow to change the plan ot apply the plan"*. **Nothing new has to be built underneath.** `BR-MET-007` — the unit's default plan — is a signed rule already, and the create endpoint already accepts a nested plan block; the wizard simply never drew the

	panel, on the reasoning that a plan is assignable from the unit once it exists. That reasoning holds for one unit and fails for three. The picker is searchable because a utility has more than five plans, and it offers only plans the building's services can be billed on.
WHAT CHANGED · LEAVING IT BLANK IS AN ANSWER	Not an omission. The third control says it in words — *set the plan when somebody moves in* — and the consequence is stated rather than discovered: the unit is created and cannot be billed until a plan is set.
WHAT CHANGED · IT IS A WIZARD, WITH A REVIEW	PO, this session: *"this should be wizard and you should show preview and create"*. Two steps, exactly like adding a property: **Details**, then **Review & create**. Adding units is the same kind of act as adding a property — it mints numbers from a series and creates rows that will bill — so it gets the same last look before anything is written. The preview table has moved off this step onto that one, where it belongs.
WHAT CHANGED · IT SAYS WHAT IT WILL MAKE	By name — *Unit 2 · Unit 3 · Unit 4* — and that each starts vacant with no meter, and that a vacant unit's base charges reach the owner.
WHAT CHANGED · THE UNIT NUMBERS ARE SHOWN	They come from the utility's series in Settings and appeared only after the save. If the series is not set up the block says so and links to Settings, exactly as the property's does — never an invented number.
COGNITIVE LOAD	One search, five inputs and one folded section. The generator's token syntax is not on screen unless a clerk asks for it.
STATES	**No building chosen yet** — Everything below the search is held, greyed and unreachable, and the commit says *Choose a building first*. Nothing about units can be answered before it. **The building is out of service** — The summary carries its status pill and the commit is held: a property that takes no service cannot gain a unit that bills.

A label is already taken	The refusal is short and names the clash — *Unit 2 already exists* — and the start number moves on.
Uneven layout	The fold opens and the preview under the pattern shows the first labels it produces, so the syntax is checked by eye and not by trying.
Adding a common area instead	The unit count disappears and the shared-space list takes its place; the two are the same act with different consequences and the screen only ever shows one.
No plan chosen	The preview's Plan column says *none yet* in the absence style, and the commit is not held — it is a legitimate choice, and the unit's Plan tab will say the same thing.
No plan fits the services	The picker is empty and says which service has no plan, with a link to Plans & Rates. Never a silent empty list.
No numbering series	The block says the unit series has not been set up and links to Settings. No number is invented and the create is held.
COMPONENTS	`WizardFrame` `SearchSelectField` `SummaryCard` `TextField` `SelectField` `RefusalStrip` `Panel` `Note`
RULES	A consequence preview before the commit. A refusal is short and says what to do, not what went wrong. Button grammar: a tick commits.

U3 NEW BUILD COMMITMENT PUJ-08 COMMITMENT PUJ-25 COMMITMENT PUJ-26

U3 Add units · Review & create S16 · PRM-07


The question: *is this right, before three flats become real?*

`Premises → + New unit → step 2`

WHAT A CLERK HITS TODAY

There is no review at all. The unit generator writes on the press. Adding a property gets a last look before anything is written; adding units — which mints numbers from the same kind of series, and creates the rows that actually bill — gets none.

So a mistyped *How many* or a pattern that produces *Apt 101, Apt 102, Apt 103* where you wanted *1, 2, 3* is found afterwards, on a list, one row at a time.

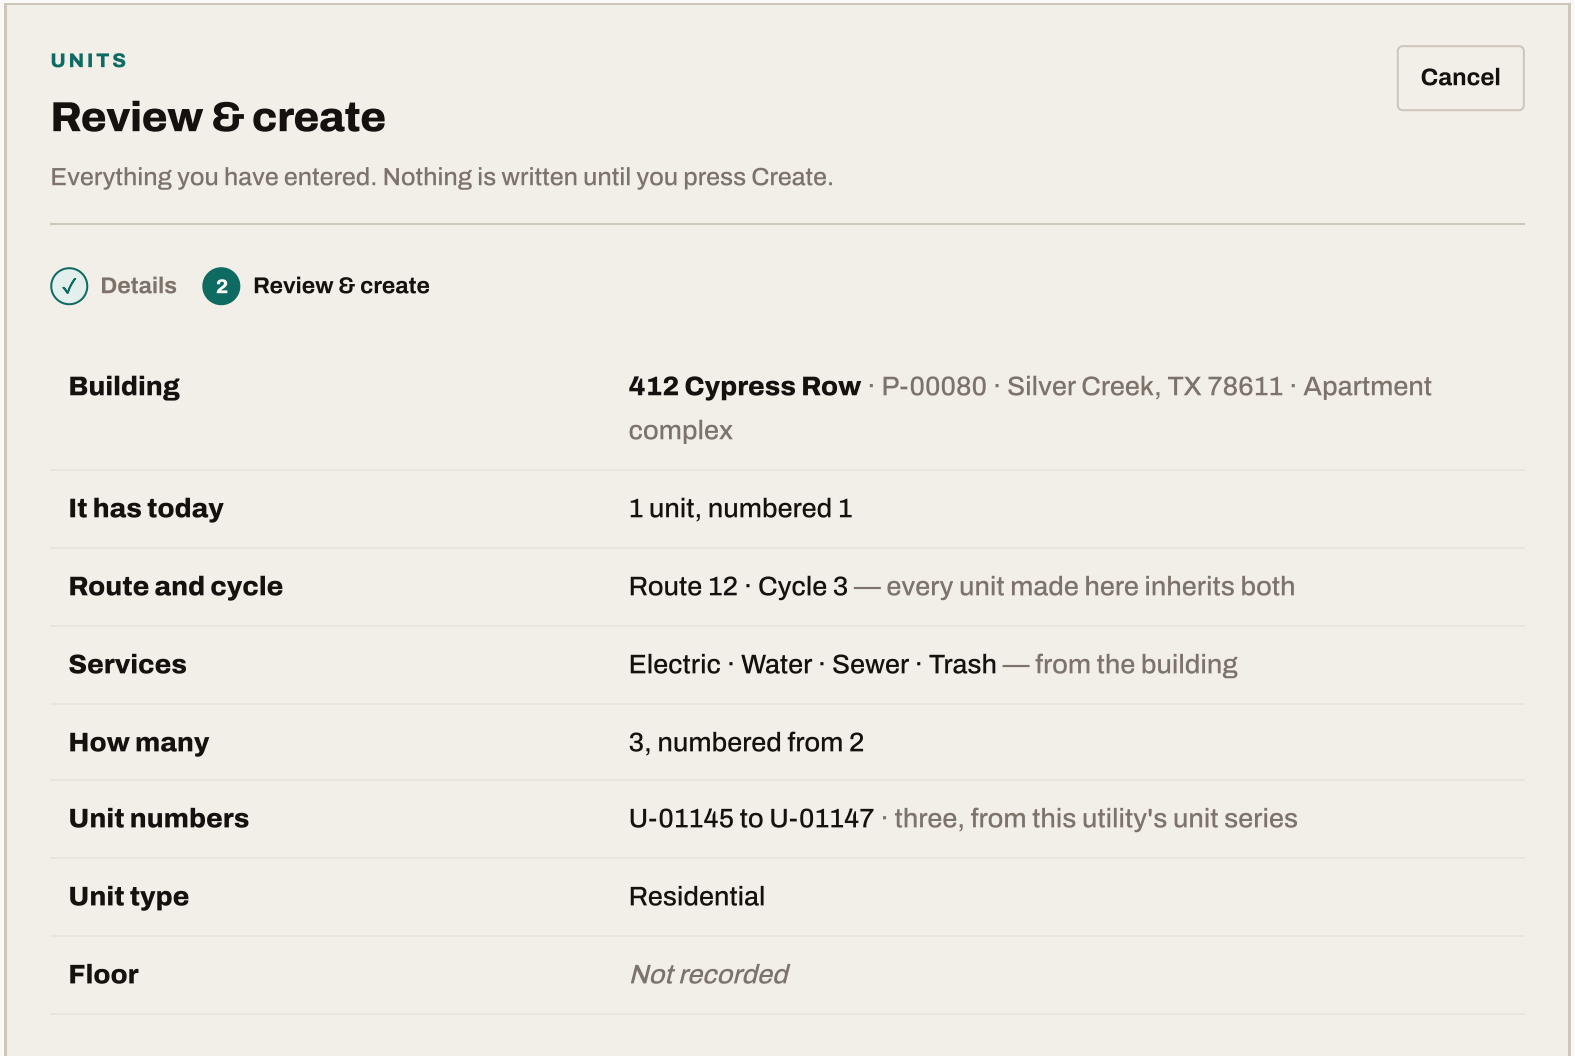

Plan	Residential Standard · from the day each unit is created
Common areas	*None being added here*

THIS WILL CREATE

Label	Unit number	Type	Plan	Starts
2	U-01145	Residential	Residential Standard	*Vacant, no meter*
3	U-01146	Residential	Residential Standard	*Vacant, no meter*
4	U-01147	Residential	Residential Standard	*Vacant, no meter*

Unit numbers come from this utility's series in Settings — they are taken when you press Create, not now. Each unit starts vacant with no meter, and base charges on a vacant unit reach the owner.

← Back

Create 3 units ✓

Recorded in the audit log by the server: who, when, and what.

WHAT CHANGED

- **There is a last look, and there was none.** Adding a property has one; adding units did not, although it mints numbers from a series and creates the rows that bill.
- **The building is at the top of it**, with its number and its address, because the commonest way to get this wrong is to create three flats on the right street and the wrong building.
- **What the building lends is listed** — route, cycle and services — so a clerk sees what each new unit inherits without having to know that it does.
- **The numbers the series will take are named**, and the note says plainly that they are taken on the press and not now. A number shown on a review that a second clerk then takes is worse than no number at all.

- **Every answer is on it, including the ones left blank.** *Floor — not recorded* and *common areas — none being added here* are drawn as absences, not left out. The property review had the opposite fault: eight answers given, four shown.

FOR	The same clerk, one press from creating rows that will appear on a bill. This screen exists for the thirty seconds before that.
HOW YOU GET HERE	*Continue* → from step 1. ← *Back* returns with everything still filled in.
PRIMARY ACTION	**Create 3 units ✓** — a tick commits, and the count is in the button.
WHAT CHANGED · THE SCREEN ITSELF	PO, this session: *"this should be wizard and you should show preview and create"*. It did not exist. The generator wrote on the press, so a mistyped count or a pattern producing *Apt 101* where *1* was wanted was found afterwards, on a list, one row at a time.
WHAT CHANGED · ABSENCES ARE SHOWN	A blank answer is drawn as an absence rather than omitted. That is the fault the property's own review had — eight things entered, four shown, and the two missing ones decided how the property would be billed.
COGNITIVE LOAD	Ten rows of answers, one preview table of three rows, two buttons. No prose beyond one consequence note.
STATES	**A label clashed while you reviewed** — The refusal names the clash in five words and ← *Back* lands on the field that caused it, not at the top. **The series moved** — Another clerk took U-01145 meanwhile. The numbers are re-read on the press, the preview updates and the commit says what it is about to take. **Refused by the server** — The failure appears above the button with the field named — never a *Retry* and a *Download error report* on a screen with nothing to fix.

COMPONENTS	`WizardFrame` `StepRail` `PlainTable` `ConsequencePanel` `RefusalStrip` `Note`
RULES	A consequence preview before the commit. Button grammar: an arrow navigates, a tick commits. An absence is drawn as an absence. A refusal is short and says what to do. Every money-or-service action is recorded with who, when and what.

U4 EXISTS BEHIND COMMITMENT PUJ-27 COMMITMENT PUJ-28 COMMITMENT PUJ-29

U4 Unit → Overview S15 · PRM-03

The question: *what is this flat, who is in it, and what of ours is on it?*

`Premises → Units → a unit`

WHAT A CLERK HITS TODAY

A unit's status can be seen and not changed. The header shows *Occupied · Active*. The only button is *Move*. The page even advises *"deactivate it and create it under the other premise"* — for a button that is not there.

The unit knows nothing about where it is. No coordinates and no parcel, on any of the 1,109 units in the database.

The address is only in the title bar. The Premise row shows a code; the street is in the heading above it, so the two halves of one fact sit in two places.

UNIT

Unit 2

U-01145 · 412 Cypress Row, Silver Creek, TX 78611 · Residential · ACTIVE OCCUPIED

Route 12 · Cycle 3 — from the building

Edit | Move | Change status

Overview | Assets | Plan | Account | Occupancy | Audit log

5	$61.40	Standard	—
ASSETS	OWED	PLAN	OPEN WORK
2 metered · 3 behind the meter	due 24 Sep	since 1 Jun 2026	nothing booked

In this building	412 Cypress Row, Silver Creek, TX 78611 Apartment complex · 4 units · Open it →
Floor	*Not recorded*
Floor area	*Not recorded*
Parcel	R-114-0082-004 · from the building
On the map	30.752104, –98.238391 · from the building Give this unit its own point
Checked against GIS	CHECKED · inherited with the building's point
Account	**A-10517** · M. Alvarez · ACTIVE · since 1 Jun 2026 · Residential Owes **$61.40**, due 24 Sep · deposit $150.00 held · autopay on Open the account →
Services	Electric · Water

WHAT CHANGED

- **The unit number is in the header.** *U-01145,* ahead of the address — the number a clerk reads down the phone and writes on a work order. Every other tab of the unit carried it and this one did not, which is the same drift that had the property number missing from the property page.

- **A unit can carry its own parcel and its own point**, and where it does not, it says plainly that it is using its building's. That is your ruling drawn: the address stays on the building, the point may differ.
- **Change status is a real control**, in the danger tier, matching the property's.
- **The building is a row, with its street address in it**, not a code under a heading. One fact in one place, and a link that opens it.
- **An occupied unit shows its account, not its occupant.** The number, the holder, the status, what is owed and when it is due, the deposit we are holding and whether autopay will take it — with one link out. *Occupant* was a name and a number on one line; a clerk who has found the flat is next going to be asked about the money, and the account is where all of it is.
- **A vacant unit says what that costs, in the same place.** No account, base charges reaching the owner, and the owner's account named and linked — rather than a blank where the account row would be.
- **The tiles say what a person came for** — what of ours is on it, what is owed, which plan, and whether anyone is due to visit. The assets tile counts everything tagged to the unit and splits it: the two that are read and bill, and the three that are ours and are not.
- ⚠ **The six tabs are unchanged, and the second one stays *Assets*.** An earlier draft renamed it to *Meters*; PO ruling this session reverses that, on the property and on the unit alike. A unit holds a cart, a comms endpoint and a fire line as readily as it holds a meter, and the tenant's catalogue has thirteen types to prove it.

FOR	A clerk answering a question about one flat — who is in it, what is metering it, what it owes. It is where a service call lands after the address has been found.
HOW YOU GET HERE	The Units tab, the property's Units tab, an account, a meter, a work order, and the global search. Like the property page, it is reached from more places than it links to.
PRIMARY ACTION	✎ **Edit.** *Move* and *Change status* beside it; only *Change status* is in the danger tier.
WHAT CHANGED · A UNIT CAN BE SOMEWHERE	Its own parcel and its own point, and where it has neither it says plainly that it is using its building's. That is the ruling of 8 September drawn: the address stays on

	the building, the point may differ, and the screen always says which of the two it is showing. All 1,109 units carry nothing today.
WHAT CHANGED · STATUS IS CHANGEABLE	The badge read *Occupied · Active* and the only button was *Move*. The page even advised deactivating — for a button that did not exist.
WHAT CHANGED · THE BUILDING IS A ROW WITH ITS ADDRESS IN IT	It showed a property code under a heading that held the street, so one fact sat in two places in two vocabularies. It is one row now, with the address in it and a link that opens the building.
WHAT CHANGED · THE TILES	What is metering it, what is owed, which plan and since when, and whether anyone is due to visit.
WHAT DID NOT CHANGE	Six tabs, same order. *Assets* reads *Meters*.
WHAT CHANGED · THE ACCOUNT, WHEN OCCUPIED	PO ruling this session: an occupied unit displays its account. The row was *Occupant · M. Alvarez · account A-10517* — a name, a number and a date. It now carries the account's status, what is owed and when, the deposit held and whether autopay will actually take it, with a link to the rest. Vacant is the same row saying no account, base charges to the owner, and naming the owner's account.
WHAT CHANGED · THE FOUR TILES ARE THE PAGE'S, NOT THE TAB'S	PO ruling this session: *these KPIs will be displayed across all views*. **Assets · Owed · Plan · Open work** now sit on every tab of the unit — Overview, Assets, Plan, Account, Occupancy and the audit log — exactly as the header and the tab strip do. The property's four do the same across its six. A number that is true of the whole page does not belong to one tab of it, and a clerk who has read it once should not lose it by moving sideways.
COGNITIVE LOAD	Four tiles, seven facts, one map, six tabs. Two sentences of description in total.
STATES	**Using the building's point** — The row says *from the building*. This is the common case and it is stated rather than implied. **Its own point** — The row shows the unit's own figures and drops the *from the building* note, so the difference is visible at

	a glance — which is the whole reason the ruling exists.
Vacant	The occupant row reads *Vacant — base charges bill to the owner*, never a dash. A dash on that row is read as *nothing is billed*, which is the opposite of true.
A common area	The occupant row says so and no account can be opened on it.
COMPONENTS	`PageHeader` `KPIStrip` `PlainTable` `StatusPill` `MoveUnitModal` `UnitPlanModal` `UnitPricingPanel` `MoneyCell` `InlineLinkTo` `ArrivesWith`
RULES	An absence is italic and grey and never a zero. Consumption always carries its unit. A unit label a clerk reads down the phone is shown; a database id never is. The danger tier for taking a thing out of service.

U5 EXISTS BEHIND COMMITMENT PUJ-14 COMMITMENT PUJ-15 COMMITMENT PUJ-30 COMMITMENT PUJ-31 COMMITMENT PUJ-32

U5 Unit → Assets S15 · PRM-03

The question: *I have a meter in my hand. Attach it to this flat.*

`Premises → Units → a unit → Assets → + Assign from inventory`

WHAT A CLERK HITS TODAY

The control exists and it searches — **by asset number only**. You cannot look for *"the 5/8-inch water meter sitting in the depot"*. If you have the meter and not its number, you must go and find the number somewhere else first.

And choosing one does not attach it: the panel says it *"opens its reassign page with this unit already selected"*, so the job finishes on a different screen. **There is no way to change an attached meter's status**

from the unit at all.

UNIT

Unit 2

U-01145 · 412 Cypress Row, Silver Creek, TX 78611 · Residential · ACTIVE OCCUPIED

Route 12 · Cycle 3 — from the building

✎ Edit | Move | Change status

Overview | **Assets** | Plan | Account | Occupancy | Audit log

5	$61.40	Standard	—
ASSETS	OWED	PLAN	OPEN WORK
2 metered · 3 behind the meter	due 24 Sep	since 1 Jun 2026	nothing booked

A unit cannot bill a service until a meter is on it. + Assign from inventory

Meter	Service	Size	Status	On since	Last read	
MTR-40218	Electric	Class 200	IN SERVICE	1 Jun 2026	28 Aug · 4,182 kWh	✎ – …
MTR-40219	Water	5/8"	IN SERVICE	1 Jun 2026	28 Aug · 14 kgal	✎ – …

ASSIGN FROM INVENTORY

Search by number, type or size… | WATER × | IN THE DEPOT × | + Filter ⌄

Meter	Service	Size	Where it is	Status	
MTR-41007	Water	5/8"	Main depot · shelf B	IN STOCK	Assign ✓

Meter	Service	Size	Where it is	Status	
MTR-41008	Water	5/8"	Van 3 · K. Osei	HELD BY A TECHNICIAN	Assign ✓
MTR-40990	Water	1"	Main depot · shelf B	IN STOCK	Assign ✓

Showing 3 of 3 in stock · 41 water meters in inventory

Assigning records the start read and takes it out of stock.

WHAT CHANGED

- **You can search for the meter you are holding** — by number, by service, by size, and by where it is. The filter chips do the work the number used to.
- **Assigning happens here.** One press, and the meter is on the unit. No second screen to finish a one-step job.
- **The meters already on the unit carry their status**, and it can be changed from this row — the edit icon on the row, exactly as the rules ask for row actions.
- **What assigning does is said before you do it**, in one line: the start read is recorded, and the meter leaves stock.
- **It wears the unit's own header and its tab row**, like every other tab of the unit. It read as a separate page called *Meters on this unit*, so a clerk lost the flat they were standing on and the way back to it.

FOR	A clerk or a technician with a meter in their hand, or a supervisor preparing a change-out. It is the last step of connecting a unit and the first step of every meter exchange.
HOW YOU GET HERE	The unit's page → Assets. Also from a work order, which is where a technician arrives from.
PRIMARY ACTION	**+ Assign from inventory.** Inside the panel, **Assign ✓** on the row — one press, and it is done here.

WHAT CHANGED · SEARCH BY WHAT YOU ARE HOLDING	It searched by asset number and nothing else, so a clerk holding a meter but not its number had to go and find the number somewhere else first. Number, service, size and where it is now, with filter chips doing the work the number used to.
WHAT CHANGED · ASSIGNING FINISHES HERE	Choosing one opened that asset's own reassign page to complete the job. A one-step act took two screens and left the unit you were working on. It commits on this panel.
WHAT CHANGED · STATUS ON THE ROW	The meters already on the unit carry their status and it can be changed from the row, through the edit icon the conventions give row actions. There was no way to change an attached meter's status from the unit at all.
WHAT CHANGED · IT SAYS WHAT ASSIGNING DOES	One line: the start read is recorded and the meter leaves stock. That is a service-state change and the conventions ask for it to be said before it happens.
WHAT CHANGED · A TAB, NOT A PAGE	It carried a header of its own — *Unit 2 · 412 Cypress Row / Meters on this unit* — and no tab row, so it read as somewhere you had gone rather than part of the unit you were on. It now wears the same header, the same three page actions and the same six tabs as Overview, Plan, Account, Occupancy and the audit log; **+ Assign from inventory** moves down to the tab it belongs to.
COGNITIVE LOAD	One table of what is on the unit, one search, one table of what is available. No prose beyond the single consequence line.
STATES	**Nothing in stock** — The empty state names the service and the size searched for and offers the inventory screen, rather than an empty table. **Held by a technician** — The row shows who has it. It can still be assigned, because a van is a location and not a refusal. **Wrong service for the unit** — Refused before the press, in the row, naming the service the unit takes. A water meter cannot be assigned to an electric-only unit.

	Removing a meter — The consequence is the one the current screen already states: a final read is recorded, it returns to inventory, and the unit cannot bill that service until a replacement is on it.
COMPONENTS	`DataTable` `FilterBar` `SearchSelectField` `RowActions` `StatusPill` `RefusalStrip` `ConfirmDialog`
RULES	Row actions are icons with tooltips. A refusal caps at five or six words and says what to do. A consequence preview before a commit that changes service state. Colour is never the only signal.

U6 EXISTS BEHIND COMMITMENT PUJ-33 COMMITMENT PUJ-34 COMMITMENT PUJ-35 COMMITMENT PUJ-45

U6 Unit → Plan S15 · PRM-03

The question: *what is this flat being charged on?*

`Premises → Units → a unit → Plan`

WHAT A CLERK HITS TODAY — WALKED ON THE REAL SCREEN, OTTUMWA WATER WORKS, SCW-U-001 · UNIT 1, 101 SILVER CREEK RD

This tab is already rich, and the earlier draft of this page underdrew it badly. It carries four tiles, a six-row plan panel, a period picker and a full pricing panel below — plan, code, status, base charges, a minimum-bill line, six services with their base charges, and every rate schedule. The revision below keeps all of it and fixes five things.

⚠ **The same screen writes a date four different ways, and two of them are opposite orders forty pixels apart.** The tile says *06/01/2026*. The panel two blocks down says *2026-06-01* — the same date. The period boxes say *01/09/2026* and *30/09/2026*, which are day-first. The sentence above them says *2026-09-01 to 2026-09-30*. **A clerk reading *06/01/2026* cannot tell 1 June from 6 January**, and the screen offers both conventions as evidence.


***Effective from* appears twice** — once in the plan panel, once in the pricing panel — in two of those formats, which is how a person concludes there are two dates.

"No floor is set on this plan." is printed seven times — once for the plan and once for each of the six services, identically. Seven copies of one sentence occupy more of the screen than any figure on it.

The eligibility row explains our code to a clerk: *"Nothing checks a plan's eligibility rules yet. The rules are stored as they were written and no code reads them, so there is no result to show here."* True, and not a sentence about the job.

Three of the six services show a base charge of *$0.00* — Trash, Solar and **Fire** — with nothing to say whether that means free or priced some other way. Fire is priced on the size of the line and the count, so *$0.00* is right and reads as wrong.

Smaller: the tile is headed *METERS* where the tab beside it now reads *Assets*; the header offers **Move** and nothing else; and the services line reads *"Sewer + Battery + Water + Trash + Solar + Fire available"* — joined with plus signs, out of the order the eleven services are defined in, and ending on a word that attaches itself to Fire.

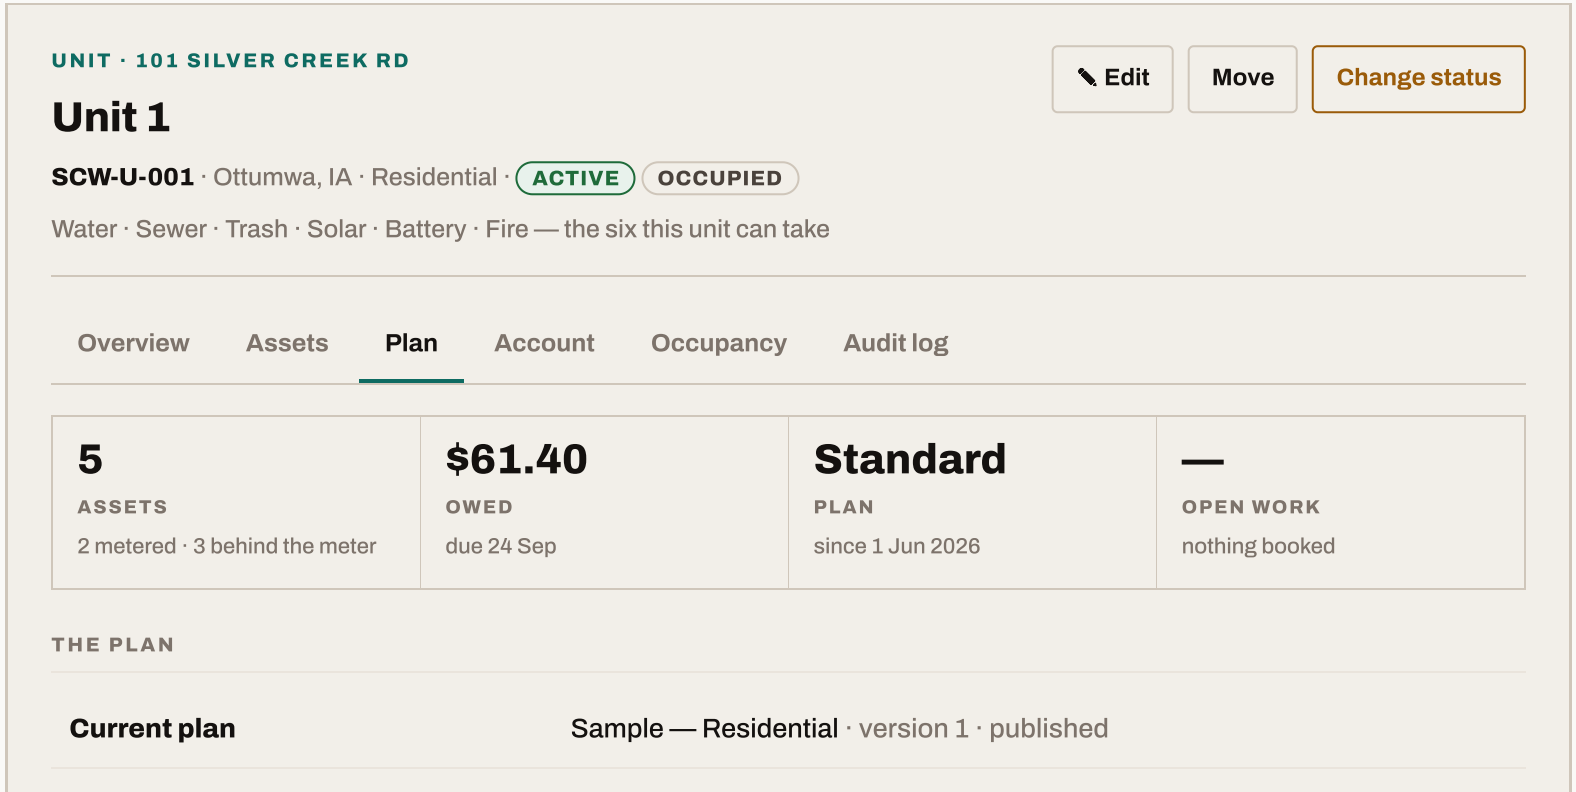

Plan code	SCW-RES
Effective from	1 Jun 2026
Base charges	$22.00 a month · the six service base charges below add to this
Minimum bill	*No floor is set — a bill can be any amount, including nothing*
Locked to this unit	No · a change here does not need a supervisor
Vacant standby	No · nothing bills while the unit is empty
Eligibility	*Not checked — no plan on this system asks for proof yet*

WHAT EACH SERVICE IS PRICED ON

Service	Base a month	Priced on	Minimum
Water	8.00	Inclining tiers · Sample — Residential water	*none*
Sewer	9.00	A percentage of water · Sample — Sewer	*none*
Trash	0.00	Per cart, monthly — not measured · Sample — Trash	*none*
Solar	0.00	By capacity · Sample — Solar capacity	*none*
Battery	5.00	By capacity · Sample — Battery capacity	*none*
Fire	0.00	By the size of the line, times how many · Sample — Fire capacity	*none*

A base of **0.00** does not mean free — it means this service carries no standing charge and is priced entirely by the column beside it. No floor is set on any of the six, so none has a minimum.

WHAT A PLAN CHANGE WOULD DO

A new plan takes effect from the date you choose and never mid-cycle. Bills already issued keep the plan they were made on. This unit is occupied, so a change made here is an error correction and is recorded with your reason — the ordinary way is through the account.

Showing what applies today, 8 Sep 2026 · look at another period

Change plan →

WHAT CHANGED

- **One date, written one way: *1 Jun 2026*.** The screen wrote the same date as *06/01/2026* in one place and *2026-06-01* in another, and set two day-first boxes beside a month-first tile. A named month cannot be read two ways, and it is the only format on this screen now.
- ***Effective from* appears once.** It was on the plan panel and again in the pricing panel below, in two different formats — which is how a clerk concludes there are two dates.
- **The seven copies of "No floor is set on this plan." become one sentence and six absences.** The plan row says what no floor means; each service says *none* in the absence style. The information is identical and it takes a tenth of the room.
- **A base of *$0.00* says why.** Trash, Solar and Fire carry no standing charge and are priced by cart, by capacity and by line size — so the *Priced on* column earns its place, and a zero stops reading as free.
- **The base charges tile is the money tile.** *$22.00 a month before any usage* is the figure a clerk is asked for; the meter count was on it instead, and the meter count is on the Assets tab. And the six service bases add to exactly that *$22.00* — the one sum on this screen a person can check, so the screen says it is a sum.
- **Eligibility says what a clerk needs** — *not checked, no plan on this system asks for proof yet* — instead of explaining that the rules are stored and no code reads them.
- **Locked and standby say what they mean** rather than *No* twice: whether a supervisor is needed, and whether anything bills while the unit is empty.
- **The period picker folds away.** *Showing what applies today* with one link to look at another period. Four controls and a sentence were open permanently for a question almost nobody asks, above the answer everybody came for.
- **The services line is a list, in the order the eleven services are defined** — *Water · Sewer · Trash · Solar · Battery · Fire* — not *"Sewer + Battery + Water + Trash + Solar + Fire available"*, where the last word attaches itself to Fire.
- **Edit and Change status join Move** in the header, per your ruling. The unit page offered *Move* alone.

FOR	A clerk asked why a bill looks the way it does, a supervisor moving a unit onto a new tariff, and whoever is opening an account on it — the pricing panel exists because a move-in has to show the rates the first bill will use.
HOW YOU GET HERE	The unit's page → Plan. The same panel is drawn at step 4 of a move-in, so a change here changes what a new customer is shown.
PRIMARY ACTION	**Change plan** →. An arrow, because it opens a chooser rather than writing. On an occupied unit it is an error-correction override and says so before it commits.
WHAT CHANGED · ONE DATE FORMAT	⚠ **Four renderings of a date on one screen, two of them opposite orders.** *06/01/2026* on the tile and in the plan panel; *2026-06-01* for the same date in the pricing panel; *01/09/2026* and *30/09/2026* in the period boxes, which are day-first; *2026-09-01 to 2026-09-30* in the sentence above them. Named months throughout, so no reading is possible but the right one.
WHAT CHANGED · SEVEN COPIES OF ONE SENTENCE	*"No floor is set on this plan."* printed once for the plan and once per service. One sentence and six absences carry the same fact.
WHAT CHANGED · A ZERO THAT READS AS FREE	Trash, Solar and Fire all show *$0.00*. Fire is priced by the size of the line times the count, so its base genuinely is nothing — and a clerk looking at a fire customer's bill has no way to tell that from an unpriced service.
WHAT CHANGED · THE TILE THAT IS NOT A TILE	*METERS 1* sat on the Plan tab, where the question is money and the meter count is one tab to the left. It becomes the plan's base charge, which is the figure this tab is opened for.
WHAT CHANGED · OUR IMPLEMENTATION, ON SCREEN	The eligibility row said the rules are stored and no code reads them. What a clerk needs is whether this plan asks for proof; what they were given was why we cannot answer.
COGNITIVE LOAD	Four tiles, eight plan rows, six service rows, one consequence line. The period picker is one link. Nothing else is on screen until asked for.

STATES	**No plan** — Says the unit cannot be billed until it has one, in those words, and offers the chooser. `rate_plan_id` is null on a real number of units, so this is not a rare state.
	Locked to this unit — The change is held with a five-word refusal and names the role that may do it.
	Occupied — The change is an override: the reason box is required and the audit row records it. The ordinary route is the account's own change-plan flow, and the screen says so.
	A schedule priced in the wrong unit — The service says a bill cannot be produced until the conversion is settled — the one condition on this screen that stops money, so it is stated on the row and not in a footnote.
	The rates could not be read — None are shown and the panel says nothing is assumed in their place. An empty rate table is the one thing worse than no table.
	An example month — Never shown. Nothing in this product prices a plan outside a bill run, and no signed rule says what a new tenant is assumed to use — so the panel states that rather than inventing a figure.
COMPONENTS	`UnitPlanModal` `UnitPricingPanel` `PlainTable` `MoneyCell` `DateCell` `StatusPill` `ArrivesWith`
RULES	Money two decimals on screen, four in store. A consequence preview before a commit that changes service state. An absence is drawn as an absence. No rule id or internal code in clerk-facing copy. A description budget of one sentence per section.

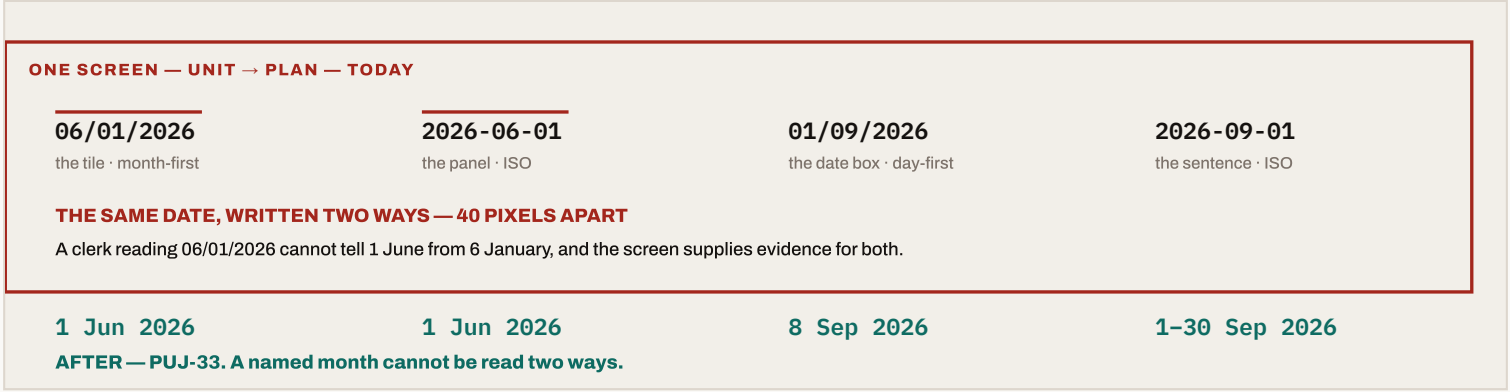


Figure 3 · The plan screen writes one date four ways. Filed as DEF-MET-4689. Each formatter is correct in isolation — a tenant format, a stored ISO string and two native date inputs the browser renders in its own locale — which is exactly why nothing caught it. Named months remove every reading but the right one.

U7 EXISTS BEHIND COMMITMENT PUJ-36 COMMITMENT PUJ-37 COMMITMENT PUJ-38 COMMITMENT PUJ-39 COMMITMENT PUJ-40 COMMITMENT PUJ-41

U7 Unit → Account S15 · PRM-03

The question: *who is paying for this flat, are they up to date, and is there anything I must know before I act?*

Premises → Units → a unit → Account

WHAT A CLERK HITS TODAY, AND WHAT THE PRODUCT COULD ALREADY TELL THEM

The tab renders five facts — account number, status, start, balance, autopay — and a *Move-out…* button that is held with the honest note that move-out is the Accounts screen's flow and *"this unit has no door to it yet."*

The accounts table has thirty-three columns and six tables hanging off it. I read them: what is missing from this tab is not information the product lacks, it is information the product already holds and does not put here.

The one that can stop a crew: protections. Three accounts on the demo utility carry one — a protection means we may not disconnect, and a clerk standing on a unit arranging a shut-off cannot see it from here at all.

The one that has just become load-bearing: the account's customer class. Since the plans change, a charge code can price differently per class — residential and commercial can be $8.00 and $34.00 for the same size — so *which class is this account* now decides a figure on the bill, and this tab does not name it.

Money we are holding, not shown. Deposits sit on **11 of 78** accounts on one demo utility and **5 of 73** on the other — $150.00 each, with the date taken.

⚠ **And nine columns are populated on ZERO rows across both demo utilities** — cash-only, bad address, bounced-payment count, tax exemption, paperless, SMS reminders, preferred language, credit tier and the old system's reference. They exist, nothing writes them, and no screen shows them. Two of those matter more than the rest: **cash-only beside autopay** is the pair that lets a screen say *autopay is on* while nothing will ever be taken, and **bad address** is a fact about post on an account whose address is walked from the building.

UNIT

Unit 2

U-01145 · 412 Cypress Row, Silver Creek, TX 78611 · Residential · ACTIVE OCCUPIED

Route 12 · Cycle 3 — from the building

✎ Edit | Move | Change status

Overview | Assets | Plan | **Account** | Occupancy | Audit log

5	$61.40	Standard	—
ASSETS	OWED	PLAN	OPEN WORK
2 metered · 3 behind the meter	due 24 Sep	since 1 Jun 2026	nothing booked

Do not disconnect. Medical protection, until 31 Mar 2027 · set by D. Whitfield, 4 Aug 2026 · see the note

WHO IS PAYING

Account	**A-10517** · M. Alvarez · customer C-04412
Status	ACTIVE · opened 1 Jun 2026
Class	Residential · this decides which base charge the plan applies
Reach them by	*Nothing recorded — no paperless choice, no SMS, no language*
Post	412 Cypress Row, Silver Creek, TX 78611 · the building's address; no separate billing address
In the old system	*No reference recorded*

THE MONEY

Owed	**61.40** · due 24 Sep 2026 · not yet overdue
Last bill	28 Aug 2026 · 61.40 · BL-2608-000052
Last payment	2 Aug 2026 · 58.10 · card, cleared
Deposit held	**150.00** · taken 1 Jun 2026 · returns on close, against what is owed
Autopay	ON · and the account is not cash-only, so it will be taken
Payment plan	*None running*
Budget billing	*Not enrolled*
Collections	*Not in collections*
Payments that bounced	0
Tax exemption	*None claimed*

BEFORE THIS

Previous account	R. Nakamura · A-10388 · 3 Feb 2024 to 28 May 2026 · closed, nothing outstanding
Vacant between	28 May to 1 Jun 2026 · 4 days, base charges billed to the owner

NOTES ON THIS ACCOUNT 2

📌 **Medical protection**	Certificate received 4 Aug 2026, renews 31 Mar 2027. D. Whitfield · not visible to the customer
Meter access	Dog in the side yard — ring first. A. Reyes, 12 Jun 2026 · visible to the customer

Open the account →

Move-out…

WHAT CHANGED

- **A protection is a banner, not a row.** Three accounts on the demo utility carry one and it is the single fact that can stop a crew from being sent. It sits above everything, with its kind, its expiry and who set it.
- **Three named groups instead of one list** — who is paying, the money, and what came before. A clerk arrives with one of those three questions and can stop reading at the right heading.
- **The class is named.** Since the plans change a charge code can carry a different price per customer class, so *Residential* is no longer a label — it selects a figure on the bill. The row says which job it does.
- **Autopay says whether it will actually be taken.** On its own it is half a sentence: an account can be marked for autopay and be cash-only, and then nothing is drafted. The two facts are one row.
- **The deposit says what happens to it** — returned on close, against what is owed — because the second question after *how much* is always *do they get it back*.
- **Five money states that are almost always empty are shown as absences:** payment plan, budget billing, collections, bounced payments, tax exemption. An absent row reads as *not looked up*; *none running* reads as an answer, and these five are exactly what a clerk is checking before they promise anything.

- **What we know about reaching them, including that we know nothing.** Paperless, SMS and language are columns with no value on any account in either demo utility. The row says so instead of leaving the reader to guess.
- **Notes are on the tab.** Eight exist on the demo utility, with a pinned flag and a customer-visible flag the product already stores. *Dog in the side yard — ring first* is worth more to a reader here than on a screen two clicks away.
- **The vacant gap is named with its cost.** Four days between two accounts, and base charges for those days reached the owner. That is the commonest opening-balance dispute there is.

FOR	A clerk on the phone to a resident; a supervisor about to send someone to disconnect; anyone preparing a move-out or arguing about an opening balance.
HOW YOU GET HERE	The unit's page → Account. *Open the account* → leads to everything this tab deliberately does not duplicate: the bill list, the payment history, the correspondence.
PRIMARY ACTION	**Open the account** →. *Move-out…* is danger tier and is honestly held today — move-out closes the account, takes a final read and raises the final bill, and that flow lives on the Accounts screen with no door from here.
WHAT CHANGED · THE PROTECTION	An account may carry a protection — medical, a regulator's date window, a dispute — that forbids disconnection. Three exist on the demo utility. It was on no screen a clerk reaches from a unit, and it is the one fact on this tab that can stop an action already in progress.
WHAT CHANGED · THE CLASS	The account's customer class selects which base charge the plan applies — residential and commercial can be $8.00 and $34.00 for the same meter size. It was a fact about the customer and it is now a fact about the money.
WHAT CHANGED · AUTOPAY IS HALF A SENTENCE	An account can be marked for autopay and also be cash-only after two bounced payments, and then nothing is drafted. Read alone, *autopay on* is the wrong answer. The portal had this exact fault and it cost a wave to find.

WHAT CHANGED · ABSENCES THAT ARE ANSWERS	Payment plan, budget billing, collections, bounced payments and tax exemption. Each is empty on almost every account and each is what a clerk is checking before they promise anything — so a stated *none* is the information, and a missing row is not.
WHAT THE PRODUCT HOLDS AND NOBODY WRITES	⚠ Nine columns are populated on ZERO rows across both demo utilities: cash-only, bad address, bounced-payment count, tax exemption, paperless, SMS reminders, preferred language, credit tier, and the old system's reference. Drawing them is not the fix — something has to write them. This tab is where their absence becomes visible, which is the first step.
COGNITIVE LOAD	One banner when there is one, three headed groups of six, ten and two rows, two notes, two buttons. A reader looking for one answer reads one group.
STATES	

Vacant	No account. The tab says base charges bill to the owner, names the owner's account and links to it, rather than showing an empty table.
Common area	Always the owner's account, always, and no move-out is offered.
In arrears	The owed figure carries its word as well as its emphasis, with how many days and which notice has gone out.
Protected	The banner leads and any disconnection control on any screen for this account is held with a five-word reason.
Cash-only with autopay marked	The autopay row says it will not be taken and why. This is the state that reads as fine and is not.
Closed	The account is shown with its close date and its final bill, and the tab says whether the deposit was returned or applied.

COMPONENTS	`PlainTable` `MoneyCell` `StatusPill` `DateCell` `ProtectionBanner` `NoteList` `InlineLinkTo` `ButtonLink`
RULES	Money two decimals on screen, four in store. Colour is never the only signal. An absence is drawn as an absence. The danger tier for anything that ends service. No database id on screen — an account number and a customer number are printed references.

U8 EXISTS BEHIND COMMITMENT PUJ-42

U8 Unit → Occupancy S15 · PRM-03

The question: *who has lived here, and when was it empty?*

`Premises → Units → a unit → Occupancy`

WHAT A CLERK HITS TODAY

The columns are *Occupant · Account · Start · End · Status*, which is close to right. **What is missing is the vacancy** — the gaps between tenancies are not rows, so a landlord asking how long their flat stood empty cannot be answered from the tab that exists to answer it.

UNIT

Unit 2

U-01145 · 412 Cypress Row, Silver Creek, TX 78611 · Residential · ACTIVE OCCUPIED

Route 12 · Cycle 3 — from the building

✎ Edit | Move | Change status

Overview | Assets | Plan | Account | **Occupancy** | Audit log

5	$61.40	Standard	—
ASSETS	OWED	PLAN	OPEN WORK
2 metered · 3 behind the meter	due 24 Sep	since 1 Jun 2026	nothing booked

Occupant	Account	From	To	Left owing	Status
M. Alvarez	A-10517	1 Jun 2026	*still here*	61.40	CURRENT
R. Nakamura	A-10203	3 Feb 2025	28 May 2026	0.00	CLOSED
Vacant	—	1 Dec 2024	3 Feb 2025	0.00	VACANT PERIOD

Showing 3 · this unit has been vacant once in two years

⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **Vacant periods are rows.** A history with the gaps left out is not a history, and the gaps are what a landlord is asking about.
- ***Left owing***, so a closed tenancy says whether it closed cleanly.
- ***Still here*** **rather than an empty end date** — an absence drawn as an absence.
- **A footer that counts the vacancies**, which is the summary of the whole tab in one line.

FOR	A landlord's agent asking how long a flat stood empty, and a clerk investigating an opening balance.
HOW YOU GET HERE	The unit's page → Occupancy.
PRIMARY ACTION	None. It is a history.
WHAT CHANGED · THE GAPS ARE ROWS	A vacancy is a fact about the unit and it was inferable only by subtracting dates.
COGNITIVE LOAD	Six columns, no prose.

STATES	**Never occupied**	One vacant row from the day the unit was created, so the tab is never blank.
	Common area	Shows the owner's account for the whole period; a common area is never vacant.
COMPONENTS	`PlainTable` `DateCell` `MoneyCell` `StatusPill`	
RULES	An absence is drawn as an absence, never an empty cell. Money right-aligned and tabular. No database id on screen.	

U9 EXISTS BEHIND COMMITMENT PUJ-17 COMMITMENT PUJ-43


U9 Unit → Audit log S15 · PRM-03

The question: *who changed this unit, and what did it say before?*

`Premises → Units → a unit → Audit log`

WHAT A CLERK HITS TODAY

On the unit I walked, the tab said *"Nothing has been recorded against this record in the window the log covers"* and offered *Open the audit log for this record →*. **That sentence is honest and it is also a dead end** — the tab tells a person their history is elsewhere, on a screen they then have to find their way back from.

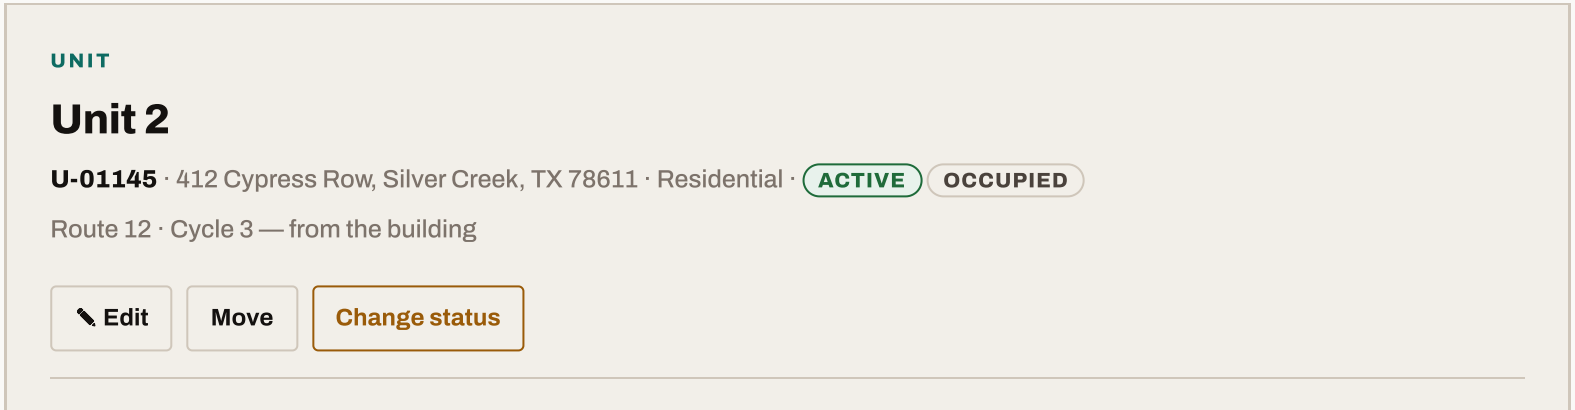

Overview | Assets | Plan | Account | Occupancy | **Audit log**

5	$61.40	Standard	—
ASSETS	OWED	PLAN	OPEN WORK
2 metered · 3 behind the meter	due 24 Sep	since 1 Jun 2026	nothing booked

Search this history... ALL + Filter

When	Who	What changed	From	To
1 Jun 2026, 09:14	D. Whitfield	Unit created	—	Unit 2
1 Jun 2026, 09:20	D. Whitfield	Plan	*None*	Residential Standard
1 Jun 2026, 11:02	K. Osei	Meter assigned	—	MTR-40218 · Electric

Showing 3 of 3 ⇤ ← Page 1 of 1 → ⇥

WHAT CHANGED

- **The history is on the tab**, in the same shape as the property's — with the old value as a column rather than behind an expand control.
- **When the window really is empty, it says why**: entries older than the retention period have been removed, which is a different fact from nothing having happened.
- **The link out stays**, for the full log, but it is no longer the only thing on the tab.

FOR	Anybody answering *why does this say that* about one flat.
HOW YOU GET HERE	The unit's page → Audit log.
PRIMARY ACTION	None. It is a record and nothing on it can be changed.

WHAT CHANGED · THE TAB HOLDS ITS OWN HISTORY	It pointed at another screen instead of showing what it had.
COGNITIVE LOAD	Five columns, one search, no prose.
STATES	**Just created** — One row. A new unit's history is one line and should look like one. **Beyond retention** — Says older entries have been removed on the retention schedule — not that nothing happened.
COMPONENTS	`AuditTab` `AuditEventCell` `DataTable` `DateCell` `FilterBar`
RULES	Every money or service action is recorded with who, when and what. No database id on screen.

U10 NEW BUILD COMMITMENT PUJ-27 COMMITMENT PUJ-44 COMMITMENT PUJ-45


U10 Edit a unit S15 · PRM-03

The question: *the label is wrong, or something about this flat has changed.*

Premises → Units → a unit → Edit

WHAT A CLERK HITS TODAY

There is no edit screen for a unit. The unit's page offers *Move* and nothing else; the units list has a pencil on the row. So a unit's label, floor and floor area can be changed from a list and not from the unit itself — which is where a person is standing when they notice.

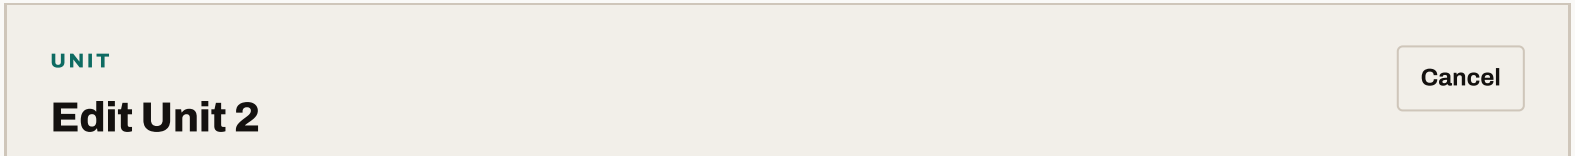

U-01145 · 412 Cypress Row, Silver Creek, TX 78611 · Residential · ACTIVE OCCUPIED

Route 12 · Cycle 3 — from the building

WHAT THIS UNIT IS CALLED

Unit label *

2

What a resident and a reader call it.

Unit type

Residential

Floor

Ground

Floor area

820 sq ft

WHERE IT IS optional

Using **412 Cypress Row**'s point — 30.752104, −98.238391 · parcel R-114-0082-004

Give this unit its own

A unit only needs its own point where it sits somewhere its building does not — a cabin, a pad, a wing of a campus.

WHAT IT CAN TAKE

Utility services

Add a service…

ELECTRIC × WATER ×

Only what the building offers. Removing one is refused while a meter for it is attached.

This is a common area

No — it is a unit somebody lives in

A common area bills to the owner and can never hold a resident's account.

WHAT IT IS CHARGED ON optional

Plan

Residential Standard

The change takes effect

1 Oct 2026 — the next cycle

Electric and water. Type to filter; only plans this unit's services can be billed on are offered.

Never mid-cycle. Bills already issued keep the plan they were made on.

A unit with no plan cannot be billed. If this one has none the field says so and applying one here is the whole job.

Cancel

Save changes ✓

WHAT CHANGED

- **The plan is here, and it can be applied or changed.** PO ruling: a plan is attached when units are created and changed when one is edited. The Plan tab shows what a unit is charged on and offers *Change plan* →; the edit form is where the rest of the unit is changed, so a clerk fixing a label and a plan in the same minute should not need two screens.
- **An edit screen reachable from the unit**, holding what a unit actually owns: its label, its type, its floor, its area, its services and whether it is a common area.
- **Its own point, as an offer rather than a field.** The common case is inheriting the building's, so that is what is shown, with one control to break away from it — your ruling drawn as an interaction rather than as two empty boxes.
- **Removing a service is refused while a meter for it is attached**, said on the field rather than discovered on save.
- **Common area is a question with an answer in words**, not a tick-box, because it changes who gets billed.

FOR	A clerk correcting a flat — a label typed wrong, a floor recorded wrong, a service added when the building was extended.
HOW YOU GET HERE	The unit's page → ✎ *Edit*. Also the pencil on the units list, which opens the same form.
PRIMARY ACTION	**Save changes ✓**.
WHAT CHANGED · IT EXISTS	The unit's page had no edit control at all; the only route was a row action on a list.

WHAT CHANGED · THE POINT IS AN OFFER	Two empty coordinate boxes on every unit would imply every unit ought to have them. Almost none should.
COGNITIVE LOAD	Seven fields in three groups, one offer, two lines of help.
STATES	**Has its own point** — The block shows the unit's figures and offers to go back to the building's. **Service in use** — The chip cannot be removed and says why in five words. **Occupied** — Becoming a common area is refused while an account is open on it.
COMPONENTS	`FormModal` `TextField` `SelectField` `ServicesAvailableField` `RefusalStrip`
RULES	Required asterisks only where the server insists. A refusal caps at five or six words and says what to do. A multiple choice is chips plus an add control.

U11 EXISTS BEHIND COMMITMENT PUJ-46 COMMITMENT PUJ-47 COMMITMENT PUJ-55

U11 Move a unit to another property S15 · PRM-03

The question: *this flat was recorded on the wrong building. Put it on the right one.*

`Premises → Units → a unit → Move`


WHAT A CLERK HITS TODAY

The screen exists and it is the **only** action the unit's page offers — *Move* sits alone in the header where Edit and Change status should be beside it.

It asks four things and it asks them well: where the unit is now, where it is going, the date it takes effect, and why. The reason is required and the help says plainly that it is *"the only record of why this unit moved."* A future date is refused — *"this product cannot hold a move that has not happened yet."*

Two things are wrong. The date help says *"Enter the date as YYYY-MM-DD"*, which is a format instruction rather than a date picker. And where a unit has carried accounts the confirmation says *"This unit has carried 2 account(s)."* — the *(s)* of a message written by a machine, on the one sentence that is asking a person to accept a consequence.

And it says, honestly, that **it cannot count the bills**: *"How many bills this unit has produced cannot be shown — nothing counts bills for a single unit yet."* That is the number a clerk would most want before agreeing.

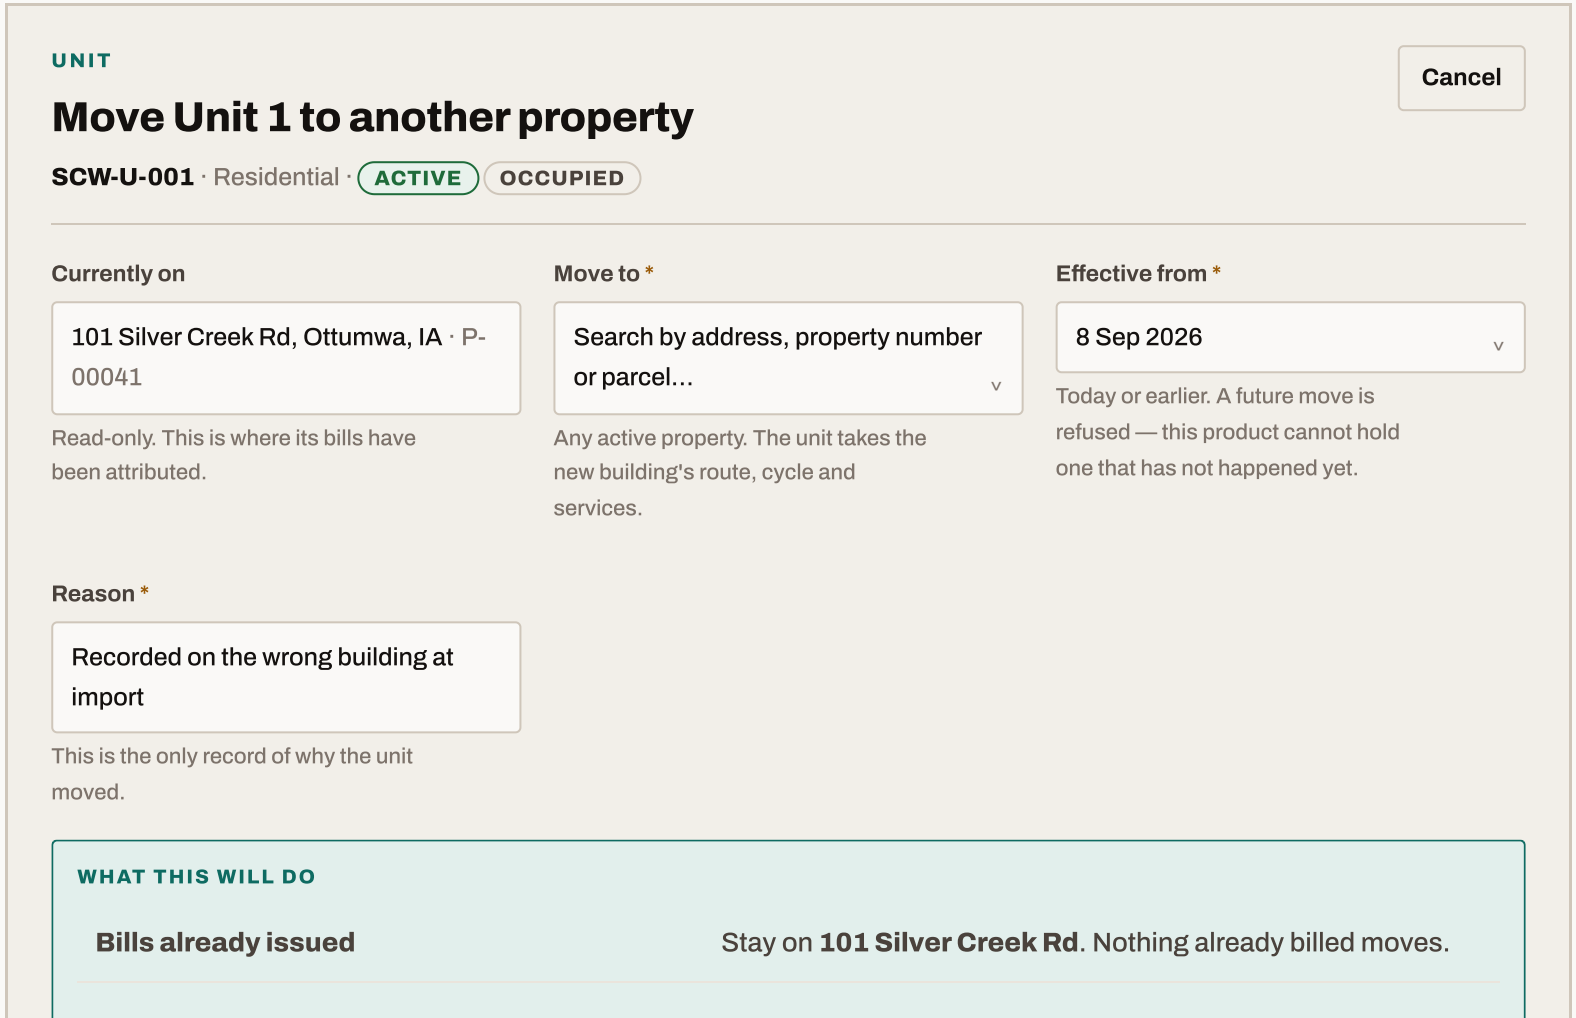

The next bill	Is attributed to the new property, from 8 Sep 2026.
Accounts this unit has carried	**2** — a report that reads a unit's current property will show both under the new one.
Bills it has produced	*Cannot be counted — nothing counts bills for a single unit yet*
Route and cycle	Route 12 · Cycle 3 → **Route 4 · Cycle 1**, from the new building.
Meters and assets	The 5 tagged to this unit travel with it. Their addresses are the building's, so all five change address too.
Recorded	Both properties, the date and your reason, in the audit log.

⚠ This unit has carried **two accounts**. Tick to move it anyway.

☐ **I understand, and I want to move this unit anyway**

Required before the move can be made

Cancel

Move unit ✓

WHAT CHANGED

- **The consequence is a list, not a paragraph.** What stays behind, what moves, what changes address, and what is recorded. Two sentences carried all of it and a person agreeing to a move needs to see the parts separately.
- **The assets travel and the screen says so.** Five things are tagged to this unit and an address is held in one place — on the property — so every one of them changes address the moment this commits. Nothing on the old screen said that, and it is the consequence with the longest reach.
- **The route and cycle change, and both are named.** A unit inherits them from its building, so a move is also a change of who reads the meter and when it bills. That belongs in front of the button.
- **A date picker, not a format instruction.** *"Enter the date as YYYY-MM-DD"* is what a screen says when it has no picker. Named months, today or earlier, and the refusal for a future date stays exactly as it is — it

is a true statement about what this product can hold.

- **The account warning is written for a person.** *"This unit has carried 2 account(s)"* becomes *two accounts*. The *(s)* belongs to the machine that wrote it.
- **The uncounted bills stay uncounted, and stay visible.** The one number a clerk would most want is the one we cannot produce. It is drawn as an absence with its reason rather than left off — a missing row is read as zero.
- **The commit is danger tier.** The old screen deliberately did not use it. A move re-attributes where a unit's next bill lands and cannot be undone by pressing Move again, because the reason and the date would then be wrong in both directions.

FOR	A clerk correcting an import that put a flat on the wrong building, and — rarely — a genuine re-parcelling. It is almost always an error correction, which is why the reason box is the point of the screen.
HOW YOU GET HERE	The unit's page → **Move**. Today it is the only button in that header; with Edit and Change status beside it, it becomes the third of three and stops being the default thing to press.
PRIMARY ACTION	**Move unit** ✓, danger tier. A tick commits.
WHAT CHANGED · THE CONSEQUENCE, ITEMISED	Seven rows in place of two sentences: bills already issued stay, the next bill moves, how many accounts are affected, that the bill count cannot be produced, the new route and cycle, that the five tagged assets change address with the unit, and what is written to the audit log.
WHAT CHANGED · THE ASSETS CHANGE ADDRESS	An address is stored in one place — on the property — and everything else walks to it. So moving a unit silently re-addresses every meter, sub-meter, cart and endpoint on it. True before this change and said nowhere.
WHAT CHANGED · A PICKER AND A PLURAL	*"Enter the date as YYYY-MM-DD"* and *"2 account(s)"* — a format instruction and a machine's plural, on the two sentences a person has to read before agreeing.

COGNITIVE LOAD	Four fields, one consequence table, one tick, two buttons. The tick appears only where the unit has carried an account.
STATES	**Same property** — Refused in five words — *already on that property* — before anything else is checked. **Future date** — Refused, and the reason is a true statement about the product rather than a validation message: a move that has not happened yet cannot be held. **Never carried an account** — No tick and no warning. The consequence table still lists what changes. **Has carried accounts** — The count leads the warning and the tick is required. Reports that read a unit's current property will show its whole history under the new one. **Reason left empty** — Held. It is the only record of why the unit moved, and the refusal says that rather than *this field is required*.
COMPONENTS	`MoveUnitModal` `SearchSelectField` `DateField` `TextField` `CheckboxField` `ConsequencePanel` `RefusalStrip`
RULES	The danger tier for a commit that cannot be simply undone. A consequence preview before the commit. A refusal caps at five or six words. Every service action is recorded with who, when and what. An absence is drawn as an absence.

U12 NEW BUILD COMMITMENT PUJ-48

U12 Take a unit out of service `S15 · PRM-03`

The question: *this flat has gone. Close it — but don't let me break a live account.*

Premises → Units → a unit → Change status

WHAT A CLERK HITS TODAY

There is no way to do this. The unit's page shows *Active* and offers only *Move*. It also advises *"deactivate it and create it under the other premise"* — advice for a button that does not exist.

UNIT

Change status

Cancel

Unit 2 · 412 Cypress Row · currently Active

New status *

Inactive — no longer takes service

From *

09/30/2026

Why *

Merged into Unit 1

NOT WHILE THIS IS LIVE

Account A-10517 is still open	Open it →
2 meters are still on this unit	Show them →

Close the account and remove the meters first. Then this can be done.

Cancel

Deactivate unit

Held: an account is still open.

WHAT CHANGED

- **The control exists**, in the same place and the same words as the property's, in the danger tier.

- **It refuses while an account is open or a meter is attached** — your ruling of 8 September for a unit — and each blocker links to the list that clears it.
- **It asks when and why**, because *where did Unit 2 go* is a question somebody asks a year later.
- **The advice on the unit's page now points at a real button**, which is the smallest possible fix and was impossible before.

FOR	A clerk closing a flat — merged, demolished, or converted to a common area.
HOW YOU GET HERE	The unit's page → *Change status*. Deliberately the only route.
PRIMARY ACTION	**Deactivate unit**, in the danger tier.
WHAT CHANGED · IT EXISTS	Neither the property nor the unit had a status control, and the unit's page gave advice that assumed one.
WHAT CHANGED · THE REFUSAL IS THE SCREEN	Not a toast. Each blocked thing is a row with a link, so *why not* is also the route to *do this first*.
COGNITIVE LOAD	Three inputs, one refusal panel, two buttons.
STATES	**Blocked** — The blockers, each linked, and the commit held with a five-word reason. **Clear** — The refusal panel is replaced by the consequence: what stops billing and what the record will read afterwards. **Already inactive** — Offers reactivation instead, with the same date and reason.
COMPONENTS	`ConfirmDialog` `FormModal` `PlainTable` `RefusalStrip` `StatusPill`
RULES	The danger tier for destructive commits. A refusal caps at five or six words. Every service action is recorded with who, when and what.

Commitments in this section

Every specification below changes a unit screen, and every one is UNVERIFIED.

PUJ-22 UNVERIFIED

The units list is scanned by address, and carries money

WAITS ON	The figure is already computed.
SCREENS	U1
DONE LOOKS LIKE	The Units list shows **Address** as its second column with **412 Cypress Row** in it, the unit label leading its cell over **U-01144**, and an **Owed** column reading **61.40** — across 1,109 units.

PUJ-23 UNVERIFIED

Adding units starts by naming the building

WAITS ON	PO ruling, 8 Sep 2026.
SCREENS	U2
DONE LOOKS LIKE	From the units list a clerk searches **412 Cypress** and sees **412 Cypress Row · P-00080 · Apartment complex · Active · 1 unit today, numbered 1 · Route 12 · Cycle 3** before anything else is asked; from a property the same panel arrives already filled.

PUJ-24 UNVERIFIED

The plain case of adding units is plain

WAITS ON	Nothing. The generator already exists.
SCREENS	U2

DONE LOOKS LIKE — A clerk types **3** and **2** and presses **Continue →**; the floors-by-units pattern generator with its `{floor}` and `{seq:00}` tokens is folded away behind one line.

PUJ-25 UNVERIFIED

A plan can be attached when units are created

WAITS ON — PO ruling, 8 Sep 2026. `BR-MET-007` is signed and the create endpoint already accepts a nested plan block.

SCREENS — U2 · U3

DONE LOOKS LIKE — A clerk picks **Residential Standard** on the add-units form and the preview's Plan column reads it on all three rows; leaving it blank reads **Set the plan when somebody moves in** and the units are created unbillable.

PUJ-26 UNVERIFIED

Adding units gets a review before anything is written

WAITS ON — PO ruling, 8 Sep 2026.

SCREENS — U3

DONE LOOKS LIKE — Step 2 lists the building, what it lends, the three labels, **U-01145 to U-01147** and **Floor · Not recorded**, then commits on **Create 3 units ✓**.

PUJ-27 UNVERIFIED

A unit may carry its own point and its own parcel

WAITS ON — PO ruling, 8 Sep 2026 — narrows the one-home address rule for coordinates only.

SCREENS — U4 · U10

DONE LOOKS LIKE — A cabin's unit page reads **On the map 30.751880, −98.238004 · this unit's own point**; a flat in a block reads **30.752104, −98.238391 · from the building** with **Give this unit its own point** beside it.

PUJ-28 UNVERIFIED

An occupied unit shows its account on the Overview

WAITS ON — PO ruling, 8 Sep 2026.

SCREENS — U4

DONE LOOKS LIKE — The Overview reads **Account · A-10517 · M. Alvarez · Active · since 1 Jun 2026 · Residential** over **Owes $61.40, due 24 Sep · deposit $150.00 held · autopay on**; a vacant unit reads that base charges reach the owner and names the owner's account.

PUJ-29 UNVERIFIED

The unit's Overview carries its number

WAITS ON — PO ruling, 8 Sep 2026.

SCREENS — U4

DONE LOOKS LIKE — The unit page header reads **U-01145 · 412 Cypress Row, Silver Creek, TX 78611** on the Overview, as it already does on Plan, Account, Occupancy and the audit log.

PUJ-30 UNVERIFIED

The inventory search takes what a clerk is holding

WAITS ON — Nothing. The registry already filters on type, size and location.

SCREENS — U5

DONE LOOKS LIKE — A clerk with a meter in hand searches **5/8 water depot**, sees the chips **Water ×** and **In the depot ×**, and the matching meters are listed — not only the ones whose asset number was typed.

PUJ-31 UNVERIFIED

Assigning an asset finishes on the unit

WAITS ON — Nothing.

SCREENS — U5

DONE LOOKS LIKE — A clerk presses **Assign ✓** on a row inside the panel and the meter appears in the unit's asset table above it — without opening that asset's own reassign page.

PUJ-32 UNVERIFIED

An attached asset's status can be changed from its row

WAITS ON — PO ruling, 8 Sep 2026.

SCREENS — U5

DONE LOOKS LIKE — A clerk presses the pencil on **MTR-40218**, changes **In service** to **Removed** with a date and a reason, and the row updates without leaving the unit.

PUJ-33 UNVERIFIED

The plan screen writes a date one way

WAITS ON — DEF-MET-4689.

SCREENS — U6

DONE LOOKS LIKE — Every date on the Plan tab reads **1 Jun 2026** — the tile, the plan panel and the pricing panel alike — and the period picker reads **Showing what applies today, 8 Sep 2026**.

PUJ-34 UNVERIFIED

The plan screen stops repeating itself and stops explaining our code

WAITS ON — DEF-MET-4693.

SCREENS — U6

DONE LOOKS LIKE **No floor is set — a bill can be any amount, including nothing** appears once, and the six services read **none** in the absence style; the eligibility row reads **Not checked — no plan on this system asks for proof yet**.

PUJ-35 UNVERIFIED

A base charge of zero says what the service is priced on instead

WAITS ON Nothing.

SCREENS U6

DONE LOOKS LIKE The Plan tab shows **Fire · 0.00 · By the size of the line, times how many**, **Trash · 0.00 · Per cart, monthly — not measured** and **Solar · 0.00 · By capacity**, under a note that a base of 0.00 is not free.

PUJ-36 UNVERIFIED

A protection is visible from the unit

WAITS ON `DEF-CUS-4691`. `account_protections` holds 3 rows on the demo utility.

SCREENS U7

DONE LOOKS LIKE The unit's Account tab opens with **Do not disconnect. Medical protection, until 31 Mar 2027 · set by D. Whitfield, 4 Aug 2026** above every other fact, and any disconnection control for that account is held.

PUJ-37 UNVERIFIED

The account's customer class is named

WAITS ON `CR-087` made the class select the base charge.

SCREENS U7

DONE LOOKS LIKE The Account tab reads **Class · Residential · this decides which base charge the plan applies**, so a clerk can see why the same size meter is $8.00 here and $34.00 on

a commercial account.

PUJ-38 UNVERIFIED

Autopay is read together with cash-only

WAITS ON	`DEF-CUS-4692` for the column that is never written.
SCREENS	U7
DONE LOOKS LIKE	The Account tab reads **Autopay · On · and the account is not cash-only, so it will be taken**; on a cash-only account the same row says it will not be taken and why.

PUJ-39 UNVERIFIED

The five money states a clerk checks are stated, not omitted

WAITS ON	Nothing.
SCREENS	U7
DONE LOOKS LIKE	The Account tab shows **Payment plan · None running**, **Budget billing · Not enrolled**, **Collections · Not in collections**, **Payments that bounced · 0** and **Tax exemption · None claimed**, with **Deposit held · 150.00 · taken 1 Jun 2026**.

PUJ-40 UNVERIFIED

Account notes are on the tab

WAITS ON	Nothing. `account_notes` holds 8 rows with pinned and customer-visible flags.
SCREENS	U7
DONE LOOKS LIKE	The Account tab lists 📌 **Medical protection** and **Meter access · Dog in the side yard — ring first · A. Reyes, 12 Jun 2026 · visible to the customer**.

PUJ-41 UNVERIFIED

Something writes the nine account columns nothing writes

WAITS ON	DEF-CUS-4692. Populated on zero rows across both demo utilities.
SCREENS	U7
DONE LOOKS LIKE	On the demo utility at least one account carries each of cash-only, bad address, a bounced-payment count, a tax exemption, paperless, SMS reminders, a preferred language, a credit tier and an old-system reference — so a screen reading them can be tested at all.

PUJ-42 UNVERIFIED

A vacancy is a row on the occupancy tab

WAITS ON	Nothing. The gaps are derivable from the tenancies either side.
SCREENS	U8
DONE LOOKS LIKE	The Occupancy tab shows **Vacant · 28 May to 1 Jun 2026 · 4 days · base charges billed to the owner** between the two tenancies, so a landlord can be told how long the flat stood empty.

PUJ-43 UNVERIFIED

The unit's audit tab draws its rows

WAITS ON	Nothing.
SCREENS	U9
DONE LOOKS LIKE	The Audit log tab lists the unit's own rows — **1 Jun 2026 · D. Whitfield · Plan set · none → Residential Standard** — instead of a sentence saying the history is on another screen.

PUJ-44 UNVERIFIED

A unit has an edit screen

WAITS ON PO ruling, 8 Sep 2026.

SCREENS U10

DONE LOOKS LIKE From the unit's page a clerk presses ✎ **Edit**, changes the label from **2** to **2B** and the floor area to **820 sq ft**, and saves — without going back to the list to find the pencil.

PUJ-45 UNVERIFIED

A unit's plan is applied or changed from its edit form

WAITS ON PO ruling, 8 Sep 2026.

SCREENS U10 · U6

DONE LOOKS LIKE The edit form carries **Plan · Residential Standard** and **The change takes effect · 1 Oct 2026 — the next cycle**, and a unit with no plan says so with applying one available in the same form.

PUJ-46 UNVERIFIED

The move screen itemises what moving does

WAITS ON Nothing.

SCREENS U11

DONE LOOKS LIKE **Move Unit 1** lists seven consequences, including **Meters and assets · the 5 tagged to this unit travel with it. Their addresses are the building's, so all five change address too** and **Route 12 · Cycle 3 → Route 4 · Cycle 1**.

PUJ-47 UNVERIFIED

The move screen uses a picker and a human plural

WAITS ON DEF-MET-4694.

SCREENS U11

DONE LOOKS LIKE — The effective-date field is a picker showing **8 Sep 2026**, not the instruction *Enter the date as YYYY-MM-DD*; the warning reads **This unit has carried two accounts**.

PUJ-48 UNVERIFIED

A unit can be taken out of service

WAITS ON — PO ruling, 8 Sep 2026: an open account on it blocks deactivation.

SCREENS — U12

DONE LOOKS LIKE — A clerk presses **Change status** on a unit, sees **1 open account · 2 attached meters**, and the commit is held reading **Close the account first**; once clear, a date and a reason are required.

PUJ-50 UNVERIFIED

A building's address finds its units

WAITS ON — Nothing. The join exists.

SCREENS — U1

DONE LOOKS LIKE — Typing **412 Cypress Row** into the units list returns the four units at that address; today only a unit's own label is searchable.

PUJ-55 UNVERIFIED

Bills can be counted for a single unit

WAITS ON — Nothing ruled. The move screen already states it cannot be done.

SCREENS — U11

DONE LOOKS LIKE — The move screen reads **Bills it has produced · 14** instead of **Cannot be counted — nothing counts bills for a single unit yet**.

05 Behind the screens

A unit is what actually takes service — it holds the meters and everything else of ours, the plan and the account. A property with no units bills nothing at all. These screens are the same five acts as part one, for the smaller thing: find, create, read, change, retire.

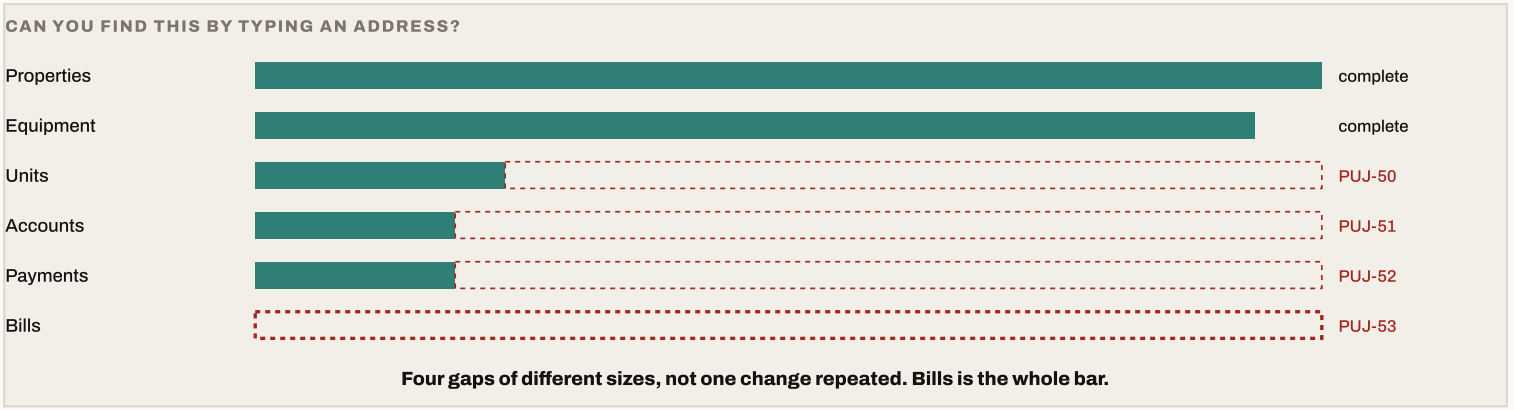


Figure 4 · Address search is four gaps of different sizes, not one change repeated six times. Properties and equipment already search it thoroughly. Units, accounts and payments search a fragment. Bills do not search it at all — a bill knows its account and the account knows its unit, and no query crosses that.

Commitments in this section

Six specifications change something no clerk will see on a Premises screen.

PUJ-49 UNVERIFIED

The map reads a unit's own point where it has one

WAITS ON PUJ-27.

SCREENS Equipment map (outside this document)

DONE LOOKS LIKE — On a park of twelve cabins the equipment map shows twelve pins at twelve cabins, not one pin at the site office.

PUJ-51 UNVERIFIED

An address finds the accounts at it

WAITS ON — Nothing.

SCREENS — Accounts list (outside this document)

DONE LOOKS LIKE — Typing **412 Cypress Row** into the accounts list returns **A-10517** and the other accounts at that building — the commonest question at a counter.

PUJ-52 UNVERIFIED

An address finds the payments made at it

WAITS ON — PUJ-51.

SCREENS — Payments list (outside this document)

DONE LOOKS LIKE — Typing **412 Cypress Row** into the payments list returns the payments taken against accounts at that address.

PUJ-53 UNVERIFIED

An address finds the bills raised at it

WAITS ON — PUJ-51. The largest of the four gaps: a bill knows its account and the account knows its unit, and no search crosses that.

SCREENS — Bills list (outside this document)

DONE LOOKS LIKE — Typing **412 Cypress Row** into the bills list returns **BL-2608-000052** and every other bill raised against that building.

PUJ-54 UNVERIFIED

The address guard's allow-list moves, with the ruling beside it

WAITS ON	PUJ-27. The guard counts latitude and longitude as address fields and will go red.
SCREENS	Build guard (outside this document)
DONE LOOKS LIKE	The guard passes with `units.lat` and `units.lng` named in its allow-list and the 8 Sep 2026 ruling quoted in the line above them, so the next reader meets the reason rather than a quietly loosened check.

06 The rulings, in one place

What was decided, and what it costs. **These do not go stale.** A ruling stays ruled until another ruling supersedes it — the staleness warning above applies to descriptions of the code, never to this section.

A unit may carry its own point and its own parcel

Where it does, that is the truth for that unit. Where it does not, it uses its building's — and the screen says which.

This narrows a standing rule. The address rule says a place is described in one home so that a map and an envelope cannot disagree, and it names latitude and longitude alongside the address. *The address half stands untouched.* The coordinate half now allows a unit to differ, deliberately, because a cabin or a pad is somewhere its site office is not.

The reference number becomes the Parcel ID

It is called *External / GIS ref* today and it is **empty on all 673 properties**, so renaming it costs nothing and no data is overwritten.

A property cannot be shut down while anything on it is live

Active units, meters still attached, or open accounts each block it. The refusal names what is blocking and links to the list that clears it.

The same applies to a unit: an open account on it blocks its deactivation.

A property carries one or more utility services

Recorded as removable chips with an add control, on both the create and the edit form, which is what the rules already ask of any multiple choice. It is what a unit inherits and what a meter must match.

All four of these are already in the repository, and this document is not their home.

Checked, not assumed: the decision log carries four dated Premises & Units sections from 8 September 2026 — four rulings, then eight, then eight, then twelve — and `BR-MET-1161` through `BR-MET-1164` are in the metering module's business rules. Appendix D lists every one with where it lives.

07 Where the work is

Twenty-three screens, and the size of each. **This heading read ~~Twenty-one~~ until this pass** — the count had drifted two behind the table under it.

#	SCREEN	SIZE	WHY THAT SIZE
P1	The property list	Small	One column and one filter; the server already knows which properties have a point
P2	Add a property · Details	Medium	Regrouped, plus the lookup must report its own failure and the coordinates must save
P3	Add a property · Review	Small	Shows what it already holds, plus the numbers the series will allocate
P4	Property → Overview	Small	Every fact is served; the point, the flag and the route are new rows
P5	Property → Units	Small	Drop the internal id, add a money column the server already computes
P6	Property → Common areas	Small	An add control on the tab that reports their absence
P7	Property → Assets	Medium	All thirteen asset types, grouped, with a last-read column that can say *not read* and why
P8	Property → Work orders	Small	Drawn to the journey; not walked, and the block says so
P9	Property → Audit log	Small	The old value moves out from behind an expand control
P10	Edit a property	Small	Two fields, a rename, and the same shape as the create screen
P11	Take a property out of service	Medium	The refusal is computed from live units, meters and accounts

U1	The units list	Small	Address as a column, money added, the internal id demoted
U2	Add units · Details	Medium	A premises search and summary, the numbers the series will take, and a plan the endpoint already accepts
U3	Add units · Review & create	Medium	A screen that does not exist; the generator writes on the press today
U4	Unit → Overview	Medium	A unit gains two columns and a fallback rule the server mus answer
U5	Unit → Assets	Medium	The inventory search must take more than a number, and assigning must finish here
U6	Unit → Plan	Medium	Walked on the live screen: four date formats, one sentence seven times, and a zero that reads as free
U7	Unit → Account	Small	The money is already computed for the account screen
U8	Unit → Occupancy	Medium	Vacant periods have to be derived from the gaps between tenancies
U9	Unit → Audit log	Small	Draw on the tab what the linked screen already shows
U10	Edit a unit	Medium	A form that does not exist, over fields that all do — and the plan, applied or changed from here
U11	Move a unit to another property	Medium	The consequence itemised, and the five assets that change address with it
U12	Take a unit out of service	Medium	The refusal is computed from the open account and the attached meters

Eleven small, twelve medium, none large. Nothing here is a new rule or a new shape of data beyond the two coordinate columns on a unit — which is why the process does not change.

08 The honest limit

I cannot feel effort. Twelve clicks is a number. Whether it grates on the fortieth building of a morning is not something I can tell you, and it is the thing most worth watching a real clerk for.

Three times during the walk I nearly reported a fault that was not there — I typed into the wrong search box, cut a page off before the control I was looking for, and missed a results panel because I expected different markup. Each time the product was fine and my instrument was wrong. Everything stated as missing above was confirmed a second way. It is worth knowing that these screens are easy to misread, for a person as well as for me.

Two things work and might still be wrong for the job: the pattern generator is the only route to bulk units, so adding one costs the same journey as adding forty — the fold-away above assumes that is acceptable, and a clerk may disagree. And a property's page shows five tabs before anything about money.

What I have not walked: correcting an address on a property that already has bills against it, and watching what follows it. That is the second job, and it is the one that will tell us whether the address really does flow everywhere the rule says it does.

Drawn from the running product on 8 September 2026, at version 2.233.0. Every figure was taken from the application or its database, not from the code. The screens follow the product's own binding conventions — one page header, the numbered step rail, required asterisks on the label, the danger tier for anything that takes a thing out of service, row actions as icons, a pagination footer on every list, and a consequence box before any commit that changes service state.

09 The stated-absence register

Every sentence in this document saying something does not exist, is not shown, is not served, is always empty or is deliberately left out. **Each gets exactly one of two outcomes and there is no third category.**

Read from the walk of all twenty-three screens and all eight sections, not from memory: **81 absences**. Of those, **55 mint a specification**, **18 fold into one minted earlier in this pass**, and **8 are out of scope with a ruling behind each.** 55 + 18 + 8 = 81.

The judgement rule, and where it was applied.

Where the document records a ruling that a thing waits, that is out of scope and the ruling is quoted. Where nobody has ruled, it is a specification that names what it waits on — because shelving something needs a person's decision and this pass does not have one.

Two calls were close. *A worked example month on the plan screen* went out of scope because the product's own code states the reason and tracks it as an open question elsewhere — that is a ruling, even though no PO said it in this document. *Bills produced by a single unit cannot be*