SMARTBillHub

`Customer portal · read of 2.232.0`

01 The standards every screen is drawn to
02 Before you sign in
03 Starting and stopping service
04 Your account, once you are in
05 The bill
06 Paying
07 When money is tight
08 What you used
09 Asking us something
10 You and your settings
11 Every stated absence
12 The specification register
13 What this pass changed
14 Appendix

SMARTBILLHUB · CUSTOMER PORTAL BLUEPRINT · ANALYSIS ONLY, NOTHING BUILT

Sixty screens, and the doors between them

Every screen a customer can reach, drawn against the running product — with the absences the product states in its own words, the door each screen does or does not have, and what would have to be built.

READ AT	PRODUCT NOW	SCREENS DRAWN	SPECIFICATIONS	OUT OF SCOPE	SCREENS NAMING NO DOOR
`2.232.0 · d940f460`	could not check	60	24	9	37 of 60

READ AT ONE MOMENT · RE-VERIFY BEFORE ACTING

Every **as-built** statement here was true at version **2.232.0**, commit **d940f460**, on **8 September 2026**, and must be re-verified before it is trusted.

Whether the product has moved on, I could not check. This checkout has no default branch — `origin/HEAD` does not resolve — and 47 remote branches. Naming one as "the product now" would be a guess.

Three statements I already know to be stale, corrected in place rather than deleted: the document says `/stop-or-restart` and `/visit/:slug` have no door anywhere — **both were built**, and each is struck and answered on its own screen. And every route label was missing the tenant segment; all 81 are corrected.

What this warning does and does not cover. Descriptions go stale. **Rulings do not** — a decision stays decided until another supersedes it, and the ones in appendix D2 are dated and recorded. Open questions stay open until somebody answers them, not until the code changes.

DESCRIPTION — GREY RAIL

A statement about what the code does today, including an honest statement that

COMMITMENT — ACCENT CARD

A change specification: a named piece of work, what it waits on, the screens it

something is missing. It commits nobody to anything.

changes, and what a person would be able to do and see once it is done.

If a thing is not in a commitment card, nobody has undertaken to build it.

The four state chips, and only four. EXISTS BEHIND the screen is drawn and the data behind it is served · NEW READ the screen exists and something on it has no read · NEW BUILD a specification changes this screen · BLOCKED a specification here waits on a decision nobody has made. A screen no specification covers carries NO COMMITMENT — that absence is the finding, not an oversight.

01 The standards every screen is drawn to

Everything below is either one of the thirty-six ratified UI rules, a failure evidenced in the product this week, or a convention North American utility customers already expect. Nothing here is a new design philosophy.

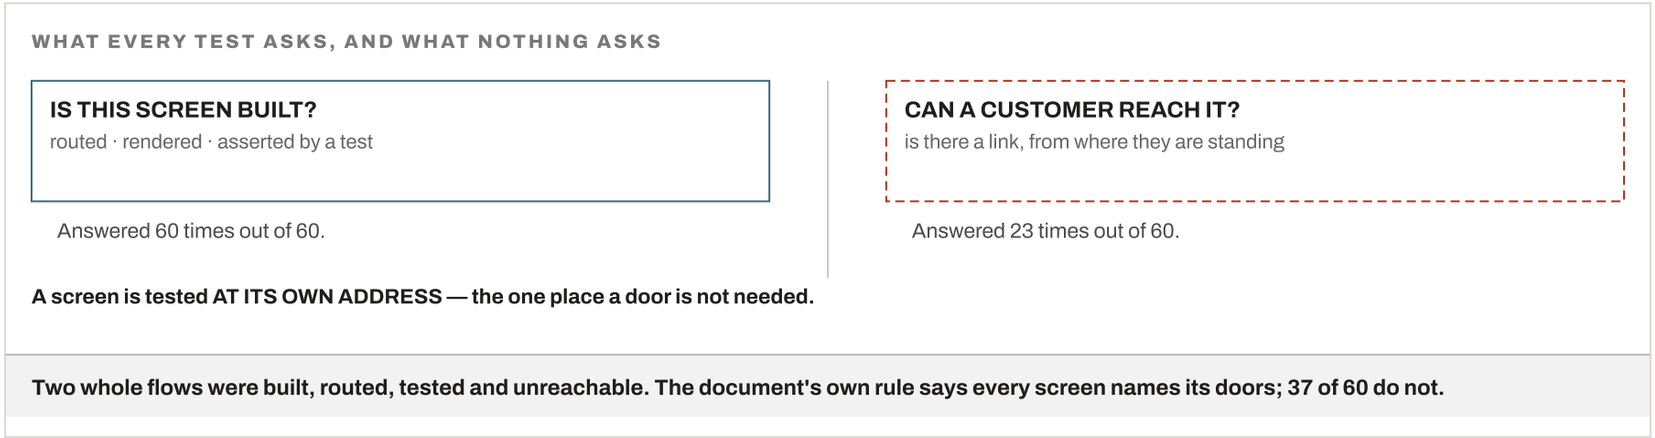


Figure 1 · **a route is not a door.** Every test in the portal asks whether a screen renders at its own address — the one place a door is not needed. Nothing asks whether a customer standing on another screen can get to it.

These five blocks render out of order: A · B · E · D · C. The document names them by letter and refers to them by letter, so a reader following a reference to block C lands on the wrong one. **Left exactly as it stands and reported rather than silently re-sorted** — moving them changes what

every existing reference points at, and that is a decision rather than a repair.

A Icons, and the one staff rule that does not survive the crossing

> The staff app says **row actions are icons with tooltips, never text links**. On a customer's phone there is no hover, so a tooltip is invisible — and one of those glyphs sends a disconnection notice. **In the portal every icon carries its word.**

Icon + label, always	Never an icon alone. The icon speeds recognition for a returning customer; the word carries it for everyone else.
One glyph, one meaning	Borrowed from the staff vocabulary so the two halves of the product agree: ↓ download · ↗ opens elsewhere · ✎ change · 👁 view · ⚠ needs attention.
Colour is never the only signal	Overdue is red *and* says “Past due”. About one in twelve men reads red-green differently.
No emoji as a section marker	A utility bill is a financial document. Icons label controls; they do not decorate headings.

B Reducing what the customer has to hold in their head

> Six rules, each removing a thing the customer would otherwise have to work out for themselves.

The two numbers, everywhere	**Amount due** and **due date** appear in the same place on every screen. Those are the only two facts most visits are about.
Never ask them to compute	Show the difference, not two numbers to subtract. “$18.40 more than last August”, not two figures side by side.
One primary action	One filled button per screen. Everything else is quieter. A screen with three equal buttons has no recommendation.
Plain words over correct ones	“What you owe”, not “Outstanding balance”. “We read your meter”, not “Actual read obtained”.
Recognition over recall	Never make them remember an account number to do something. It is on screen wherever it is needed.
The bad news comes with the way out	A past-due notice never appears without the help beside it. A customer who is behind is the one least able to go hunting.
Whose account is this?	Name, service address and **account number** ride in the frame, above the navigation, on every signed-in screen — so the answer is never a page away. It settles which property a landlord is looking at, and it puts the number in front of anyone about to phone, which is the first thing they will be asked for. The account number is the customer's own reference from their bill; a database id is never shown.


E The doors — audited against the code, because nine of them were fiction

> The Product Owner put it exactly: *"all your screens are good — only problem is door to that screen. when you mention that door is from x screen, when we check x screen we dont find the door there."* Every inbound link in the portal was then read out of the source. **Nine back-links in these drawings were assumed rather than read**, and **two whole flows turned out to have no door at all.**

Stop service · unreachable	`/stop-or-restart` has **no inbound link anywhere** — not from Home, My details, Your account, or the nav. The route is registered, the screen is built, and nothing points at it. Moving out is one of the commonest reasons to open a utility portal.
One service centre · unreachable	`/visit/:slug` likewise. *Where to find us* lists the places and never opens one.
"My details" was a habit	Four screens were drawn as reached from My details — **payment methods, autopay, equipment and documents**. None of them is. They come from Payments, Payments, Usage and Bills. It read plausibly, which is exactly why it survived.
No way to sign up, from the sign-in screen	`/enrol` is reached from the landing page and from the guest payment receipt — **not from `/sign-in`**, which offers *Forgot your password?* and nothing else. Anybody who arrives at the sign-in screen directly, from a bookmark or an emailed link or the *Sign in* word in the top bar, cannot create an account from there. It is the most obvious place to look for it.
Past due and budget billing	Corrected earlier the same day, and both are product findings rather than drawing ones — see the panel above the *when money is tight* group.
The rule this produced	**A route existing is not a door.** Every screen's spec now carries a *How you get here* row naming its real inbound links, read from the source rather than assumed — and where the answer is *nothing*, it says so. Two questions were being confused: *is this screen built*, which every test asserts, and *can a customer reach it from where they are standing*, which nothing checks at all.

D The two heading bars, and why there are exactly two

> Every desktop screen opens with the same bar. There are **two** of them, because there are two kinds of visitor and they need different things at the top of the page — and only two, because a third would mean a customer could not tell at a glance whether they are signed in.

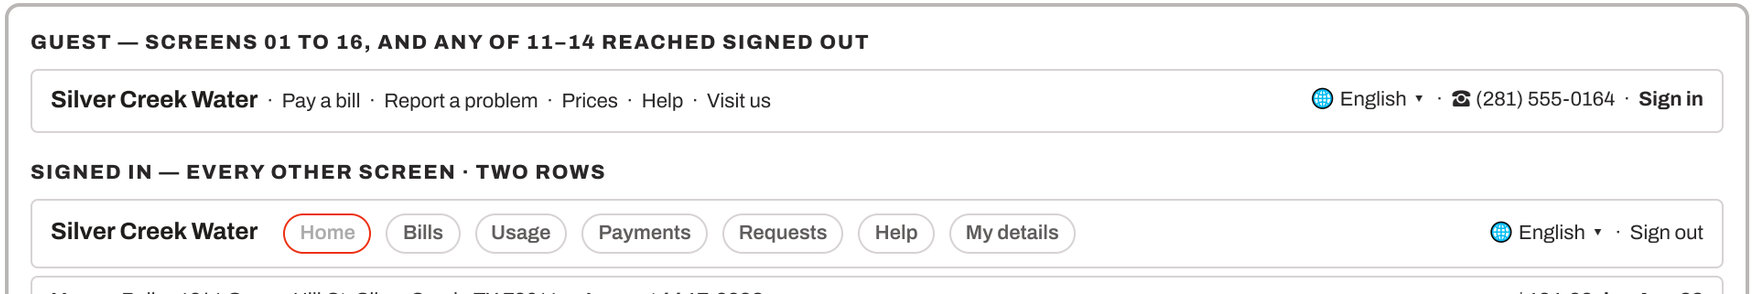



Left, on both	The utility's name, always in the same place. On the guest bar it is followed by the five things a stranger can do without an account; on the signed-in bar by **who and which account** — the name, the service address and the account number, which is what a landlord needs and what anyone about to phone is asked for first.
Right, on both	Language first, because somebody who cannot read the page must be able to fix that from anywhere. Then the phone number for a guest, or **the amount due and its date** for a customer — the two numbers most visits are about, in the same place on every screen. Then the one identity action: Sign in, or Sign out.
The menu is in the bar	Seven sections, in the header row itself, between the utility's name and the language control — because that is where a menu lives and where people look for one. The current section is marked. A guest has no sections to move between; their five tasks sit in the same place, so the two bars have the same shape.
The account line, underneath	A second, quieter row carrying **who and which account** — name, service address, account number — and, on the right, **the amount due and its date**. It is separate from the menu because it is not navigation: it is the answer to "whose account am I looking at", which a landlord needs on every screen and which anyone about to phone is asked for first. Same two rows on every signed-in screen.
What never moves	Position, order and wording. A back-link (← *Bills*) or a wizard's step rail sits **underneath** the bar, never inside it — those change per screen, and the bar is the thing that does not.
Why not one bar	A single bar would have to show either an account or a sign-in prompt, and getting that wrong is worse than either: a customer who sees a sign-in link assumes they were logged out, and a guest who sees an account number assumes they are looking at somebody else's. Two bars make the state legible before anything is read.

c What a North American utility customer already expects

> These are conventions, not preferences. Breaking them costs a support call each time.

MONEY
$1,247.31 — dollars, comma thousands, two decimals. Never four on screen.

DATES
MM/DD/YYYY, and a written month where there is room: “due Aug 22”.

THE WORDS THEY KNOW
Past due · Budget billing · Autopay · Paperless · Shut-off notice · Payment arrangement · ZIP code.

ASSISTANCE IS A FIRST-CLASS PATH
Energy assistance, medical certificates and winter protections are what a struggling customer is looking for by name.

USAGE IN THEIR OWN UNIT
kWh, gallons, ccf, therms — never a raw number, never a converted one.

PAPER STILL EXISTS
The portal is a second channel, not a replacement

channel, not a replacement. Every bill is printed regardless.

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-23 **Every screen carries its How-you-get-here row** UNVERIFIED

Waits on: ⚠ THE DOCUMENT CLAIMS THIS IS ALREADY DONE AND IT IS NOT. Rule E says *every screen's spec now carries a How you get here row*; **23 of the 60 do**. The 37 without one are exactly the screens whose doors were never audited.

Screens: every screen

WHAT DONE LOOKS LIKE ON SCREEN

Every one of the 60 screens carries the row, and each names an inbound link that exists in the source — the same check the door guard runs.

02 Before you sign in

Fourteen screens anyone can reach — a stranger, a customer who never enrolled, somebody standing next to a burst main. Roughly a third of visits never sign in at all, so nothing here may depend on having an account.

01 The landing page · signed out NEW BUILD COMMITMENT CPB-24

`/:tenant/portal`

01 The landing page `/:tenant/portal` · signed out

> **The question:** a stranger has typed the utility's address into their phone. Most of them want to pay a bill, one is standing next to a burst main, and a few want to sign in. The page has to serve all three without asking anyone to choose a category first.

PHONE · 390

Silver Creek Water English ▾

Emergency? Burst main, no water, or a gas smell — call **(281) 555-0164**, 24 hours.

PAY YOUR BILL

With the bill number from your bill. No sign-up needed.

Pay a bill →

ALREADY HAVE A SIGN-IN?

Sign in

Create one · Forgot your password?

OR DO THIS WITHOUT SIGNING IN

- ⚠ Report a problem ›
- 👁 Track something you reported ›
- 🏠 Start service at a new address ›
- 💲 Prices and fees ›
- 📍 Where to find us ›
- ❓ Help ›

Silver Creek Water · Mon–Fri 8 AM – 5 PM · (281) 555-0164

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us English ▾ · ☎ (281) 555-0164 · **Sign in**

Emergency? A burst main, no water, or a gas smell — call us. Do not use a form. **(281) 555-0164**

24 hours, every day

Pay your bill

The bill number from the bill in front of you, and your ZIP code. No sign-up.

Bill number · BL-2608-000042 | ZIP code

Find this bill

OR DO THIS WITHOUT SIGNING IN

- ⚠ **Report a problem** — A leak, no water, a manhole
- 👁 **Track a report** — With your reference
- 🏠 **Start service** — Moving in
- 💲 **Prices and fees** — What we charge
- 📍 **Where to find us** — Offices and hours
- ❓ **Help** — Common questions

SIGN IN

To see your bills, your usage, and set up autopay.

Email

Password

Sign in

Create a sign-in · Forgot your password?

LOW PRESSURE · QUARRY HILL AREA

Crews on site since 9:40 AM. Expected back to normal by 4 PM today.

↗ All current problems

STRUGGLING TO PAY?

Grants and discounts exist and most people who qualify never claim them.

↗ See help paying

FOR	Everyone who arrives without being signed in. It is the busiest page in the portal and the only one a stranger, a customer and somebody in an emergency all land on together.
HOW YOU GET HERE	It **is** the door. Everything a signed-out visitor reaches starts here or from the guest bar.
PRIMARY ACTION	**Pay a bill.** One filled button, and it is not "Sign in" — most visits are a payment, and most of those people have no account and do not want one. Sign-in is the outlined second path.

THE EMERGENCY BAND	Above everything, on every width, in the danger tier, with a phone number and not a form. Somebody standing in water must not have to read a page.
COGNITIVE LOAD	Three routes, visually distinct, no menu to open first: pay · sign in · everything else. The "everything else" list is written as the things people do, not as site sections.
LIVE OUTAGES	Shown unprompted. It answers "is it just me?" and prevents a duplicate report, which is the commonest call during an incident.
ASSISTANCE	Reachable from the front page, not buried behind a sign-in. Somebody who cannot pay is often somebody who never enrolled.
STATES	**NOTHING WRONG** The outage panel is absent, not shown saying "no outages" — that trains people to ignore it. · **PORTAL OFF** The utility has not switched sign-in on: the pay and contact routes stay, sign-in says so. · **ALREADY SIGNED IN** Never rendered — the frame sends them to Home. · **BRANDING UNSET** Falls back to the utility's name in plain type. A missing logo must not take the page with it.
COMPONENTS	PublicFrame · Callout danger · QuickPayCard · SignInCard · TaskGrid · OutageBanner · PortalLanguage
RULES	Colour is never the only signal. Every icon carries its word. All copy and branding are the utility's own, configured in settings.

02 Choose your language · signed out EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal` `/:tenant/portal/sign-in` `/:tenant/portal/pay-now`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


02 Choose your language · signed out `/:tenant/portal` `/:tenant/portal/sign-in` `/:tenant/portal/pay-now`

> **The question:** this page is not in a language I read. A picker that is itself only in English has already failed the person who needs it.

PHONE · 390 · OPEN FROM THE TOP BAR

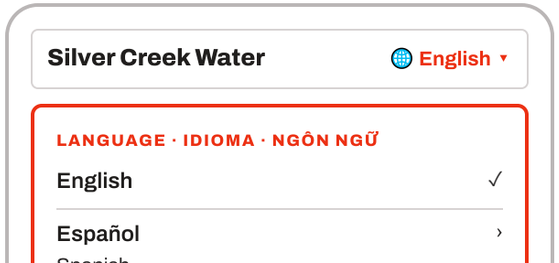

DESKTOP · 1280 · THE MENU OPEN

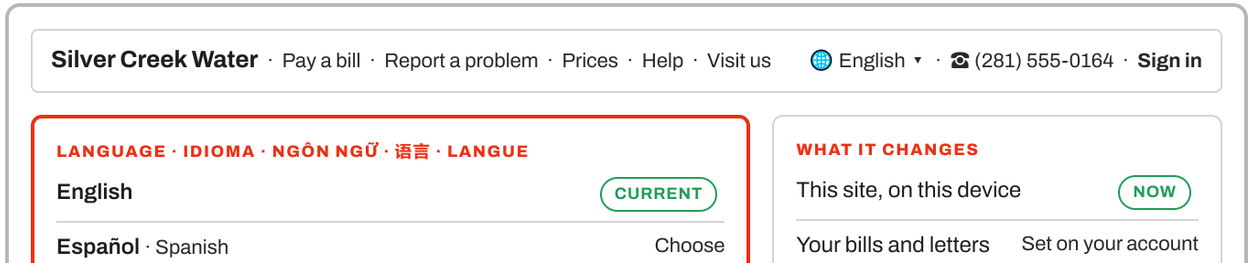

Spanish

Tiếng Việt ›
Vietnamese

中文 ›
Chinese

Français ›
French

Your choice is remembered on this device. Bills and letters keep the language on your account until you change it there.

Tiếng Việt · Vietnamese — Choose

中文 · Chinese — Choose

Français · French — Choose

Each language is written in that language, first. The English name is underneath, for anyone helping somebody else set it.

A guest has no account, so the choice lives in this browser until they sign in.

IF WE HAVE NOT TRANSLATED SOMETHING

A page we have not translated stays in English rather than showing a machine translation. It says so, in your language, at the top.

FOR	Anyone who arrives and cannot read the page. It is reachable from the top bar of every signed-out screen, so it is never more than one tap away.
THE RULE THAT MAKES IT WORK	**Every language is written in its own language, first.** "Español", not "Spanish". Somebody who reads no English cannot find "Spanish" in a list; they can find "Español" instantly. The English name sits underneath for whoever is helping them.
COGNITIVE LOAD	No flags — a flag is a country, not a language, and picking the wrong one offends. No auto-detection that cannot be overridden. The current choice is marked, so nobody wonders whether the tap worked.
GUEST VERSUS ACCOUNT	A guest has nowhere to store a preference, so it lives in this browser. The screen says so plainly rather than implying their bills will change language. Bills and letters are set on the account, and that screen is linked from here.
UNTRANSLATED CONTENT	Where a utility has written help content in only some languages, the page stays English and says so *in the chosen language* — never a machine translation, which reads as mechanical to a native speaker and costs the whole page its credibility.
STATES	**ONE LANGUAGE** No picker at all — a chooser with one option is furniture. / **PARTLY TRANSLATED** The language is offered, with a line saying which parts are English. / **CHOSEN** The page redraws immediately in that language, including this picker. / **STORAGE BLOCKED** The choice holds for the visit and says it will not be remembered.
COMPONENTS	PublicFrame · PortalLanguage · LanguageRow
RULES	Each utility's catalogue is authored in its own language, not translated from English. The languages offered are the utility's own choice, configured in settings.


03 Sign in NEW BUILD COMMITMENT CPB-24

/:tenant/portal/sign-in


03 Sign in `/:tenant/portal/sign-in`

> **The question:** how do I get to my bill? — and, for the third of visitors who are not signed up, **how do I pay without an account?**

PHONE · 390

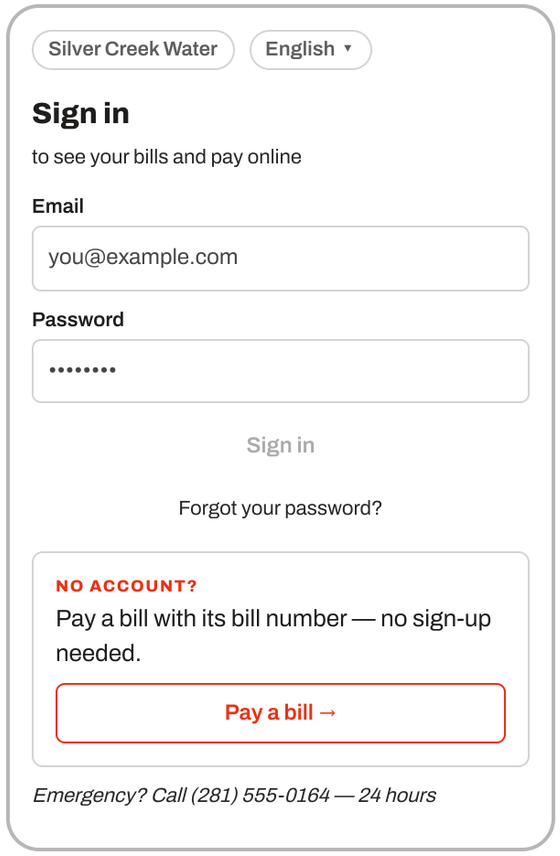

DESKTOP · 1280

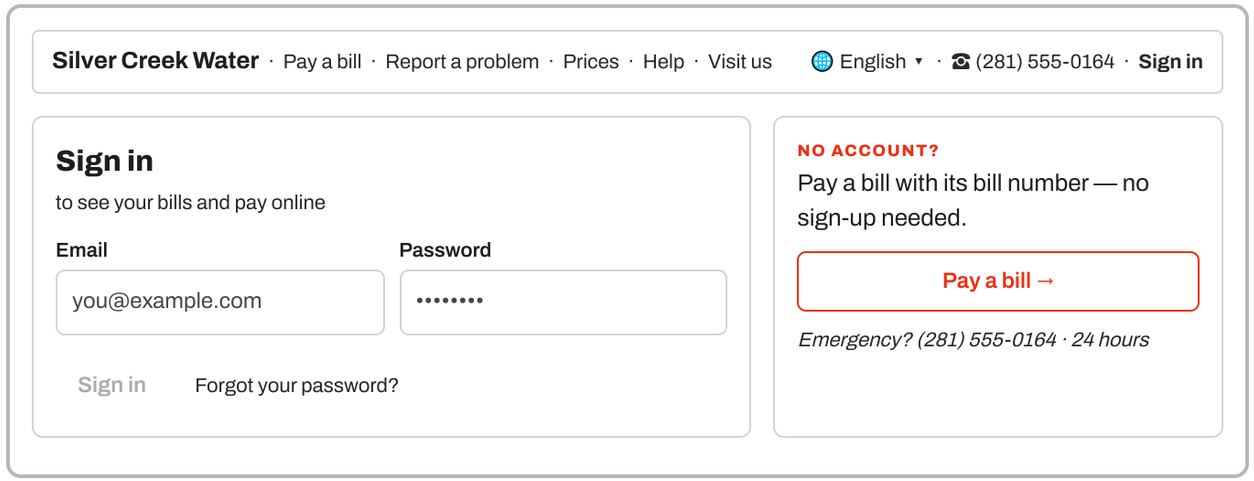

FOR	Getting an existing customer to their bill in two fields, and giving a stranger with a paper bill a way to pay without signing up.
HOW YOU GET HERE	**The landing page** (its own sign-in form is embedded there) and the **Sign in** word in the guest top bar.
PRIMARY ACTION	One filled button: **Sign in**. Quick-pay is the outlined second path, never a third equal button.
COGNITIVE LOAD	Two fields. No "username or email" ambiguity — it is the email the bill was sent to, and the label says so on error.

STATES

LOADING
Button reads "Signing in…" and is

WRONG DETAILS
One message under the pair,

LOCKED OUT
Says how long, and offers the

PORTAL OFF
The utility has not switched it on:

	disabled. The form stays visible.	never per field: "That email and password do not match."	reset — never a bare refusal.	says so, with the phone number.

WORDS	"Sign in", not "Log on". "Forgot your password?" as a question, not "Password recovery".
LANGUAGE	A guest picks from the top bar. A signed-in customer gets their own account's language without asking.
COMPONENTS	PortalFrame · Field · Button · Button ghost · PortalLanguage
RULES	Emergency number on every unauthenticated screen. Colour never the only signal. Icon never alone.

04 Create your sign-in

EXISTS BEHIND · NO COMMITMENT

`/:tenant/portal/enrol`

04 Create your sign-in `/:tenant/portal/enrol`

> **The question:** I get a paper bill — how do I get online? The one thing that stops people is being asked for a number they cannot find.

PHONE · 390

← The landing page

Create your sign-in

You need your account number and last bill

Account number

4417-0092

Where to find it on your bill

ZIP code of the service address

78611

Your email

you@example.com

Choose a password

••••••••

At least 10 characters

Create my sign-in

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · (281) 555-0164 · **Sign in**

← The landing page

Create your sign-in

Two things off your bill, and an email address.

Account number

4417-0092

ZIP code of the service address

78611

Your email

you@example.com

Choose a password

••••••••

At least 10 characters. We will email you to confirm it is you.

Create my sign-in

WHERE THE ACCOUNT NUMBER IS

SILVER CREEK WATER

Account 4417-0092

Amount due $191.00

Top right of your paper bill, above the amount due.

NOT READY TO SIGN UP?

You can pay a bill with just your account number.

Pay without signing in →

Cannot find your account number? Call (281) 555-0164.

FOR	Turning a paper-bill customer into an online one, in four fields.
HOW YOU GET HERE	**The landing page** — one of the three doors it carries beneath the sign-in form — and **the guest payment receipt**, offered after somebody has paid without an account. ⚠ **Not the sign-in screen.** `/:tenant/portal/sign-in` offers *Forgot your password?* and nothing else, so a person who lands there — from a bookmark, an emailed link, or the *Sign in* word in the top bar — has **no way to create one** and must go back to the front page to find it. That is the most obvious place to look and it is the one place it is missing.
COGNITIVE LOAD	The account number is the barrier, so the screen shows a picture of a bill with the number circled rather than describing where to look. The ZIP code is the second factor because it is the one thing everybody knows without hunting.
THE ESCAPE HATCH	Quick-pay is offered on the same screen. Someone who cannot complete this must not leave without having paid.
STATES	**NO MATCH** — One message for the pair — never "that account exists but the ZIP is wrong", which confirms an account to a stranger. **ALREADY ENROLLED** — "This account already has a sign-in." Offers the password reset, not a second account. **EMAIL IN USE** — Says so and offers to add this account to the existing sign-in. **CONFIRM PENDING** — "Check your email" — and says the link lasts an hour, before they go looking.
COMPONENTS	PortalFrame · Field · BillLocator · Button

05 Forgotten password EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/forgot-password`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

05 Forgotten password `/:tenant/portal/forgot-password`


> **The question:** I cannot get in — what now? The screen must not tell an attacker whether an email is registered.

PHONE · 390

← Sign in

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us — English ▾ · ☎ (281) 555-0164 · **Sign in**

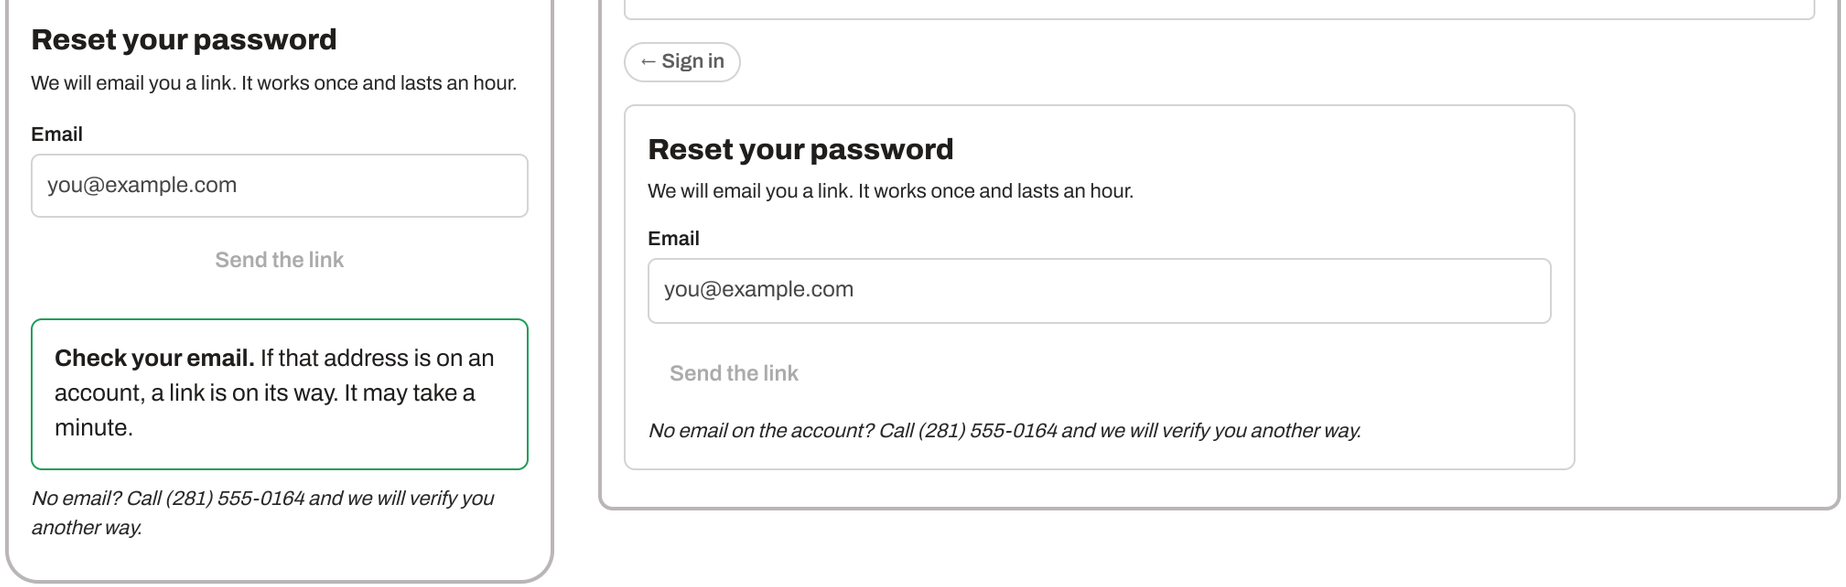

FOR	Getting a locked-out customer back in without revealing who has an account.
COGNITIVE LOAD	The link's lifetime is stated *before* they submit, so a link that has expired is not a surprise.
STATES	**SENT** The same confirmation whether or not the email exists. Never "no such account". / **LINK EXPIRED** Says it expired and offers a new one in one tap — a dead end here is a phone call. / **NO EMAIL ON FILE** Falls back to the phone number rather than stranding them. / **FAILED TO SEND** Says so plainly and keeps the typed address.
WORDS	"Send the link", not "Submit". The confirmation says what to do next, not that a request was received.
COMPONENTS	PortalFrame · Field · Button · Callout ok

06 Pay without signing in NEW BUILD COMMITMENT CPB-01 COMMITMENT CPB-23

`/:tenant/portal/pay-now`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

06 Pay without signing in `/:tenant/portal/pay-now`

The question: I have the bill in my hand and I just want to pay it. No account, no password, no sign-up.

PHONE · 390

Silver Creek Water

Pay a bill

No sign-in needed

Bill number

BL-2608-000042

Where to find it — top right of your bill

ZIP code of the service address

78611

Find this bill

IS THIS THE RIGHT BILL?

Bill	**BL-2608-000042**
For	**Jul 1 – Jul 31, 2026**
Account	**4417-0092**
Name	**Marcus Bell**
Service address	**1841 Quarry Hill Ct Silver Creek, TX 78611**
Amount due	**$191.00**
Due	**Aug 22, 2026**

Pay $191.00

A receipt is emailed to you. Nothing is stored.

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · (281) 555-0164 · **Sign in**

Pay a bill

No sign-in needed — the bill number from the bill in front of you, and the ZIP code.

Bill number

BL-2608-000042

ZIP code of the service address

78611

Top right of your bill, next to the date

Find this bill

BILL BL-2608-000042

Jul 1 – Jul 31, 2026

Issued Aug 5, 2026

Amount due

$191.00

by Aug 22, 2026

This bill belongs to

Marcus Bell · account 4417-0092

1841 Quarry Hill Ct, Silver Creek, TX 78611

Pay from

Bank account ····4417 · no fee

Pay $191.00

Not the right bill? Try another bill number

WHAT YOU CAN SEE HERE

Only the amount due and the due date. Your bill history, usage and personal details need a sign-in.

WORTH 60 SECONDS

A sign-in gets you your bills, your usage, autopay and paperless.

Create a sign-in instead

FOR Taking money from someone who will never sign up. Every barrier here is a payment the utility does not receive today.

IT STARTS WITH THE BILL NUMBER	Not the account number. The person doing this is **holding one bill** and wants that bill paid — the bill number is the most prominent thing on the page in front of them, and it names exactly what they intend to pay. An account number asks them to think about a relationship; a bill number asks them to read the paper. It also removes an ambiguity: an account with two unpaid bills has one account number and two possible answers to "how much".
HOW THE FOUND BILL IS LAID OUT	Three bands, each owning its full width, rather than two columns of label-and-value rows. **Band one: which bill** — the number, the period and the issue date on the left, the **amount and its date on the right**, in the largest type on the screen. **Band two: whose bill** — the name, the account number and the address, as a small block of prose rather than three more rows. **Band three: the act** — where the money comes from and the button, side by side. The earlier drawing put eight facts into a two-column grid where the address wrapped and nothing lined up after it; a reader had to scan in two directions to answer one question.
WHAT THE FOUND BILL SHOWS	Seven facts, so nobody pays the wrong bill: **bill number · bill period · issued date · account number · name · service address · amount and due date**. The period is the one people check hardest — a landlord paying a tenant's bill, or somebody with two properties, recognises the month and the address long before they recognise a number.
WHAT IT MUST NOT EXPOSE	Only that bill. No history, no other bills, no usage, no phone number, no email. The bill number plus the ZIP proves possession of one document, not identity — so it unlocks that document and nothing else.
THE SECURITY COST, STATED	Bill numbers are sequential (`BL-2608-000042`), so the pair is guessable in a way an account number and ZIP is only slightly less so. The mitigations are the same and they are not optional: **rate-limit by address and by ZIP**, refuse after a few misses, and never say which half was wrong. The reward for guessing is one bill's amount and address, and the ability to pay somebody else's bill — which is a nuisance rather than a theft, but a real one.
STATES	**NO MATCH** — One message for the pair — never "that bill exists but the ZIP is wrong". Rate-limited. **ALREADY PAID** — "This bill was paid on Aug 19." Offers to pay the account's current balance instead. **NEWER BILL EXISTS** — Says so and offers it: "A newer bill for August is also due." **PAST DUE** — Shows the past-due amount and links to help paying — the same duty as anywhere else. **CLOSED ACCOUNT** — Shows the final balance if one is owed, and says the account is closed.
COMPONENTS	PortalFrame · Field · AmountDueCard · Button

07 Your payment · without an account · done

NEW BUILD · COMMITMENT CPB-22

`/:tenant/portal/pay-now`

07 Your payment · without an account `/:tenant/portal/pay-now` · done

> **The question:** I paid without signing in — did it work, and how do I prove it later when I have no account to look it up in? A guest has no history to come back to, so this screen is the only record they get.

PHONE · 390

✓

Payment made

$191.00

Aug 13, 2026 · Visa ····8102

WRITE THIS DOWN

PMT-2608-0311

Your reference. You have no account to look this up in, so keep it.

↓ Download receipt

↗ Email it to me

WHERE YOU STAND

Account 4417-0092

Balance now **$0.00**

Nothing is past due CLEAR

NEXT TIME, IN 60 SECONDS

A sign-in keeps every receipt for you, and you would not have to find your account number again.

Create a sign-in

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · ☎ (281) 555-0164 · **Sign in**

✓

Payment made

$191.00

Aug 13, 2026 at 2:41 PM · Visa ····8102 · includes a $2.95 card fee

Against	**Account 4417-0092 · August 2026 bill**
Balance now	**$0.00**
Past due	**Nothing**
On your card statement as	**SILVER CREEK WATER**

KEEP THIS REFERENCE

PMT-2608-0311

You paid without an account, so there is nowhere here to look this up again. The receipt is the record.

↓ Download receipt

↗ Email it to me

NEXT TIME, IN 60 SECONDS

A sign-in keeps every receipt, shows your usage, and can pay the bill automatically so there is nothing to remember.

Create a sign-in

FOR	The guest payment confirmation. It is the same moment as the signed-in receipt but a different screen, because the guest has **nowhere to come back to**.
HOW YOU GET HERE	The end of the quick-pay flow. It is not linked from anywhere else, which is right — it is a receipt for one payment, not a page to revisit.

WHY IT IS SEPARATE	The signed-in receipt can say "a copy is in Payments whenever you need it". This one cannot. The reference is therefore the loudest thing after the amount, with download and email offered before anything else.
COGNITIVE LOAD	The balance after the payment is shown for the same reason as everywhere else: somebody who was behind should not have to phone to find out whether they still are.
THE CARD FEE	Stated on the receipt as part of the total, because a guest cannot go back and check what they agreed to.
THE INVITATION	Offered last, quietly, and only after the payment is complete. Asking someone to sign up before they have paid is what quick-pay exists to avoid.
STATES	**CLEARED A NOTICE** Green panel naming it: "Your disconnection notice is cancelled." · **DID NOT CLEAR IT** Amber, not green: what is still owed and by when. · **PENDING** A bank transfer that takes days says so, with the date it will land. · **EMAIL FAILED** The download still works and says so — the reference must not depend on an email arriving.
COMPONENTS	PublicFrame · Callout ok · ReferenceCard · ReceiptActions
RULES	Only the amount, the date and the balance are shown — a guest session proves possession of a bill, not identity. No history, no personal details, no other bills.

08 Prices and fees NEW BUILD COMMITMENT CPB-01 COMMITMENT CPB-23


`/:tenant/portal/fees`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


08 Prices and fees `/:tenant/portal/fees`

> **The question:** what was this $45 for, and what else can you charge me? Published prices, before they appear on a bill.

PHONE · 390

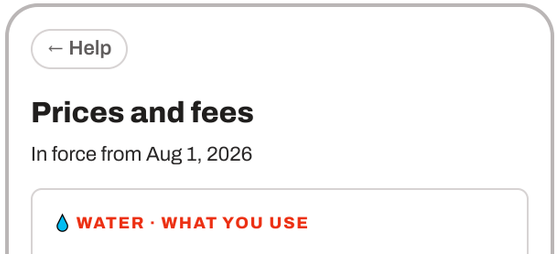

DESKTOP · 1280

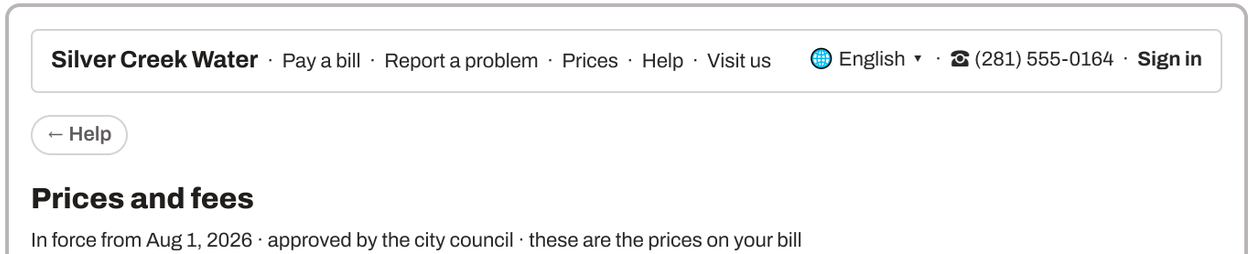

First 5 kgal	**$4.24 / kgal**
5 – 15 kgal	**$6.89 / kgal**
Over 15 kgal	**$8.48 / kgal**
Monthly base charge	**$8.00**

SEWER

90% of the water you use	**$5.00 / kgal**

ONE-OFF FEES

Connection	**$45.00**
Reconnection	**$45.00**
Returned payment	**$30.00**
Card convenience fee	**$2.95**
Paper bill	**$2.00 / month**
Late payment	**1.5%, at least $5.00**

Bank payments are free. Paperless removes the $2.00.

WATER

First 5 thousand gallons	**$4.2400 per kgal**
Next 10 — 5 to 15 thousand gallons	**$6.8900 per kgal**
Everything above 15 thousand gallons	**$8.4800 per kgal**
Monthly base charge · 5/8 inch meter	**$8.00**

Inclining tiers: the more you use, the more the next gallon costs.

SEWER

Charged on 90% of the water you use	**$5.0000 per kgal**
Monthly base charge	**$9.00**

FIRE LINE · SPRINKLER SUPPLY

2 inch	**$12.00 a month**
6 inch	**$60.00 a month**

Charged per line, by its size.

ONE-OFF AND MONTHLY FEES

Connection	**$45.00**
Disconnection	**$45.00**
Reconnection	**$45.00**
Seasonal turn-off or turn-on	**$25.00**
Move-out final read	**$20.00**
Meter re-read, if you ask	**$20.00**
Meter accuracy test	**$25.00**
Returned payment	**$30.00**
Card convenience fee	**$2.95 a payment**
Paper bill	**$2.00 a month**
Late payment	**1.5% of what is overdue, at least $5.00**

FEES YOU CAN AVOID

Paying from a bank account is free. Going paperless removes the $2.00. Autopay means no late fee.

FOR Publishing what the utility charges, so a fee on a bill is never the first time a customer sees it.

COGNITIVE LOAD Grouped as usage prices, then one-off fees, then a panel naming the fees a customer can avoid — which is the only part most people act on.

MONEY Unit prices carry four decimals because that is what makes a bill line add up; totals and flat fees carry two.

STATES

A CHANGE IS COMING
A band naming the date and what moves: "Water prices rise on Oct 1."

HISTORIC
A date picker showing what was in force for an older bill.

NOT PUBLISHED
The utility has not turned this page on: the phone number, not an empty page.

DIFFERENT BY SIZE
Base charges vary by meter size; the customer's own is marked.

COMPONENTS PortalFrame · PriceBlock · Callout ok

RULES Every figure comes from the utility's live rate schedules and charge codes — nothing on this page is typed by hand, so it cannot disagree with a bill.

09 Report a problem EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/report`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

09 Report a problem `/:tenant/portal/report`

> **The question:** there is water coming out of the road — who do I tell, right now? This is the one screen a stranger may reach in an emergency.

PHONE · 390

Silver Creek Water

GAS SMELL, OR WATER FLOODING A ROAD?

(281) 555-0164

Call now — 24 hours. Do not use this form.

Report a problem

What is happening?

Choose one ▾

- Water leaking in the street
- No water
- Water looks or smells wrong
- Low pressure
- A manhole or cover
- Streetlight out
- Something else

Where

📍 Use my location, or type an address

A photo helps

📷 Add a photo

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us 🌐 English ▾ · ☎ (281) 555-0164 · **Sign in**

Emergency? Gas smell, water flooding a road, or a downed line — call us, do not use this form. **(281) 555-0164**

24 hours, every day

Report a problem

You do not need an account.

What is happening? Water leaking in the street ▾

How bad? A steady trickle ▾

Where 📍 Corner of Quarry Hill Ct and Lakeview Dr

Anything else Been running since yesterday morning.

A photo helps 📷 Add a photo

Your phone, if we need to call Optional

ALREADY KNOWN ABOUT


⚠ Low pressure · Quarry Hill area — Since 9:40 AM

Crews are on site. Expected back to normal by 4 PM today.

↗ See all current problems

WHAT HAPPENS AFTER YOU REPORT

1 · You get a reference straight away
2 · We assess it, usually within the hour
3 · If you left a phone number we call before visiting

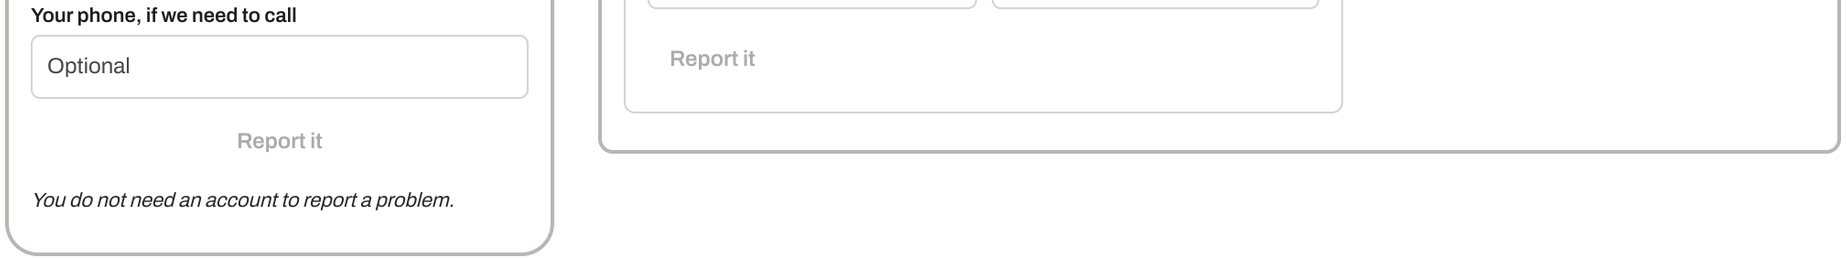

FOR	Letting anyone — customer or not — report a problem, and getting genuine emergencies onto the phone instead of into a queue.
THE EMERGENCY BAND	Above everything, on every width, in the danger tier. A form that quietly accepts a gas-smell report is the most dangerous screen in the product.
COGNITIVE LOAD	No sign-in. Location by one tap. A photo instead of a description. Someone reporting a burst main is standing in the street on a phone.
KNOWN PROBLEMS	Showing what is already reported nearby prevents duplicates and answers "have you been told?" without anyone having to ask.
STATES	**SENT** A reference on screen immediately, and by text if a number was given. **ALREADY KNOWN** Offers to attach to the existing report rather than creating a duplicate. **OUTSIDE OUR AREA** Says so and names who to call — never accepts a report it will not act on. **PHOTO FAILED** The report still sends; the photo can be added afterwards.
COMPONENTS	PortalFrame · Callout danger · Select · LocationField · FileDrop
RULES	What a stranger typed is recorded as a report, not as a change to any property record.

10 Track a report EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/track`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

10 Track a report `/:tenant/portal/track`

> **The question:** I reported a leak on Tuesday and I do not have an account — has anybody been?

PHONE · 390 **DESKTOP · 1280**

Silver Creek Water

Track a report

No sign-in needed

Reference

REP-8842

Or a phone number you gave us

Look it up

Lost it? A phone number finds everything reported from it in the last 90 days.

Water leaking in the street CREW ON THE WAY

Corner of Quarry Hill Ct and Lakeview Dr

Reported **Sep 2, 9:14 AM**

Expected fixed **Today, by 4 PM**

WHAT HAS HAPPENED

Sep 8, 8:02 AM
A crew is on the way.

Sep 2, 10:30 AM
We inspected it and scheduled a repair.

Sep 2, 9:14 AM
You reported it.

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · (281) 555-0164 · **Sign in**

Track a report

No sign-in needed — the reference we gave you when you reported it.

Reference

REP-8842

Or a phone number you gave us

(512) 555-0148

Look it up

Lost the reference? A phone number finds everything reported from it in the last 90 days. Or call (281) 555-0164.

Showing **1 report** for REP-8842 · Look up another

Water leaking in the street

REP-8842 · corner of Quarry Hill Ct and Lakeview Dr · reported Sep 2, 2026

WHAT HAS HAPPENED

Sep 8, 8:02 AM · Silver Creek Water
A crew is on the way. We expect the road to be back to normal by 4 PM today.

Sep 2, 10:30 AM · Silver Creek Water
We inspected it. It is a service line, not a main, and a repair is scheduled.

Sep 2, 9:20 AM · Silver Creek Water
Received. We will inspect within one working day.

Sep 2, 9:14 AM · You
Been running since yesterday morning. leak.jpg

WHERE IT IS UP TO

Crew on the way

Expected fixed today, by 4 PM.

OTHERS REPORTED THIS TOO

4 people have reported the same problem. You will all be told when it is fixed.

Anything to add? You can reply here without signing in.

Type here…

Send

FOR	Anybody, customer or not, who reported a problem and wants to know whether it is being dealt with. Without this the only way to find out is to phone.
COGNITIVE LOAD	The status has a time attached — "expected fixed today, by 4 PM" — because "in progress" with no date is what makes somebody phone.
THE LOOKUP	Two ways in, on both widths: the **reference** we gave them, or a **phone number they left**, which returns everything reported from it in the last 90 days. A reference on a scrap of paper is the thing people lose, and losing it is what turns a self-service check into a phone call — so the fallback is on the screen, not behind a link.

NO SIGN-IN	Either key alone opens it, because most reporters have no account. It therefore shows only what a passer-by may see: what was reported, where, and what is being done. No names, no customer addresses, no account details. A phone-number lookup returns only reports made from that number, and is rate-limited for the same reason quick-pay is.
OTHERS REPORTED IT	Saying four other people reported the same thing answers "does anyone know?" — and stops a fifth duplicate report.
STATES	**NOT FOUND** "We cannot find that reference." Offers the phone-number lookup and our number, and never confirms whether a reference exists. **SEVERAL FOUND** A phone number with three reports lists them, newest first, each opening its own thread. **FIXED** Green, with what was done and when — a report that ends silently reads as ignored. **OVERDUE** Says the expected date has passed and gives a new one. Owning it beats silence. **NOT OURS** Says which body is responsible — a streetlight may belong to the city.
COMPONENTS	PortalFrame · Field · Thread · StatusCard

11 Help EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/help` `/:tenant/portal/visit`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


11 Help `/:tenant/portal/help` `/:tenant/portal/visit`

> **The question:** the portal has not answered me — how do I reach a person, and when are they there?

PHONE · 390

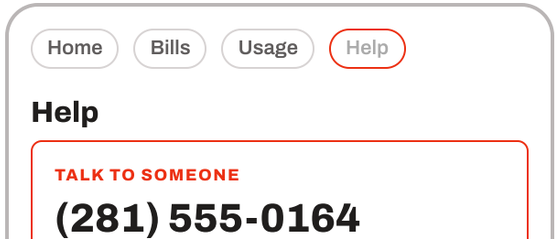

DESKTOP · 1280

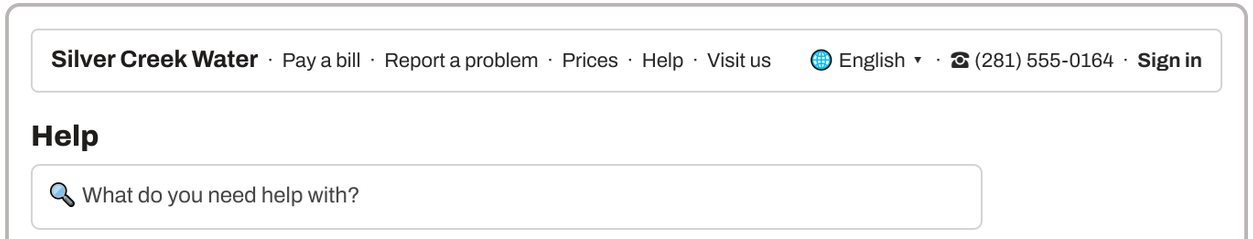

Mon–Fri, 8 AM – 5 PM · open now

Emergencies, 24 hours, same number

Search

What do you need help with?

COMMON QUESTIONS

- Why is my bill higher this month? ›
- How do I read my meter? ›
- What if I cannot pay? ›
- How do I start or stop service? ›
- What is budget billing? ›

Worth knowing · A running toilet can use 4,000 gallons a month.

COME AND SEE US

Main office
412 Water St, Burnet, TX 78611
Mon–Fri 8 AM – 5 PM · cash, card, check

↗ Directions

COMMON QUESTIONS

- Why is my bill higher this month? ›
- How do I read my meter? ›
- What if I cannot pay my bill? ›
- How do I start or stop service? ›
- What is budget billing, and should I use it? ›
- Why was my meter estimated? ›
- How do I report a leak? ›

TALK TO SOMEONE

(281) 555-0164

Mon–Fri, 8 AM – 5 PM Central · open now

Emergencies	**24 hours, same number**
Email	**help@silvercreekwater.com**

We reply to email within 1 working day.

Worth knowing · A running toilet can use 4,000 gallons a month.

COME AND SEE US

Main office · 412 Water St, Burnet, TX 78611
Mon–Fri 8 AM – 5 PM · cash, card and check accepted

Payment drop box · 24 hours, outside the main office

↗ Directions · ↗ All locations

FOR	Reaching a person, and answering the seven questions that make up most of the call volume before anyone dials.
COGNITIVE LOAD	The phone number is the loudest thing, with the hours and whether the office is open *right now*. A number without hours produces a call to a closed office and a second call tomorrow.
QUESTIONS, NOT TOPICS	Articles are titled as the question a customer would ask. "Billing enquiries" is a filing category; "Why is my bill higher this month?" is what someone types.
THE TIP	One line, from the utility's own list, in a quiet band below the questions — never above them and never beside the phone number, which is what this screen is for. **Exactly one tip renders per screen**, which is not a design restraint we are choosing: the tip record targets one screen, carries an optional month range and an on/off switch, and where two match the one with the lower position wins. So "without crowding it" is already the rule, and the drawing follows it rather than inventing a carousel.
WHEN THERE IS NO TIP	**No band at all** — not an empty box, not a placeholder. A tip that is switched off, or out of season, leaves nothing behind. The seeded demo relies on

TIP	exactly this: its freeze-warning tip is both off and out of season, and the portal home shows no tip container.
TIPS ELSEWHERE	The same one-line band, in the same position relative to the content, on every screen a tip targets — usage, usage-looks-high, send a reading, past due, and here. One design, applied wherever the utility has written one; not a Help-page feature.
WRITTEN IN ITS OWN LANGUAGE	Each utility's help content — answers and tips alike — is authored in the language it is offered in, not machine-translated from English. A translated sentence reads as mechanical to a native speaker and undermines the rest of the page.
STATES	**CLOSED NOW** Says when it opens next, and what to do in the meantime. **NO ARTICLES** Falls back to the phone number and email — never an empty search box. **TIP OUT OF SEASON** The band is absent entirely. Nothing says "no tip today". **NO RESULTS** Offers the three most-read articles plus the phone number. **ONE OFFICE** No "all locations" link — a list of one is furniture.
COMPONENTS	PortalFrame · SearchField · ArticleRow · ContactCard · ServiceCentreCard
RULES	All content is the utility's own, configured in settings. Nothing here is hard-coded.

12 One help article

EXISTS BEHIND · COMMITMENT CPB-23


`/:tenant/portal/help/:slug`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


12 One help article `/:tenant/portal/help/:slug`

> **The question:** the article title matched my problem — does the answer actually solve it, and what do I do next?

PHONE · 390

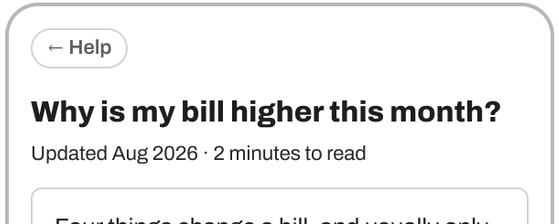

DESKTOP · 1280

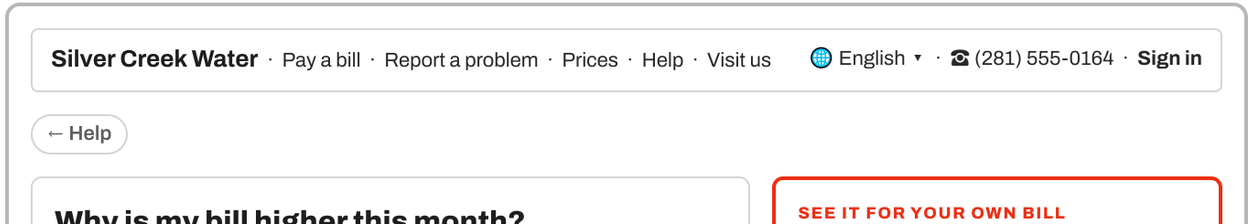

Four things change a bill, and usually only one of them is at work.

1 · You used more. Summer and winter are the heaviest months for most homes.

2 · The period was longer. A bill covering 33 days costs more than one covering 29.

3 · Prices changed. We tell you 30 days ahead when they do.

4 · A meter read was estimated. The next real read corrects it.

SEE IT FOR YOUR OWN BILL

We can show which of these applies to yours, with the figures.

Why my August bill costs this →

DID THIS HELP?

Yes No

Why is my bill higher this month?

Updated August 2026 · about 2 minutes to read

Four things change a bill from one month to the next, and usually only one of them is at work.

1 · You used more. Air conditioning in summer and heating in winter are the biggest single cause. Your own usage page shows the pattern across the year.

2 · The billing period was longer. Periods are not all the same length — a bill covering 33 days will cost more than one covering 29, even at identical usage.

3 · Prices changed. When rates rise we tell you at least 30 days beforehand, and the change appears on the prices page.

4 · A meter read was estimated. When we cannot reach the meter we estimate from your history; the next real read corrects the difference, so you are never charged twice.

Did this answer your question? Yes No

Rather than reading about it — we can show which of these four applies to your August bill, with the figures.

Why my August bill costs this

RELATED

- Why was my meter estimated?
- What is budget billing?
- How do I read my meter?

Still not answered? **Ask us a question** — we reply within one working day.

FOR	Answering one question completely, and then handing the reader the thing that acts on it.
THE PANEL THAT MATTERS	A generic article about bill increases is worth far less than the customer's own attribution. Every article that has a live equivalent links straight to it — reading about a thing is second best to seeing it.
COGNITIVE LOAD	Reading time and the last-updated date are stated. Numbered points, short paragraphs, no jargon; the four causes are the four the product can actually attribute.
WRITTEN IN ITS OWN LANGUAGE	Authored in the language it is offered in, not machine-translated. A translated sentence reads as mechanical and costs the page its credibility.
STATES	**NO SUCH ARTICLE** Offers the search and the three most-read, never a bare 404. **NOT SIGNED IN** The "see it for your own bill" panel becomes a sign-in prompt, not a dead button. **MARKED UNHELPFUL** Offers to ask a question, with the article's title pre-filled. **OUT OF DATE** An article not reviewed in a year is flagged to staff, never silently trusted.

COMPONENTS PortalFrame Article RelatedList Feedback

13 Where to find us EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/visit`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

13 Where to find us `/:tenant/portal/visit`

> **The question:** which office is nearest, and which one can do the thing I need? A list of addresses answers only half of it.

PHONE · 390

← Help

Where to find us

Town, ZIP code, or name

Nearest | Takes cash | Open now | Open Saturday

14 places · showing the 3 nearest to 78611

Main office OPEN NOW
412 Water St, Burnet · 4 miles
Cash · card · check · start and stop service
Mon–Fri 8 AM – 5 PM · ↗ Directions

North counter CLOSED
88 Lake Rd, Buchanan Dam · 11 miles
Card and check only · no cash
Tue and Thu 9 AM – 3 PM · ↗ Directions

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · (281) 555-0164 · **Sign in**

← Help

Where to find us

14 places · showing the 3 nearest to 78611

Find a place: Town, ZIP code, or the name of an office
What do you need to do?: Pay in cash
Search


Nearest first | Open now | Open Saturday | Takes cash | Start or stop service | Drop box

Map · three pins around Burnet, TX

LOOKING TO PAY CASH?
Only the **main office** takes cash. The drop box never does — never post cash and never leave it in the box.

DO YOU NEED TO COME IN AT ALL?
Paying, starting service, stopping service and assistance applications can all be done here on the site.
Pay online instead

PLACE	WHERE	WHAT YOU CAN DO	OPEN
Main office	412 Water St,	Cash, card,	OPEN NOW

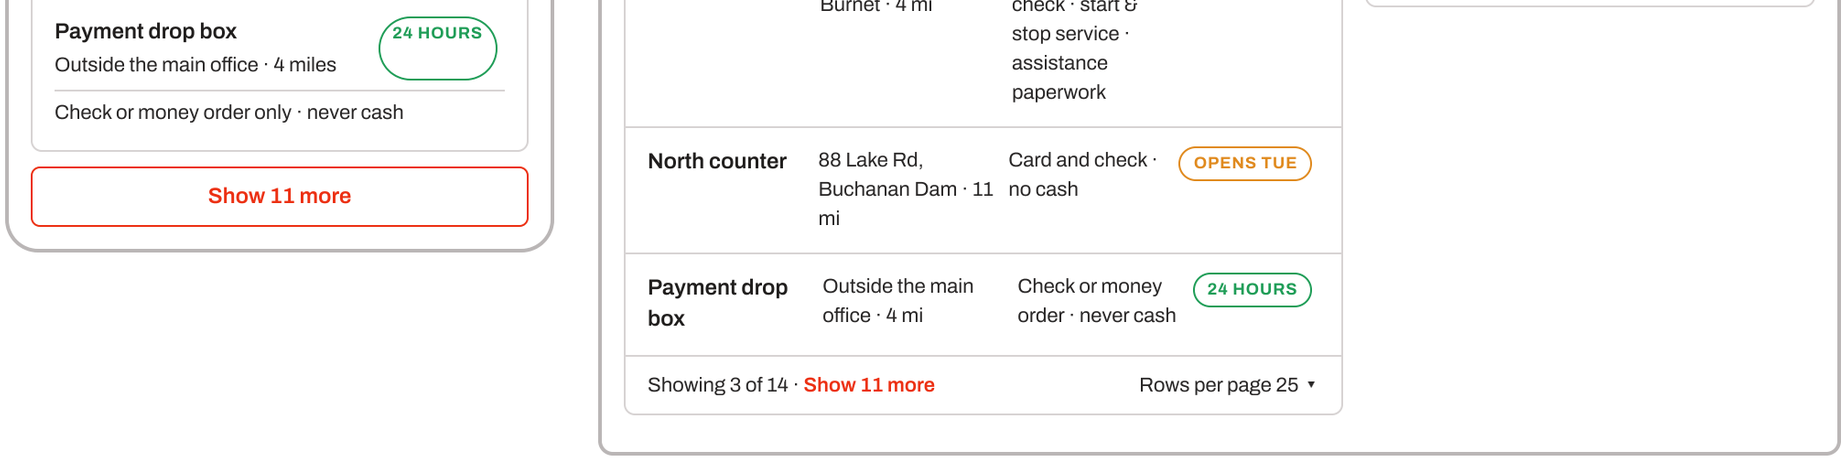

FOR	Choosing which office to drive to. Distance alone is not enough — the nearest one may not take cash.
SEARCH, BECAUSE THREE IS NOT THE NUMBER	The drawing showed three places and a scroll, which is right for one utility and wrong for the next. A city system can have **a dozen counters, drop boxes and partner payment agents**, and a customer wants the one near *them*, not the one near the head office. So: a search by **town, ZIP or name**, filters for what a place can actually do, and server-side paging — "showing 3 of 14", never the whole list at once and never a cap on how many a utility may have.
FILTER BY THE ERRAND, NOT BY THE FEATURE	The filters are the reasons somebody comes in: **takes cash · open now · open Saturday · start or stop service · drop box**. "Pay in cash" is the one that decides the journey, because it is the only thing no other channel does — and the nearest office may be the one that cannot.
COGNITIVE LOAD	Sorted by distance, with open-now on every row and what each place can actually do. A journey to a counter that cannot take your cash is the failure this screen prevents.
THE CASH WARNING	Called out separately, because posting cash or dropping it in a box is a real and unrecoverable loss.
STATES	**ONE LOCATION** Opens screen 42 directly — a list of one is furniture. **NO LOCATION SHARED** Sorted alphabetically instead of by distance, with no error. Search still works. **SEARCH FINDS NOTHING** "No place matches 'Marble Falls'." Offers the full list and the phone number. **TWO OR THREE PLACES** Search and filters are absent — a search box over three rows is furniture. **ALL CLOSED** Says when the next one opens, and points at the drop box and the online routes. **NONE CONFIGURED** Falls back to the phone number rather than an empty page.
COMPONENTS	PublicFrame · SearchField · FilterChips · Map · LocationRow · OpenNowBadge · Pagination

RULES

Server-side paging, and **no cap on how many service centres a utility may have** — the same rule that governs every other list in the product. A screen that assumes three is the shape that has to be rebuilt when a larger utility arrives.

14 One service centre EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/visit/:slug`

WAS: ~~Nothing in the portal links to an individual service centre~~
NOW: ANSWERED — **the door was built.** `CentresPage.tsx` now links each centre to `/:tenant/portal/visit/:slug`; the route-reachability guard names it. Fixed by the doors wave, `DEF-CWP-4655`.

14 One service centre `/:tenant/portal/visit/:slug`

The question: I am going to come in and pay — where is it, when is it open, and can I pay cash?

PHONE · 390

← Help

Main office

Open now · until 5:00 PM today

WHERE
412 Water St
Burnet, TX 78611
↗ Directions · ☎ (281) 555-0164

OPENING HOURS

Mon – Fri	**8:00 AM – 5:00 PM**
Saturday	**Closed**
Sunday	**Closed**

Closed Nov 27 – 28 for Thanksgiving.

WHAT YOU CAN DO HERE
· Pay by cash, card, check or money order

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us 🌐 English ▾ · ☎ (281) 555-0164 · **Sign in**

← Help

Main office · 412 Water St, Burnet

Map · 412 Water St, Burnet, TX 78611

WHAT YOU CAN DO HERE

Pay a bill	**Cash · card · check · money order**
Start or stop service	**Bring photo ID**
Hand in assistance paperwork	**Yes**
Payment drop box	**Outside, 24 hours**

OPEN NOW
until 5:00 PM
Today is Monday, Sep 8.

OPENING HOURS

Monday – Friday	**8:00 AM – 5:00 PM**
Saturday	**Closed**
Sunday	**Closed**

Closed Nov 27 – 28 for Thanksgiving, and Dec 24 – 25.

↗ Directions · ☎ (281) 555-0164 · ↗ All our locations

· Start or stop service
· Hand in assistance paperwork
· Payment drop box, outside, 24 hours

Parking	**Free, at the rear**
Step-free access	**Yes, from the car park**

FOR	Somebody about to get in a car. Wrong hours here means a wasted journey and an angry phone call.
HOW YOU GET HERE	**Nothing.** Nothing in the portal links to an individual service centre — `/:tenant/portal/visit/:slug` has no inbound link of any kind, constructed or literal. *Where to find us* lists the places and does not open one. Filed as a defect.
COGNITIVE LOAD	Open-or-closed *right now* is the headline, above the hours table. Holiday closures are listed rather than left to be discovered at the door.
WHAT YOU CAN DO HERE	Not every office does everything. Payment methods are named explicitly — cash is the reason a large share of these visits happen, and no other channel accepts it.
ACCESSIBILITY	Step-free access and parking are facts somebody needs before setting out, not afterwards.

STATES

CLOSED NOW	CLOSED TODAY ONLY	TEMPORARILY CLOSED	NO MAP
Amber, says when it opens next, and points at the 24-hour drop box.	A holiday closure says which holiday and the next open day.	Says why and for how long, with the nearest alternative.	The address and directions link still work — a map that fails must not take the address with it.

COMPONENTS PortalFrame · OpenNowBadge · HoursTable · Map

RULES The address is the utility's own service centre — one of the three places in the product that legitimately holds an address of its own, because it is not a property that takes service.

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-01 A customer can pay by card — UNVERIFIED

Waits on: No payment provider is wired. Five separate pieces of copy say so — *We cannot take card payments yet*, *Card payments are not ready yet*, *Online payment arrives later this year*, *We cannot take fees online yet*, *This account is cash only*.

Screens: 35 · 36 · 37 · 6 · 8

WHAT DONE LOOKS LIKE ON SCREEN

A customer with $121.00 due presses Pay now, enters a card, and the receipt reads "Paid $121.00 · Aug

A customer with $191.00 due presses Pay now, enters a card, and the receipt reads "Paid $191.00 · Aug 14 · reference PMT-2608-0311" with the balance underneath reading $0.00.

CPB-22 **A guest can see their own receipt again** UNVERIFIED

Waits on: *We cannot show that receipt here* — a guest payment has no account to look it up in, so the receipt exists only in the moment.

Screens: 7 · 37

WHAT DONE LOOKS LIKE ON SCREEN

A guest who paid $191.00 on Aug 14 re-opens their emailed link and sees the same receipt, reference PMT-2608-0311.

CPB-24 **The two dead hold sentences are retired** UNVERIFIED

Waits on: `portal.held.card` and `portal.held.signIn` sit in all eleven catalogues and are rendered by **no source file at all**. The holds they described were released by the doors wave; the wording was never taken out.

Screens: 1 · 3

WHAT DONE LOOKS LIKE ON SCREEN

The two keys are gone from all eleven catalogues and no screen changes, because nothing rendered them.

03 Starting and stopping service

Ten screens, and two four-step flows that mirror each other. Start is reached before there is an account; stop is reached from inside one. They are drawn as two flows and would be **built as one** — the same wizard component with different steps configured, because the stepper, the read-back, the change links, the what-happens-next panel and the refusal behaviour are identical work.

15 Start service · 1 Address EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/start-service`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


15 Start service · 1 Address `/:tenant/portal/start-service`

> **The question:** do you even serve this address, and with what? Asked first, before a single detail, because everything after it is wasted if the answer is no.

PHONE · 390

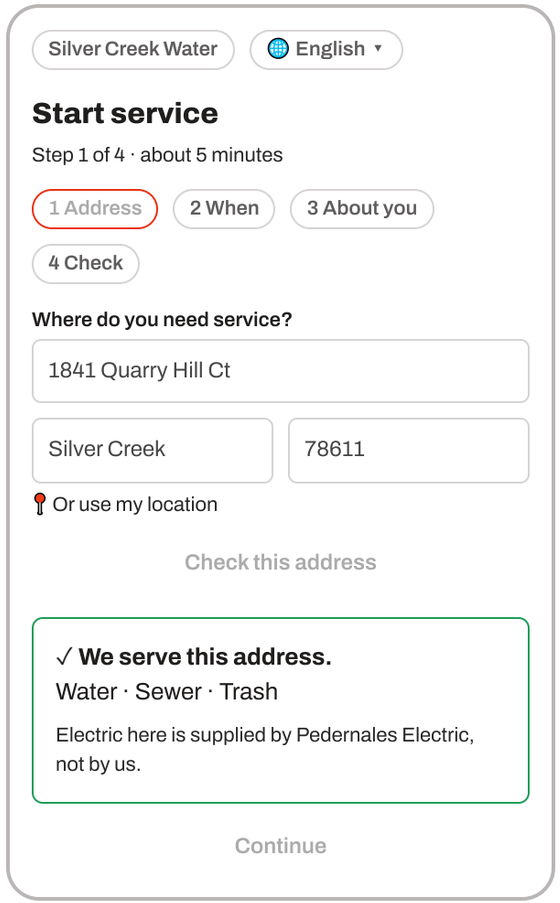

DESKTOP · 1280

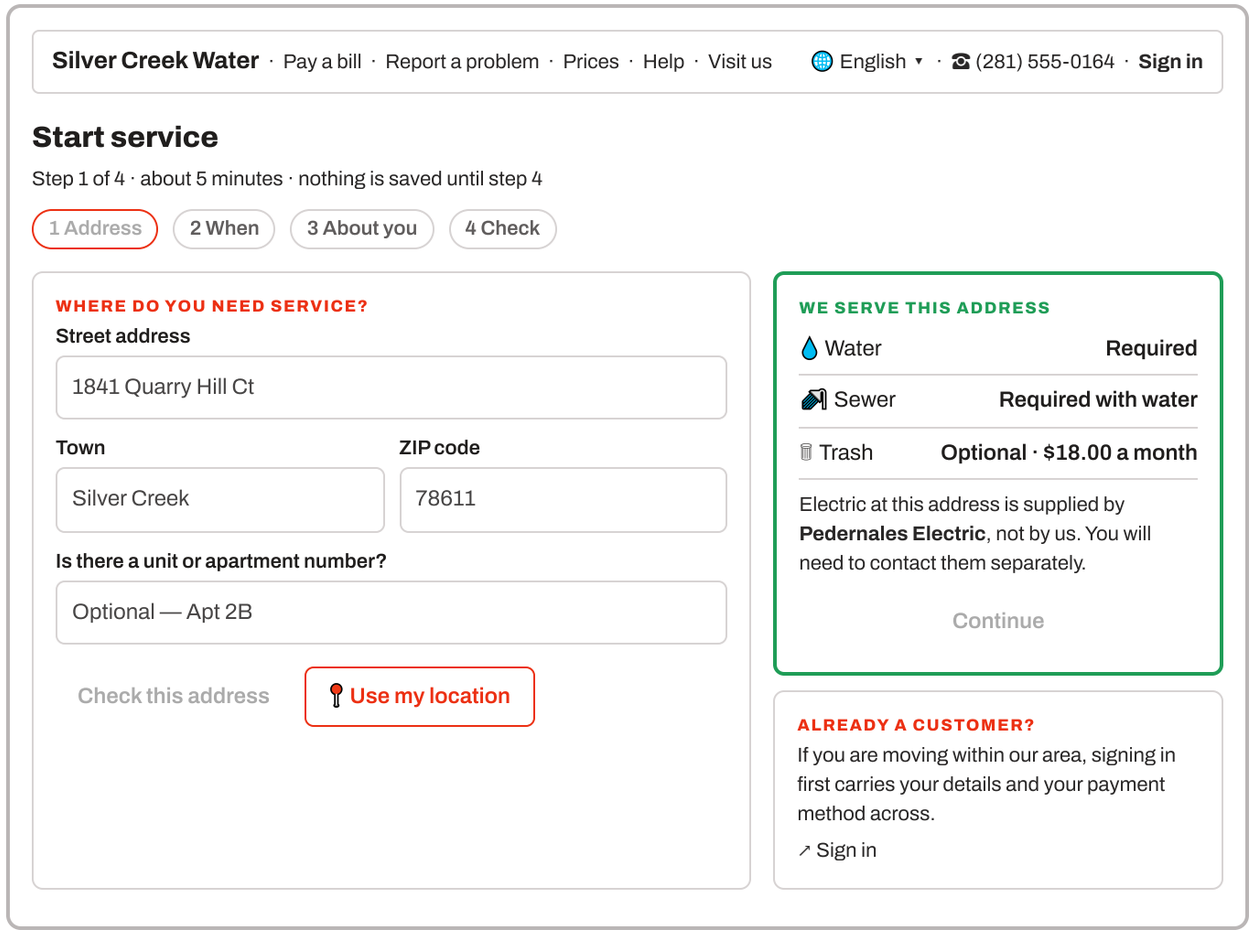

FOR	Answering "can I get service here" in one field, before anybody fills a form.
WHY IT IS STEP ONE	Every other question is wasted if the answer is no. A person who fills three steps and is then told the address is outside the area has spent five minutes to learn something the first field knew.
WHAT THE CHECK MUST SAY	Not just yes or no — **which services**, which are required, which are optional and what they cost. And, where the utility knows it, **who supplies the rest**: "electric here is Pedernales Electric" saves a second search and a call.
COGNITIVE LOAD	Nothing is asked about the person yet. Location by one tap. The step count and the time are stated before the first field.
STATES	**NOT OUR AREA** — Says so immediately and names who does serve it, where known. **ADDRESS NOT RECOGNISED** — Offers the nearest matches rather than refusing a typed address. **ALREADY HAS SERVICE** — Says so: somebody else holds it, or you do. Routes to sign-in or the phone. **UNIT NEEDED** — A multi-unit building asks which unit, because service is per unit.
COMPONENTS	PublicFrame · Stepper · AddressField · ServiceAvailability
RULES	The address is checked against premises records; nothing here creates one. A unit refines a premises by label, not by a second address.

16 Start service · 2 When EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/start-service`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


16 Start service · 2 When `/:tenant/portal/start-service`

> **The question:** when do I need it on, which of the optional services do I want, and what will it cost to start?

PHONE · 390

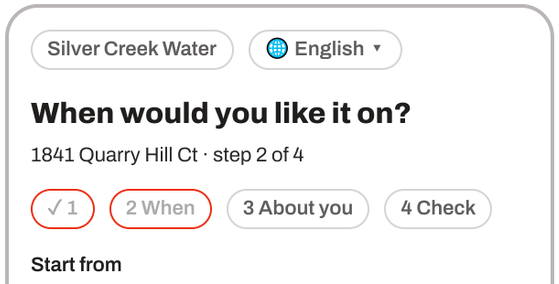

DESKTOP · 1280

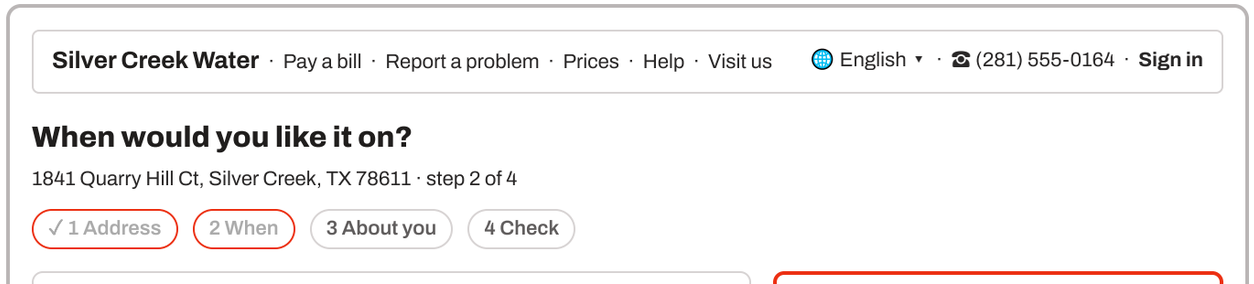

09/14/2026

Earliest we can do is 09/10/2026

Is it a home or a business?

Home ▾

WHICH SERVICES?

☑ Water	Required
☑ Sewer	Required with water
☑ Trash · weekly	$18.00 a month

WHAT IT COSTS TO START

Connection fee	**$45.00**
Deposit	**Decided at step 3**

Charged on your first bill, not today.

Continue

Nobody needs to be home unless the water is off at the street.

Start from

09/14/2026

Home or business?

Home ▾

Earliest is 09/10/2026 — we need three working days

Which services?

☑ **Water**	Required at this address
☑ **Sewer**	Required with water · charged on 90% of your water
☑ **Trash** · weekly collection, Tuesdays	Optional · $18.00 a month

Continue

WHAT IT COSTS TO START

Connection fee	**$45.00**
Deposit	**Decided at step 3**
On your first bill	**$45.00 + any deposit**

Nothing is taken today. A deposit, if one is needed, depends on a credit check at the next step.

ON THE DAY

Nobody needs to be home unless the water is shut off at the street. If it is, we will call to arrange a time.

A TYPICAL MONTHLY BILL HERE

about $96

Water, sewer and trash for a household of three, based on this street.

FOR	The date, the services, and the two costs — one to start, one every month.
THE EARLIEST DATE IS STATED	Before they type, not after they are refused. "Earliest is 09/10 — we need three working days" is one sentence that prevents a rejected form.
COGNITIVE LOAD	Required services are ticked and locked with the reason; only the genuinely optional one is a choice. The estimated monthly bill answers the question behind the question — moving people want to know what they are signing up to, not just the joining fee.
STATES	**DATE TOO SOON** Says the earliest date rather than rejecting the typed one. **BUSINESS CHOSEN** The service list and the fees change, and the screen says they did. **NO OPTIONAL SERVICES** The list is shown as facts, not tick-boxes, when nothing is optional. **NO ESTIMATE AVAILABLE** The panel is absent, not shown with a dash.
COMPONENTS	PublicFrame · Stepper · DateField · ServicePicker · CostPanel

17 Start service · 3 About you EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/start-service`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

17 Start service · 3 About you `/:tenant/portal/start-service`

> **The question:** who are you, how do we reach you, and can you prove it? This is the step people abandon, because it is the one that needs a document they do not have to hand.

PHONE · 390

Silver Creek Water · English ▾

About you

Step 3 of 4

✓ 1 · ✓ 2 · 3 About you · 4 Check

Your name

Marcus Bell

Email

m.bell@example.com

Phone

(512) 555-0148

Date of birth

MM/DD/YYYY

Used for the credit check only. It decides whether a deposit is needed.

Proof of identity

Add a photo of your ID

Driving licence, passport or state ID

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English ▾ · ☎ (281) 555-0164 · **Sign in**

About you

Step 3 of 4 · this is the only step that needs a document

✓ 1 Address · ✓ 2 When · 3 About you · 4 Check

First name

Marcus

Last name

Bell

Email — where your bill will be sent

m.bell@example.com

Phone

(512) 555-0148

Date of birth

MM/DD/YYYY

Mailing address, if different

Same as the service address ▾

Proof of identity

Drop a file here, or choose one


A driving licence, passport or state ID · JPG, PNG or PDF · up to 10 MB

WHY WE ASK FOR EACH OF THESE

Name and address	Whose account it is
Email	Where the bill goes
Phone	Only if something goes wrong on the day
Date of birth	The credit check, which decides the deposit
Photo ID	Required by state rules before service starts

NO ID TO HAND?

Send it later. Everything else is saved and we hold your request for 30 days. Service cannot start until it arrives, so the sooner the better.

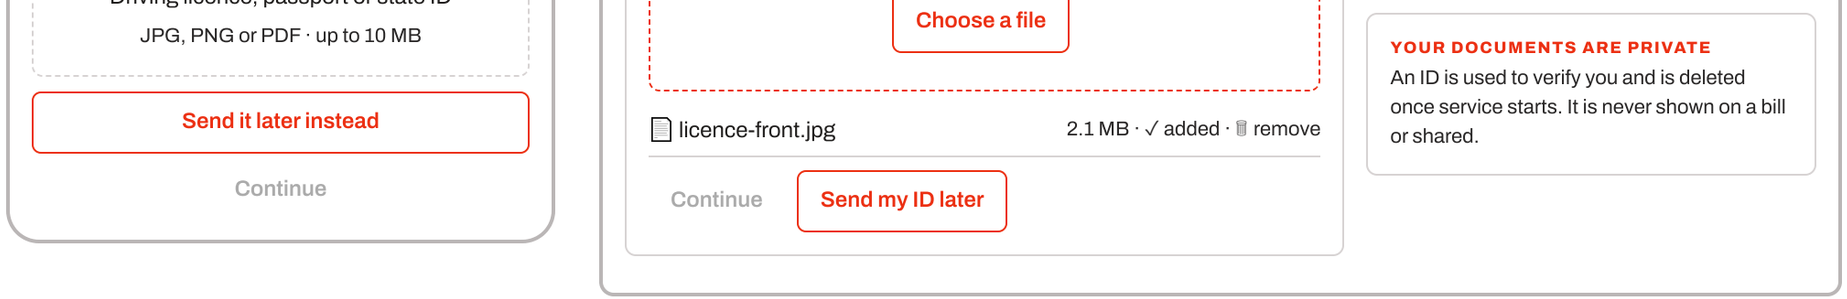

FOR	Identity, contact and the credit check. It is the step that decides whether a deposit is charged, and the step most abandonments happen on.
EVERY FIELD SAYS WHY	A panel naming what each one is for. People type a date of birth into a utility form with real hesitation; "the credit check, which decides the deposit" is the difference between suspicion and cooperation.
THE DOCUMENT DROP	Drag-and-drop with an explicit "choose a file", the accepted formats and the size limit stated *before* the attempt. An uploaded file is listed with its size and a way to remove it — never a silent success.
SEND IT LATER	The escape hatch, offered as a real option rather than a failure. The commonest reason this form is abandoned is a document that is upstairs, in a car, or at work — and somebody who leaves to fetch it does not come back. What it costs is stated: service cannot start until it arrives.
STATES	**FILE TOO LARGE** Says the limit in plain terms and keeps every typed field. · **WRONG FORMAT** Names the formats accepted; does not clear the drop zone. · **DEPOSIT REQUIRED** Shown at step 4 with the reason and what would remove it — never as a surprise on the first bill. · **SIGNED IN** Name, email, phone and mailing address arrive pre-filled from the account.
COMPONENTS	PublicFrame · Stepper · Field · FileDrop · AttachmentRow · Callout warn

18 Start service · 4 Check EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/start-service`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

18 Start service · 4 Check `/:tenant/portal/start-service`

> **The question:** is all of that right, what have I agreed to, and what happens next? The last screen before a request that starts a legal supply.

PHONE · 390

Silver Creek Water · English

Check this, then send it

✓ 1 · ✓ 2 · ✓ 3 · 4 Check

SERVICE

Address	1841 Quarry Hill Ct Silver Creek, TX 78611
From	Sep 14, 2026
Services	Water · Sewer · Trash

✎ Change

YOU

Name	Marcus Bell
Email	m.bell@example.com
ID	✓ licence-front.jpg

✎ Change

WHAT YOU WILL BE CHARGED

Connection fee	$45.00
Deposit	$0.00

No deposit needed — the credit check passed.

On your first bill $45.00

☐ I agree to the terms of service

Send my request

DESKTOP · 1280

Silver Creek Water · Pay a bill · Report a problem · Prices · Help · Visit us · English · ☎ (281) 555-0164 · **Sign in**

Check this, then send it

Step 4 of 4 · nothing has been submitted yet

✓ 1 Address · ✓ 2 When · ✓ 3 About you · 4 Check

SERVICE ✎ CHANGE

Service address	1841 Quarry Hill Ct, Silver Creek, TX 78611
Starting	Monday, Sep 14, 2026
Water	Residential Standard · tiered
Sewer	90% of the water you use
Trash	Weekly, Tuesdays · $18.00 a month

YOU ✎ CHANGE

Name	Marcus Bell
Email	m.bell@example.com
Phone	(512) 555-0148
Mailing address	Same as the service address
Proof of identity	✓ licence-front.jpg · 2.1 MB

WHAT YOU WILL BE CHARGED

Connection fee	$45.00
Deposit	$0.00
On your first bill	**$45.00**

No deposit is needed — the credit check passed. Nothing is taken today; both appear on your first bill, around Oct 5.

WHAT HAPPENS NEXT

1 · We confirm by email within one working day
2 · We turn the water on, on Sep 14
3 · Your first bill arrives around Oct 5
4 · You can create a sign-in as soon as we confirm

☐ I agree to the **terms of service** ↗

Send my request

Send is disabled until the box is ticked.

FOR	The read-back before a request that starts a legal supply and a billing relationship.
IT READS BACK WHAT WILL BE	Every answer from the three steps before, each with a change link that returns to the step it came from — not a generic Back. This is the same discipline the rate wizard's review needed and did not have.

STORED	
THE DEPOSIT VERDICT, HERE	With its reason. "No deposit is needed — the credit check passed" closes the question this whole flow raises at step 3, at the moment somebody is deciding whether to press.
WHAT HAPPENS NEXT	Four dated steps, so nobody has to phone to ask whether it worked. The confirmation window is stated before the request, not after.

STATES

DEPOSIT REQUIRED	ID NOT ATTACHED	ADDRESS TAKEN MEANWHILE	SENT
The figure and the reason, and what would remove it — not a bare amount.	Says service cannot start until it arrives, and how to send it. Sending is still allowed.	Refused with the reason and the phone number; nothing typed is lost.	A reference on screen and by email, and the request appears under Your requests once there is an account.

COMPONENTS PublicFrame · Stepper · ReadBack · CostPanel · Consent

19 Finish starting service EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/start-service/:draft`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


19 Finish starting service `/:tenant/portal/start-service/:draft`


> **The question:** I started this last night on my phone and had to stop — where was I, and what is still needed? The answer must be the **fields themselves**, not a list of what is missing. Somebody who returns has thirty seconds and a document in their hand.

PHONE · 390

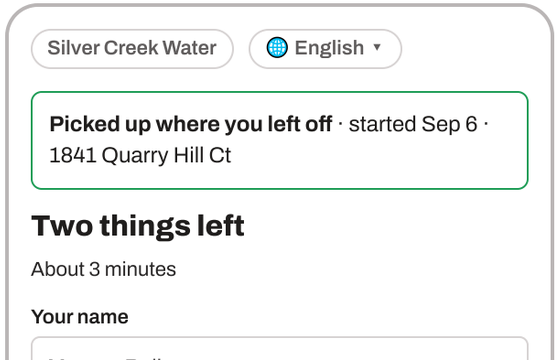

DESKTOP · 1280

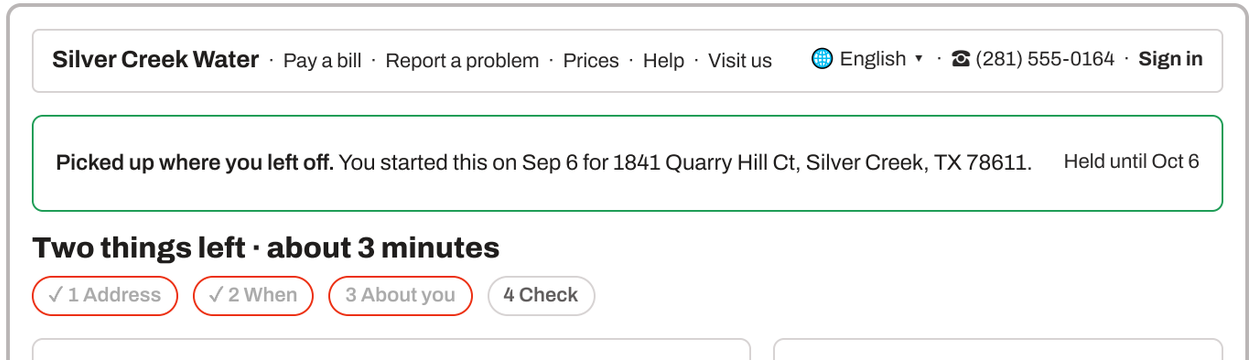

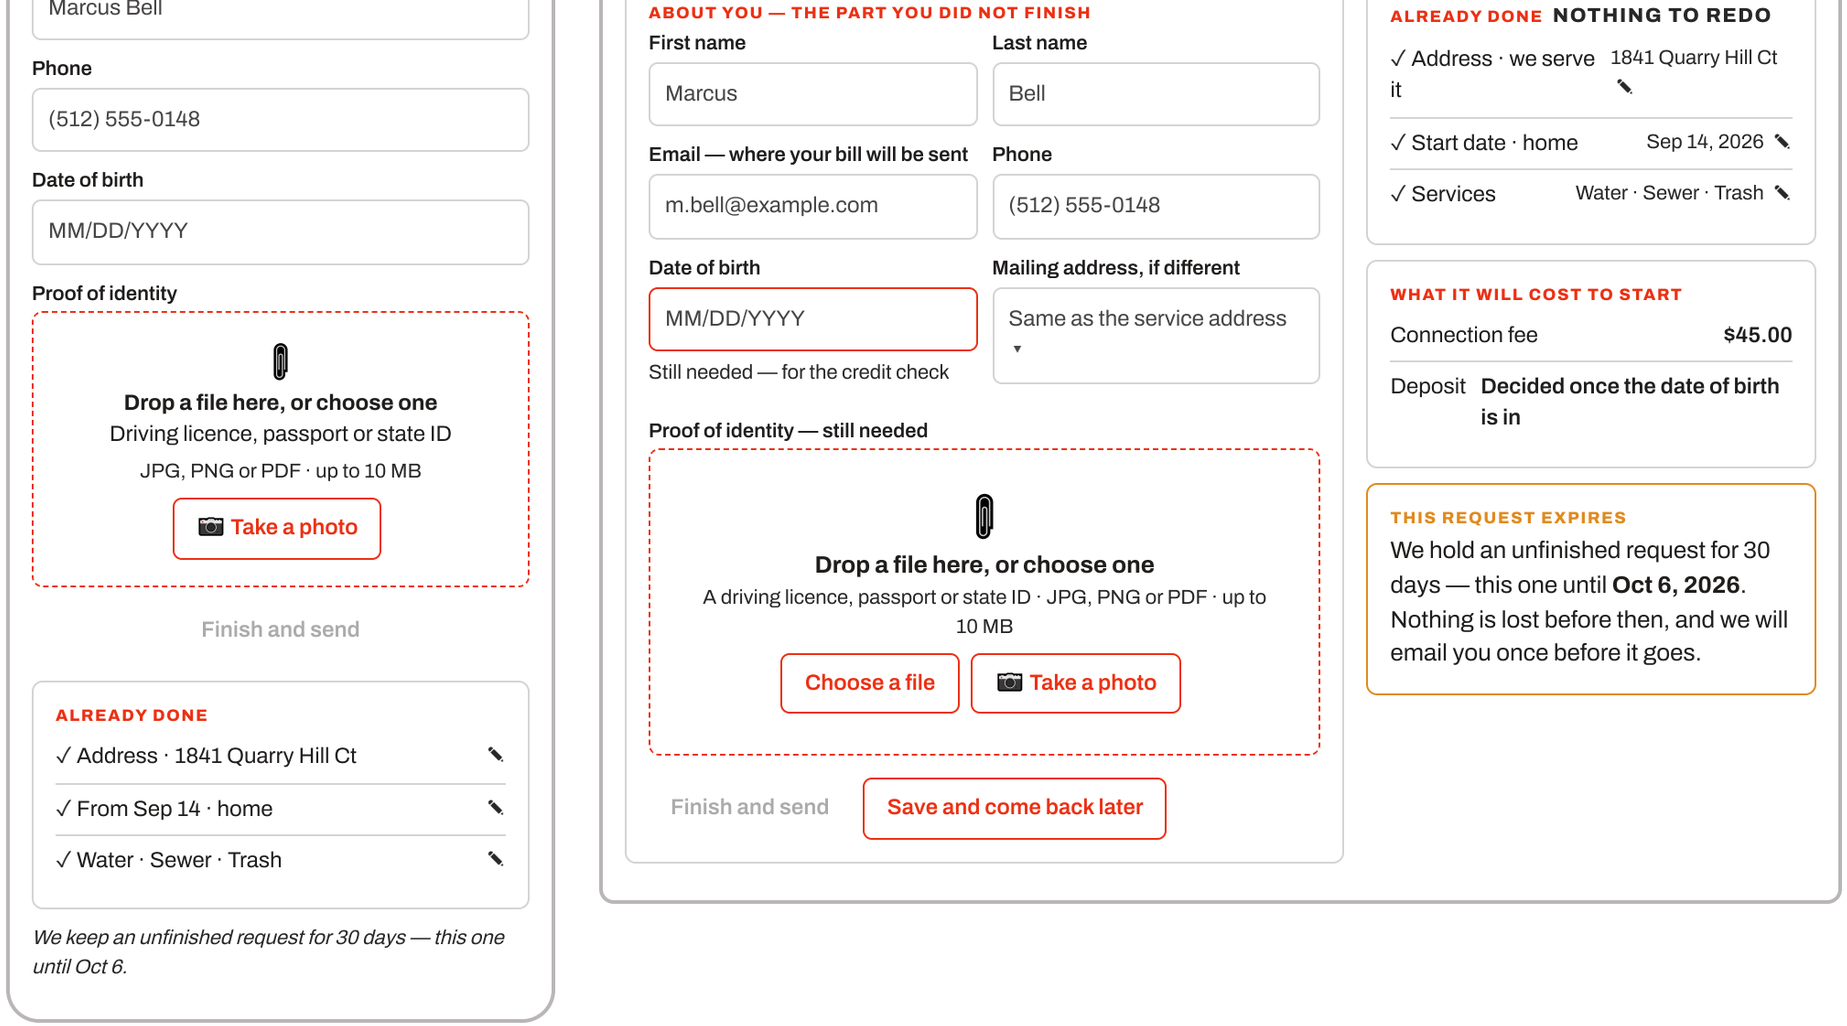

FOR	Bringing back somebody who abandoned a move-in form — usually at the document, usually because it was upstairs or at work.
IT OPENS ON THE FIELDS, NOT ON A CHECKLIST	The first version of this screen listed what was still needed and made the clerk press *Carry on* to reach it. That is one more tap between a person holding their licence and the thing that takes a photo of it. **The unfinished step is the page**; what is already done is a small panel beside it, with change links, not a progress report.
THE DOCUMENT DROP	Drag-and-drop, **choose a file**, and **take a photo** — the last is the one that matters on a phone, because the ID is in the person's hand and the camera is one tap away. Formats and the size limit are stated before the attempt, and an added file is listed with its size and a way to remove it.
STILL-NEEDED FIELDS ARE MARKED	An accented border and one line underneath — "still needed, for the credit check". Everything already answered is pre-filled and editable, so a returning person can correct a typo without starting over.

MARKED

THE EXPIRY, WITH A DATE

A saved draft has a life and the date is on the screen, plus a promise to email before it goes. A form that quietly vanishes is worse than one that never saved.

STATES

EXPIRED	ADDRESS TAKEN MEANWHILE	DATE NOW PAST	NOTHING LEFT BUT THE ID
Says so and offers to start again with every answer it can still pre-fill.	Someone else took service there: says so, with the phone number.	Asks for a new start date rather than silently moving it.	The page is the drop zone and one button. No form at all.

COMPONENTS

PublicFrame · Stepper · Field · FileDrop · CameraCapture · DoneList · Callout warn

---

20 Stop service · 1 Which property

EXISTS BEHIND · NO COMMITMENT

`/:tenant/portal/stop-or-restart`

> **WAS:** ~~/stop-or-restart has no door anywhere in the portal~~
> **NOW:** ANSWERED — **the door was built.** YourAccount.tsx now links to `/:tenant/portal/stop-or-restart`. Fixed by the doors wave, `DEF-CWP-4654`.

20 Stop service · 1 Which property `/:tenant/portal/stop-or-restart`

> **The question:** which one am I stopping, and all of it or part of it? Skipped entirely for the customer with one property and one set of services — which is most of them.

PHONE · 390

← My details

Stop service

Step 1 of 4

1 Which · 2 When · 3 Final bill · 4 Check

Which property?

◉ **1841 Quarry Hill Ct**
4417-0092 · Water · Sewer · Trash

○ **220 Lakeview Dr**
4417-0155 · Water

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

Stop service

Step 1 of 4 · nothing is stopped until you confirm at step 4

1 Which property · 2 When · 3 Final bill · 4 Check

WHICH PROPERTY?

◉ **1841 Quarry Hill Ct**, Silver Creek, TX 78611 · 4417-0092 · Water, Sewer, Trash

NOT SURE WHICH YOU NEED?

Moving out — Stop all services

Stop everything, or just part?

◉ Stop all services — Closes the account

○ Just stop trash — Keeps water and sewer on

Continue

○ **220 Lakeview Dr**, Burnet, TX 78611 · 4417-0155 · Water

STOP EVERYTHING, OR JUST PART OF IT?

◉ **Stop all services** — the account closes and a final bill is sent

○ **Stop trash only** — water and sewer stay on, the account stays open

○ **Pause for a season** — $25.00, the account stays open, nothing is billed for usage

Continue

Away for the winter — Pause for a season — cheaper than stopping and restarting

Do not want the trash service — Stop trash only

Stopping and restarting later costs $45.00 to reconnect. Pausing costs $25.00 and keeps your account number.

FOR	Landlords, people with two properties, and anybody who wants to drop one service rather than all of them.
HOW YOU GET HERE	**Nothing.** `/:tenant/portal/stop-or-restart` has **no door anywhere in the portal** — not from Home, not from My details, not from Your account, not in the nav. The route is registered and the screen is built. Filed as a defect; this whole four-step flow is currently unreachable.
SKIPPED FOR MOST PEOPLE	One account with no optional services means nothing to choose, so this step does not render — the flow opens on **When** and says "step 1 of 3". A chooser with one option is furniture, exactly as everywhere else.
STOP IS NOT THE ONLY ANSWER	A large share of stop requests are seasonal absences. Pausing costs $25.00 and keeps the account; stopping and restarting costs $45.00 to reconnect. Naming the three situations in the customer's own words — moving out, away for the winter, do not want trash — routes them without making them price it themselves.
STATES	**ONE ACCOUNT, ALL REQUIRED** Step absent. The flow is three steps and says so. · **LANDLORD ACCOUNT** Explains that service reverts to the property owner rather than stopping. · **ALREADY SCHEDULED** Shows the stop already booked and offers to change or cancel it. · **CANNOT PAUSE** Where a utility does not offer it, the option is absent rather than refused.
COMPONENTS	PortalFrame · Stepper · RadioCard · GuidancePanel

21 Stop service · 2 When EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/stop-or-restart`


No door named. This screen carries no *How you get here* row, though the document's own rule E

says every screen does. It is one of 37. See CPB-23.


21 Stop service · 2 When `/:tenant/portal/stop-or-restart`

> **The question:** what is the last day I need it, and does anyone have to be home? The date is the one thing on this whole flow a customer gets wrong, because they pick their moving day rather than the day after.

PHONE · 390

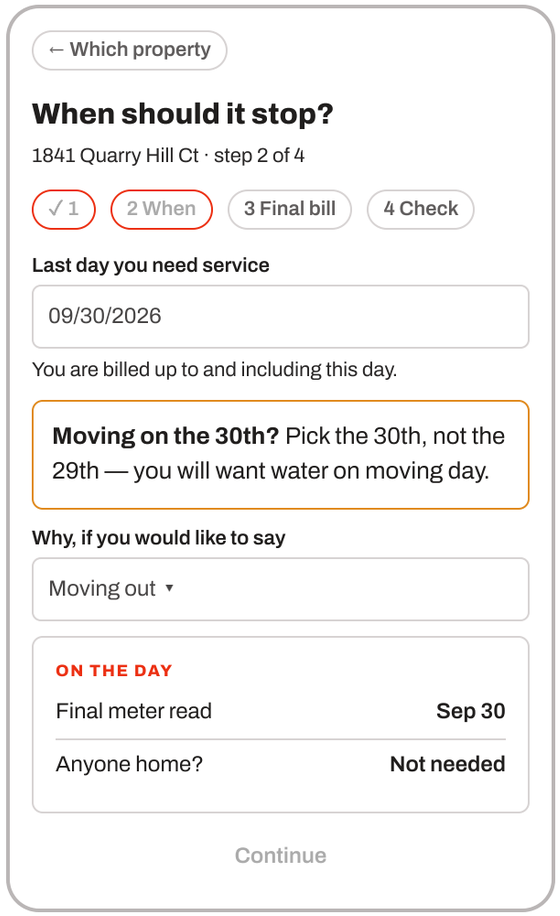

DESKTOP · 1280

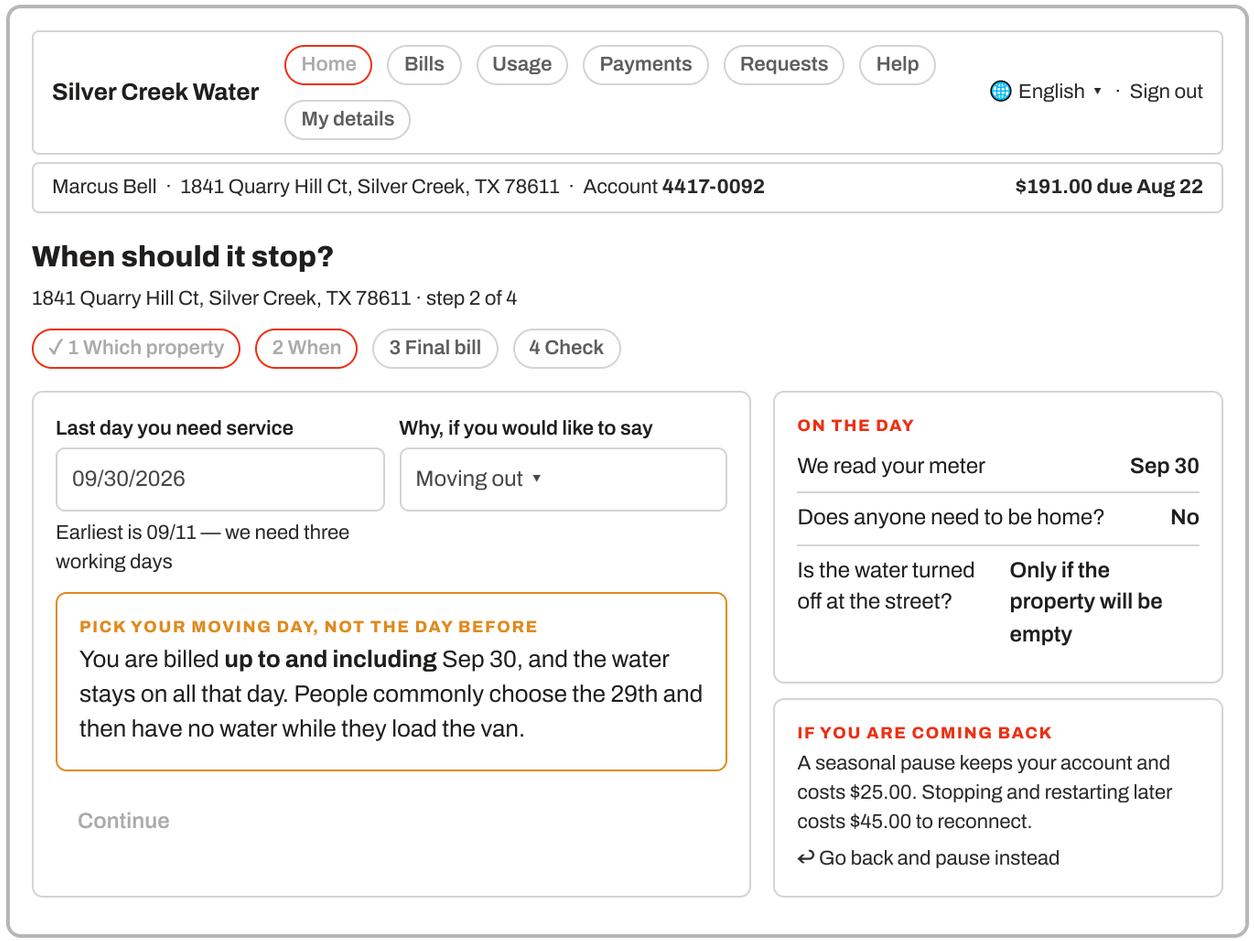

FOR	The date, and the one misunderstanding that generates a call on moving day.
THE WARNING IS THE POINT	**"Billed up to and including"** is stated at the field, and the consequence spelled out: people pick the day before they move, then have no water while loading a van. One sentence prevents an emergency call and a reconnection fee.

THE EARLIEST DATE IS STATED	Before they type. A stop needs a read scheduled, so it cannot be tomorrow, and saying so beats refusing afterwards.
THE WAY BACK	The seasonal alternative is offered again here, because "when" is the step at which somebody realises they are only going away for three months.

STATES

DATE ALREADY BILLED	DATE TOO SOON	FAR FUTURE	PROPERTY EMPTY
Refused with the reason and the earliest allowed — an issued bill is never unpicked.	Says the earliest date rather than rejecting the typed one.	Accepted, with a note that we will confirm nearer the time.	Asks whether to shut off at the street, which prevents a burst pipe in an empty house.

COMPONENTS PortalFrame · Stepper · DateField · Callout warn

22 Stop service · 3 Where the final bill goes EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/stop-or-restart`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

22 Stop service · 3 Where the final bill goes `/:tenant/portal/stop-or-restart`

> **The question:** where do you send the last bill, and my deposit? A final bill posted to the address they have just left is the most expensive small failure in the whole product.

PHONE · 390

← When

Where should the final bill go?

Step 3 of 4

✓ 1 · ✓ 2 · 3 Final bill · 4 Check

○ This address 1841 Quarry Hill Ct

◉ A new address

220 Lakeview Dr

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

Where should the final bill go?

Step 3 of 4 · your final bill is sent around Oct 5


✓ 1 Which property · ✓ 2 When · 3 Final bill · 4 Check

THE FINAL BILL

○ Send it to **this** 1841 Quarry Hill Ct — only if somebody will still be

YOUR DEPOSIT COMES BACK

$150.00

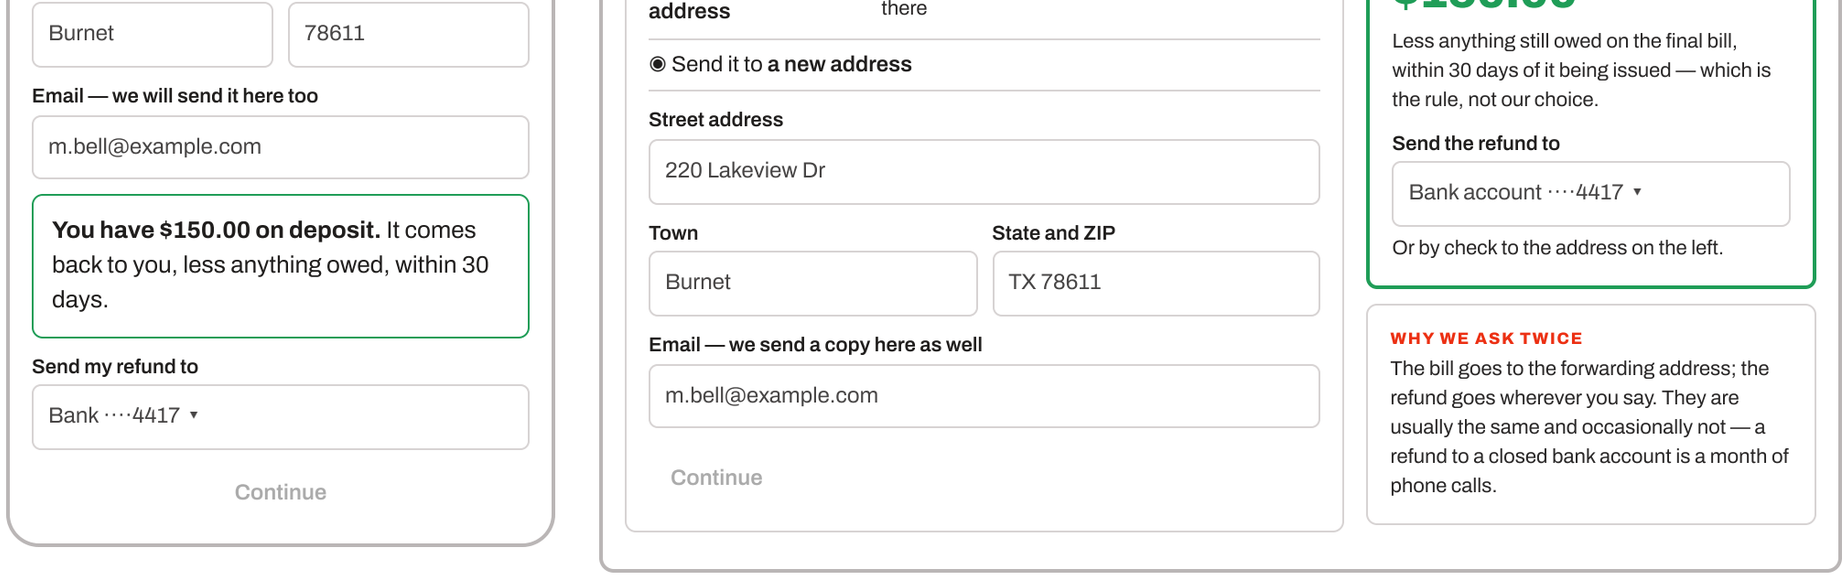

FOR	The two things that go wrong after somebody leaves: the bill posted to the house they moved out of, and the deposit sent nowhere.
ITS OWN STEP, ON PURPOSE	Buried at the foot of a single stop form, the forwarding address is the field people skip. Given a step of its own, with the deposit figure beside it, it is the field they came to fill in.
THE DEPOSIT IS SHOWN, NOT MENTIONED	**$150.00**, what is deducted, and the 30-day rule stated as a rule rather than a promise. It is the question every leaving customer phones about, and the refund destination is asked here rather than assumed.
BILL AND REFUND ARE SEPARATE	They are usually the same and occasionally not. A refund into an account being closed with the move is a month of phone calls, so the screen asks rather than infers.
STATES	**NO DEPOSIT HELD** The panel is absent, not shown as $0.00 — nothing was ever taken. · **MONEY OWED** Says the final bill is expected to exceed the deposit, with the estimate. · **NO FORWARDING ADDRESS** Allowed, with a warning that the bill goes to the old address. · **EMAIL ONLY** Where the utility permits it, paper can be declined — and it says the bill is then email only.
COMPONENTS	PortalFrame · Stepper · AddressField · Callout ok · Select
RULES	A forwarding address is a mailing address on the customer, not a second address on the premises — the property keeps its own.

23 Stop service · 4 Check

EXISTS BEHIND · COMMITMENT CPB-23

`/:tenant/portal/stop-or-restart`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

23 Stop service · 4 Check `/:tenant/portal/stop-or-restart`

> **The question:** is that right, and what happens after I press it? Four dates, so nobody has to phone to ask whether it worked.

PHONE · 390

← Final bill

Check this, then confirm

✓ 1 · ✓ 2 · ✓ 3 · 4 Check

WHAT WILL HAPPEN

Stopping	1841 Quarry Hill Ct
Last day	Sep 30, 2026
Services	Water · Sewer · Trash
Final bill to	220 Lakeview Dr Burnet, TX 78611

✎ Change

THEN

1 · Meter read	Sep 30
2 · Final bill	around Oct 5
3 · Due	around Oct 20
4 · Deposit back	by Nov 4

Stop service on Sep 30

You can cancel this up to Sep 29.

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — 🌐 English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

Check this, then confirm

Step 4 of 4 · nothing is stopped until you press the button

✓ 1 Which property · ✓ 2 When · ✓ 3 Final bill · 4 Check

WHAT WILL HAPPEN ✎ CHANGE

Property	1841 Quarry Hill Ct, Silver Creek, TX 78611
Account	4417-0092 — this account will close
Last day of service	Wednesday, Sep 30, 2026
Services stopping	Water · Sewer · Trash — all of them
Final bill posted to	220 Lakeview Dr, Burnet, TX 78611
Deposit refund to	Bank account ····4417

WHAT YOU WILL OWE

Service to Sep 30 · estimated	$86.20
Move-out final read	$20.00
Deposit held	−$150.00
Expected back to you	**$43.80**

WHAT HAPPENS NEXT

1 · We read your meter	Sep 30
2 · Your final bill is sent	around Oct 5
3 · It is due	around Oct 20
4 · Your deposit is returned	by Nov 4

Stop service on Sep 30

You can cancel this any time up to Sep 29.

AUTOPAY IS ON

Your final bill will be taken automatically on its due date, from bank ····4417. If that account is closing with your move, change it now.

✎ Change autopay

An estimate — the final read decides it.

FOR	The read-back, the expected money, and the four dates — before an act that closes an account.
THE MONEY IS ESTIMATED AND SAYS SO	A leaving customer wants to know whether they owe or are owed. Showing **$43.80 expected back** with "the final read decides it" answers the question honestly; showing nothing sends them to the phone.
THE AUTOPAY WARNING	The one nobody thinks of: autopay will take the final bill from an account that may be closing with the move. Flagged here, with a change link, because after this screen the customer stops visiting.
CANCELLABLE, WITH A DATE	"You can cancel this up to Sep 29" — moves fall through, and a stop that cannot be undone is a reconnection fee.
SAME CODE, TWO FLOWS	Start and stop are the same four-step component with different steps configured — stepper, read-back, change links, the what-happens-next panel and the refusal behaviour are one implementation. Only the fields and the copy differ, which is why they are drawn as two flows and built as one.
STATES	**BALANCE OUTSTANDING** Says what is owed and that it moves to the final bill. Never blocks the stop. · **LANDLORD ACCOUNT** Says service reverts to the owner rather than closing. · **CONFIRMED** A reference, the four dates by email, and the request appears under Your requests. · **AUTOPAY OFF** The amber panel is absent entirely.
COMPONENTS	PortalFrame · Stepper · ReadBack · Timeline · Callout warn

24 Your final bill EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/final-bill`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

24 Your final bill `/:tenant/portal/final-bill`

> **The question:** I moved out three weeks ago — is that everything, and where is my deposit?

PHONE · 390 **DESKTOP · 1280**

← Home

Your final bill

1841 Quarry Hill Ct · closed Sep 30, 2026

COMING BACK TO YOU

$63.80

to bank ····4417, by Oct 30

HOW IT WORKED OUT

Final bill · Sep 1 – Sep 30	$86.20
Deposit held	–$150.00
Owed to you	**$63.80**

WHERE THE BILL WENT

220 Lakeview Dr, Burnet, TX 78611 — the forwarding address you gave us.

↓ Download the final bill · Your account is now closed.

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Home

Your final bill

1841 Quarry Hill Ct, Silver Creek, TX 78611 · account closed Sep 30, 2026

THE FINAL BILL · SEP 1 – SEP 30, 2026

Electric · 412 kWh	$62.88
Water · 3 kgal	$18.35
Sewer · 2.7 kgal	$13.50
Move-out final read	$20.00
Trash · stopped Sep 30, 20 of 30 days	–$28.53
Final bill	**$86.20**

AND THEN

Deposit held since Jun 2, 2026	–$150.00
Coming back to you	**$63.80**

YOUR REFUND

$63.80

To bank account ····4417, by **Oct 30, 2026** — 30 days from the final bill, as the rules require.

WHERE WE SENT IT

220 Lakeview Dr, Burnet, TX 78611 — the forwarding address you gave when you stopped service.

✎ That is wrong — change it

↓ Download the final bill · This account is closed and no further bills will be sent.

FOR

The last thing a leaving customer sees. It answers "is that everything" and "where is my deposit" without a call.

COGNITIVE LOAD

The refund is the headline, not the bill, because that is what they came for. The proration is itemised — "stopped Sep 30, 20 of 30 days, –$28.53" — since a part-month charge is the commonest final-bill dispute.

THE FORWARDING ADDRESS

Shown, with a way to correct it. A refund sent to the address they left is the most expensive small failure in the whole product.

STATES

YOU OWE US
Same layout inverted: the amount due is the headline, with the ways

REFUND SENT
Says the date it went and when to expect it in the bank

NO DEPOSIT
The deposit row is absent, not shown as $0.00 — nothing was

ESTIMATED FINAL READ
Says so and that the figure may change once the meter is read

to pay.

expect it in the bank.

ever held.

change once the meter is read.

COMPONENTS PortalFrame Callout ok ChargeLine AddressField

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

None.

---

04 Your account, once you are in

Five screens. One property for most people; for a landlord or a small business, several — and everything else in the portal assumes one, which is what these make safe.

25 Home EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal` `/:tenant/portal/home`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


25 Home `/:tenant/portal` `/:tenant/portal/home`

> **The question:** what do I owe, when is it due, and is anything wrong? Nothing else belongs above the fold.

PHONE · 390

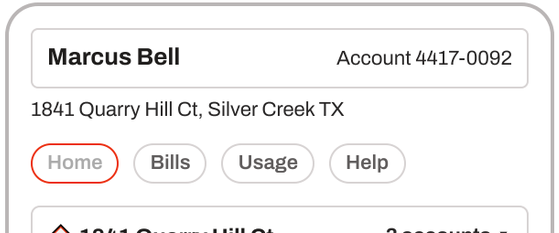

DESKTOP · 1280

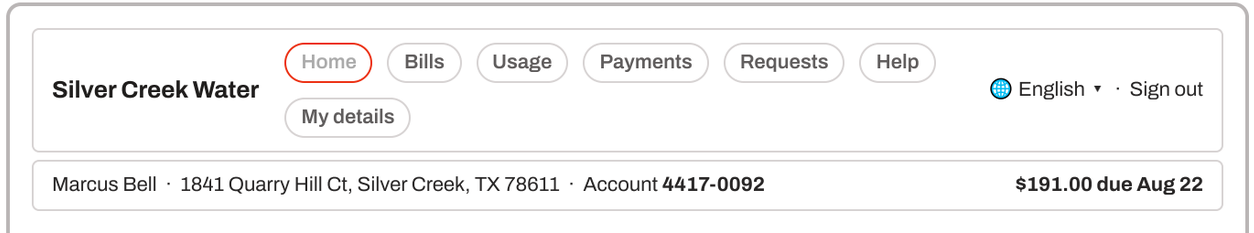

1841 Quarry Hill Ct · 3 accounts

AMOUNT DUE

$191.00

Due Aug 22, 2026 · in 9 days

Pay $191.00 now

Set up autopay

YOUR ACCOUNT

Account	4417-0092
Name	Marcus Bell
Service address	1841 Quarry Hill Ct Silver Creek, TX 78611
Services	⚡ 💧 🚚 🗑
Equipment	8841-C · W-2209 · F-0118
Status	ACTIVE

All account details

YOUR BILL — August

Electric · 800 kWh	$107.50
Water · 8 kgal	$47.50
Sewer	$36.00

See the whole bill →

USAGE — Electric

800 kWh

5% less than July · 12% more than last August

Next meter read — Sep 30 · in 22 days

YOUR ACCOUNT

4417-0092 · Marcus Bell

1841 Quarry Hill Ct · 3 accounts

Service address 1841 Quarry Hill Ct Silver Creek, TX 78611	Services ⚡ Electric · 💧 Water 🚚 Sewer · 🗑 Trash	Status ACTIVE since Jun 2, 2026 See equipment	How we reach you (•••) •••-0148 m•••••@example.com
Service area Quarry Hill · Route 4 · Cycle 2	Plan Residential Standard	Equipment 8841-C · W-2209 · F-0118	ID on file Driving licence ••••4417 Show · Change

Autopay on · Paperless off · Budget billing off · No deposit held · Nothing past due · Everything about this account

AMOUNT DUE

$191.00

Due Aug 22, 2026 · in 9 days

Pay $191.00 now

Set up autopay

YOUR BILL — August 2026 · $191.00

BL-2608-000077 · Jul 1 – Jul 31 · due Aug 22

Electric · 800 kWh	$107.50
Water · 8 kgal	$47.50
Sewer · 7.2 kgal	$36.00
State & local tax	$8.30

See the whole bill → · Download PDF · Why it costs this

USAGE — Electric

800 kWh — 5% less than July

See all your usage →

NEXT METER READ

Sep 30

in 22 days

SERVICE

1841 Quarry Hill Ct — ACTIVE

Electric · Water · Sewer · Trash

FOR	Answering the whole visit in one glance for the majority who came to check or pay.
PRIMARY ACTION	**Pay $191.00 now** — the button carries the amount, so the decision is made before the tap.
COGNITIVE LOAD	Amount and date in the largest type on the page, in the accent-bordered card that appears in the same position on every screen. Usage is a comparison, not a raw figure.
STATES	**LOADING** Skeleton cards of the right height. Never dashes — a dash means "genuinely none". **NOTHING DUE** "You are all paid up." with the next bill date. Not an empty card. **PAST DUE** The card turns red, reads **PAST DUE**, and the help link sits inside it, not elsewhere. **FAILED TO LOAD** Says the bill could not be loaded and offers the phone number. Never a page of dashes. **ONE ACCOUNT** The switcher is absent — a chooser with one option is furniture. **FEWER THAN SIX BILLS** The chooser lists what exists. A first bill means no chooser at all. **AN OLDER MONTH CHOSEN** Paid bills show "Paid Jul 19" where the due date was; the Pay button does not appear. **NO ID ON FILE** That row is absent rather than shown empty; a prompt appears only where one is required.
THE ACCOUNT CARD	A wide card under the bars carrying everything that identifies the account: **account number · name · service address · service area, route and cycle · which services · the plan · the equipment installed · phone · email · the ID on file**. It is the answer to "am I in the right place, and does this look like me" — the question a landlord with three properties, and anybody about to phone, asks first. The header bar carries the same three facts in one line; this card is the full version, on the one screen where a customer starts.
EQUIPMENT AS REFERENCES	The serials alone — **8841-C · W-2209 · F-0118** — not "Electric meter 8841-C · 5/8 inch". A customer already knows what is installed; what they cannot produce from memory is the number a clerk asks for on the phone or a plumber needs off the meter. Three references fit on one line where three descriptions took three, and the room that frees carries the **account status**, which is the fact people actually check. The full descriptions, sizes and ownership stay one tap away on the equipment screen.
STATUS, ON THE CARD	**Active since Jun 2, 2026**, as a chip and a date. Below it the settings that change what happens next month — autopay, paperless, budget billing, deposit held, and whether anything is past due. A customer reading this card is deciding whether anything needs their attention, and status is the single word that answers it.
THE MONTH CHOOSER	The bill panel carries a **chooser for the last six months**, showing the month and its total — "August 2026 · $191.00". It is here because the commonest reason to leave Home is to compare this month with last, and that round trip through the bills list and back is three screens to answer one question. Choosing a month redraws the panel in place; the bill number, period and due date follow it, so nothing on screen can belong to a different month than the heading says.
WHAT IS MASKED, AND WHY	Phone, email and the government ID are **masked by default and revealed on request** — `(•••) •••-0148`, `m•••••@example.com`, `Driving licence ••••4417`. Enough to confirm it is the right record; not enough to be read over a shoulder in an office, a library or a shared kitchen. Only the last four of an ID is ever shown, and revealing is a deliberate act with an audit trail behind it. The account number is *not* masked — it is printed on every bill and quoting it is what a customer is asked to do.

THE ACCOUNT SWITCHER	Top right of the card and, on a phone, above the amount due: **the current property with a count of the rest**. Every figure below it belongs to the account named in it. A landlord who pays the wrong property's bill has been failed by this control, so it is the one thing on Home that is never ambiguous — and it is **absent entirely for a customer with one account**.
WHERE IT SITS, AND THE TENSION	This screen's own question is "what do I owe" and nothing should push that below the fold. So on desktop the card is a single band above the amount due, and **on a phone it sits BELOW it** — compact, four rows, with "all account details" expanding the rest. On the width where space is scarce, the money wins and the identity is one tap away.
WHICH SERVICE	The usage tile carries a **service picker**, built from the services this customer actually has. Without it the tile shows one service's figure with no label — a customer on electric, water, sewer and trash sees "800" and cannot tell what it counts. Two rules follow it everywhere: every figure inside the tile belongs to the SELECTED service (a comparison sentence about water while Electric is chosen is the defect that reached a live screen this week), and a customer with only one service gets no picker at all, because a chooser with one option is furniture.
WHO AND WHICH ACCOUNT	The customer's **name**, their **service address** and their **account number** sit above the navigation, on this and every signed-in screen. Three reasons, and each is a real failure without it: a customer with two properties cannot tell which one they are looking at; anyone phoning is asked for the account number first, and hunting for it on a paper bill is the commonest reason a call starts badly; and somebody who has followed an emailed link needs to know whose account opened, especially where a household shares one sign-in. The account number is the customer's own reference, printed on their bill — not a database id, which never appears.
WORDS	"Amount due", "Due Aug 22", "in 9 days". Never "Outstanding balance" or "Net position".
COMPONENTS	PortalFrame · AmountDueCard · ServiceLines · UsageSpark · Button
RULES	No internal id on screen — the bill number is the customer's, the database id is not. One filled button.

26 Home, at its second address EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/home`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

26 Home, at its second address `/:tenant/portal/home`

> **Not a separate screen.** The portal serves the home page at both `/:tenant/portal` and `/:tenant/portal/home`. Both render screen 03; the second exists so a link written by a person, an email template or another system does not 404.

DRAWN AT	Screen 03 · Home — the identity bar, the amount due, the service lines, the usage picker and the next read.

WHY BOTH EXIST	`/:tenant/portal` is what the frame links to and what a signed-in customer lands on. `/:tenant/portal/home` is the spelling a human writes and the one that turns up in emails and bookmarks.
WHAT MUST BE TRUE	They must render the **same screen**, not two that drift. One route table entry pointing at one component — never a second copy that gets a fix the other does not.
LISTED HERE	So that all fifty routes are accounted for and nobody later finds an address nothing describes.

27 Your accounts EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/accounts`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


27 Your accounts `/:tenant/portal/accounts`

> **The question:** which of my properties owes what, and which one needs me today?

PHONE · 390

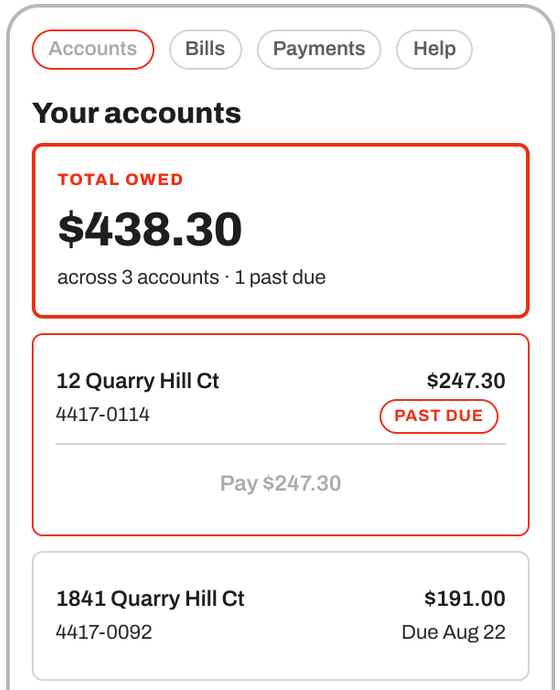

DESKTOP · 1280

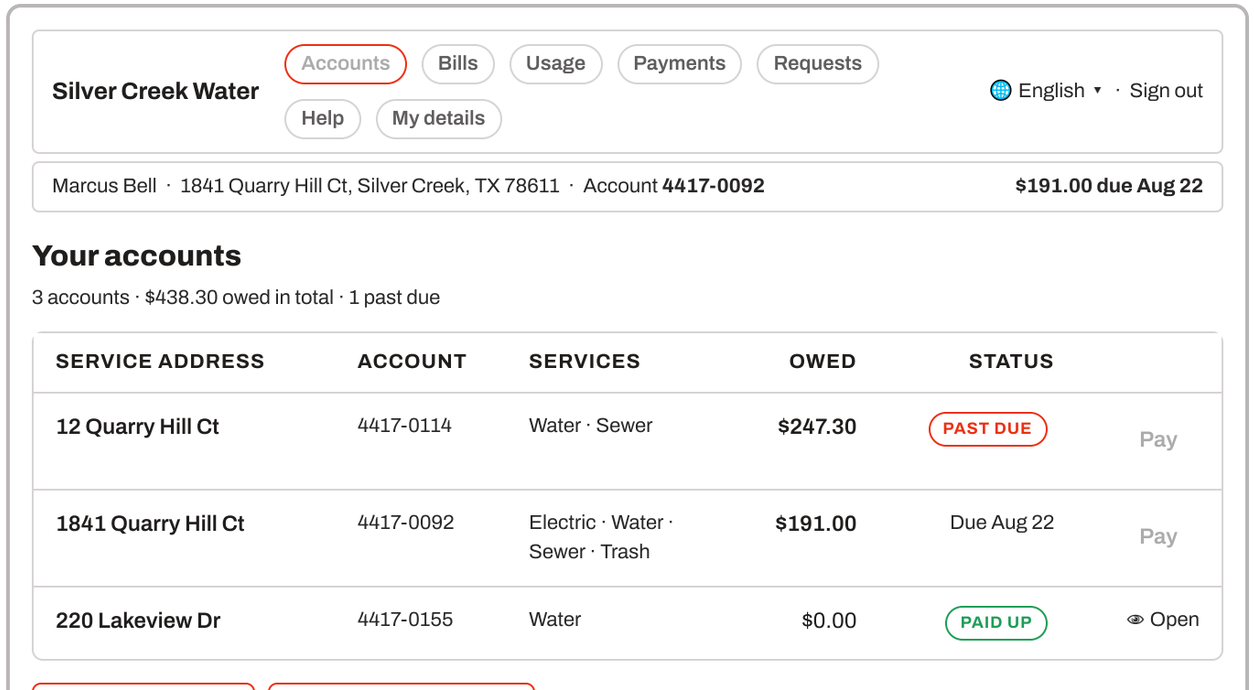

220 Lakeview Dr $0.00
4417-0155 PAID UP

+ Add an account

+ Add an account | Pay all three · $438.30

FOR	Landlords and small businesses. One glance says which property needs attention today.
COGNITIVE LOAD	Sorted by urgency, not alphabetically — past due first, then due soonest. The address is the heading because that is how an owner thinks of a property; the account number is underneath for when they phone.
PAYING TOGETHER	A single payment across accounts is offered, because a landlord with eleven properties will not make eleven payments. It allocates per account and each gets its own receipt line.
STATES	**ONE ACCOUNT** This screen is skipped entirely — a list of one is furniture, and Home opens instead. / **MANY ACCOUNTS** Paged with a search by address. Never a full unpaged list, at any number. / **A CLOSED ACCOUNT** Stays listed, marked Closed, with its final balance if any. / **ACCESS REMOVED** Disappears from the list, and says so once rather than silently.
COMPONENTS	PortalFrame · AccountRow · StatusChip · Button · Pagination
RULES	Server-side paging, no cap on how many accounts one person may hold — a property company is a real customer.

28 One account EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/account`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

28 One account `/:tenant/portal/account`

> **The question:** everything about this one property, on one page — what it costs, what is installed, who it is in the name of.

PHONE · 390 **DESKTOP · 1280**

← Accounts

1841 Quarry Hill Ct

Account 4417-0092 · open since Jun 2, 2026

AMOUNT DUE

$191.00

Due Aug 22, 2026

Pay $191.00 now

THIS ACCOUNT

In the name of	**Marcus Bell**
Services	**Electric · Water · Sewer · Trash**
Plan	**Residential Standard**
Autopay	**On · bank ····4417**
Paperless	**Off**
Deposit held	**$0.00**

GO TO

Bills	3
Usage	4 services
Equipment	3 items
Requests	1 open

Silver Creek Water Accounts · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Accounts

1841 Quarry Hill Ct, Silver Creek, TX 78611

Account 4417-0092 · open since Jun 2, 2026 · in the name of Marcus Bell

THIS ACCOUNT

Services	**Electric · Water · Sewer · Trash**
Plan	**Residential Standard**
Billed	**Monthly, around the 5th**
Autopay	**On — full bill, on the due date, from bank ····4417**
Budget billing	**Off — you would pay $171.40 a month**
Paperless	**Off — a paper bill costs $2.00 a month**
Discounts	**None applied**
Deposit held	**$0.00**

AMOUNT DUE

$191.00

Due Aug 22, 2026 · in 9 days

Pay $191.00 now

GO TO

- Bills · 3
- Usage · 4 services
- Equipment · 3 items
- Requests · 1 open
- Documents · 6

RECENT

August bill issued	Aug 5, $191.00
Payment cleared	Jul 19, $176.20
Meter read	Jul 31, 800 kWh

FOR

The whole picture of one property, for somebody who holds several and needs to answer a question about this one.

COGNITIVE LOAD

Settings are shown with their consequence, not just their state: "Paperless — Off, a paper bill costs $2.00 a month", "Budget billing — Off, you would pay $171.40 a month". A bare Off is a fact; the consequence is a decision.

STATES

CLOSED
Header says closed and when; the due card becomes the final

PENDING START
Says service begins Sep 14 and no bill exists yet

NOT IN YOUR NAME
A tenant on a landlord's account sees the services and their own

PAST DUE
The due card takes the past-due treatment, with the three ways out

balance or a credit.	no bill exists yet.	bills, not the owner's details.	treatment, with the three ways out.

COMPONENTS PortalFrame · AmountDueCard · DetailRow · JumpList

RULES The account number is the customer's reference and is shown; the database id is not. The address is derived from the property record.

29 Add an account EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/accounts/add`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


29 Add an account `/:tenant/portal/accounts/add`

> **The question:** I have another property with you — how do I see it here too, without a second sign-in?

PHONE · 390

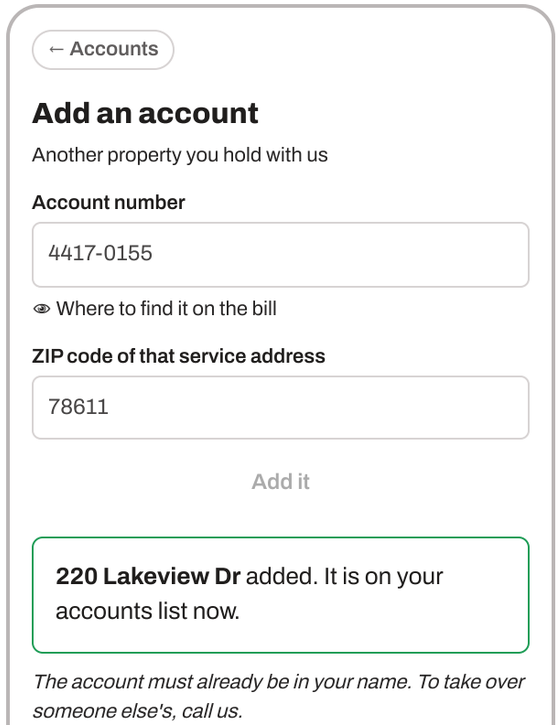

DESKTOP · 1280

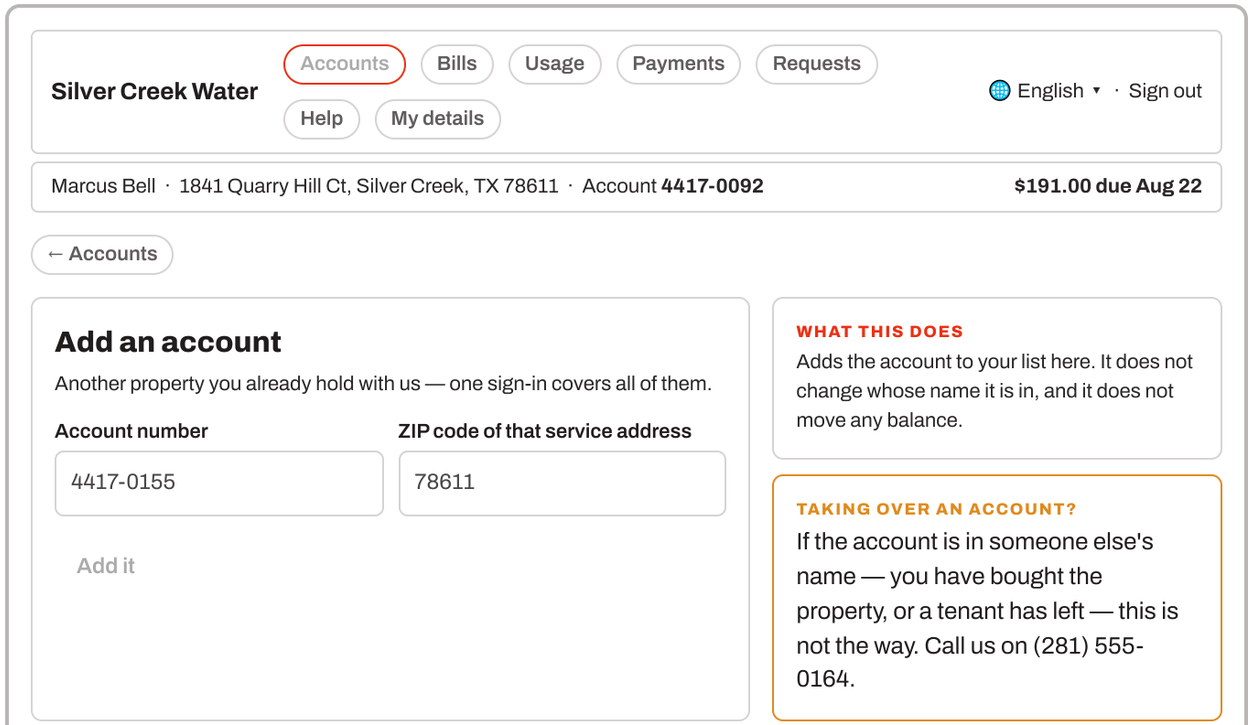

FOR	One sign-in covering every property a person holds.
THE DISTINCTION THAT MATTERS	Adding an account to a view is not taking one over. The screen says so and routes a transfer to the phone, because a change of responsible party has legal and deposit consequences a form cannot settle.

STATES

NO MATCH	ALREADY ADDED	DIFFERENT NAME	ADDED
One message for the pair, rate-limited — the same guessable pair as quick-pay.	"That account is already on your list." Links to it.	Refused with the reason and the phone number, never a silent failure.	Confirmation names the address, not the number — that is how the owner recognises it.

COMPONENTS PortalFrame · Field · Callout ok · Callout warn

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

None.

05 The bill

Five screens. Everything a customer disputes, questions or files starts here, so this group carries the heaviest explanatory load — and the most chance to answer a question before it becomes a phone call.

30 Bills EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/bills`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

30 Bills `/:tenant/portal/bills`

> **The question:** which bill is which, and is any of them still unpaid? A list of dates and amounts answers neither.

PHONE · 390

Home · Bills · Usage · Help

Your bills

Every bill since you started, Jun 2026

Aug 2026 — $191.00
Jul 1 – Jul 31 — DUE AUG 22
Pay $191.00 now

Jul 2026 — $176.20
Jun 1 – Jun 30 — PAID JUL 19

Jun 2026 — $168.94
May 1 – May 31 — PAID JUN 20

↓ Download all as a spreadsheet

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

Your bills

Every bill since you started, Jun 2026 · 3 bills

BILL	COVERS	AMOUNT	STATUS	
Aug 2026	Jul 1 – Jul 31, 2026	**$191.00**	DUE AUG 22	Pay now
Jul 2026	Jun 1 – Jun 30, 2026	$176.20	PAID JUL 19	View · ↓ PDF
Jun 2026	May 1 – May 31, 2026	$168.94	PAID JUN 20	View · ↓ PDF

↓ Download all as a spreadsheet · Bills are kept for seven years

---

FOR — Finding a specific bill, and seeing at a glance whether anything is still owed.

PRIMARY ACTION — **Pay** on the unpaid bill only. Paid rows carry no filled button — nothing to do means nothing to press.

COGNITIVE LOAD — The month is the heading and the period is underneath, because customers say "my August bill" and mean the one that arrived in August. Both are shown so neither reading is wrong.

STATES

LOADING
Three grey rows of the right height, so the page does not jump when they fill.

NO BILLS YET
"Your first bill will arrive after your first meter read, around Sep 30." Says when, not that the list is empty.

FAILED
"We could not load your bills." Retry, plus the phone number.

MANY BILLS
Paged at 12 with a year filter. Never a full unpaged list.

WORDS — "Paid Jul 19", not "Settled" or "Closed". "Due Aug 22", not "Payment due date: 08/22/2026".

WORDS	"Paid Jul 19", not "Settled" or "Closed". "Due Aug 22", not "Payment due date: 08/22/2026".
COMPONENTS	PortalFrame · BillRow · StatusChip · Button · Pagination
RULES	Server-side paging, no cap. Bill number is the customer's reference and is shown; the database id never is.

31 One bill EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/bills/:number`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


31 One bill `/:tenant/portal/bills/:number`


> **The question:** what am I actually paying for? Every line must name a service, a quantity, a unit and a price — the four facts that stop the call.


PHONE · 390

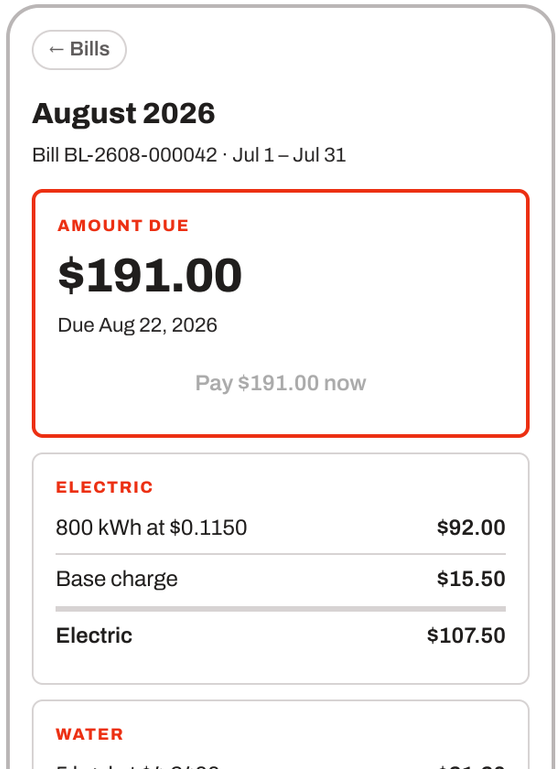

DESKTOP · 1280

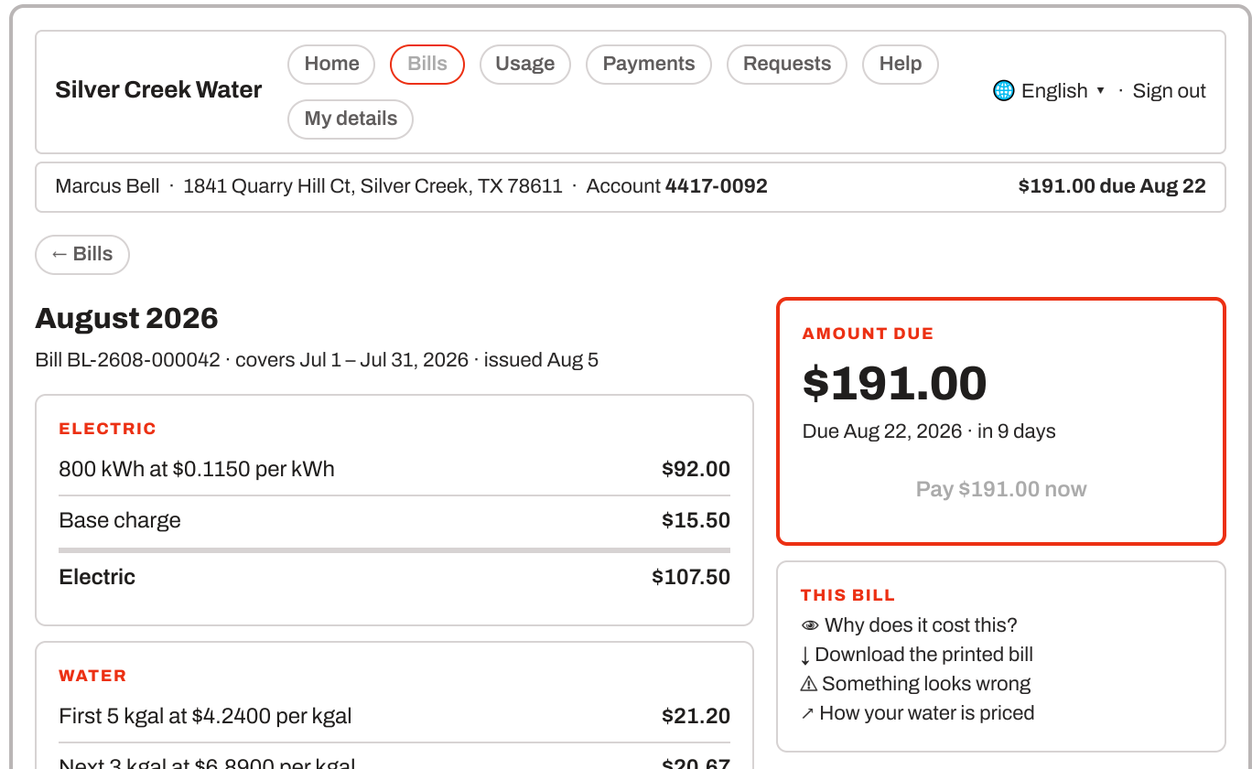

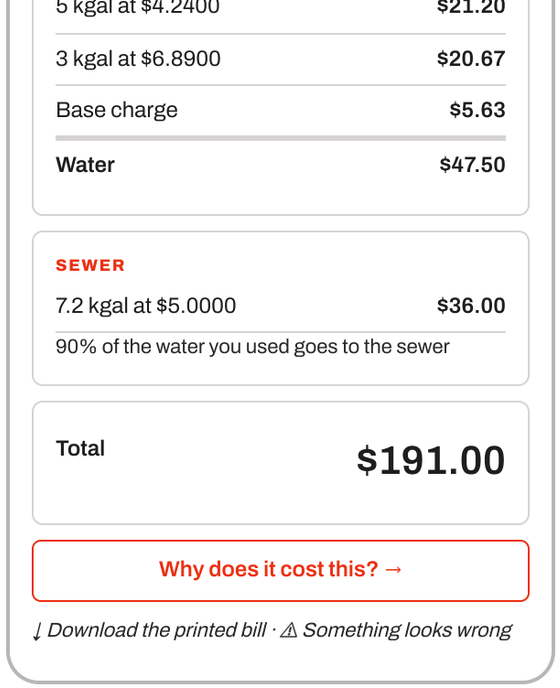

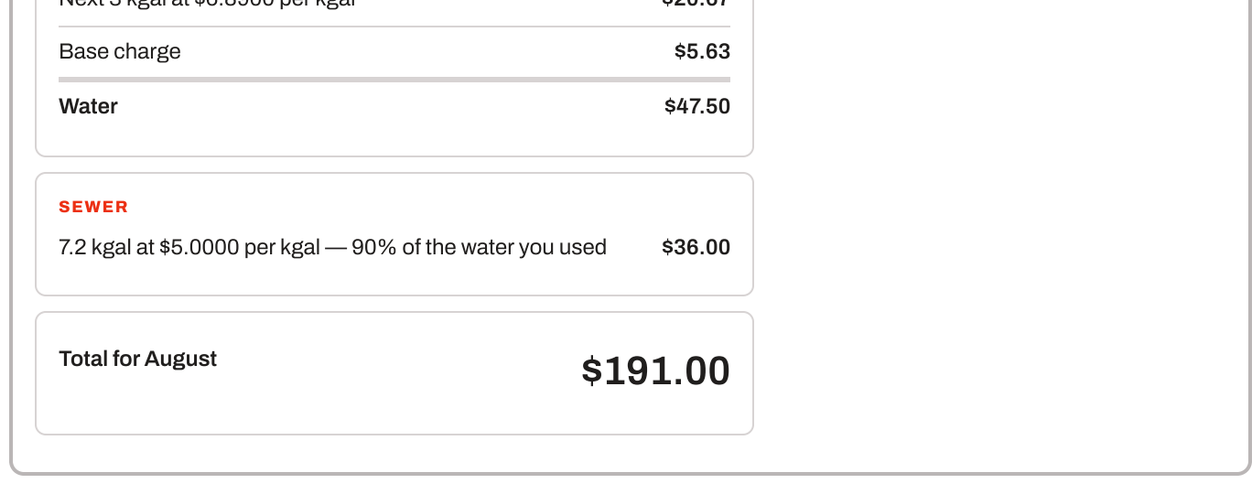

FOR	Answering "what am I paying for" completely enough that no one needs to call.
PRIMARY ACTION	**Pay**. Everything else — compare, download, dispute — is a quiet link.
COGNITIVE LOAD	Every line carries quantity, unit and unit price, so the customer can check the arithmetic themselves. A line reading only "$36.00" is the shape that generates a call.
MONEY	Two decimals on totals, four on unit prices — a rate genuinely is $4.2400 per thousand gallons, and rounding it to $4.24 makes the line stop adding up.
STATES	**PAID** The due card becomes "Paid in full on Aug 19" and the button disappears entirely. **ESTIMATED READ** A band above the lines: "This bill is estimated — we could not read your meter." With what happens next. **CORRECTED** Shows the correction as its own line, never by altering the original — an issued bill is never rewritten. **NOT YOURS** A bill number for another account 404s rather than confirming it exists.
COMPONENTS	PortalFrame · AmountDueCard · ServiceBlock · ChargeLine · Button
RULES	Quantity always with its unit, never assumed. Nothing on this screen is editable — a bill is a record.

32 Why it costs this NEW BUILD COMMITMENT CPB-08 COMMITMENT CPB-23

`/:tenant/portal/bills/:number/comparison`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

32 Why it costs this `/:tenant/portal/bills/:number/comparison`

> **The question:** why is this more than last time? The single most common reason a customer calls, and the one the portal can answer alone.

PHONE · 390

← August 2026

Why it costs this

THE DIFFERENCE

$14.80 more

than July · $191.00 vs $176.20

WHERE IT CAME FROM

You used 60 kWh more electricity	+$6.90
You used 1 kgal more water	+$6.89
Sewer follows your water	+$4.50
One fewer day in the period	−$3.49
Difference	**+$14.80**

PRICES DID NOT CHANGE

Your rates are the same as July. The whole difference is what you used and how long the period was.

THE LAST 12 MONTHS

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← August 2026

Why August costs $14.80 more than July

WHERE THE DIFFERENCE CAME FROM

You used 60 kWh more electricity — 800 kWh, against 740 in July	+$6.90
You used 1 kgal more water — 8 kgal, against 7 in July	+$6.89
Sewer follows your water, at 90% of it	+$4.50
The period was one day shorter — 31 days, against 32	−$3.49
Total difference	**+$14.80**

Your prices did not change between these two bills.

YOUR LAST 12 BILLS

Lowest	Average	Highest
$142.10	**$171.40**	**$228.75**
Feb		Jul 2025

Lowest	Average	Highest
$142.10	**$171.40**	**$228.75**

FOR	Answering the bill-shock call before it is made, by attributing the whole difference to named causes that sum exactly.
COGNITIVE LOAD	The customer is never asked to subtract. The headline is the difference itself; the parts add to it; a leftover is shown as "everything else", never hidden.
THE HARD PART	Attribution must be honest. If the portal cannot split the difference — a rate change and a usage change in the same period — it says which parts it could attribute and how much is unexplained, rather than guessing.
STATES	**CHEAPER** Same layout, "$9.20 less than July", in green. The good news gets the same treatment. · **NO PREVIOUS BILL** "This is your first bill, so there is nothing to compare it with yet." Not an empty chart. · **PRICES DID CHANGE** The rate change is its own line and says so: "Water prices rose on Oct 1 · +$7.40". · **ESTIMATED** Says the comparison uses an estimated read and may change once the meter is read.
WORDS	"You used 60 kWh more", not "Consumption variance +60". "One fewer day in the period", not "Proration adjustment".
COMPONENTS	PortalFrame · DifferenceCard · AttributionList · BillHistoryBars
RULES	Consumption always with its unit. No rule reference or internal code in any sentence here.

33 The printed bill EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/bills/:number/document`

33 The printed bill `/:tenant/portal/bills/:number/document`

> **The question:** can I get the real bill, the one that matches the paper, for my landlord or my accountant?

PHONE · 390

← One bill

The printed bill

Exactly what we mailed you, one page


SILVER CREEK WATER
PO Box 2210, Burnet, TX 78611

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← One bill

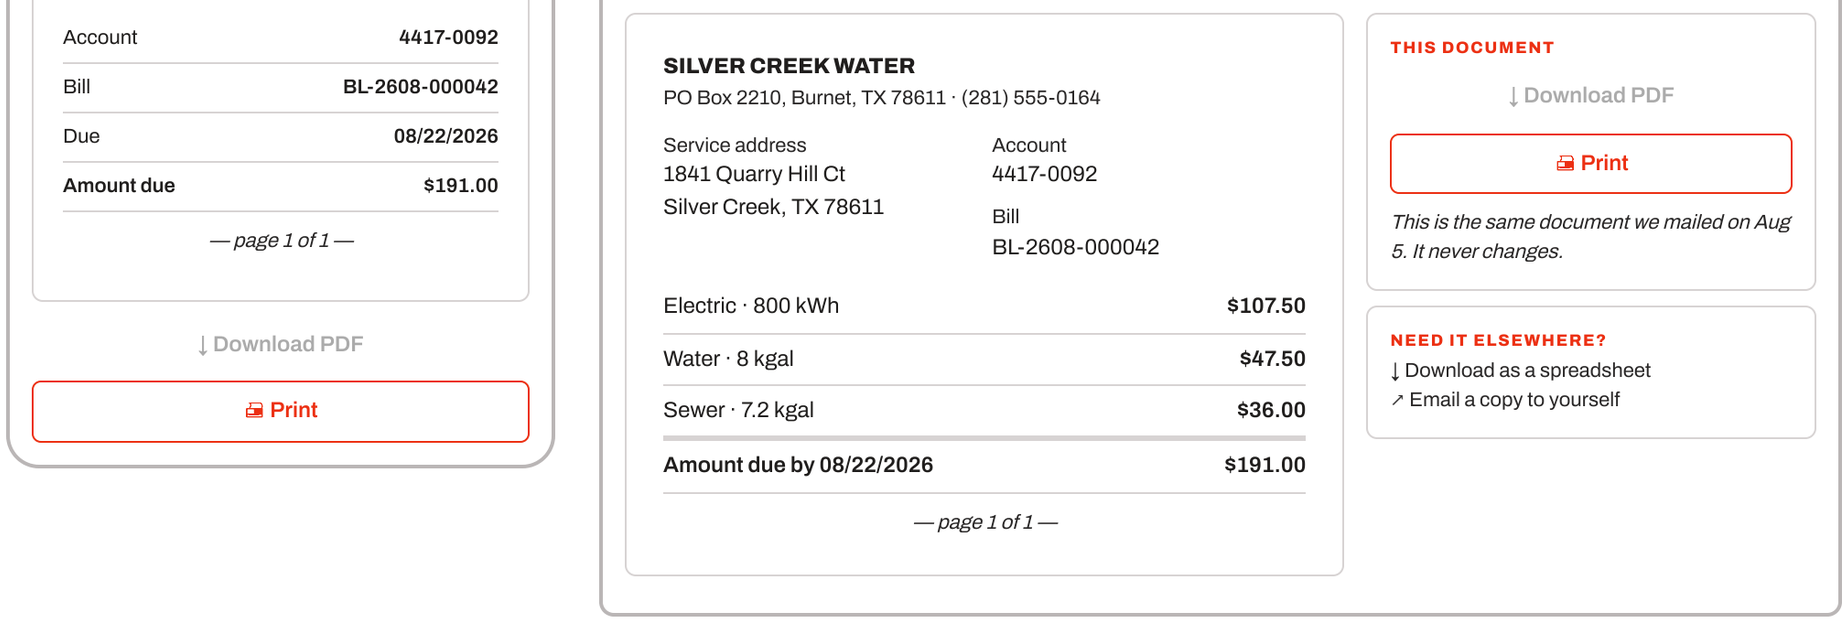

FOR	Producing the document itself — for a landlord, a benefits claim, an accountant, a house sale.
HOW YOU GET HERE	**Bills** and **One bill** — both build the link from the bill number.
PRIMARY ACTION	**Download PDF**. Print is second because most people asking for this need a file, not paper.
COGNITIVE LOAD	The preview is the real document at real proportions, not a re-rendered summary — so what downloads is never a surprise. The page count is stated on screen.
TYPOGRAPHY	Set as a document, not as terminal output. A fixed-width face here reads as broken software, and it was: the chooser was showing the raw file until this week.

STATES

GENERATING
"Preparing your bill…" with the download disabled, never a broken image.

NOT AVAILABLE
An older bill predating the portal: says so and offers to post a copy.

MULTI-PAGE
Page navigation appears only when there is more than one page.

BLOCKED
A viewer that cannot start downloads gets a plain link, not a silent failure.

COMPONENTS PortalFrame · DocumentPreview · Button

34 Something looks wrong

BLOCKED · COMMITMENT CPB-13 · COMMITMENT CPB-23


/:tenant/portal/bills/:number/dispute

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


34 Something looks wrong `/:tenant/portal/bills/:number/dispute`

> **The question:** I think this bill is wrong — what happens now, and do I still have to pay it? The second half is what they are really asking.

PHONE · 390

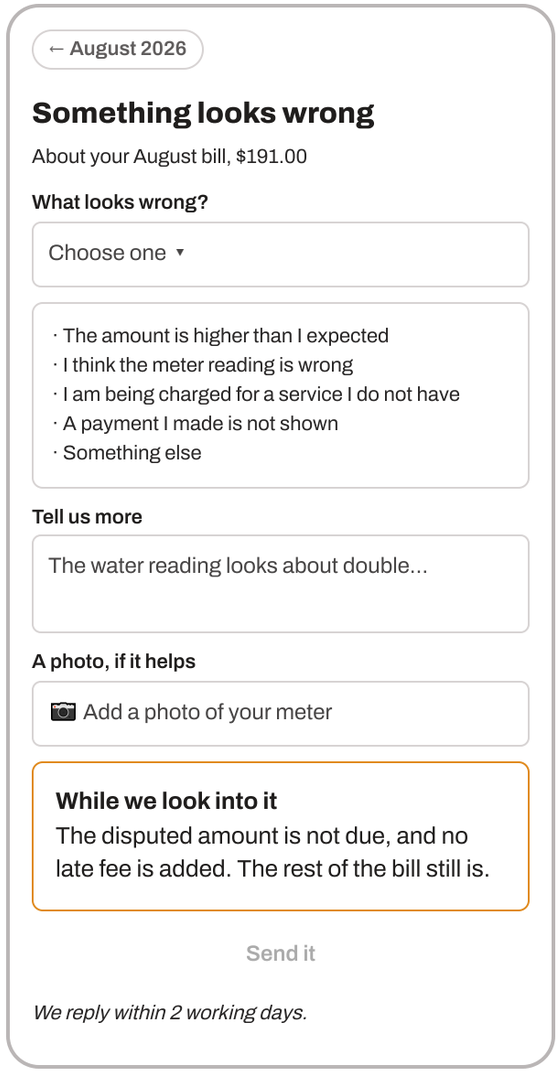

DESKTOP · 1280

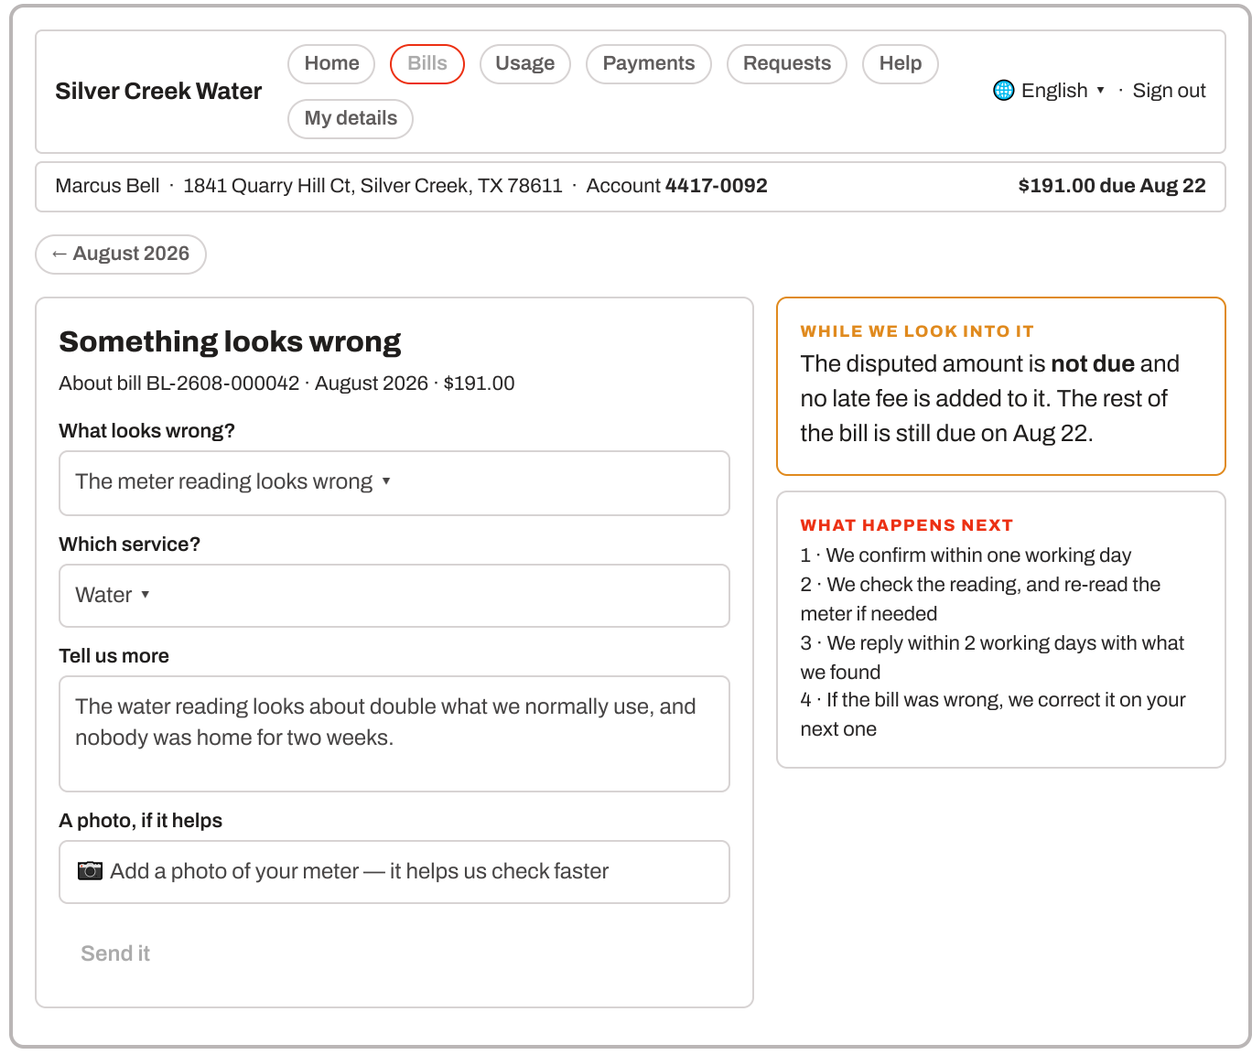

FOR	Letting a customer raise a problem in one place, and — the part that matters — telling them what they owe in the meantime.
PRIMARY ACTION	**Send it**. One button; the photo is optional and says why it helps.
COGNITIVE LOAD	The reasons are the five real ones, in the customer's words, chosen from a list. An open text box alone makes them compose an argument; a list lets them recognise their situation.
THE CRITICAL PANEL	What is owed while a dispute is open is stated *before* they send, not after. It is the question behind the question, and leaving it out guarantees a phone call whatever else the screen does.
STATES	**SENT** Becomes a tracked request with a reference, linked straight to screen 27. · **ALREADY DISPUTED** Shows the open one rather than taking a second — with its status. · **TOO LATE** Past the window: says the window and offers the phone number, never a bare refusal. · **PHOTO TOO LARGE** Says the limit in plain terms and keeps everything else typed.
WORDS	"Something looks wrong", not "Raise a dispute" or "Billing enquiry". Customers do not think of themselves as disputing.
COMPONENTS	PortalFrame · Field · Select · FileDrop · Callout warn · Stepper
RULES	Refusals stay short. The dispute writes an audit entry; nothing here alters the issued bill.

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-08 A usage month says what it cost — UNVERIFIED

Waits on: Nothing joins a usage month to the bill line it produced.

Screens: 50 · 32

WHAT DONE LOOKS LIKE ON SCREEN

The Usage screen reads "800 kWh at $0.1150 = $92.00" for August, and the figure is the bill's own line, not a re-calculation.

CPB-13 A disputed amount is split out on the request — UNVERIFIED

Waits on: No money at all travels with a request, so the split the wireframe draws cannot be shown.

Screens: 34 · 56

Screens: 34 · 36

WHAT DONE LOOKS LIKE ON SCREEN

A dispute reads "the disputed $47.50 is not due; the remaining $143.50 is still due on Aug 22", and Past due shows $143.50.

06 Paying

Six screens, in the order money actually moves: choose, check, confirm — then the record, the methods, and making it automatic. This is the group the utility is paid by.


35 Pay now NEW BUILD COMMITMENT CPB-01

`/:tenant/portal/pay` `/:tenant/portal/pay/check`


35 Pay now `/:tenant/portal/pay` `/:tenant/portal/pay/check`


The question: how much, from where, and what will it cost me to pay this way? The fee must be visible before the button, not after.

PHONE · 390

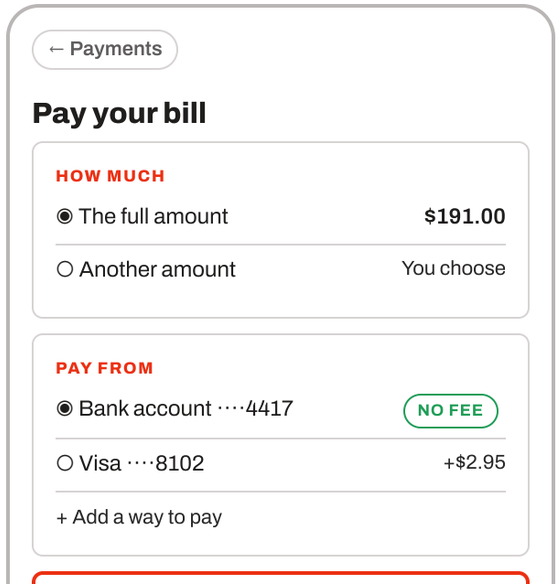

DESKTOP · 1280

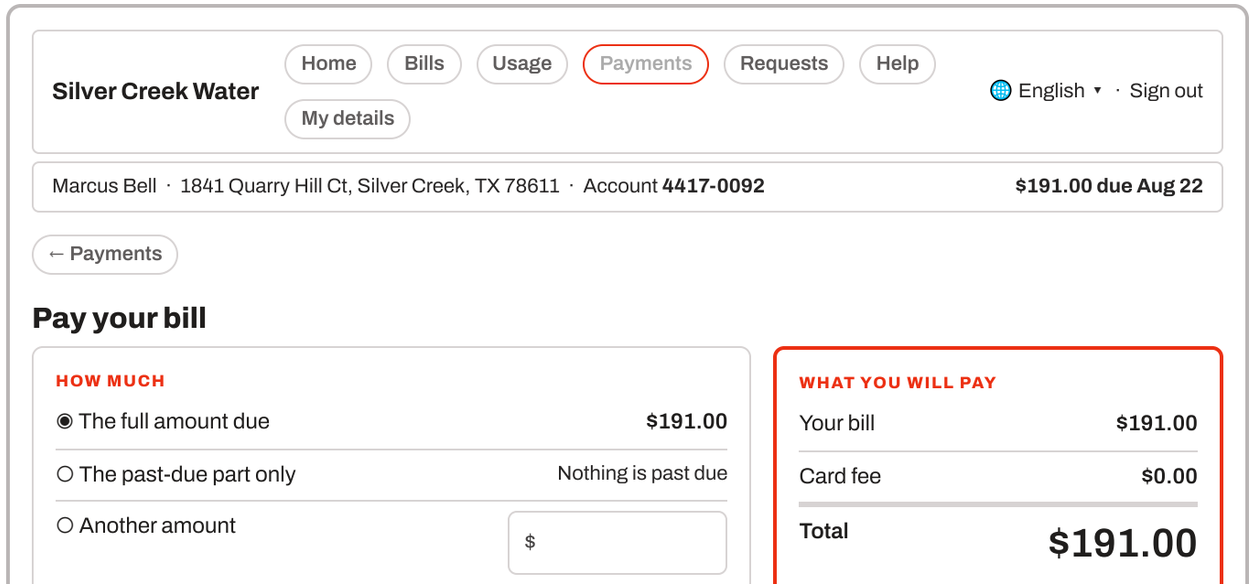

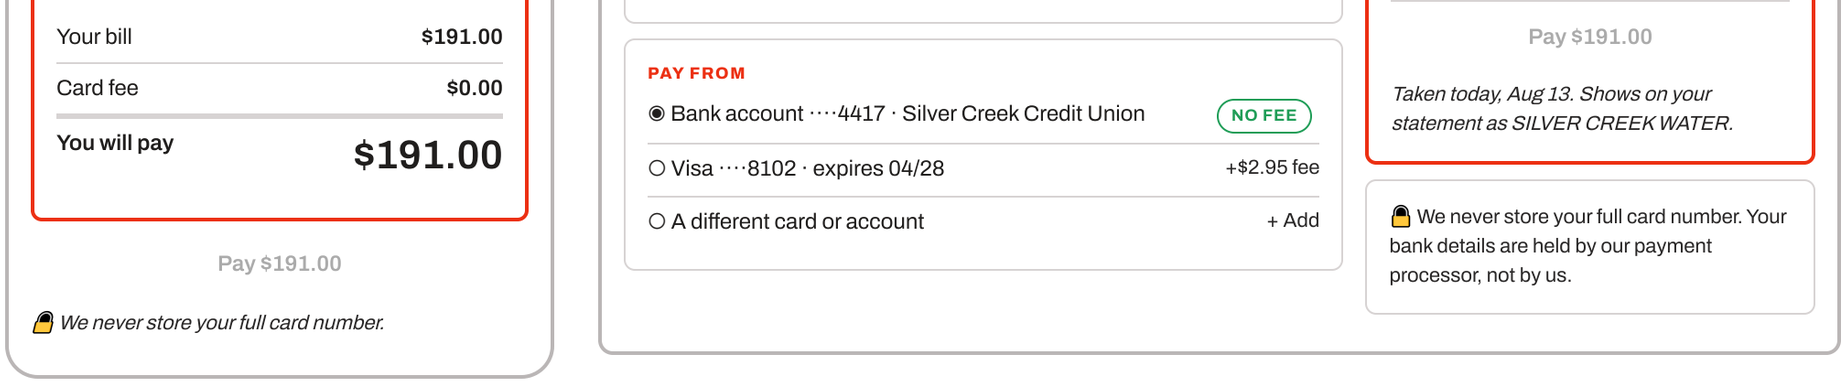

FOR	Taking a payment with no uncertainty about the amount, the fee or the date.
HOW YOU GET HERE	**Payments**, and the quick-pay flow. Home links to `/:tenant/portal/pay-now`, the guest route, rather than here.
PRIMARY ACTION	One button, and it names the figure: **Pay $191.00**. Never a bare "Continue" — the button is the last thing read before money moves.
COGNITIVE LOAD	The fee is a line in the total, not a footnote. The fee-free option is listed first and labelled. The customer never adds anything up.
NORTH AMERICAN CONVENTION	Bank transfer is free and card carries a convenience fee — this is what customers expect and the screen states it rather than surprising them at the end.
STATES	**PROCESSING** Button disabled and reads "Taking your payment…". The page cannot be submitted twice. / **DECLINED** Says the bank declined it and what to try; the amount and method stay selected. / **NOTHING DUE** "You have nothing to pay right now." Offers to pay ahead rather than showing an empty form. / **CARD EXPIRED** Flagged on the method before they press, not after.
COMPONENTS	PortalFrame · RadioCard · MethodRow · TotalPanel · Button
RULES	Money shown to two decimals. The payment is idempotent — a double submit takes one payment.

36 Check before you pay

NEW BUILD · COMMITMENT CPB-01 · COMMITMENT CPB-23


`/:tenant/portal/pay/check`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


36 Check before you pay `/:tenant/portal/pay/check`

> **The question:** before the money actually goes — is this the right amount, from the right place, and what will it cost me? The last screen at which anything can be changed.

PHONE · 390

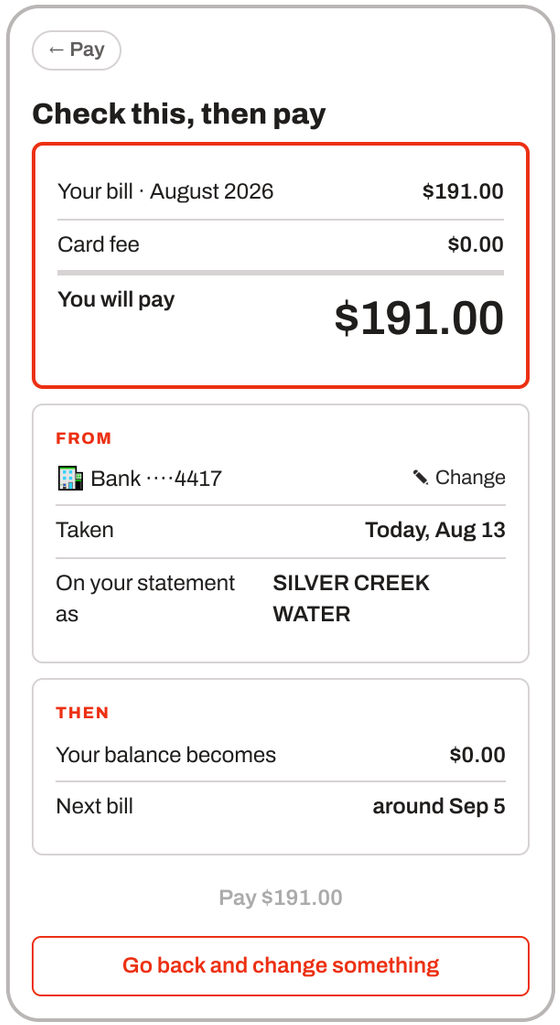

DESKTOP · 1280

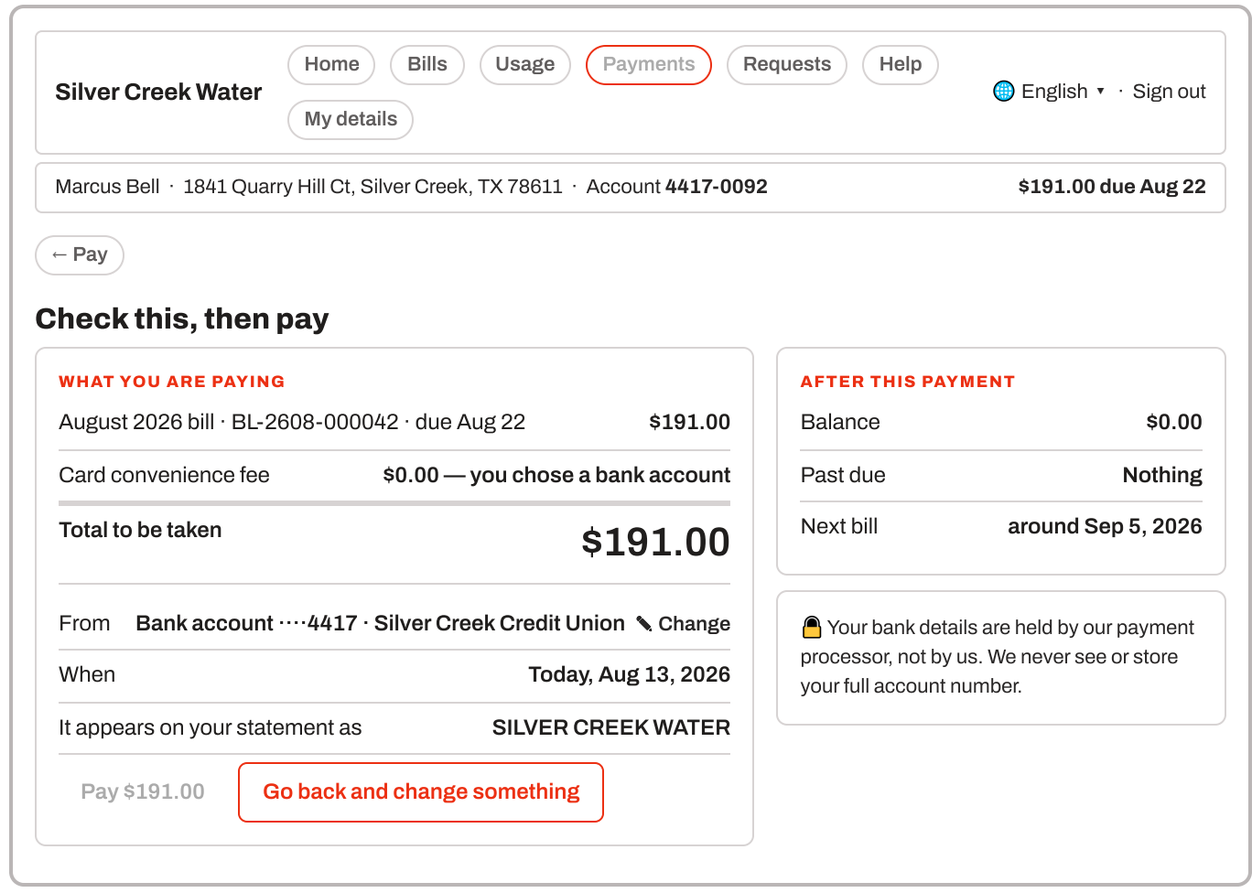

FOR	The moment before money moves. Everything on it exists to remove a reason to abandon.
WHY IT IS ITS OWN SCREEN	The pay screen is a form; this is a confirmation. Separating them means the total, the fee and the date are read once, deliberately, rather than glanced at while choosing a card.

COGNITIVE LOAD	The statement descriptor is shown, because "what will this look like on my bank statement" is a real question that produces chargebacks when unanswered. The balance *after* is shown for the same reason as on the receipt.
STATES	**AMOUNT CHANGED** If a payment landed while they were here, the total is redrawn and says so before the button. · **METHOD EXPIRED** Caught here, not at the processor: the row is flagged and Pay is disabled. · **FEE APPLIES** The fee line is non-zero and the fee-free alternative is offered inline. · **SESSION TIMED OUT** Nothing is taken; the amount and method are kept.
COMPONENTS	PortalFrame · TotalPanel · MethodRow · Button
RULES	The payment is idempotent — a double submit from this screen takes one payment.

37 Payment made

NEW BUILD · COMMITMENT CPB-01 · COMMITMENT CPB-22 · COMMITMENT CPB-23

`/:tenant/portal/pay/done`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

37 Payment made `/:tenant/portal/pay/done`

> **The question:** did it work, and is my disconnection notice cleared? A confirmation that only says "success" answers half of it.

PHONE · 390

✓

Payment made

$191.00

Aug 13, 2026 · from bank account ····4417

WHERE YOU STAND

Balance now	$0.00
Next bill	around Sep 5

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

✓

Payment made

$191.00


Aug 13, 2026 at 2:41 PM · from bank account ····4417 · reference PMT-2608-0311

YOUR RECEIPT

↓ Download receipt

↗ Email it to me

A copy is in Payments whenever you need it.

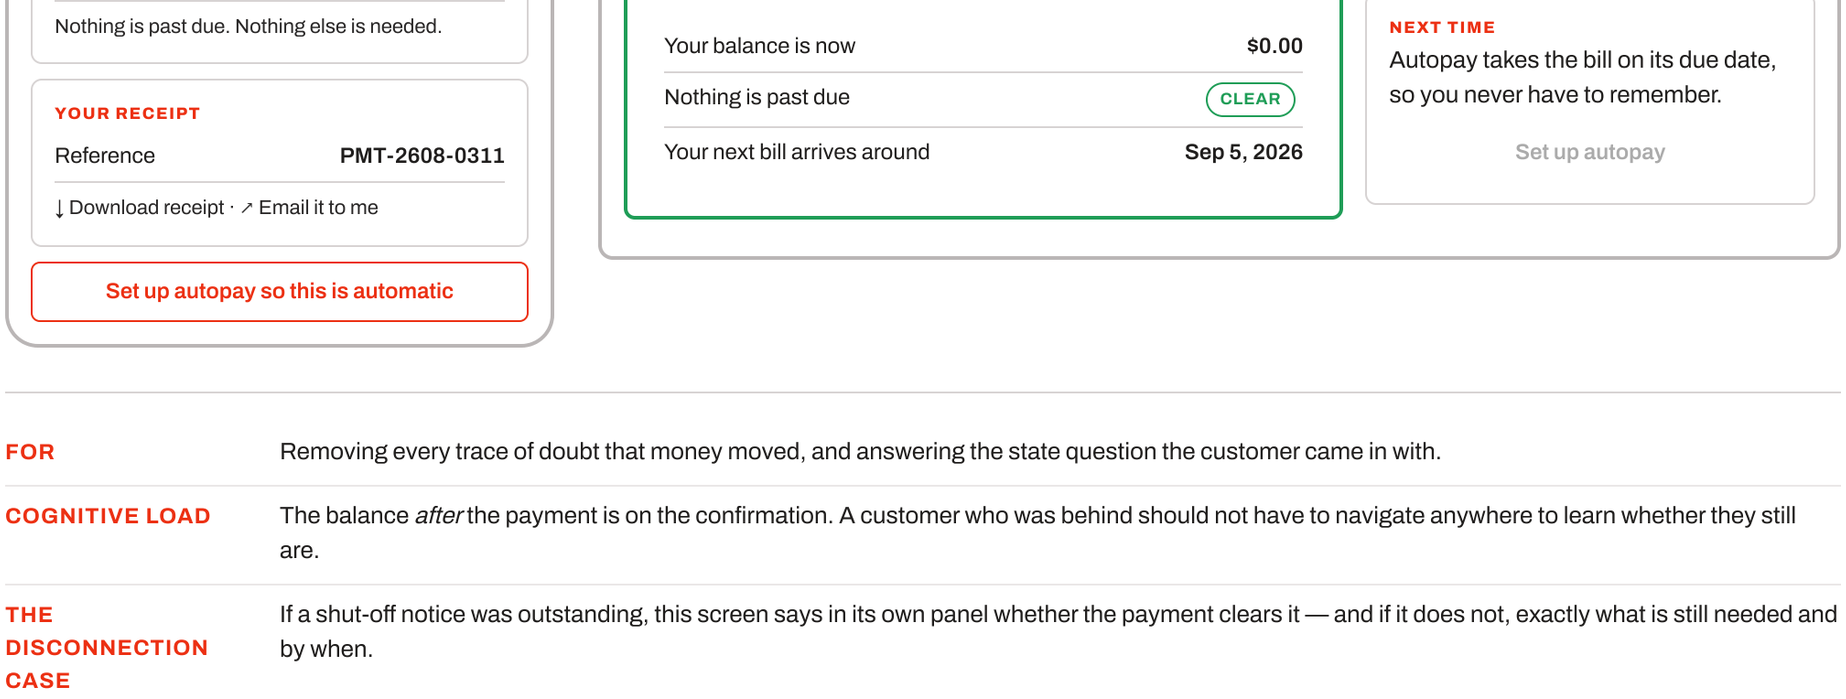

FOR	Removing every trace of doubt that money moved, and answering the state question the customer came in with.
COGNITIVE LOAD	The balance *after* the payment is on the confirmation. A customer who was behind should not have to navigate anywhere to learn whether they still are.
THE DISCONNECTION CASE	If a shut-off notice was outstanding, this screen says in its own panel whether the payment clears it — and if it does not, exactly what is still needed and by when.
STATES	**CLEARED THE NOTICE** Green panel: "Your disconnection notice is cancelled." Named explicitly. **DID NOT CLEAR IT** Amber, not green: "$56.30 is still past due — the notice stands until Aug 20." **PENDING** A bank transfer that takes days says so, with the date it will land. **PARTLY PAID** Shows the remaining balance as the headline second figure.
WORDS	"Payment made", not "Transaction complete". The reference is the customer's, not a database id.
COMPONENTS	PortalFrame · Callout ok · BalancePanel · ReceiptActions
RULES	A payment is never edited afterwards; a correction is a new record. This screen is a receipt, not a form.

38 Payments EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/payments`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

38 Payments `/:tenant/portal/payments`

> **The question:** did my payment go through, and which bill did it go against? The second half is what a landlord or a disputed account needs.

PHONE · 390

Home · Bills · Payments · Help

Your payments

$191.00 — Aug 13 · bank ····4417 — CLEARED — August bill

$176.20 — Jul 19 · Visa ····8102 — CLEARED — July bill

$168.94 — Jun 20 · bank ····4417 — CLEARED — June bill

↓ Download all as a spreadsheet

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

Your payments

3 payments · $536.14 in the last 12 months

DATE	AMOUNT	PAID FROM	WENT AGAINST	STATUS	
Aug 13, 2026	**$191.00**	Bank account ····4417	August 2026 bill	CLEARED	↓ Receipt
Jul 19, 2026	$176.20	Visa ····8102	July 2026 bill	CLEARED	↓ Receipt
Jun 20, 2026	$168.94	Bank account ····4417	June 2026 bill	CLEARED	↓ Receipt

↓ Download all as a spreadsheet · Payments are kept for seven years

---

FOR — Proving a payment was made and showing which bill it settled.

COGNITIVE LOAD — "Went against" is a column, not something to work out from dates. A payment that was split across two bills says both.

STATES

- **PENDING** — Amber chip and the date it is expected — never shown as cleared early.
- **RETURNED** — Red chip, the reason in plain words, the fee charged, and what to do now.
- **REFUNDED** — Its own row referencing the original, never an edit to it.
- **NONE YET** — "You have not made a payment yet." With the amount due and a button.

WORDS — "Cleared", not "Settled" or "Posted". "Returned", not "NSF" — the fee line can name the term, the status may not.

COMPONENTS — PortalFrame · PaymentRow · StatusChip · Pagination

RULES — Server-side paging, no cap on how many a customer may have. Payment rows are never rewritten.


39 Payment methods EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/payment-methods`


39 Payment methods `/:tenant/portal/payment-methods`

> **The question:** what is on file, what is it costing me, and what breaks if I remove one?

PHONE · 390

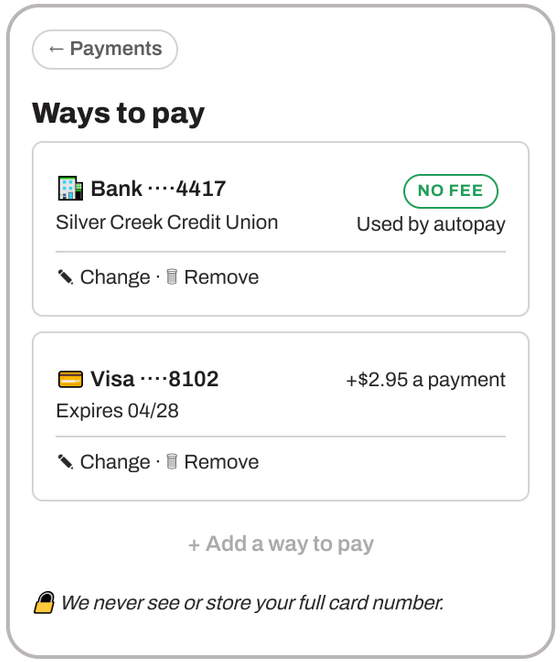

DESKTOP · 1280

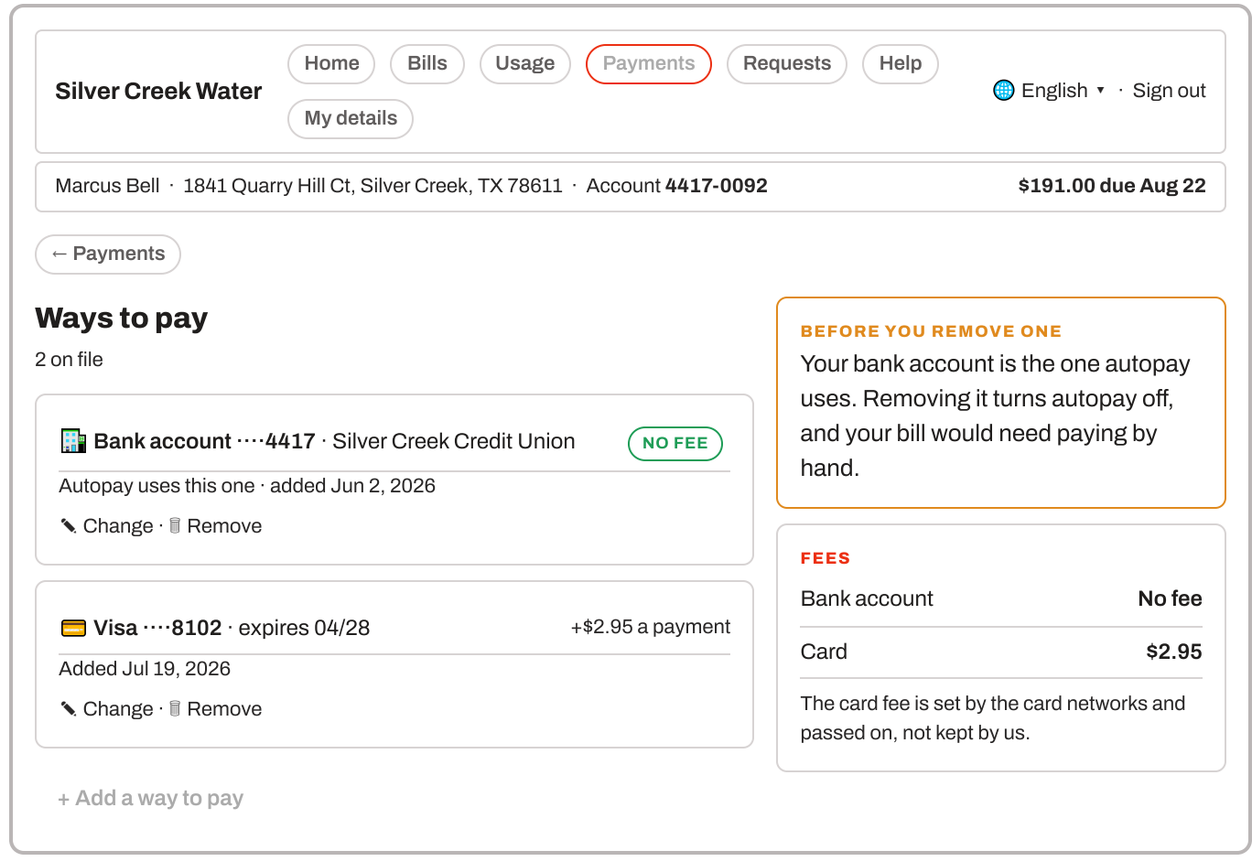

FOR	Managing what is on file, and understanding the cost and the consequences before changing anything.
HOW YOU GET HERE	**Payments** (an errand card), **Pay now** and **Autopay**. **Not My details** — that screen has no link to it.
COGNITIVE LOAD	The fee sits on the method, so choosing later on the pay screen needs no memory. Which method autopay depends on is labelled on the method itself.
DESTRUCTIVE	Remove asks to confirm and names what it breaks — "This turns autopay off" — rather than a generic "Are you sure?".

ACTION

STATES

NONE ON FILE	EXPIRING SOON	EXPIRED	REMOVING THE LAST ONE
"You have no way to pay saved yet." One button, no empty table.	Amber flag 60 days out, with the change link, before autopay fails.	Red, and autopay says it will fail — stated here rather than discovered on the due date.	Refused with the reason if autopay is on; offers to turn autopay off first.

COMPONENTS PortalFrame · MethodCard · ConfirmDialog · Callout warn

RULES Icons carry their words. Only the last four digits ever appear — no full number, on any screen.


40 Autopay NEW BUILD COMMITMENT CPB-02

`/:tenant/portal/autopay`


40 Autopay `/:tenant/portal/autopay`

> **The question:** if I turn this on, what exactly gets taken, from where, and when — and can I stop it?

PHONE · 390

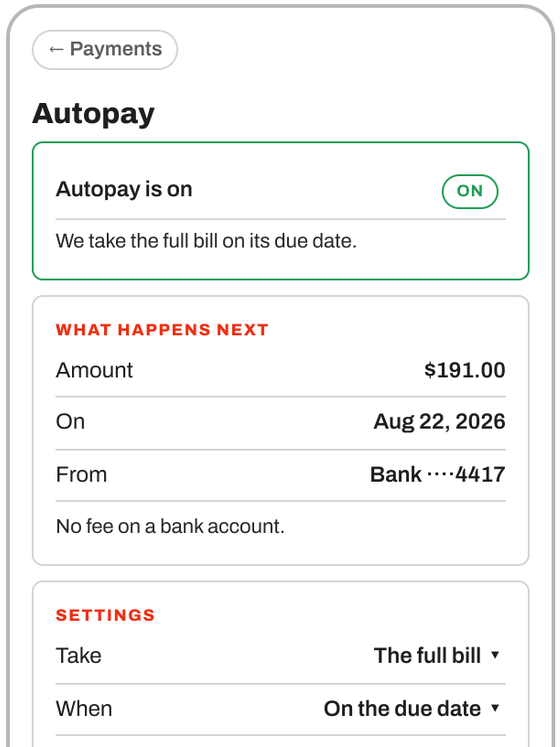

DESKTOP · 1280

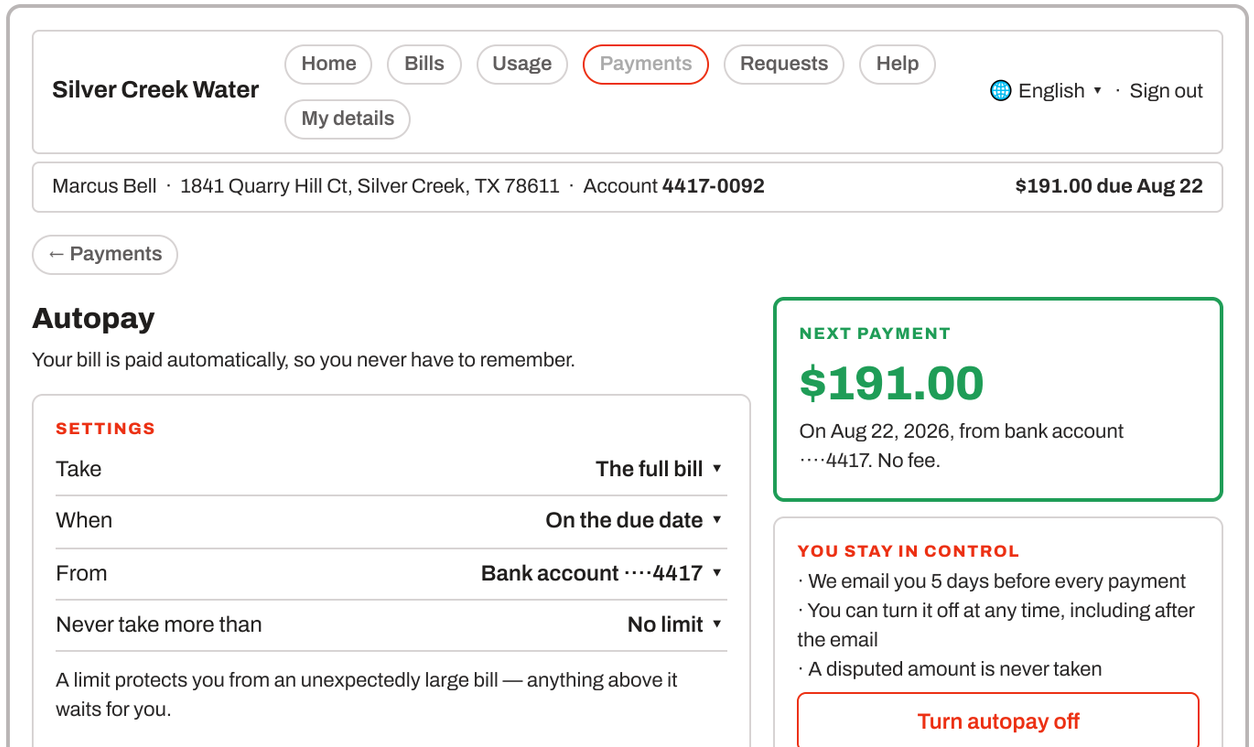



FOR	Setting up automatic payment, and — the part that decides whether people enrol — proving they stay in control.
HOW YOU GET HERE	**Payments** (an errand card) and **Payment methods**. **Not My details**.
PRIMARY ACTION	Off state: **Turn autopay on**. On state: **Save**, with turning it off as the quiet outlined option. The destructive control is never the loudest thing on the screen.
COGNITIVE LOAD	The next actual payment — figure, date, source — is shown before any setting is touched. Nobody should have to imagine what their settings will do.
THE TRUST PANEL	The advance email, the ability to cancel, and the disputed-amount exclusion are the three objections to autopay, answered on the screen where the decision is made.
STATES	**OFF** Explains what it would do with the customer's real figures, then one button. / **NO METHOD** Offers to add one first rather than showing a form that cannot be saved. / **CARD EXPIRING** Amber: says autopay will fail on the date and offers to change the card. / **LAST ONE FAILED** Says which payment failed, why, and what is owed now.
WORDS	"Autopay" — the North American term, not "Direct debit" or "Recurring payment authorisation".
COMPONENTS	PortalFrame · ToggleCard · Select · Callout ok · Button ghost

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-02 **Autopay can actually draft a payment** — UNVERIFIED

Waits on: The same missing provider as CPB-01, on a different flow. *We cannot draft payments yet* holds the Turn autopay on button.

Screens: 40

WHAT DONE LOOKS LIKE ON SCREEN

A customer turns autopay on, and the next bill of $191.00 is drafted on Aug 22 without them opening the

portal — the Autopay screen reading "Next: $191.00 on Aug 22".

07 When money is tight

Nine screens, and the most consequential group in the portal. They run in the order somebody in difficulty meets them: the bad news, the plan, the help, the protections — then the two that prevent it happening again, and the one that gives money back.


41 Past due EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/overdue`


41 Past due `/:tenant/portal/overdue`


The question: how bad is this, and what do I have to do to stop it? Anything that reads as a threat without a route out is a failure of this screen.

PHONE · 390

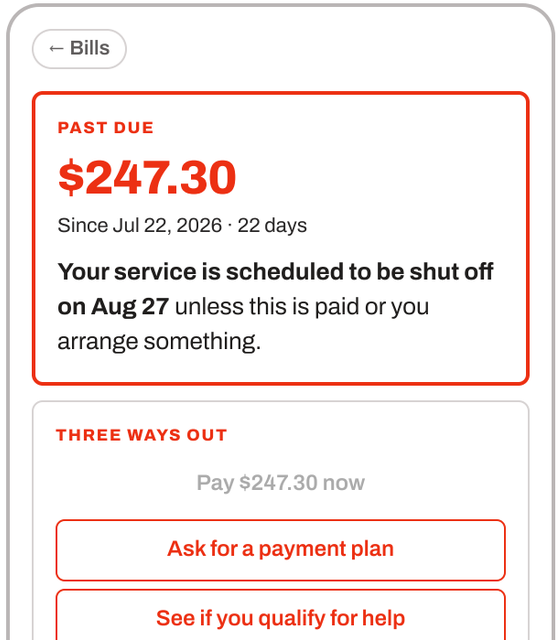

DESKTOP · 1280

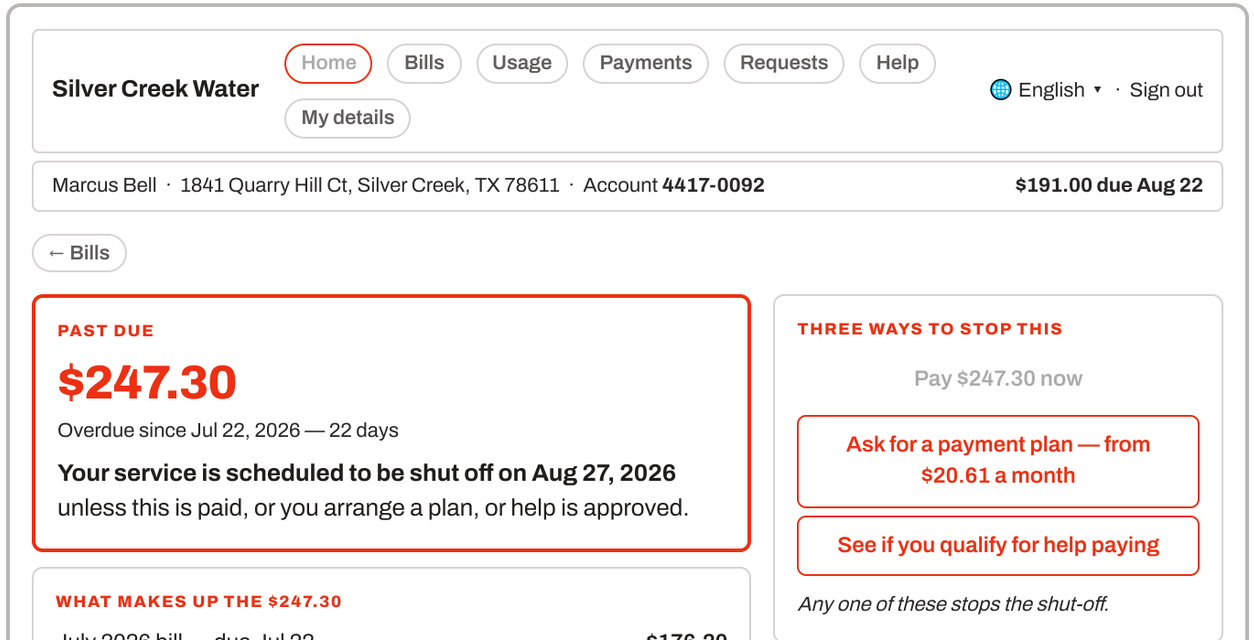

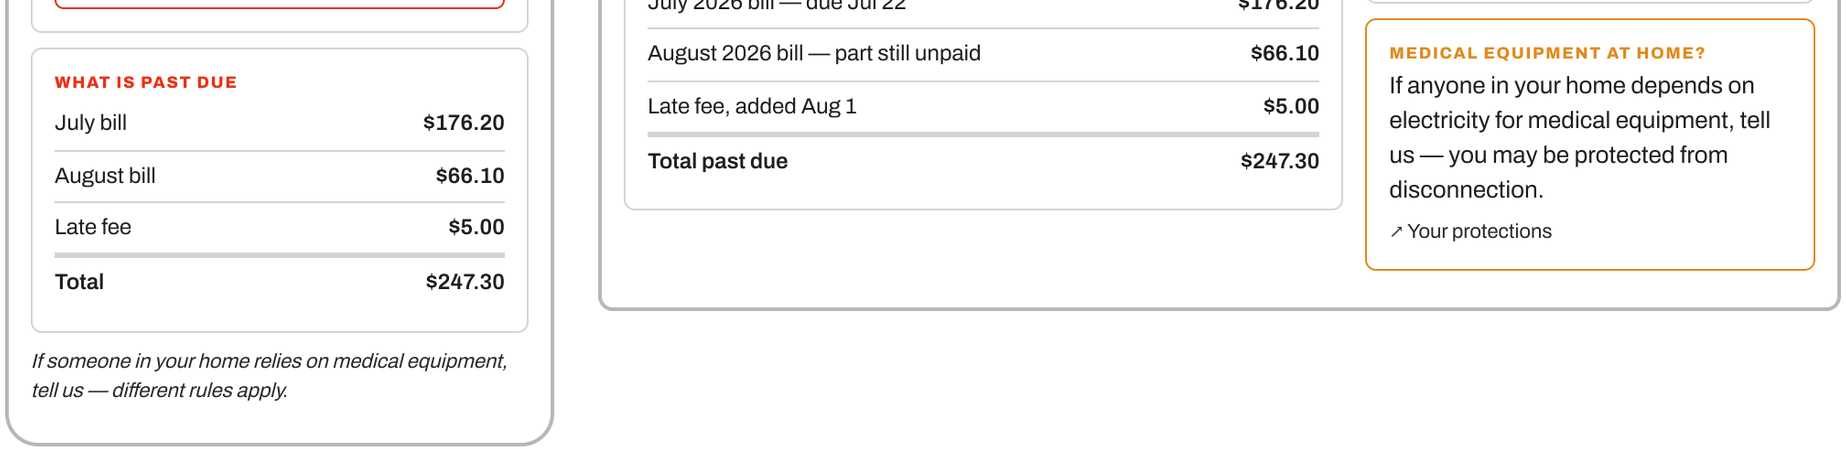

FOR	Telling a customer how serious this is, and giving them three ways out on the same screen.
HOW YOU GET HERE	**Bills** — the *Where things stand* list at the foot of the bills page. **That is the only door.** Home does not link here, and it is not in the nav.
PRIMARY ACTION	**Pay** is filled; the plan and the assistance route are outlined and equally prominent as a pair. A customer who cannot pay must not have to leave to find the alternative.
COGNITIVE LOAD	The breakdown is itemised because customers frequently do not recognise the total — they remember paying something. Naming the bills lets them check.
TONE	Factual and non-punitive. The date is stated exactly. There is no bold red beyond the amount, no exclamation, and the sentence "Any one of these stops the shut-off" appears before the customer has to decide.
STATES	**LATE, NOT YET NOTICED** — No shut-off date yet: says when one would be issued. **NOTICE ISSUED** — As drawn, with the date. **PROTECTED** — Winter moratorium or medical certificate: says the protection and its end date, and that the debt still grows. **ALREADY DISCONNECTED** — Leads with what it takes to restore, and the reconnection fee, before anything else.
WORDS	"Past due" and "shut off" — the words the letter used. Not "in arrears", not "cessation of supply".
COMPONENTS	PortalFrame · Callout danger · ArrearsBreakdown · Button · Callout warn
RULES	Colour is never the only signal — the panel says "Past due" in words. Bad news always carries the way out.

42 Ask for a payment plan


EXISTS BEHIND · NO COMMITMENT

/:tenant/portal/ask-for-a-plan /:tenant/portal/plan-offer


42 Ask for a payment plan /:tenant/portal/ask-for-a-plan /:tenant/portal/plan-offer

> **The question:** I cannot pay $247.30 this month — can I pay it over time, and will you still cut me off?

PHONE · 390

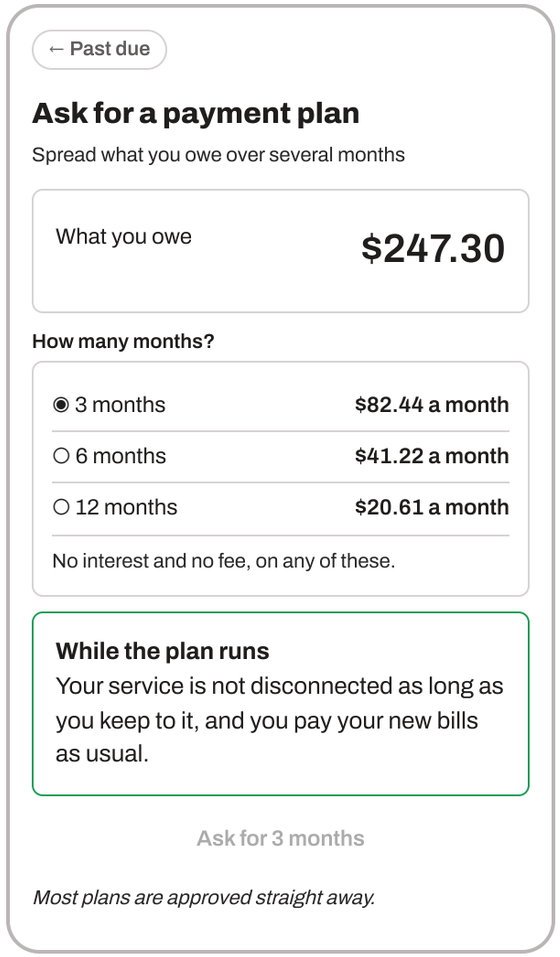

DESKTOP · 1280

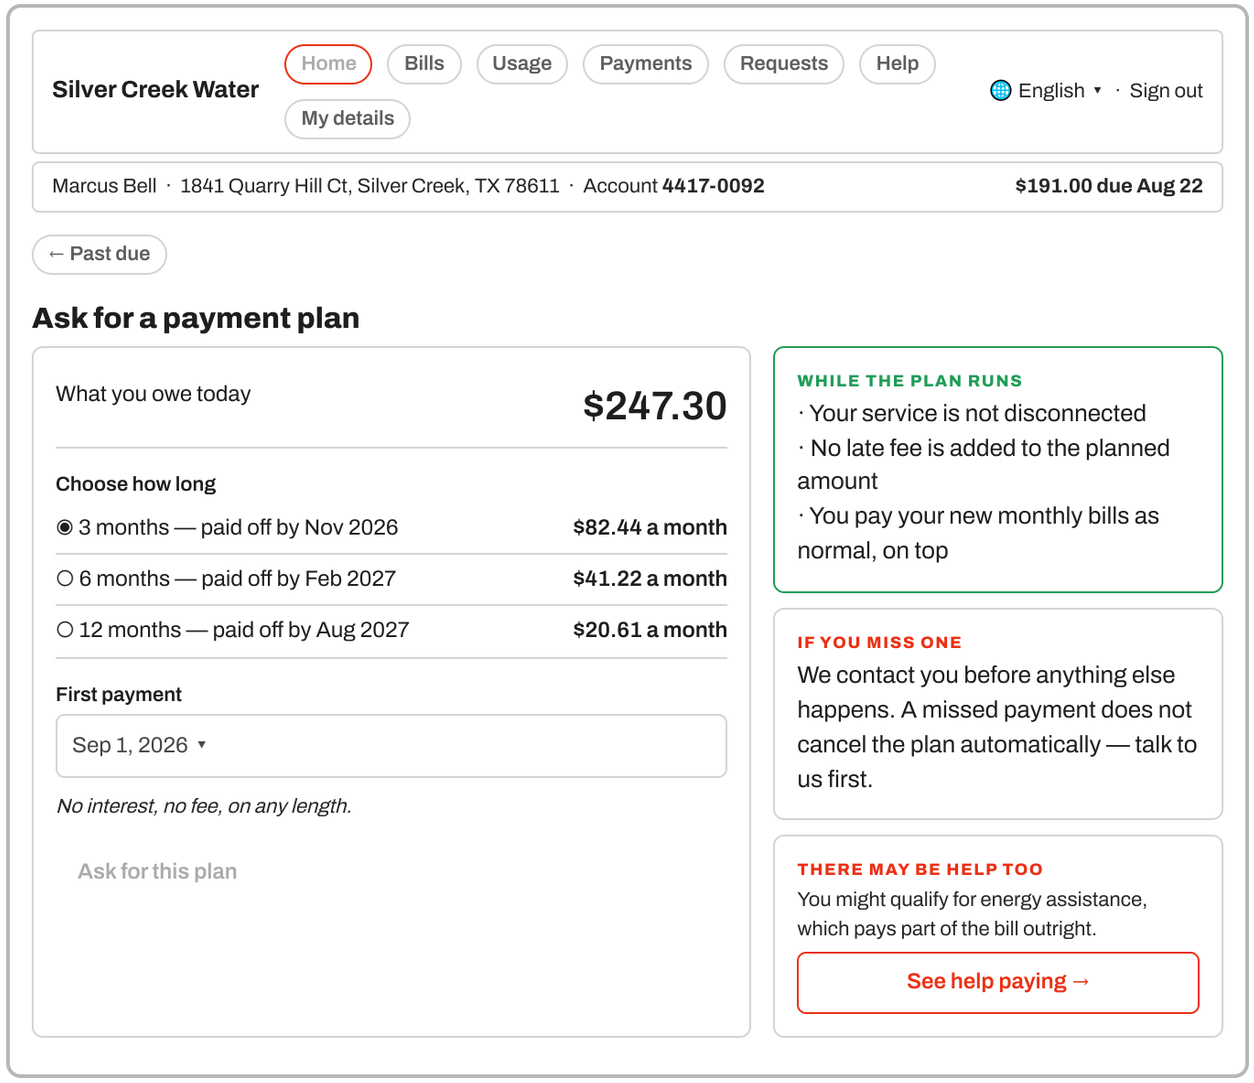

FOR	Giving a customer who cannot pay a way to stay connected, in one screen, without phoning.
HOW YOU GET HERE	**Past due**, **Help paying** and **Home** — three doors, the most of any screen in this group, which is right for the thing a struggling customer most needs.

COGNITIVE LOAD	Each option shows the monthly figure and the finish date — no division, no calendar arithmetic. "$41.22 a month, paid off by Feb 2027" is one decision, not two.
THE CRITICAL PANEL	Whether service is protected during the plan is the question behind the request. It is answered beside the choice, not after submitting.
CROSS-LINK	Assistance is offered here, because a customer asking for a plan is exactly the one who may qualify for a grant — and most do not know it exists.
STATES	**APPROVED INSTANTLY** Straight to screen 16 with the schedule and the first date. / **NEEDS REVIEW** "We will reply within one working day" — and protections hold in the meantime, stated. / **ALREADY ON A PLAN** Shows the existing one instead of taking a second. / **NOT ELIGIBLE** Names why, and offers the phone number — never a bare refusal to someone in difficulty.
WORDS	"Payment plan" and "payment arrangement" both appear at least once, because different utilities taught customers different names for the same thing.
COMPONENTS	PortalFrame · RadioCard · Callout ok · Button

43 The plan we can offer


NEW BUILD · COMMITMENT CPB-03 · COMMITMENT CPB-21

`/:tenant/portal/plan-offer`


43 The plan we can offer `/:tenant/portal/plan-offer`


> **The question:** I asked for a plan — what are you actually offering, and do I have to take it? The moment between the request and the agreement.

PHONE · 390

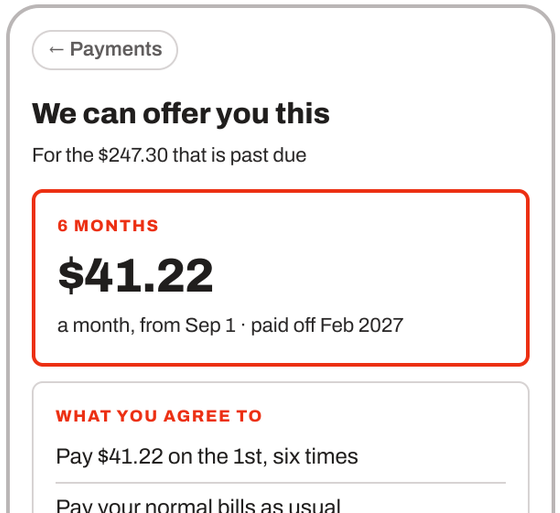

DESKTOP · 1280

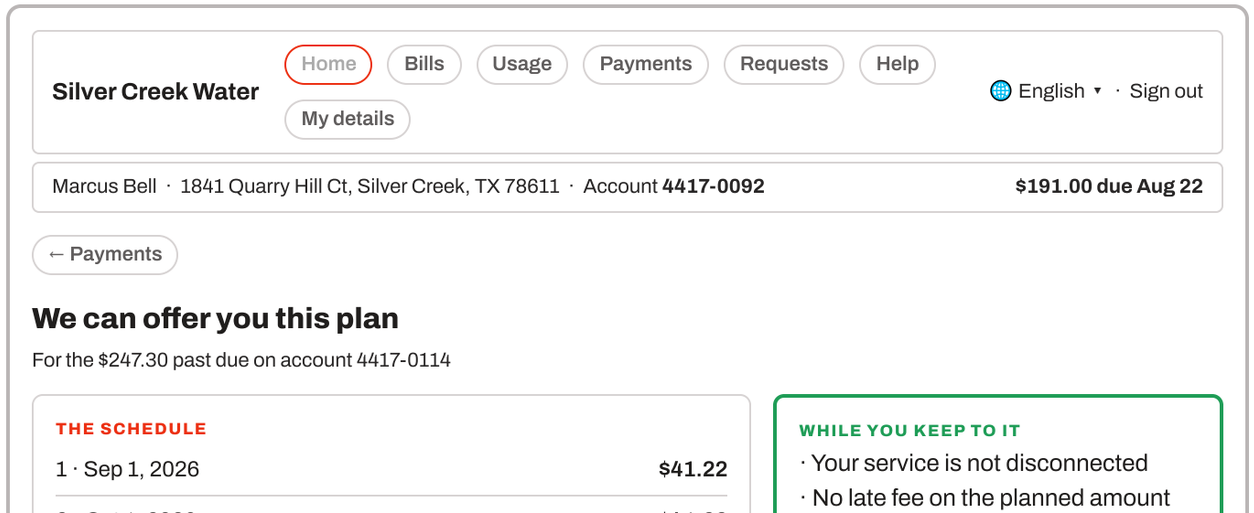

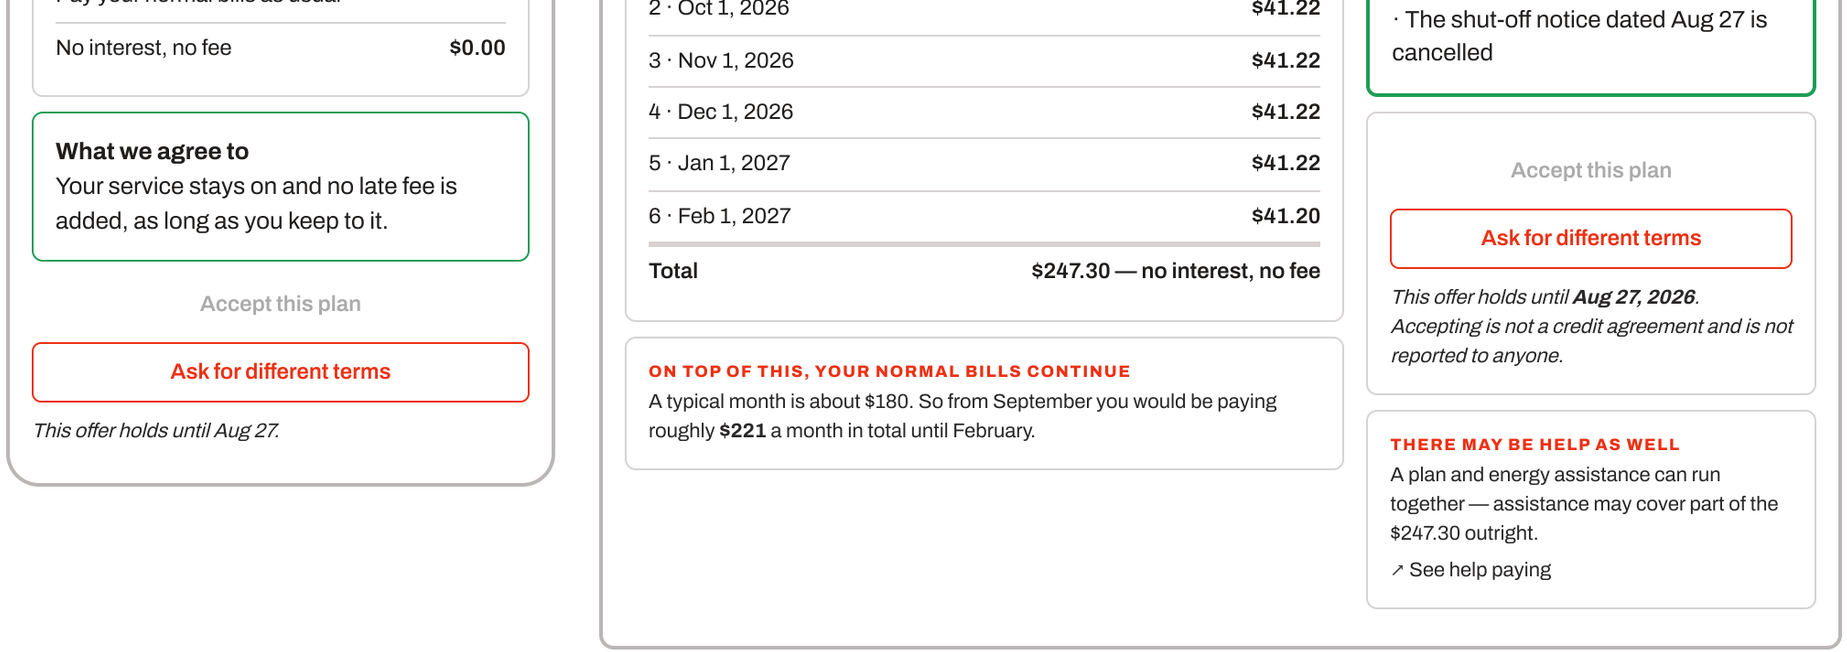

FOR	Turning a request into an agreement, with both sides' obligations on one screen.
HOW YOU GET HERE	**Payments** — one of the seven errand cards. Not from Past due, which is where somebody who has just asked for a plan would look for the answer.
WHY IT IS ITS OWN SCREEN	Asking and agreeing are different acts. The offer may not match the request — a utility may counter with six months where twelve was asked — and the customer must be able to see and decline it.
THE TOTAL BURDEN	"Roughly $221 a month in total until February" is the number that decides whether somebody can keep the plan. Showing the instalment alone sets people up to fail in month two.
DIGNITY	Says explicitly that this is not a credit agreement and is not reported. That fear stops people accepting plans they can afford.

STATES

COUNTER-OFFER
Says plainly it differs from what was asked, and why, before the terms.

EXPIRED
Says the offer lapsed and re-offers, rather than dead-ending someone in difficulty.

DECLINED
Returns to the past-due screen with assistance still offered.

ACCEPTED
Goes straight to the plan screen with the first date.

COMPONENTS

PortalFrame · InstalmentList · Callout ok · Button


44. Your plan NEW BUILD COMMITMENT CPB-21

/:tenant/portal/plan


44 Your plan /:tenant/portal/plan

> **The question:** where am I up to, what is next, and am I still protected?

PHONE · 390

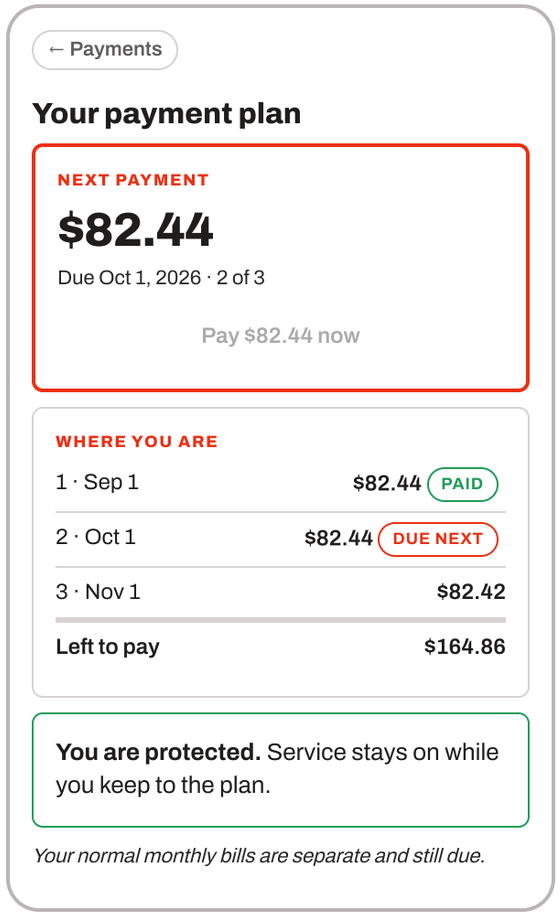

DESKTOP · 1280

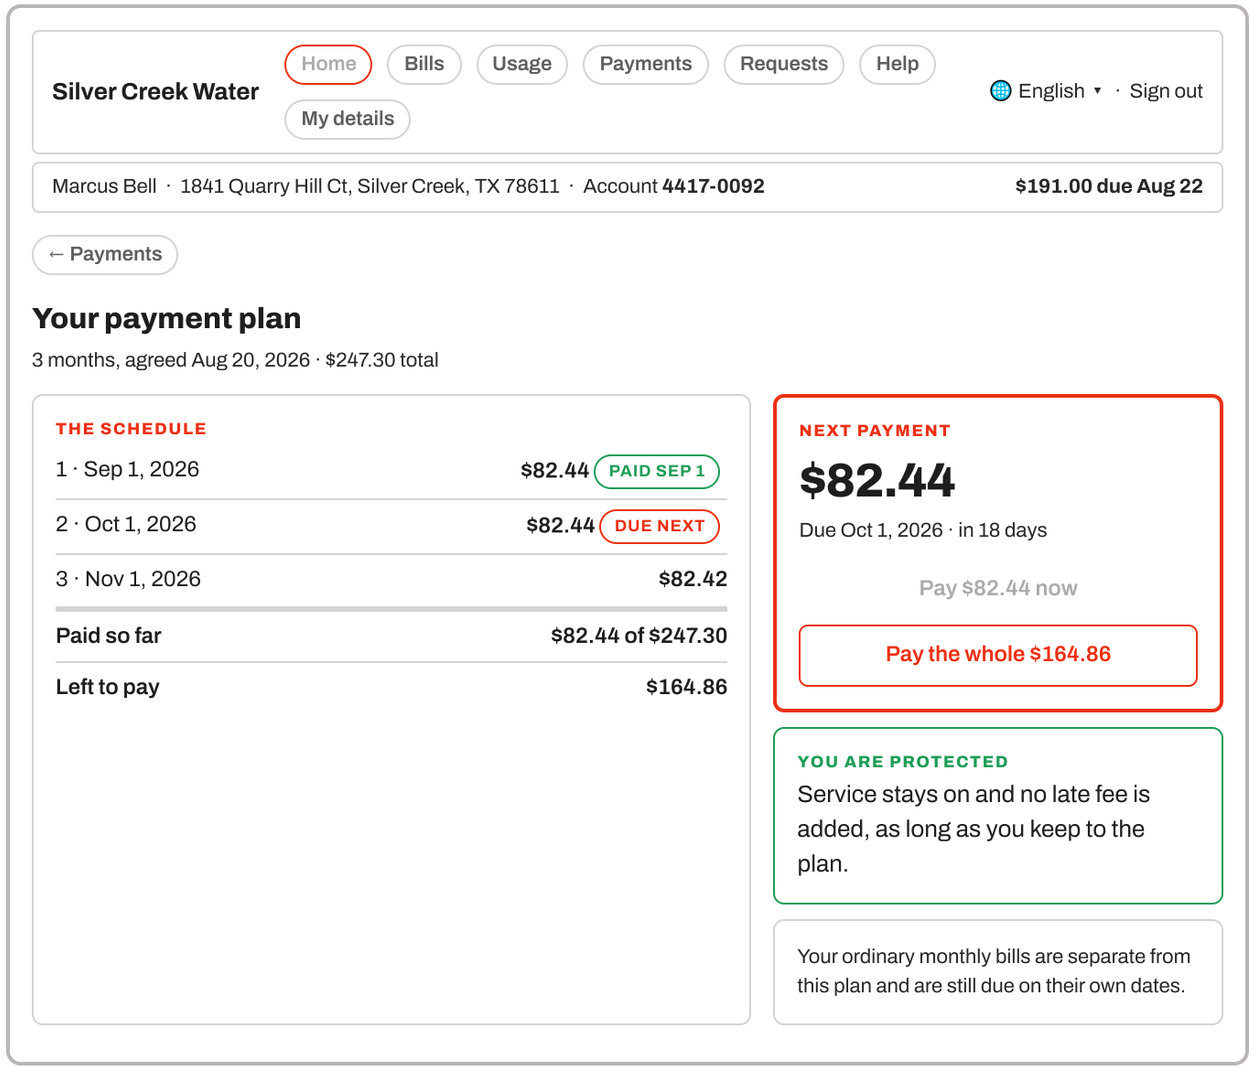

FOR	Showing a customer mid-plan exactly where they stand, so they never have to phone to ask.
HOW YOU GET HERE	**Payments** — one of the seven errand cards. That is the only door.

COGNITIVE LOAD	Paid, due next and still to come are three visibly different states. "Left to pay" is computed for them. Paying the balance off early is offered — people in a plan often can, later.
THE SEPARATION	That ordinary bills continue alongside the plan is the single most misunderstood thing about payment plans, so it is stated on the screen rather than in the agreement.

STATES

ON TRACK	MISSED ONE	BROKEN	FINISHED
Green protection panel, as drawn.	Amber, not red: says what to do and by when, and that protection continues until then.	States plainly that the plan has ended, what is owed, and how to ask for a new one.	"Paid off Nov 1 — nothing more is owed on this plan." A visible ending.

COMPONENTS PortalFrame · InstalmentList · StatusChip · Callout ok

45 Help paying EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/help-paying`

45 Help paying `/:tenant/portal/help-paying`

> **The question:** is there money available, do I qualify, and how do I get it? Most customers do not know these programmes exist.

PHONE · 390

← Past due

Help paying your bill

Grants, discounts and one-off help

ENERGY ASSISTANCE

A federal grant that pays part of your bill. Most households under $3,660 a month qualify.

Typical award **$300–$600**

Check if you qualify

SENIOR DISCOUNT

15% off every bill if you are 65 or over.

✎ Apply — proof of age needed once a year

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Past due

Help paying your bill

You may qualify for more than one of these at the same time.

ENERGY ASSISTANCE — THE BIGGEST ONE

A federal grant paid straight to us against your bill. It is not a loan and is not repaid.

Typical award	**$300 – $600**
Household income limit	**$3,660 a month for 4**


SENIOR DISCOUNT · 15% OFF EVERY BILL

You are 65 or over. Proof once a year.

✎ Apply

LOW-INCOME CREDIT · $25.00 A MONTH

If you are on a qualifying programme — your agency confirms

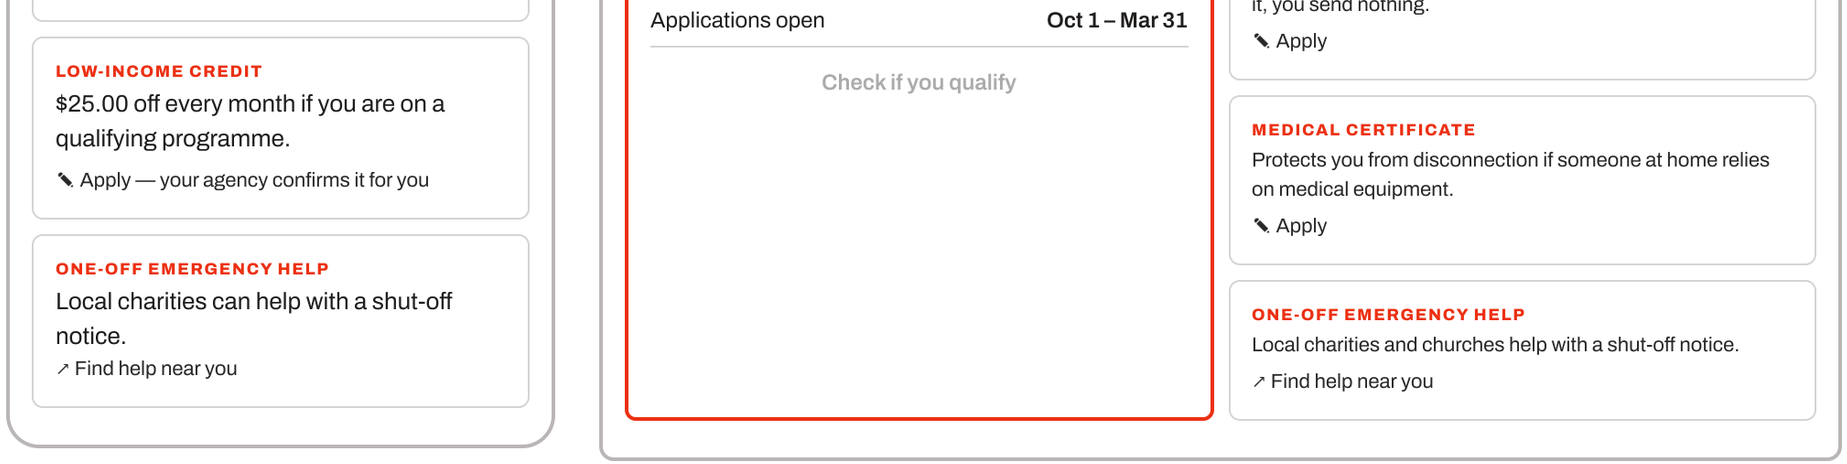

FOR	Making assistance findable. In most utilities take-up is a fraction of eligibility, and the commonest reason is that customers never learn the programmes exist.
HOW YOU GET HERE	**Past due** and **Bills**.
PRIMARY ACTION	**Check if you qualify** on the largest programme. The rest are quieter — but all are on one screen, because someone who qualifies for one usually qualifies for several.
COGNITIVE LOAD	Each programme states the amount and the qualifying test up front. "Most households under $3,660 a month" lets someone self-assess in two seconds instead of starting an application to find out.
DIGNITY	No language implying charity or failure. The grant is described as what it is: money that exists, paid against the bill, not repaid.
STATES	**ALREADY RECEIVING** — Shows what is applied and when it renews, above the rest. **APPLICATION OPEN** — Shows where it is up to and what is still needed. **SEASON CLOSED** — Says when it opens again rather than hiding the programme. **NONE CONFIGURED** — Falls back to the utility's own phone number — never an empty screen for someone in difficulty.
COMPONENTS	PortalFrame · ProgrammeCard · Button
RULES	Every programme is tenant-configured; nothing here is hard-coded. Figures come from the utility's own settings.

46 Your protections

EXISTS BEHIND · NO COMMITMENT

`/:tenant/portal/protections`

46 Your protections / :tenant/portal/protections

The question: can they actually cut me off right now? A customer who is frightened needs the rules stated plainly and applied to their own situation.

PHONE · 390

← Past due

Your protections

RIGHT NOW

You are protected until Mar 31, 2027. Winter rules stop disconnection between Nov 1 and Mar 31.

The amount you owe still grows during this time.

WHAT PROTECTS YOU

❄ Winter, Nov 1 – Mar 31	APPLIES
Medical equipment at home	✎ Apply
Active military service	✎ Apply
A payment plan you keep to	↗ Ask for one
⚠ An open dispute	On the disputed part only

BEFORE ANY SHUT-OFF

· A written notice, at least 10 days ahead
· A phone call or a visit
· Never on a Friday, a weekend or a public holiday

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Past due

Your protections

WHERE YOU STAND RIGHT NOW

You cannot be disconnected until Mar 31, 2027. Texas winter rules stop disconnection between Nov 1 and Mar 31 for customers who have asked for a payment plan.

What you owe still grows during this time, and is due when the protection ends. A plan is still the better route.

EVERY PROTECTION, AND WHETHER IT APPLIES TO YOU

❄ Winter moratorium · Nov 1 – Mar 31	APPLIES TO YOU
Medical equipment at home · renewed yearly	✎ Apply — a doctor's note
Active military service · while deployed	✎ Apply — service papers
A payment plan you are keeping to	↗ Ask for one
⚠ An open dispute · the disputed amount only	Not currently open
Extreme weather · declared heat or cold days	Automatic, no application

WHAT MUST HAPPEN BEFORE ANY SHUT-OFF

1 · A written notice, at least 10 days beforehand
2 · A phone call or a visit to the property
3 · Never on a Friday, a weekend, or the day before a public holiday
4 · Never while any application above is being decided

These are the rules your utility follows. If you think one was missed, tell us.

Something went wrong — tell us

FOR	Answering "can they cut me off" with the customer's own situation, not a policy document.
HOW YOU GET HERE	**Past due** — the only door, so this screen is two clicks behind one that Home does not link to.

COGNITIVE LOAD	The verdict comes first, with its date. The full list is underneath, each row marked applies / can apply / does not — so nobody has to read a rulebook and work out which paragraph is theirs.
HONESTY	"The amount you owe still grows during this time" is stated, because a protection read as forgiveness produces a much worse spring.
STATES	**PROTECTED** Green, with the end date, as drawn. · **NOT PROTECTED** Neutral, not alarming: says which could apply and links each application. · **APPLICATION PENDING** Says protection holds while it is being decided. · **EXPIRING** Warns 30 days before a protection ends, with what happens then.
COMPONENTS	PortalFrame · Callout ok · ProtectionRow · StatusChip
RULES	Rules vary by state and by utility, so every row is configured, never hard-coded. Icons always carry their words.

47 Budget billing NEW BUILD COMMITMENT CPB-18

`/:tenant/portal/level-pay` `/:tenant/portal/level-pay/standing`

47 Budget billing `/:tenant/portal/level-pay` `/:tenant/portal/level-pay/standing`

> **The question:** can I pay the same amount every month instead of a $92 bill in March and a $229 one in July? And what happens to the difference?

PHONE · 390

← Help paying

Budget billing

The same amount every month, all year

YOU WOULD PAY

$171.40

every month, instead of $142 to $229

YOUR LAST 12 BILLS

The flat line is your budget amount.

THE HONEST PART

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Help paying

Budget billing

YOUR LAST 12 BILLS, AGAINST THE BUDGET AMOUNT

Your lowest	Budget amount	Your highest	A year costs
$142.10	$171.40	$228.75	$2,056.80

YOU WOULD PAY

$171.40

every month, starting with your September bill

Start budget billing

You can stop at any time.

This spreads your bills — it does not lower them. Each summer we check, and if you have paid too little or too much we settle up over the next year.

Start budget billing

You can stop at any time. Any difference is settled then.

HOW THE SETTLE-UP WORKS

Every August we compare what you paid with what you used	once a year
Paid too little — the shortfall is spread over the next 12 months	no interest
Paid too much — it comes off your next bills	or refunded
Your monthly amount is recalculated each August	we tell you first

THIS SPREADS, IT DOES NOT REDUCE

Over a year you pay the same total. What changes is that no single month is a shock.

FOR	Turning an unpredictable bill into a predictable one, without misleading anyone into thinking it is cheaper.
HOW YOU GET HERE	**Help paying — the only door**, and this is the finding worth acting on: budget billing is a mainstream product for anyone with a lumpy bill, and it is reachable only through a screen about hardship.
COGNITIVE LOAD	The customer's own twelve bills are the argument. No hypothetical example, no generic explanation — their real range, their real average, their real annual total.
HONESTY	"This spreads your bills — it does not lower them" is on the screen, above the button. Budget billing generates complaints when the settle-up arrives unexplained; the settle-up rules are stated before enrolment, not in a letter afterwards.
STATES	**ALREADY ON IT** Shows the monthly amount, what has built up or been overpaid, and the next review date. **NOT ENOUGH HISTORY** "We need about a year of bills to work out a fair amount." Says when they will qualify. **NOT ELIGIBLE** Names the reason — a past-due balance, usually — and links to the payment plan instead of dead-ending. **SETTLE-UP DUE** A panel showing the shortfall or credit and how it is being spread, before the next bill lands.
WORDS	"Budget billing" — what North American utilities call it. "Level pay" is the internal name and never appears.
COMPONENTS	PortalFrame · BillHistoryBars · AmountCard · Button

48 Where your budget billing stands NEW BUILD COMMITMENT CPB-18

`/:tenant/portal/level-pay/standing`

48 Where your budget billing stands `/:tenant/portal/level-pay/standing`

The question: I pay $171.40 every month — am I ahead or behind on what I have actually used, and what happens in August?

PHONE · 390

← Budget billing

Where you stand

7 months into your budget year

YOU HAVE USED MORE THAN YOU HAVE PAID

$142.60

behind, so far

THE YEAR SO FAR

Paid · 7 × $171.40	$1,199.80
Actually used	$1,342.40
Difference	**$142.60**

WHAT HAPPENS IN AUGUST

We work out the year, and spread anything owed over the next 12 months. On today's figures that would add about **$11.88** a month.

Your new monthly amount would be around **$183.28**.

Pay the $142.60 now instead

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Budget billing

Where your budget billing stands

Budget year Sep 2025 – Aug 2026 · month 7 of 12 · $171.40 a month

PAID AGAINST USED, MONTH BY MONTH

Paid so far	Used so far	Behind by	Months left
$1,199.80	**$1,342.40**	**$142.60**	**5**

The flat line is what you pay. The bars are what you actually used.

WHY YOU ARE BEHIND

Your budget amount was worked out from last year. This summer has been hotter, so June and July used more than the same months last year — $88.20 more between them.

BEHIND BY $142.60

Nothing is owed today. In **August 2026** we settle the year and spread anything outstanding over the next 12 months.

That would add about	**$11.88 a month**
New monthly amount	**around $183.28**

OR CLEAR IT NOW

Paying the $142.60 before August keeps next year's amount closer to today's.

Pay $142.60

Leaving budget billing settles the difference straight away.

Stop budget billing

FOR	The single biggest source of budget-billing complaints is the settle-up arriving unexplained. This screen makes it visible every month instead of once a year.
HOW YOU GET HERE	**Budget billing**, from two places on that screen.

COGNITIVE LOAD	Behind or ahead is the headline. The consequence is computed — "$11.88 a month, new amount around $183.28" — rather than leaving somebody to divide $142.60 by twelve.
WHY YOU ARE BEHIND	Attribution, not just arithmetic. "June and July used $88.20 more than the same months last year" is actionable; "you are behind" is not.

STATES

AHEAD	LEVEL	JUST STARTED	REVIEW DUE
Same layout in the success colour: the credit and what happens to it.	"You are within $12 of where you should be." Not an empty screen.	"Too early to say — we need three months." With the review date.	The settle-up is imminent: shows the final figures and the new monthly amount.

COMPONENTS PortalFrame · StandingChart · Callout warn · Button


49 Money back EXISTS BEHIND NO COMMITMENT

`/:tenant/portal/money-back`


49 Money back `/:tenant/portal/money-back`


> **The question:** my account is in credit — can I have it back, or does it just sit there?

PHONE · 390

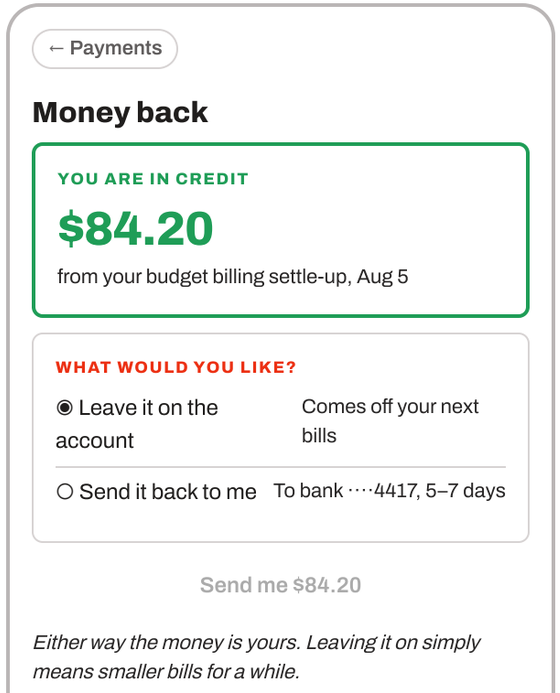

DESKTOP · 1280

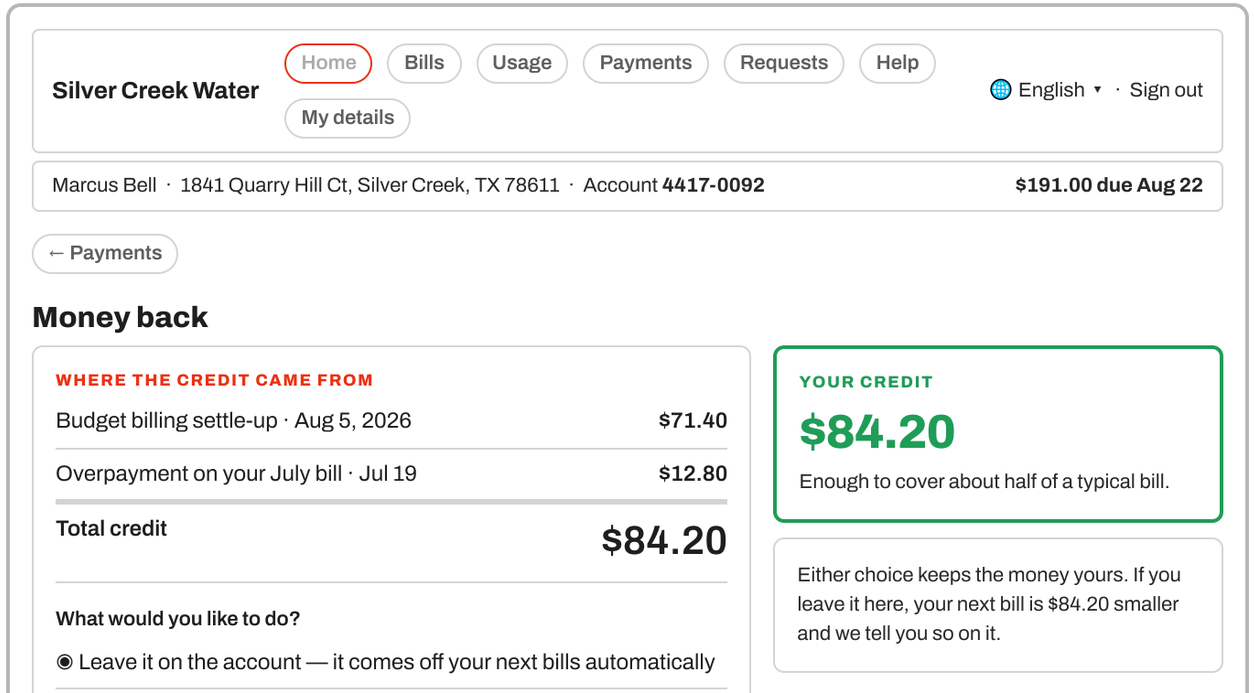

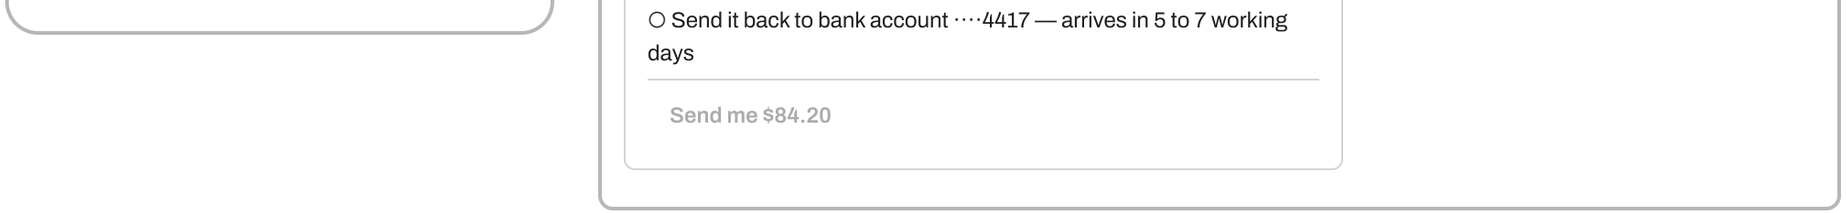

FOR	Telling a customer they have money owed to them, and letting them choose what happens to it — instead of the credit sitting silently.
HOW YOU GET HERE	**Payments** — one of the seven errand cards. That is the only door.
COGNITIVE LOAD	Where the credit came from is itemised, because an unexplained credit is as unsettling as an unexplained charge. Both options say what actually happens next, with a timescale.
STATES	**NO CREDIT** "There is nothing owed back to you at the moment." Says what would create one. **REFUND IN PROGRESS** Shows the date it was sent and when to expect it. **BLOCKED** Past-due amount elsewhere: says the credit is offsetting it, and by how much. **CLOSING ACCOUNT** The final credit is refunded automatically; the screen says so and no choice is offered.
WORDS	"Money back", not "Credit balance refund". "You are in credit", not "Your account carries a credit balance".
COMPONENTS	PortalFrame · Callout ok · CreditBreakdown · RadioCard

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-03 A customer can download what we sent them — UNVERIFIED

Waits on: *Downloads are not ready yet* holds the download on Documents and on a payment-plan agreement.

Screens: 60 · 43

WHAT DONE LOOKS LIKE ON SCREEN

A customer presses Download a year and gets a PDF of the twelve bills listed above it, named for the account: 4417-0092-2026.pdf.

CPB-18 Level pay can work out a monthly amount for every account — UNVERIFIED

CPB-18 **Level pay can work out a monthly amount for every account** UNVERIFIED

Waits on: *We cannot work out a monthly amount for this account at the moment* is a live refusal on the budget-billing screen.

Screens: 47 · 48

WHAT DONE LOOKS LIKE ON SCREEN

The Budget billing screen offers "$96.00 a month" for an account with less than a year of history, or says precisely which month is missing.

CPB-21 **A plan says who set it up** UNVERIFIED

Waits on: *We cannot show you who set this up* on a payment-plan offer.

Screens: 43 · 44

WHAT DONE LOOKS LIKE ON SCREEN

The plan reads "Agreed with Dana Whitfield on Aug 14" rather than an unnamed agreement.

08 What you used

Three screens. The evidence behind the bill, and the only place several services must share one page without confusing each other.

50 Usage NEW BUILD COMMITMENT CPB-06 COMMITMENT CPB-07 COMMITMENT CPB-08 COMMITMENT CPB-23

`/:tenant/portal/usage`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

50 Usage `/:tenant/portal/usage`

> **The question:** am I using more than I used to, and is that why the bill went up? One service at a time — a customer cannot read four units on one axis.

PHONE · 390

Home | Bills | Usage | Help

What you used

Electric ▾

LAST MONTH

800 kWh

5% less than July · 12% more than August last year

Lowest	Average	Highest
412 kWh	664 kWh	948 kWh

AGAINST LAST YEAR

Aug 2026	800 kWh
Aug 2025	714 kWh
Difference	**+86 kWh**

Summer is your heaviest season — it has been in each of the last two years.

DESKTOP · 1280

Silver Creek Water — Home | Bills | Usage | Payments | Requests | Help | My details — English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

What you used

Electric | Water | Sewer

ELECTRIC · THE LAST 12 MONTHS

This month	Lowest · Feb	Average	Highest · Jul 2025
800 kWh	412 kWh	664 kWh	948 kWh

LAST MONTH

800 kWh

Against July 2026	−42 kWh
Against August 2025	+86 kWh

WHAT THIS COST YOU

800 kWh at $0.1150	$92.00

See the whole bill →

FOR	Letting a customer see their own consumption pattern and connect it to the bill.
ONE SERVICE AT A TIME	A picker on phone, tabs on desktop. kWh, thousand gallons and therms cannot share an axis, and a chart that mixes them is unreadable. The picker is built from the services this customer actually has — never a fixed list.
THE FAILURE TO AVOID	Every figure on this screen must belong to the selected service. Showing "Average water month 15 kgal" while Electric is selected is the defect that reached a live screen this week; the fix is that no summary is rendered outside the block that owns its data.
COGNITIVE LOAD	Comparisons are computed: "5% less than July", "+86 kWh against last August". The customer never subtracts two figures the screen has already shown them.
UNITS	Every number carries its unit, at the number, in the customer's own unit. Never converted, never assumed.

UNITS	Every number carries its unit, at the number, in the customer's own unit. Never converted, never assumed.
STATES	**NO HISTORY** "We need two reads before we can show a trend." Says when that will be. · **NO PRIOR YEAR** The comparison block says so in a sentence — never a raw key, never a blank row. · **ESTIMATED MONTHS** Marked on the chart with a legend, so the customer knows which bars are measured. · **ONE SERVICE ONLY** No picker at all — a chooser with one option is furniture.
COMPONENTS	PortalFrame · ServicePicker · UsageChart · ComparisonRows
RULES	Weight follows importance — the chart outranks the summary tiles above it, not the other way round.

51 Readings

NEW BUILD · COMMITMENT CPB-04 · COMMITMENT CPB-09 · COMMITMENT CPB-23


`/:tenant/portal/readings`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


51 Readings `/:tenant/portal/readings`


> **The question:** was my meter actually read, or was this bill a guess? A customer disputing a bill comes here first.

PHONE · 390

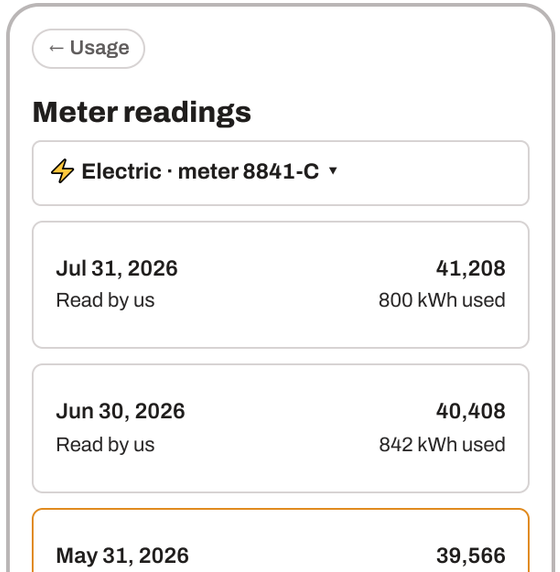

DESKTOP · 1280

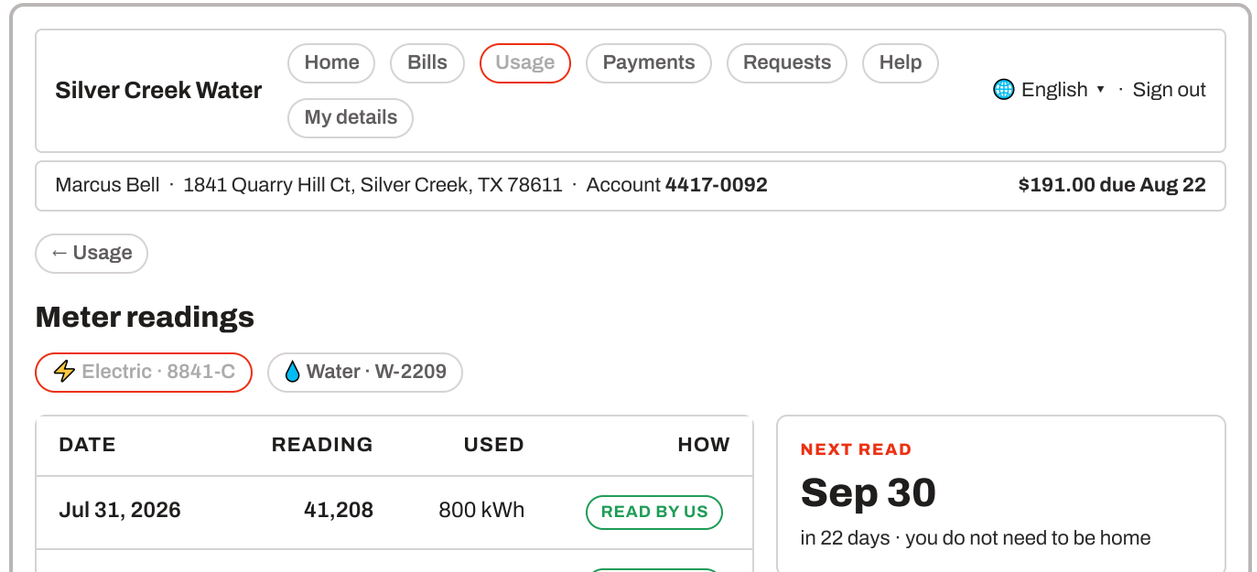

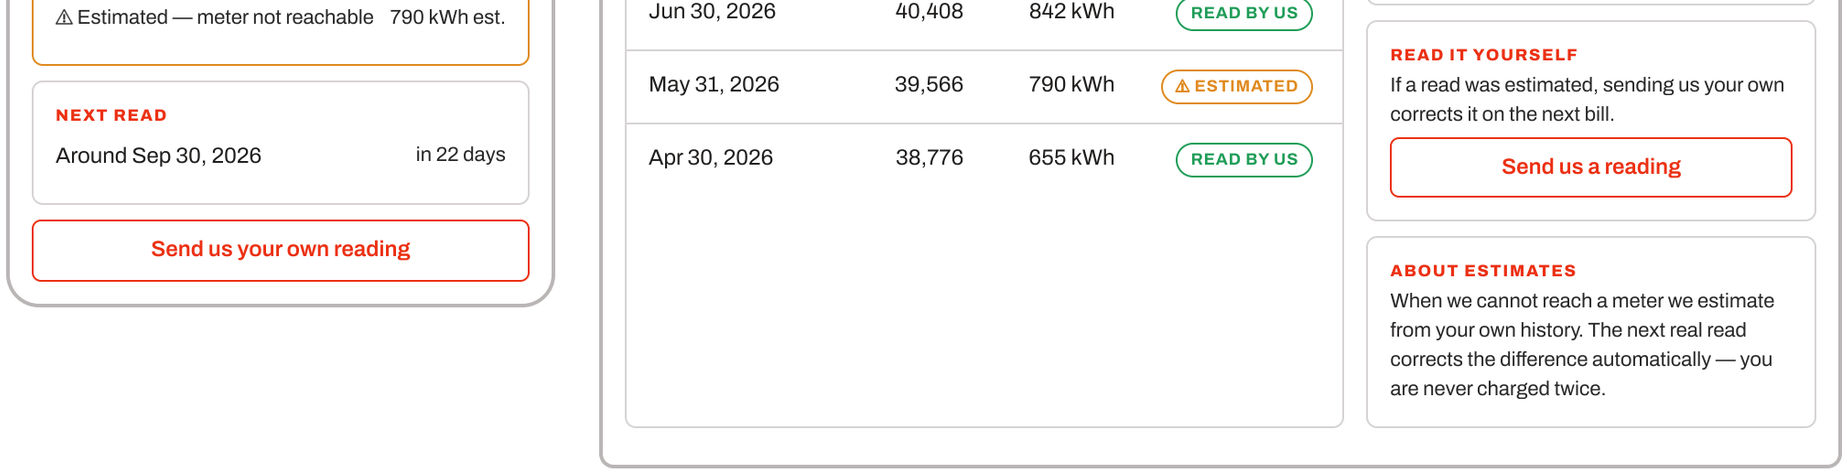

FOR	Showing the evidence behind every bill, and distinguishing a measured read from an estimated one at a glance.
COGNITIVE LOAD	Both the dial reading and the amount used are shown, because customers check the dial against their own meter. The difference is computed for them.
ESTIMATES	Flagged with colour *and* the word "Estimated" *and* a row tint — three signals, because this is the fact most likely to be disputed. The self-correction is explained, since "am I paying twice" is the follow-up question.
STATES	**NO READS YET** "Your first read is due around Sep 30." Not an empty table. · **CUSTOMER READ** A third kind of chip: "You sent this", with the date received. · **METER CHANGED** An explicit row: old meter final read, new meter start, so a reset number is never alarming. · **LONG RUN OF ESTIMATES** A banner offering a read appointment — three estimates in a row is a service failure.
WORDS	"Read by us", not "Actual". "Estimated — meter not reachable", not "Estimated read, no access".
COMPONENTS	PortalFrame · ServicePicker · ReadingRow · StatusChip
RULES	The meter's own serial is the customer's reference and is shown; the database id is not.

52 Equipment NEW BUILD COMMITMENT CPB-10

`/:tenant/portal/equipment`

52 Equipment `/:tenant/portal/equipment`

> **The question:** what is installed at my address, whose is it, and what am I paying for it?

PHONE · 390

← Usage

What is at your address

1841 Quarry Hill Ct, Silver Creek, TX 78611

Electric meter — Ours
8841-C · installed Jun 2, 2026 — No charge

Water meter · 5/8" — Ours
W-2209 · installed Jun 2, 2026 — No charge

Fire line · 2" — Ours
Sprinkler supply — $12.00 a month

If something looks damaged or is leaking, tell us — do not touch it yourself.

Report a problem

DESKTOP · 1280

Silver Creek Water | Home | Bills | Usage | Payments | Requests | Help | My details | English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

← Usage

What is at your address

1841 Quarry Hill Ct, Silver Creek, TX 78611

EQUIPMENT	REFERENCE	INSTALLED	WHOSE	MONTHLY
Electric meter	8841-C	Jun 2, 2026	Ours	No charge
Water meter · 5/8 inch	W-2209	Jun 2, 2026	Ours	No charge
Fire line · 2 inch sprinkler supply	F-0118	Jun 2, 2026	Ours	**$12.00**

WHOSE IS WHAT

Equipment marked **Ours** is maintained by us at no cost to you. Anything marked **Yours** is your responsibility to repair.

NEVER TOUCH A METER YOURSELF

If something is damaged, leaking or making a noise, tell us and we will come out. There is no charge for a safety visit.

Report a problem

FOR	Answering what is installed, who maintains it, and which items carry a monthly charge — the three facts behind most equipment questions.
HOW YOU GET HERE	**Usage**. **Not My details**.
COGNITIVE LOAD	"Ours" and "Yours" in one column settles the repair-bill question without reading a policy. Size is stated in inches, as the customer's plumber would.
SAFETY	The instruction not to touch a meter is on the screen that lists meters, not in a leaflet, and the visit is stated as free so nobody delays reporting a leak over cost.

STATES

NOTHING RECORDED
"We have not recorded your equipment yet." With a way to ask.

BEING REPLACED
A row showing the swap in progress and the date.

CHARGED ITEM
The monthly charge links to the bill line it produces.

MULTIPLE ADDRESSES
An address picker above the list, one property at a time.

COMPONENTS PortalFrame | EquipmentRow | Callout warn

RULES The address is derived from the property record, never stored on the equipment — a map and an envelope cannot disagree.

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-04 A customer can send us a meter reading

UNVERIFIED

Waits on: *Sending readings is not ready yet* holds the button on Readings. The screen already shows what we last read and when.

Screens: 51

WHAT DONE LOOKS LIKE ON SCREEN

A customer types 4,182 against the meter reading 3,946 on Jul 28, presses Send, and the reading appears in the list marked "Sent by you · pending check".

CPB-06 Usage compares against the same month last year

UNVERIFIED

Waits on: *We do not have a year to compare with yet* is the honest line today. The server sends a twelve-month percentage, not a same-month figure.

Screens: 50

WHAT DONE LOOKS LIKE ON SCREEN

The Usage screen reads "800 kWh · 86 kWh more than August 2025" beside the chart, rather than the sentence saying there is nothing to compare with.

CPB-07 Usage compares against last month

UNVERIFIED

Waits on: Nothing on the server works out a month-on-month change. Working it out in the browser would put a figure in front of a customer that no staff screen and no bill can reproduce.

Screens: 50

WHAT DONE LOOKS LIKE ON SCREEN

The Usage screen reads "5% less than July" under the big number, and a clerk looking at the same account sees the same 5%.

account sees the same 5%.

CPB-09 **Readings say when the next read is due** UNVERIFIED

Waits on: The readings data carries no next-read date. The usage data does, and the screen shows it when it exists.

Screens: 51

WHAT DONE LOOKS LIKE ON SCREEN

The Readings screen reads "Next read: Sep 30 · in 22 days" above the list.

CPB-10 **Equipment says whose it is and what it costs** UNVERIFIED

Waits on: The equipment data has no owner and no monthly charge — two of the three facts that screen exists to answer.

Screens: 52

WHAT DONE LOOKS LIKE ON SCREEN

The Equipment screen reads "Water meter · W-5000 · Ours · $12.00 a month" where it currently reads the reference and the install date alone.

09 Asking us something

Four screens. A question, and then the thread it becomes. Silence after a request is the fastest route to a second phone call.


53 Ask a question NEW BUILD COMMITMENT CPB-16 COMMITMENT CPB-17

`/:tenant/portal/ask` `/:tenant/portal/ask-a-question`


53 Ask a question `/:tenant/portal/ask` `/:tenant/portal/ask-a-question`

> **The question:** I have something to ask that no page here answers, and I do not want to sit on hold.

PHONE · 390

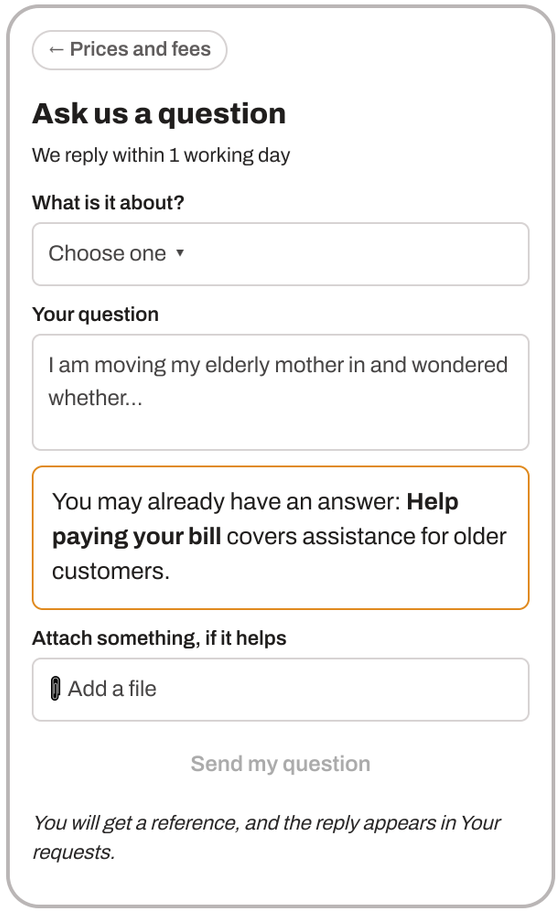

DESKTOP · 1280

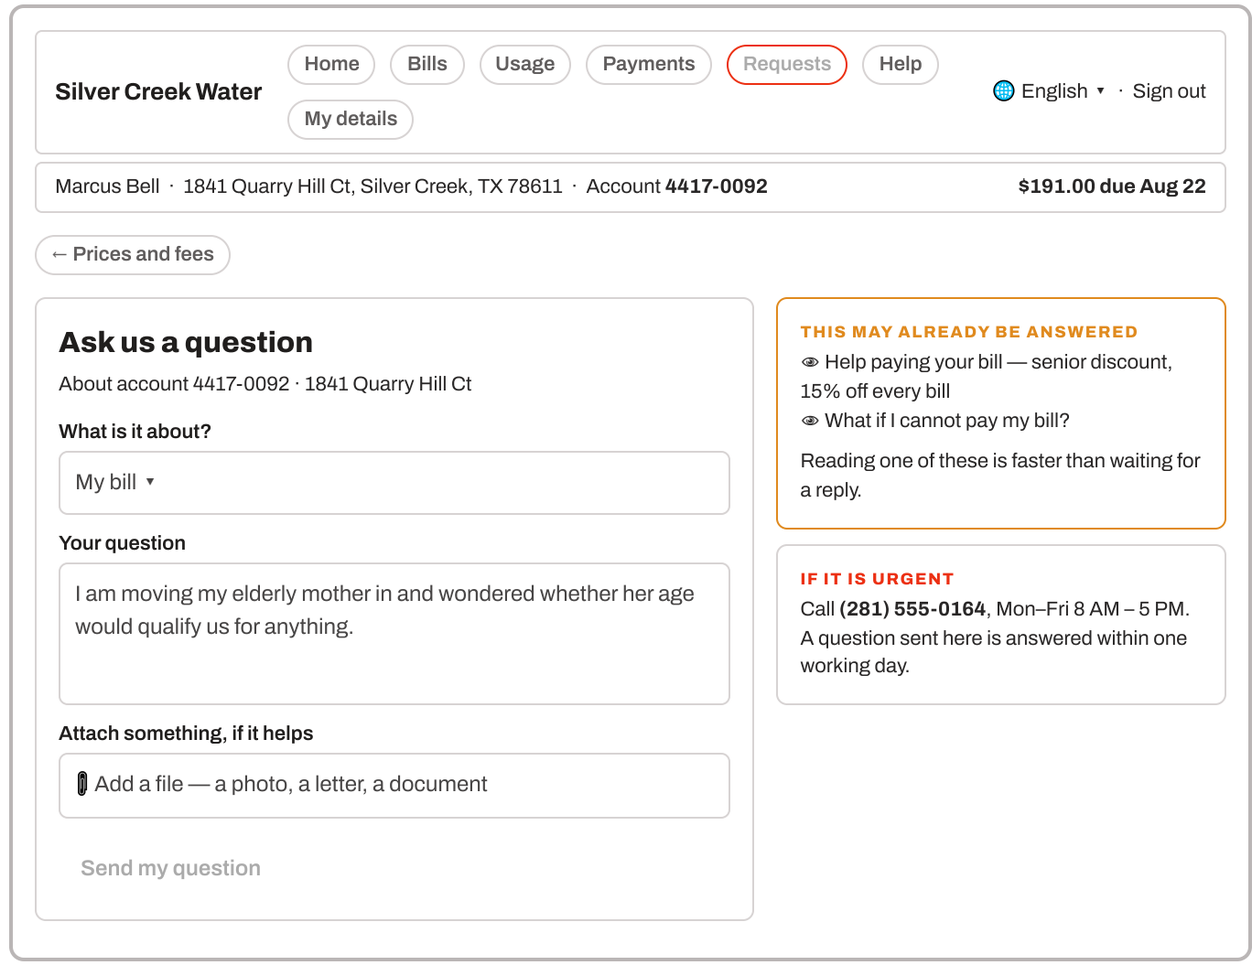

FOR	The catch-all. Everything the other twenty-nine screens do not cover ends up here rather than on the phone.
HOW YOU GET HERE	**Prices and fees** — the only door, which is a strange place for it and is worth a second one from Help.
COGNITIVE LOAD	The suggestions appear as they type, from what they have written — not a static list. A person who gets their answer in five seconds and closes the form is a success, not a lost submission.
CONTEXT	The account is attached automatically, so nobody has to state who they are. A signed-out visitor is asked for an email instead, and the screen says why.
STATES	**SENT** Becomes a tracked request with a **URGENT CHOSEN** Shows the phone number **ATTACHMENT TOO LARGE** Says the limit plainly and keeps **OUTSIDE HOURS** Says when the office opens, and

	reference, and the thread is where the reply appears.	prominently — some things should not wait a day.	everything typed.	that the question is queued either way.

COMPONENTS	PortalFrame · Select · Field · FileDrop · SuggestionCard

54 Ask a question, at its second address NEW BUILD COMMITMENT CPB-17 COMMITMENT CPB-23

`/:tenant/portal/ask`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

54 Ask a question, at its second address `/:tenant/portal/ask`

> **Not a separate screen.** The portal serves the question form at both `/:tenant/portal/ask` and `/:tenant/portal/ask-a-question`. Both render screen 40.

DRAWN AT	Screen 40 · Ask a question — the subject, the question, the live suggestions and the attachment.
WHY BOTH EXIST	`/:tenant/portal/ask` is the short form used inside the product; `/:tenant/portal/ask-a-question` is the readable one that goes into help articles and emails.
WHAT MUST BE TRUE	One component behind both. A second copy is how one of them quietly stops carrying the account context while the other keeps it.
LISTED HERE	So the fifty routes and the fifty entries in this document are the same fifty.

55 Your requests NEW BUILD COMMITMENT CPB-05 COMMITMENT CPB-11 COMMITMENT CPB-12 COMMITMENT CPB-23


`/:tenant/portal/requests`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


55 Your requests `/:tenant/portal/requests`

> **The question:** I asked for something — is anyone doing it? Silence after a request is the fastest way to a second phone call.

PHONE · 390

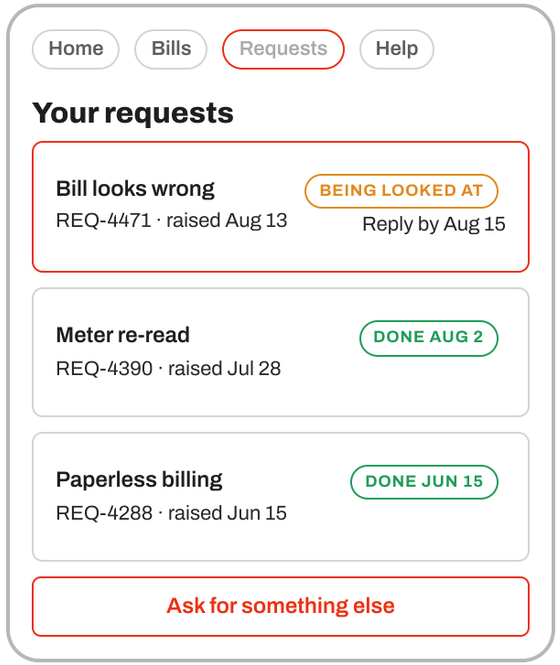

DESKTOP · 1280

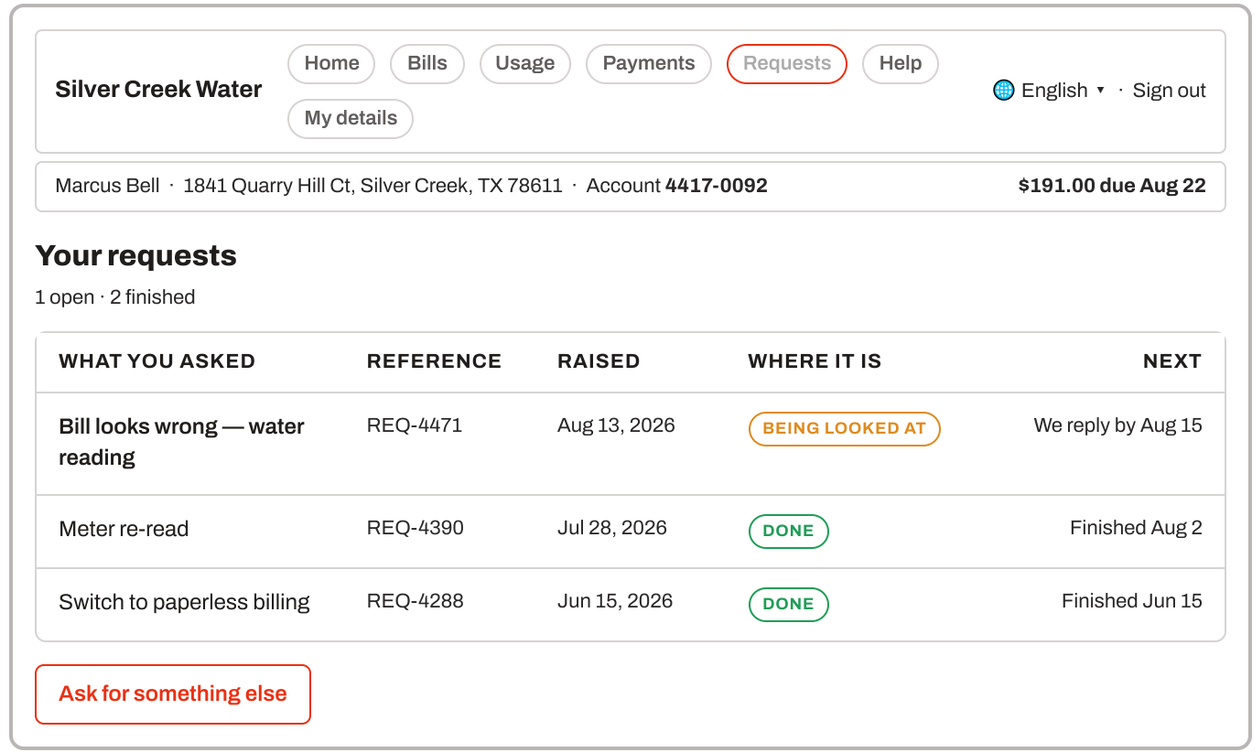

FOR	Showing every open request in one place, with what happens next and when.
COGNITIVE LOAD	"Next" is a column. A status without a date is what makes people phone; "We reply by Aug 15" is what stops them.
NAMING	Requests are titled by what the customer asked for in their own words, not by an internal category.
STATES	**NONE** "You have not asked us for anything yet." With the ways to. · **OVERDUE** Amber, and says so: "We said Aug 15 and have not replied." Owning it beats hiding it. · **NEEDS YOU** Top of the list, saying exactly what is needed from them. · **CLOSED WITH NO ACTION** Says why, never simply disappears.
COMPONENTS	PortalFrame · RequestRow · StatusChip · Pagination
RULES	The reference is the customer's, shown so they can quote it on the phone. Server-side paging, no cap.

56 One request BLOCKED COMMITMENT CPB-11 COMMITMENT CPB-13

`/:tenant/portal/requests/:reference`

56 One request `/:tenant/portal/requests/:reference`

> **The question:** what has actually happened on this, and is anything waiting on me?

PHONE · 390

← Your requests

Bill looks wrong

REQ-4471 · about your August bill

Being looked at OPEN

We will reply by Aug 15.

WHAT HAS HAPPENED

Aug 14 · Us
We have asked for a re-read of your water meter.

Aug 13 · Us
Received. We will come back to you within 2 working days.

Aug 13 · You
The water reading looks about double what we normally use...

The disputed $47.50 is not due while this is open.

Add something

Type here...

Send

DESKTOP · 1280

Silver Creek Water Home · Bills · Usage · Payments · Requests · Help · My details · English · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← Your requests

Bill looks wrong — water reading

REQ-4471 · raised Aug 13, 2026 · about bill BL-2608-000042

WHAT HAS HAPPENED

Aug 14, 11:20 AM · Silver Creek Water
We have asked for a re-read of your water meter. A technician will visit within 3 working days; nobody needs to be home.

Aug 13, 3:02 PM · Silver Creek Water
Received. We will come back to you within 2 working days.

Aug 13, 2:58 PM · You
The water reading looks about double what we normally use, and nobody was home for two weeks. 📷 meter.jpg

Add something

Type here...

Send

BEING LOOKED AT
We will reply by **Aug 15, 2026**.

WHILE THIS IS OPEN
The disputed **$47.50** is not due and carries no late fee. The remaining $143.50 is still due on Aug 22.

NOTHING IS WAITING ON YOU
If we need anything, it will say so here and we will email you.

FOR One thread showing everything said and done, in order, with what is owed in the meantime.

HOW YOU GET HERE	**Something looks wrong** and **Ask a question** — both go straight to the thread they just created, by reference.
COGNITIVE LOAD	Newest first. Each entry says who and when. "Nothing is waiting on you" is stated explicitly, because uncertainty about whose turn it is drives the follow-up call.
MONEY	The disputed and undisputed amounts are split with real figures. "Part of your bill is on hold" is not enough to act on.

STATES

WAITING ON YOU	RESOLVED	OVERDUE REPLY	CLOSED
Amber banner naming exactly what is needed, at the top.	Green, with the outcome and any credit — and the thread stays readable.	Says the promised date passed. Owning it beats a silent thread.	No reply box; offers to raise a new one referencing this.

COMPONENTS PortalFrame · Thread · Callout warn · Callout ok · Field

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-05 The three errand cards on Requests work online

UNVERIFIED

Waits on: All three read *Not online yet — ring us*. They are the commonest self-service errands in a utility portal.

Screens: 55

WHAT DONE LOOKS LIKE ON SCREEN

A customer presses one of the three and it opens the form, rather than a phone number.

CPB-11 A request says when we will reply

UNVERIFIED

Waits on: No promised reply date exists anywhere in the data. A status without a date is what makes people phone, which is the whole argument for the requests list.

Screens: 55 · 56

WHAT DONE LOOKS LIKE ON SCREEN

A request reads "Open · we reply by Aug 15", and the list's Next column carries the same date.

CPB-12 **Finished requests can be seen and counted** UNVERIFIED

Waits on: The list only ever returns open requests, so a customer cannot see what they asked for last month and the count cannot be stated.

Screens: 55

WHAT DONE LOOKS LIKE ON SCREEN

The Requests screen reads "1 open · 2 finished" and a finished request opens read-only with its outcome.

CPB-16 **Help suggests answers as somebody types** UNVERIFIED

Waits on: Searching help by what a person has written is not something the server can do; the question form shows a fixed top three.

Screens: 53

WHAT DONE LOOKS LIKE ON SCREEN

Typing "my bill is higher" offers "Why is my bill higher than last month?" before the customer finishes the sentence.

CPB-17 **A signed-out visitor at a signed-in address is offered a sign-in** UNVERIFIED

Waits on: Following the long form of a link without being signed in produces a grey failure panel reading *We could not open this page... Download error report*. True of every signed-in screen, not just one.

Screens: 53 · 54

WHAT DONE LOOKS LIKE ON SCREEN

A signed-out visitor following a link to /ask-a-question sees the sign-in screen with "Sign in to ask a question" above it, not an error report.

10 You and your settings

Four screens. Who you are, how we reach you, in what language, and everything we have ever sent.

57 Your details EXISTS BEHIND COMMITMENT CPB-23


`/:tenant/portal/my-details` `/:tenant/portal/my-details/preferences`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.


57 Your details `/:tenant/portal/my-details` `/:tenant/portal/my-details/preferences`

> **The question:** is my phone number right, is my bill going to the right place, and how do you contact me?

PHONE · 390

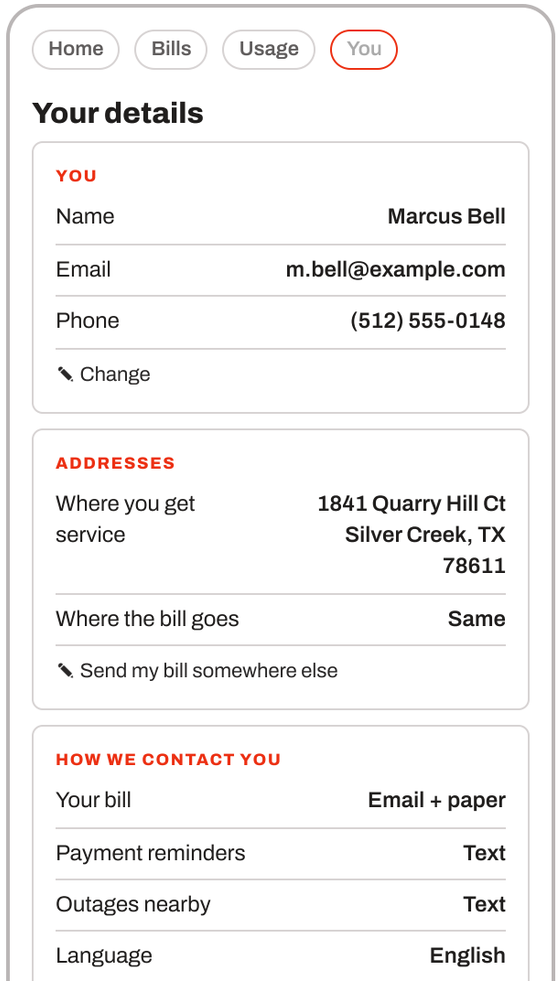

DESKTOP · 1280

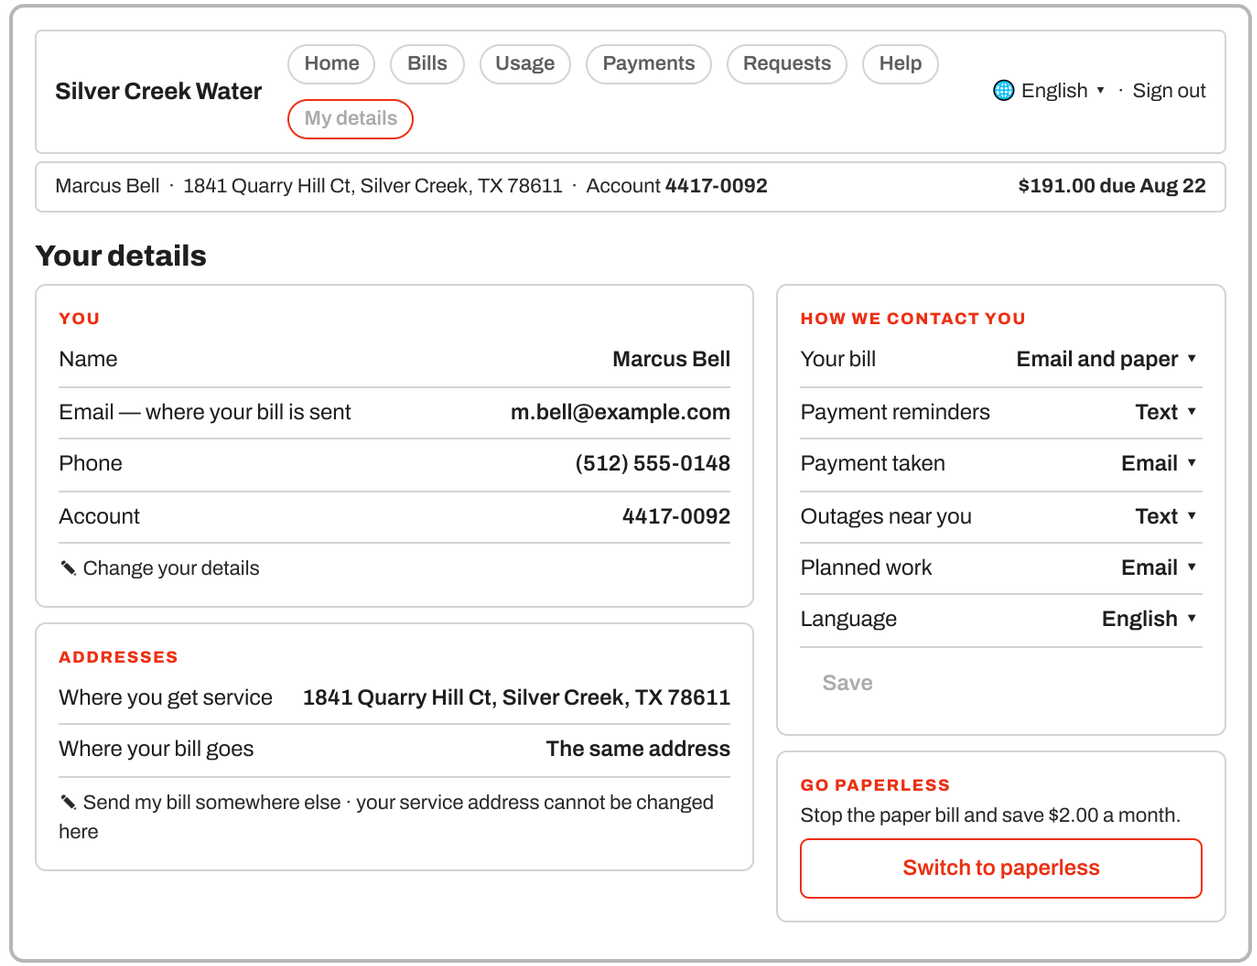

✎ Change

FOR	Keeping contact details right — the single biggest cause of a customer never receiving a shut-off notice.
COGNITIVE LOAD	Each contact row says what it is *for*, not just its name: "Email — where your bill is sent". Grouped by purpose, not by channel.
THE HONEST REFUSAL	The service address cannot be changed here, and the screen says so beside it rather than offering a field that fails. Where the bill goes is genuinely separate and genuinely editable.
THE CHANNEL-OFF CASE	If the utility has switched a channel off entirely, the row says so — "Text messages are not switched on at this utility" — instead of offering a preference that silently does nothing. Nobody should believe a reminder is coming when none can be sent.
STATES	**EMAIL UNVERIFIED** Says so and offers to resend, because bills sent there are bouncing. · **SAVED** A confirmation naming what changed, not a generic tick. · **CHANNEL UNAVAILABLE** The row is stated as unavailable with the reason, never left switchable. · **PAPERLESS ALREADY ON** The offer disappears rather than repeating something done.
COMPONENTS	PortalFrame · DetailRow · PreferenceRow · Select · Button
RULES	The account number is the customer's reference and is shown. No database id appears. The address is derived from the property record.

58 How we contact you EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/my-details/preferences`


> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

58 How we contact you `/:tenant/portal/my-details/preferences`

> **The question:** which of these actually reach me, and can I stop the ones I do not want without losing the ones I need?

PHONE · 390

DESKTOP · 1280



How we contact you

YOUR BILL

Email	On
Paper	On · $2.00 a month

One of these must stay on.

MONEY

Bill is ready	Email ▾
Payment reminder	Text ▾
Payment taken	Email ▾
Payment failed	Text + email

A failed payment always reaches you both ways.

YOUR SERVICE

Outages near you	Text ▾
Planned work	Email ▾
Meter reading visits	Off ▾

Text messages are not switched on at this utility. Anything set to text will arrive by email instead.

Save

My details

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** **$191.00 due Aug 22**

← My details

How we contact you

Grouped by what it is about, not by email or text.

YOUR BILL · ONE OF THESE MUST STAY ON

By email — to m.bell@example.com	On ▾
On paper — posted to your service address	On · $2.00 a month ▾

Turning paper off saves $24.00 a year.

MONEY

Your bill is ready	Email ▾
Reminder before it is due	Text · 3 days before ▾
We took a payment	Email ▾
A payment failed	Text and email · always
You are past due	Text and email · always

The last two cannot be switched off — a shut-off notice must reach you.

YOUR SERVICE

Outages near you	Text ▾
Planned work in your street	Email ▾
We are coming to read your meter	Off ▾

TEXT MESSAGES ARE OFF AT THIS UTILITY

Silver Creek Water has not switched text messaging on. Anything set to **Text** above will arrive by email instead — nothing is silently dropped.

LANGUAGE

Everything we send you	English ▾

Bills, notices and letters, in your language.

WHERE THESE GO

Email	m.bell@example.com
Phone	(512) 555-0148

✎ Change these on My details

Save

FOR	Control over what arrives, without letting anyone switch off the messages that must reach them.
GROUPED BY SUBJECT	By what it is about — your bill, money, your service — not by channel. Nobody thinks "which of my emails do I want"; they think "stop telling me about roadworks".

WHAT CANNOT BE SWITCHED OFF	A failed payment and a past-due notice always go both ways, and the screen says why. A customer who silences a shut-off notice has not exercised a preference; they have lost their service.
THE CHANNEL-OFF CASE	If the utility has not enabled a channel, the screen says so and states what happens instead. Offering a preference that silently does nothing is the failure this panel exists to prevent — somebody waiting for a text that can never be sent.

STATES

LAST BILL CHANNEL	EMAIL UNVERIFIED	CHANNEL DISABLED	SAVED
Turning off the second one is refused with the reason, not silently ignored.	Flagged here too — preferences pointing at a bouncing address are worthless.	The row stays visible, marked unavailable, with what happens instead.	Names what changed, not a generic tick.

COMPONENTS PortalFrame · PreferenceRow · Select · Callout warn

59 Your language · signed in EXISTS BEHIND COMMITMENT CPB-23

`/:tenant/portal/my-details/preferences`

> **No door named.** This screen carries no *How you get here* row, though the document's own rule E says every screen does. It is one of 37. See CPB-23.

59 Your language · signed in `/:tenant/portal/my-details/preferences`

> **The question:** I set the website to Spanish, but my bill still arrives in English. Which one is which, and how do I change the one that matters?

PHONE · 390

← How we contact you

Your language

EVERYTHING WE SEND YOU

English ✎ Change

Bills, letters, texts and emails. Set on your account, so it follows you to any device.

THIS WEBSITE

Español ✎ Change

What you are reading now, on this device only.

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

← How we contact you

Your language


There are two, and they can differ — which is usually not what anyone intends.

EVERYTHING WE SEND YOU — THE ONE THAT MATTERS

Your bill, letters, notices, texts and emails — English ▾

THESE TWO DO NOT MATCH

You are reading this site in **Español**,

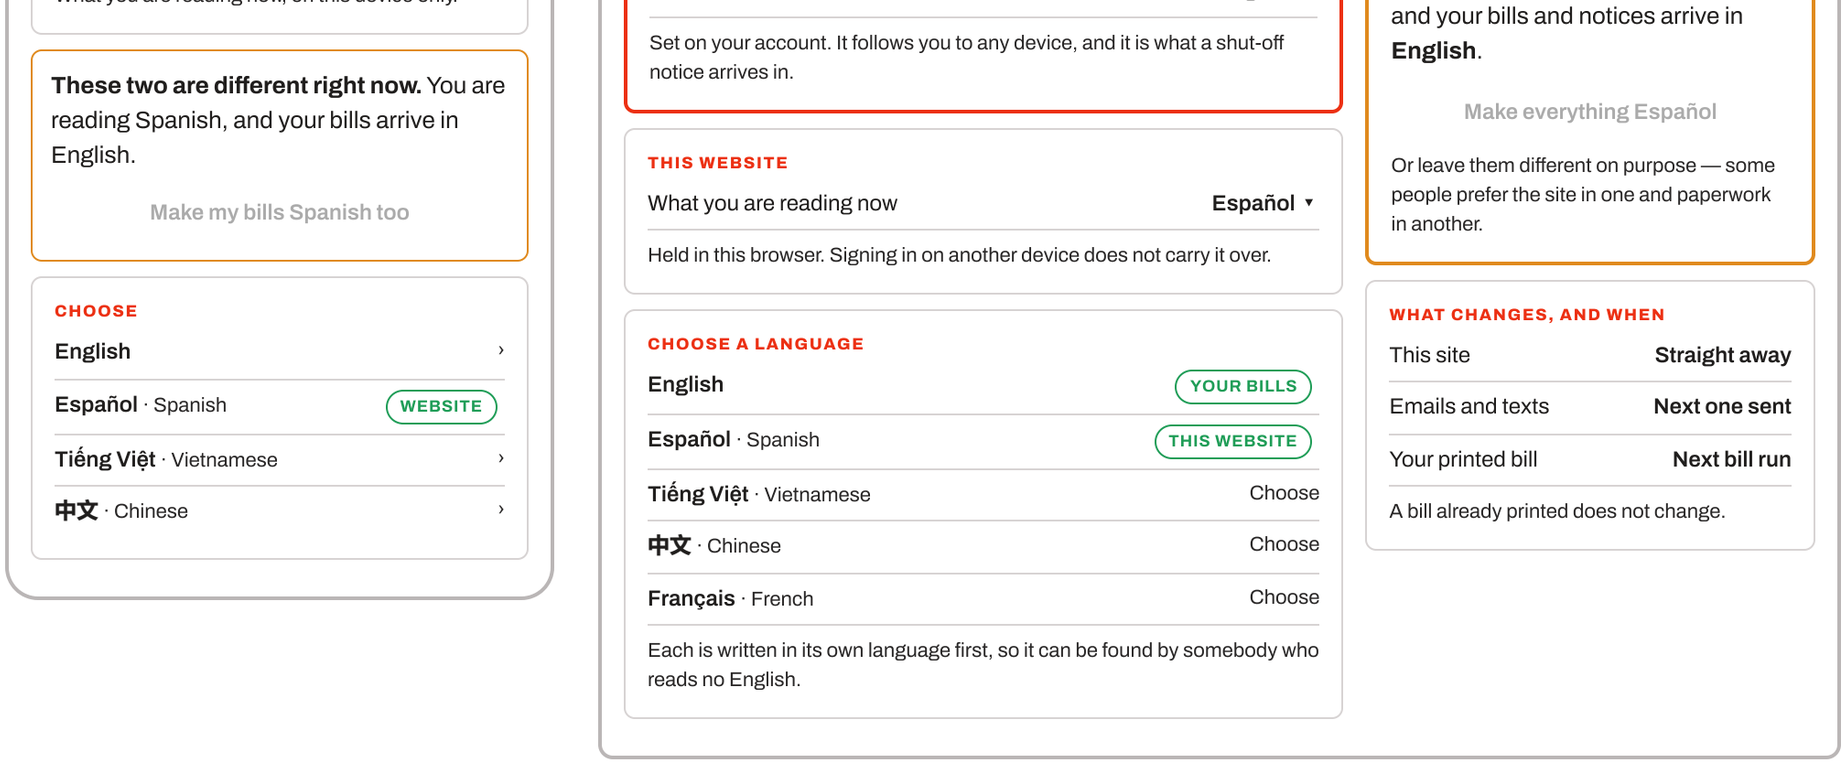

FOR	A signed-in customer, and the confusion the product creates by having two language settings that look like one.
THE WHOLE POINT	**There are two languages and they can disagree.** The one on the account decides what a bill and a shut-off notice arrive in; the one in the browser decides what this site looks like. A customer who sets the site to Spanish reasonably assumes their bill follows. This screen names both, shows when they differ, and offers one tap to align them.
WHICH ONE IS LOUDER	The account language, in the accent-bordered card, because it is the one that carries a disconnection notice. The website language is second.
COGNITIVE LOAD	Each language is written in its own language first, exactly as on the guest picker. When each change takes effect is stated, so nobody expects a bill already in the post to change.
NOT FORCED	Different on purpose is a legitimate choice — somebody may read Spanish comfortably but keep official paperwork in English for a landlord or an agency. The mismatch is flagged, never corrected automatically.
STATES	**THEY MATCH** The amber panel is absent entirely, not shown saying "these match". **ONE LANGUAGE** The whole screen is absent — nothing to choose. **NOT TRANSLATED** A language offered for bills but not for the site says which is which. **CHANGED** Confirms what changed and when each part takes effect.

COMPONENTS	PortalFrame · LanguageRow · Callout warn · Select
RULES	Catalogues are authored in their own language, never machine-translated. Languages offered are the utility's own setting.

60 Documents

NEW BUILD · COMMITMENT CPB-03 · COMMITMENT CPB-14 · COMMITMENT CPB-15 · COMMITMENT CPB-19 · COMMITMENT CPB-20

`/:tenant/portal/documents`

60 Documents `/:tenant/portal/documents`

> **The question:** I need a letter proving I live here — or my landlord wants last year's bills. Where is everything you have sent me?

PHONE · 390

← Bills

Your documents

Everything we have sent you

All kinds ▾

August bill ↓
Aug 5, 2026 · PDF

Payment receipt ↓
Jul 19, 2026 · PDF

Welcome letter ↓
Jun 2, 2026 · PDF

NEED SOMETHING ELSE?
A letter proving you have service here, for a benefits claim, a bank or a landlord.
Ask for a proof-of-service letter

DESKTOP · 1280

Silver Creek Water — Home · Bills · Usage · Payments · Requests · Help · My details — English ▾ · Sign out

Marcus Bell · 1841 Quarry Hill Ct, Silver Creek, TX 78611 · Account **4417-0092** — **$191.00 due Aug 22**

← Bills

Your documents

6 documents · kept for seven years

DOCUMENT	KIND	SENT	HOW	
August 2026 bill	Bill	Aug 5, 2026	Email + post	↓ PDF
Payment receipt · $176.20	Receipt	Jul 19, 2026	Email	↓ PDF
July 2026 bill	Bill	Jul 5, 2026	Email + post	↓ PDF
Welcome letter	Letter	Jun 2, 2026	Post	↓ PDF

ASK FOR A LETTER
A proof-of-service letter confirms you have had service at this address, for a benefits claim, a bank, a landlord or a court.
Ask for one
Usually ready the same day.

BULK
↓ Download a year of bills as one file
↓ Download a spreadsheet of everything

FOR	Every document the utility has sent, in one place — and producing the one document people phone for and that is never in a list: proof of service.
HOW YOU GET HERE	**Bills**. **Not My details**.
COGNITIVE LOAD	"How" says email, post or both, so somebody who never received a letter can see whether it was posted. The kind filter is by what a person calls it — bill, receipt, letter, notice.
STATES	**NONE YET** "Nothing has been sent to you yet." With the first bill's expected date. · **BEING PREPARED** A requested letter shows as pending with the date it will be ready. · **OLDER THAN SEVEN YEARS** Says the retention period rather than showing a gap. · **DOWNLOAD BLOCKED** A plain link, because a viewer that blocks downloads must not fail silently.
COMPONENTS	PortalFrame · DocumentRow · Select · Button

Commitments in this section

Each card names what the work waits on and what a person could do once it is done. Nothing outside a card is undertaken.

CPB-14 A customer can ask for a proof-of-service letter

UNVERIFIED

Waits on: Nothing on the server can request or produce one. The wireframe calls it the one document people phone for and that is never in a list.

Screens: 60

WHAT DONE LOOKS LIKE ON SCREEN

A customer presses Ask for a letter and it arrives in Documents within a day, named "Proof of service · 1841 Quarry Hill Ct".

CPB-15 Documents says how long we keep things, and exports

UNVERIFIED

Waits on: Neither the retention period nor a spreadsheet export exists.

Screens: 60

WHAT DONE LOOKS LIKE ON SCREEN

The Documents screen reads "Kept for seven years" and a Download a spreadsheet button produces a CSV of the same rows.

CPB-19 **Documents can reach the record of what we sent** UNVERIFIED

Waits on: *We cannot reach the record of what we have sent you, so nothing is listed* — the list depends on a queue read that can fail whole.

Screens: 60

WHAT DONE LOOKS LIKE ON SCREEN

The Documents screen lists what was sent even when the delivery queue is unavailable, and marks only the delivery column as unknown.

CPB-20 **Delivery is confirmed, not just dispatch** UNVERIFIED

Waits on: *We cannot confirm that anything arrived* — the product records that a message was sent and never that it landed.

Screens: 60

WHAT DONE LOOKS LIKE ON SCREEN

A document reads "Emailed Aug 02 · delivered Aug 02" rather than "sent" alone.

11 Every stated absence, and its one decision

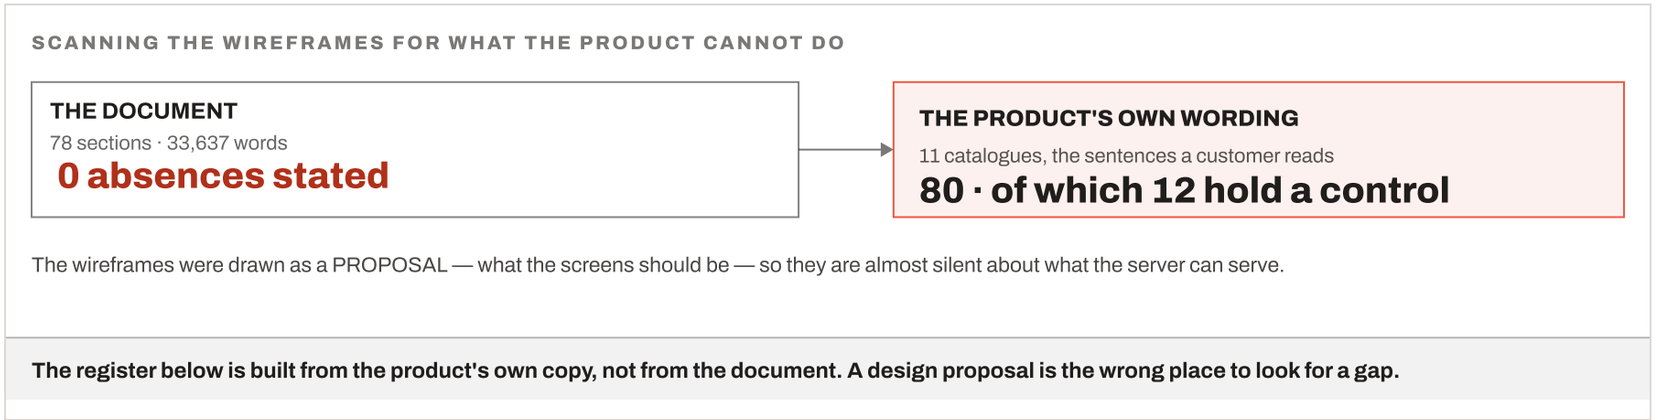


Figure 3 — **the wireframes state no absences at all.** Scanning all 78 sections for a sentence saying

Figure 2 · **the wireframes state no absences at all.** Scanning all 78 sections for a sentence saying something does not exist returned ZERO in a spec row or a note. This register is therefore built from the product's own customer-facing wording, where 80 sentences tell a person a figure or a feature is not there — 12 of them holding a control they can see and cannot use.

24 newly specified · 0 folding into a specification minted earlier · 9 out of scope. Nothing was left unresolved.

The judgement rule, and where it was close. A recorded ruling that a thing waits makes it out of scope with the ruling quoted; no ruling makes it a specification that names what it waits on. **The two languages differing** was the close one: the document draws a picker that would let a customer read the site in Spanish and take bills in English, and a ruling of 2026-09-07 makes the account's language win — so it is out of scope with the ruling, not a specification, even though the wireframe asks for it.

The repository's own live series, cited rather than minted into: portal screens run `CWP-` (62 registered, highest `CWP-3800`) and stories run `US-CWP-` (74). This document opens `CPB-` because an analysis document may propose and never allocate.

WHAT IS ABSENT	SCREENS	DECISION	REASON, AND WHO RULED IT
A customer can pay by card	35 · 36 · 37 · 6 · 8	CPB-01	No payment provider is wired. Five separate pieces of copy say so — *We cannot take card payments yet*, *Card payments are not ready yet*, *Online payment arrives later this year*, *We cannot take fees online yet*, *This account is cash only*.
Autopay can actually draft a payment	40	CPB-02	The same missing provider as CPB-01, on a different flow. *We cannot draft payments yet* holds the Turn autopay on button.
A customer can download what we sent them	60 · 43	CPB-03	*Downloads are not ready yet* holds the download on Documents and on a payment-plan agreement.
A customer can send us a meter reading	51	CPB-04	*Sending readings is not ready yet* holds the button on Readings. The screen already shows what we last read and when.
The three errand cards on Requests work online	55	CPB-05	All three read *Not online yet — ring us*. They are the commonest self-service errands in a utility portal.
Usage compares against the same month last year	50	CPB-06	*We do not have a year to compare with yet* is the honest line today. The server sends a twelve-month percentage, not a same-month figure.
Usage compares against last month	50	CPB-07	Nothing on the server works out a month-on-month change. Working it out in the browser would put a figure in front of a customer that no staff screen and no bill can reproduce.

A usage month says what it cost	50 · 32	CPB-08	Nothing joins a usage month to the bill line it produced.
Readings say when the next read is due	51	CPB-09	The readings data carries no next-read date. The usage data does, and the screen shows it when it exists.
Equipment says whose it is and what it costs	52	CPB-10	The equipment data has no owner and no monthly charge — two of the three facts that screen exists to answer.
A request says when we will reply	55 · 56	CPB-11	No promised reply date exists anywhere in the data. A status without a date is what makes people phone, which is the whole argument for the requests list.
Finished requests can be seen and counted	55	CPB-12	The list only ever returns open requests, so a customer cannot see what they asked for last month and the count cannot be stated.
A disputed amount is split out on the request	34 · 56	CPB-13	No money at all travels with a request, so the split the wireframe draws cannot be shown.
A customer can ask for a proof-of-service letter	60	CPB-14	Nothing on the server can request or produce one. The wireframe calls it the one document people phone for and that is never in a list.
Documents says how long we keep things, and exports	60	CPB-15	Neither the retention period nor a spreadsheet export exists.
Help suggests answers as somebody types	53	CPB-16	Searching help by what a person has written is not something the server can do; the question form shows a fixed top three.
A signed-out visitor at a signed-in address is offered a sign-in	53 · 54	CPB-17	Following the long form of a link without being signed in produces a grey failure panel reading *We could not open this page… Download error report*. True of every signed-in screen, not just one.
Level pay can work out a monthly amount for every account	47 · 48	CPB-18	*We cannot work out a monthly amount for this account at the moment* is a live refusal on the budget-billing screen.
Documents can reach the record of what we sent	60	CPB-19	*We cannot reach the record of what we have sent you, so nothing is listed* — the list depends on a queue read that can fail whole.
Delivery is confirmed, not just dispatch	60	CPB-20	*We cannot confirm that anything arrived* — the product records that a message was sent and never that it landed.
A plan says who set it up	43 · 44	CPB-21	*We cannot show you who set this up* on a payment-plan offer.
A guest can see their own	7 · 37	CPB-22	*We cannot show that receipt here* — a guest payment has no account to look it up in, so the receipt exists

receipt again			only in the moment.
Every screen carries its How-you-get-here row	`all`	CPB-23	⚠ THE DOCUMENT CLAIMS THIS IS ALREADY DONE AND IT IS NOT. Rule E says *every screen's spec now carries a How you get here row*; **23 of the 60 do**. The 37 without one are exactly the screens whose doors were never audited.
The two dead hold sentences are retired	`1 · 3`	CPB-24	`portal.held.card` and `portal.held.signIn` sit in all eleven catalogues and are rendered by **no source file at all**. The holds they described were released by the doors wave; the wording was never taken out.
~~Attaching a file to a question~~	Screen 53, Ask a question	**OUT OF SCOPE**	Held by a signed deferral. The box shows its reason and there is no file input, which is the correct shape for a hold: the control is absent rather than drawn dead.
~~The website's language and the bill's language differing~~	Screen 59, Your language	**OUT OF SCOPE**	PO ruling 2026-09-07: the account's language wins and the site re-applies it on every screen. A website language picker for a signed-in customer would undo itself under their hand. Both languages are named honestly instead. Letting them differ is a ruling nobody has made.
~~The portal replacing paper~~	Standards block C	**OUT OF SCOPE**	Deliberate and stated on the page: *the portal is a second channel, not a replacement. Every bill is printed regardless.* This is a product decision, not a gap.
~~An outage panel that says there are no outages~~	Screen 01	**OUT OF SCOPE**	Deliberate, and the design argument is on the page: *shown unprompted… absent, not shown saying "no outages" — that trains people to ignore it.*
~~Flags on the language picker~~	Screen 02	**OUT OF SCOPE**	Deliberate: *a flag is a country, not a language, and picking the wrong one offends.*
~~Machine translation of untranslated help~~	Screen 02, screen 12	**OUT OF SCOPE**	Deliberate: the page stays English and says so in the reader's own language, *never a machine translation, which reads as mechanical to a native speaker and costs the whole page its credibility.* B14 rule 35 states the same thing for catalogues.
~~A third heading bar~~	Standards block D	**OUT OF SCOPE**	Deliberate, and argued: *a third would mean a customer could not tell at a glance whether they are signed in.*
~~An icon without its word~~	Standards block A	**OUT OF SCOPE**	Deliberate, and it is the one staff rule the document overturns on purpose: on a phone there is no hover, so a tooltip is invisible — and one of those glyphs sends a disconnection notice.
~~A database id shown to a customer~~	Standards block B	**OUT OF SCOPE**	B14 rule 31, inherited: the account number is the customer's own reference from their bill; a database id is never shown.

12 The specification register

One row per specification, no exceptions. Every one appears both here and as a

One row per specification, no exceptions. Every one appears both here and as a card in the section that owns it.


This document had no specification index before; the table fills a gap rather than replacing one, and its own index — every screen in the order a customer meets them — stays exactly what it was. Every status reads UNVERIFIED and none is a guess: engineering fills this column in from the code, one row at a time, and **several are expected to come back already done**.

SPEC	TITLE, AND WHAT IT WAITS ON	SCREENS	WHAT DONE LOOKS LIKE ON SCREEN	STATUS
CPB-01	**A customer can pay by card** No payment provider is wired. Five separate pieces of copy say so — *We cannot take card payments yet*, *Card payments are not ready yet*, *Online payment arrives later this year*, *We cannot take fees online yet*, *This account is cash only*.	35 · 36 · 37 · 6 · 8	A customer with $191.00 due presses Pay now, enters a card, and the receipt reads "Paid $191.00 · Aug 14 · reference PMT-2608-0311" with the balance underneath reading $0.00.	UNVERIFIED
CPB-02	**Autopay can actually draft a payment** The same missing provider as CPB-01, on a different flow. *We cannot draft payments yet* holds the Turn autopay on button.	40	A customer turns autopay on, and the next bill of $191.00 is drafted on Aug 22 without them opening the portal — the Autopay screen reading "Next: $191.00 on Aug 22".	UNVERIFIED
CPB-03	**A customer can download what we sent them** *Downloads are not ready yet* holds the download on Documents and on a payment-plan agreement.	60 · 43	A customer presses Download a year and gets a PDF of the twelve bills listed above it, named for the account: 4417-0092-2026.pdf.	UNVERIFIED
CPB-04	**A customer can send us a meter reading** *Sending readings is not ready yet* holds the button on Readings. The screen already shows what we last read and when.	51	A customer types 4,182 against the meter reading 3,946 on Jul 28, presses Send, and the reading appears in the list marked "Sent by you · pending check".	UNVERIFIED
CPB-05	**The three errand cards on Requests work online** All three read *Not online yet — ring us*. They are the commonest self-service errands in a utility portal.	55	A customer presses one of the three and it opens the form, rather than a phone number.	UNVERIFIED
CPB-06	**Usage compares against the same month last year** *We do not have a year to compare with yet* is the honest line today. The server sends a twelve-month percentage, not a same-month figure.	50	The Usage screen reads "800 kWh · 86 kWh more than August 2025" beside the chart, rather than the sentence saying there is nothing to compare with.	UNVERIFIED
CPB-07	**Usage compares against last month** Nothing on the server works out a month-on-month change. Working it out in the browser would put a figure in front of a customer that no staff screen and no bill can reproduce.	50	The Usage screen reads "5% less than July" under the big number, and a clerk looking at the same account sees the same 5%.	UNVERIFIED
CPB-08	**A usage month says what it cost** Nothing joins a usage month to the bill line it produced	50 · 32	The Usage screen reads "800 kWh at $0.1150 = $92.00" for	UNVERIFIED

[08]	Nothing joins a usage month to the bill line it produced.		August, and the figure is the bill's own line, not a re-calculation.
CPB-09	**Readings say when the next read is due** The readings data carries no next-read date. The usage data does, and the screen shows it when it exists.	51	The Readings screen reads "Next read: Sep 30 · in 22 days" above the list.	UNVERIFIED
CPB-10	**Equipment says whose it is and what it costs** The equipment data has no owner and no monthly charge — two of the three facts that screen exists to answer.	52	The Equipment screen reads "Water meter · W-5000 · Ours · $12.00 a month" where it currently reads the reference and the install date alone.	UNVERIFIED
CPB-11	**A request says when we will reply** No promised reply date exists anywhere in the data. A status without a date is what makes people phone, which is the whole argument for the requests list.	55 · 56	A request reads "Open · we reply by Aug 15", and the list's Next column carries the same date.	UNVERIFIED
CPB-12	**Finished requests can be seen and counted** The list only ever returns open requests, so a customer cannot see what they asked for last month and the count cannot be stated.	55	The Requests screen reads "1 open · 2 finished" and a finished request opens read-only with its outcome.	UNVERIFIED
CPB-13	**A disputed amount is split out on the request** No money at all travels with a request, so the split the wireframe draws cannot be shown.	34 · 56	A dispute reads "the disputed $47.50 is not due; the remaining $143.50 is still due on Aug 22", and Past due shows $143.50.	UNVERIFIED
CPB-14	**A customer can ask for a proof-of-service letter** Nothing on the server can request or produce one. The wireframe calls it the one document people phone for and that is never in a list.	60	A customer presses Ask for a letter and it arrives in Documents within a day, named "Proof of service · 1841 Quarry Hill Ct".	UNVERIFIED
CPB-15	**Documents says how long we keep things, and exports** Neither the retention period nor a spreadsheet export exists.	60	The Documents screen reads "Kept for seven years" and a Download a spreadsheet button produces a CSV of the same rows.	UNVERIFIED
CPB-16	**Help suggests answers as somebody types** Searching help by what a person has written is not something the server can do; the question form shows a fixed top three.	53	Typing "my bill is higher" offers "Why is my bill higher than last month?" before the customer finishes the sentence.	UNVERIFIED
CPB-17	**A signed-out visitor at a signed-in address is offered a sign-in** Following the long form of a link without being signed in produces a grey failure panel reading *We could not open this page… Download error report*. True of every signed-in screen, not just one.	53 · 54	A signed-out visitor following a link to /ask-a-question sees the sign-in screen with "Sign in to ask a question" above it, not an error report.	UNVERIFIED
CPB-18	**Level pay can work out a monthly amount for every account** *We cannot work out a monthly amount for this account at the	47 · 48	The Budget billing screen offers "$96.00 a month" for an account with less than a year of history, or says precisely	UNVERIFIED

	moment* is a live refusal on the budget-billing screen.		which month is missing.	
CPB-19	**Documents can reach the record of what we sent** *We cannot reach the record of what we have sent you, so nothing is listed* — the list depends on a queue read that can fail whole.	60	The Documents screen lists what was sent even when the delivery queue is unavailable, and marks only the delivery column as unknown.	UNVERIFIED
CPB-20	**Delivery is confirmed, not just dispatch** *We cannot confirm that anything arrived* — the product records that a message was sent and never that it landed.	60	A document reads "Emailed Aug 02 · delivered Aug 02" rather than "sent" alone.	UNVERIFIED
CPB-21	**A plan says who set it up** *We cannot show you who set this up* on a payment-plan offer.	43 · 44	The plan reads "Agreed with Dana Whitfield on Aug 14" rather than an unnamed agreement.	UNVERIFIED
CPB-22	**A guest can see their own receipt again** *We cannot show that receipt here* — a guest payment has no account to look it up in, so the receipt exists only in the moment.	7 · 37	A guest who paid $191.00 on Aug 14 re-opens their emailed link and sees the same receipt, reference PMT-2608-0311.	UNVERIFIED
CPB-23	**Every screen carries its How-you-get-here row** ⚠ THE DOCUMENT CLAIMS THIS IS ALREADY DONE AND IT IS NOT. Rule E says *every screen's spec now carries a How you get here row*; **23 of the 60 do**. The 37 without one are exactly the screens whose doors were never audited.	all	Every one of the 60 screens carries the row, and each names an inbound link that exists in the source — the same check the door guard runs.	UNVERIFIED
CPB-24	**The two dead hold sentences are retired** `portal.held.card` and `portal.held.signIn` sit in all eleven catalogues and are rendered by **no source file at all**. The holds they described were released by the doors wave; the wording was never taken out.	1 · 3	The two keys are gone from all eleven catalogues and no screen changes, because nothing rendered them.	UNVERIFIED

13 What this pass changed, line by line

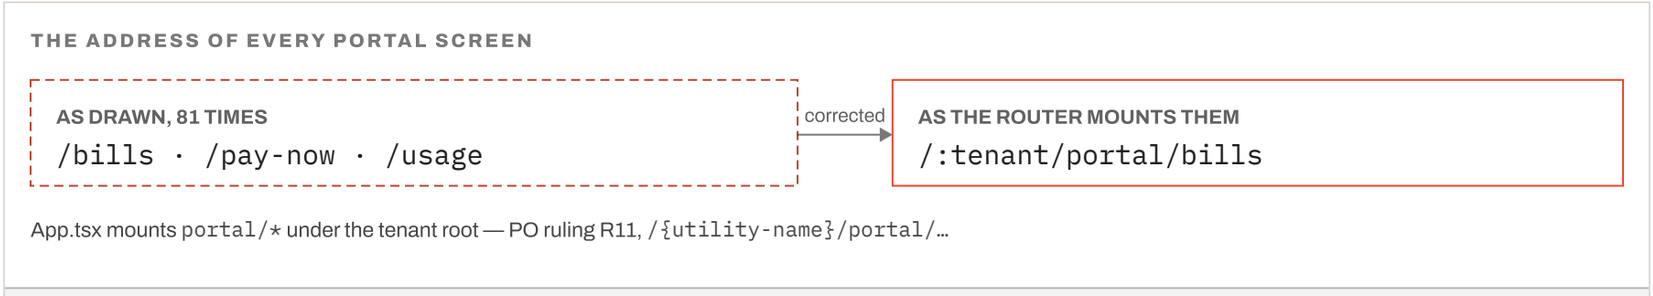

Not one of the 81 carried the tenant segment. A route inferred from a screen name is a guess; the router is the fact.

Figure 3 · **not one drawn route carried the tenant segment.** A route inferred from a screen name is a guess. The router is the fact, and it says every portal screen lives under the utility's own path.

- **All 81 route labels were missing the tenant segment.** The document draws `/bills`, `/pay-now`, `/usage`; `App.tsx` mounts `portal/*` under the tenant root, so the real address is `/:tenant/portal/bills`. Corrected on every screen.
- **Two screens are still described as unreachable and both now have doors.** Struck, marked ANSWERED and the answer printed under each, rather than deleted — a deleted row invites the same finding again.
- **The document's own rule E says every screen names its doors. Twenty-three of sixty do.** The 37 without one now carry a red callout naming the gap, and it is CPB-23.
- **The five standards blocks render A · B · E · D · C.** Reported and deliberately NOT re-sorted: the document refers to them by letter, so moving them changes what every existing reference points at.
- **The document had no figures.** Three were drawn and numbered 1–3 in document order.
- **Counts checked against what they count.** The masthead's *sixty screens*, *fifty-eight drawn in full; two are second addresses* and the sixty index rows all reconcile — screens 26 and 54 are the two second addresses.
- **Nothing was deleted.** Every screen, every drawing and every spec table is here as it stood. What is added is the layering.

---

14 Appendix — the whole document, compressed

Built from the section-by-section walk of all 78 sections, not from memory. Six tables, then two statements that matter as much as the tables.

A · Every rule this document states

The **home** column is the point. **12 of 24 are stated only here** — including *a route existing is not a door*, which is the finding this whole document was re-audited for and which the repository states nowhere.

ID	THE RULE AS STATED	WHERE	HOME	WHAT IT EXTENDS OR RESTRICTS
R-01	Every icon carries its word — never an icon alone.	Standards A	EXTENDS	Overturns the staff rule (row actions are icons with tooltips) because a phone has no hover, and one glyph sends a disconnection notice.
R-02	One glyph, one meaning: ↓ download · ↗ opens elsewhere · ✎ change · 👁 view · ⚠ needs attention.	Standards A	INHERITED	Borrowed from the staff vocabulary.
R-03	Colour is never the only signal.	Standards A	INHERITED	B14.
R-04	No emoji as a section marker.	Standards A	NO HOME	Stated only here.
R-05	Amount due and due date appear in the same place on every screen.	Standards B	NO HOME	Stated only here.
R-06	Never ask a customer to compute — show the difference, not two numbers.	Standards B	NO HOME	Stated only here.
R-07	One filled button per screen.	Standards B	NO HOME	Stated only here.
R-08	Plain words over correct ones.	Standards B	EXTENDS	B14 rule 32's description budget, applied to vocabulary.
R-09	Never make a customer remember an account number to do something.	Standards B	NO HOME	Stated only here.
R-10	Bad news never appears without the way out beside it.	Standards B	NO HOME	Stated only here, and it is the strongest rule on the page.
R-11	Name, service address and account number ride in the frame on every signed-in screen.	Standards B, D	INHERITED	PO ruling 2026-09-08, the bars wave.
R-12	A database id is never shown; the account number is the customer's own reference.	Standards B	INHERITED	B14 rule 31.
R-13	A route existing is not a door.	Standards E	NO HOME	Stated only here, and it is the finding that produced this whole block. Nothing in the repo states it.
R-14	Exactly two heading bars — guest and signed-in, never a third.	Standards D	INHERITED	PO ruling 2026-09-08.

R-15	Position, order and wording never move; a back-link sits under the bar, never inside it.	Standards D	NO HOME	Stated only here.
R-16	Money: dollars, comma thousands, two decimals — never four on screen.	Standards C	INHERITED	CLAUDE.md hard rule 2 — stored to four, displayed at two.
R-17	Usage in the customer's own unit — never raw, never converted.	Standards C	INHERITED	CLAUDE.md hard rule 3.
R-18	Assistance is a first-class path, not a page behind a sign-in.	Standards C	NO HOME	Stated only here.
R-19	The portal is a second channel; every bill is printed regardless.	Standards C	NO HOME	Stated only here.
R-20	Every language is written in its own language, first.	Screen 02	INHERITED	B14 rule 35.
R-21	An untranslated page stays English and says so — never a machine translation.	Screen 02	EXTENDS	B14 rule 35, applied to help content.
R-22	Three states — loading, empty, failed — can never render as the same picture.	Masthead	NO HOME	Stated only here.
R-23	No sentence states a fact it does not derive.	Masthead	NO HOME	Stated only here, with its own evidence: twenty-three of thirty-eight were wrong.
R-24	Every screen restacks; nothing scrolls sideways.	Masthead	INHERITED	The portal's own phone-width rule, proved by the waves.

B · Every worked figure, numbers intact

59 rows, none rounded or paraphrased — they are test cases. **None of these is a signed figure.** Two frozen rules govern them: B4's money rounding (four decimals stored, two displayed) and B4.3's proration. The drawings are illustrations, and the document says so of itself — *twenty-three of thirty-eight sentences were stating facts they did not derive*.

ID	SCREEN	FIGURES	WHAT IT SAYS TODAY	STATE
B-01	04	$191.00	Create my sign-in Where the account number is SILVER CREEK WATER Account 4417-0092 Amount due $191.00 Top right of your paper bill, above the amount due.	UNCHECKED
B-02	06	$191.00	Bill BL-2608-000042 For Jul 1 – Jul 31, 2026 Account 4417-0092 Name Marcus Bell Service address 1841 Quarry Hill Ct Silver Creek, TX 78611 Amount due $191.00 Due Aug 22, 2026 Pay $191.00 A receipt is emailed to	UNCHECKED

B-03	07	$191.00	Phone · 390 ✓ Payment made $191.00 Aug 13, 2026 · Visa ····8102 Write this down PMT-2608-0311 Your reference.	UNCHECKED
B-04	11	4,000 gallons	Common questions Why is my bill higher this month? › How do I read my meter? › What if I cannot pay? › How do I start or stop service? › What is budget billing? › 💡 Worth knowing · A running toilet can use 4,00	UNCHECKED
B-05	15	$18.00	Optional — Apt 2B Check this address 📍 Use my location We serve this address 💧 Water Required 🚰 Sewer Required with water 🗑 Trash Optional · $18.00 a month Electric at this address is supplied by Pedernales Ele	UNCHECKED
B-06	16	$18.00 · $45.00	Home ▾ Which services? ☑ Water Required ☑ Sewer Required with water ☑ Trash · weekly $18.00 a month What it costs to start Connection fee $45.00 Deposit Decided at step 3 Charged on your first bill, not today.	UNCHECKED
B-07	20	$45.00	Moving out Stop all services Away for the winter Pause for a season — cheaper than stopping and restarting Do not want the trash service Stop trash only Stopping and restarting later costs $45.00 to reconnect.	UNCHECKED
B-08	20	$25.00	Pausing costs $25.00 and keeps your account number.	UNCHECKED
B-09	20	$25.00 · $45.00	Pausing costs $25.00 and keeps the account; stopping and restarting costs $45.00 to reconnect.	UNCHECKED
B-10	21	$25.00	Only if the property will be empty If you are coming back A seasonal pause keeps your account and costs $25.00.	UNCHECKED
B-11	21	$45.00	Stopping and restarting later costs $45.00 to reconnect. ↩ Go back and pause instead For The date, and the one misunderstanding that generates a call on moving day.	UNCHECKED
B-12	22	$150.00	Step 3 of 4 ✓ 1 ✓ 2 3 Final bill 4 Check ○ This address 1841 Quarry Hill Ct ◉ A new address 220 Lakeview Dr Burnet 78611 Email — we will send it here too m.bell@example.com You have $150.00 on deposit.	UNCHECKED
B-13	22	$150.00	The deposit is shown, not mentioned $150.00 , what is deducted, and the 30-day rule stated as a rule rather than a promise.	UNCHECKED
B-14	22	$0.00	States No deposit held The panel is absent, not shown as $0.00 — nothing was ever taken.	UNCHECKED
B-15	23	$43.80	Showing $43.80 expected back with "the final read decides it" answers the question honestly; showing nothing sends them to the phone.	UNCHECKED
B-16	24	$28.53	The proration is itemised — "stopped Sep 30, 20 of 30 days, −$28.53" — since a part-month charge is the commonest final-bill dispute.	UNCHECKED
B-17	24	$0.00	No deposit The deposit row is absent, not shown as $0.00 — nothing was ever held.	UNCHECKED

B-18	25	$191.00	Primary action Pay $191.00 now — the button carries the amount, so the decision is made before the tap.	UNCHECKED
B-19	25	$191.00	The month chooser The bill panel carries a chooser for the last six months , showing the month and its total — "August 2026 · $191.00".	UNCHECKED
B-20	28	$2.00 · $171.40	Cognitive load Settings are shown with their consequence, not just their state: "Paperless — Off, a paper bill costs $2.00 a month", "Budget billing — Off, you would pay $171.40 a month".	UNCHECKED
B-21	31	$36.00	A line reading only "$36.00" is the shape that generates a call.	UNCHECKED
B-22	31	$4.24	Money Two decimals on totals, four on unit prices — a rate genuinely is $4.2400 per thousand gallons, and rounding it to $4.24 makes the line stop adding up.	UNCHECKED
B-23	32	$142.10 · $171.40 · $228.75	Your last 12 bills Lowest $142.10 Feb Average $171.40 Highest $228.75 Jul 2025 For Answering the bill-shock call before it is made, by attributing the whole difference to named causes that sum exactly.	UNCHECKED
B-24	32	$9.20	States Cheaper Same layout, "$9.20 less than July", in green.	UNCHECKED
B-25	32	$7.40	Prices did change The rate change is its own line and says so: "Water prices rose on Oct 1 · +$7.40".	UNCHECKED
B-26	32	60 kWh	Words "You used 60 kWh more", not "Consumption variance +60". "One fewer day in the period", not "Proration adjustment".	UNCHECKED
B-27	34	$191.00	Phone · 390 ← August 2026 Something looks wrong About your August bill, $191.00 What looks wrong?	UNCHECKED
B-28	35	$191.00	Primary action One button, and it names the figure: Pay $191.00 .	UNCHECKED
B-29	37	$191.00 · $0.00	Phone · 390 ✓ Payment made $191.00 Aug 13, 2026 · from bank account ····4417 Where you stand Balance now $0.00 Next bill around Sep 5 Nothing is past due.	UNCHECKED
B-30	37	$56.30	Did not clear it Amber, not green: "$56.30 is still past due — the notice stands until Aug 20." Pending A bank transfer that takes days says so, with the date it will land.	UNCHECKED
B-31	39	$2.95	Fees Bank account No fee Card $2.95 The card fee is set by the card networks and passed on, not kept by us.	UNCHECKED
B-32	40	$191.00	What happens next Amount $191.00 On Aug 22, 2026 From Bank ····4417 No fee on a bank account.	UNCHECKED

B-33	40	$191.00	Save Next payment $191.00 On Aug 22, 2026, from bank account ····4417.	UNCHECKED
B-34	41	$247.30	Phone · 390 ← Bills Past due $247.30 Since Jul 22, 2026 · 22 days Your service is scheduled to be shut off on Aug 27 unless this is paid or you arrange something.	UNCHECKED
B-35	42	$247.30	42 Ask for a payment plan /:tenant/portal/ask-for-a-plan /:tenant/portal/plan-offer The question: I cannot pay $247.30 this month — can I pay it over time, and will you still cut me off?	UNCHECKED
B-36	42	$41.22	Cognitive load Each option shows the monthly figure and the finish date — no division, no calendar arithmetic. "$41.22 a month, paid off by Feb 2027" is one decision, not two.	UNCHECKED
B-37	43	$247.30	There may be help as well A plan and energy assistance can run together — assistance may cover part of the $247.30 outright. ↗ See help paying For Turning a request into an agreement, with both sides' obligatio	UNCHECKED
B-38	44	$82.44 · $82.42 · $164.86	Phone · 390 ← Payments Your payment plan Next payment $82.44 Due Oct 1, 2026 · 2 of 3 Pay $82.44 now Where you are 1 · Sep 1 $82.44 Paid 2 · Oct 1 $82.44 Due next 3 · Nov 1 $82.42 Left to pay $164.86 You are pr	UNCHECKED
B-39	45	15%	Typical award $300 – $600 Household income limit $3,660 a month for 4 Applications open Oct 1 – Mar 31 Check if you qualify Senior discount · 15% off every bill You are 65 or over.	UNCHECKED
B-40	47	$171.40	Phone · 390 ← Help paying Budget billing The same amount every month, all year You would pay $171.40 every month, instead of $142 to $229 Your last 12 bills The flat line is your budget amount.	UNCHECKED
B-41	48	$171.40	48 Where your budget billing stands /:tenant/portal/level-pay/standing The question: I pay $171.40 every month — am I ahead or behind on what I have actually used, and what happens in August?	UNCHECKED
B-42	48	$11.88	On today's figures that would add about $11.88 a month.	UNCHECKED
B-43	48	$183.28	Your new monthly amount would be around $183.28 .	UNCHECKED
B-44	48	$88.20	This summer has been hotter, so June and July used more than the same months last year — $88.20 more between them.	UNCHECKED
B-45	48	$142.60	Behind by $142.60 Nothing is owed today.	UNCHECKED
B-46	48	$11.88 · $183.28 · $142.60	That would add about $11.88 a month New monthly amount around $183.28 Or clear it now Paying the $142.60 before August keeps next year's amount closer to today's.	UNCHECKED
B-47	48	$142.60	Pay $142.60 Leaving budget billing settles the difference straight away. ✎ Stop budget billing For The single biggest source of budget-billing complaints is the settle-up arriving unexplained	UNCHECKED

B-48	48	$11.88 · $183.28 · $142.60	The consequence is computed — "$11.88 a month, new amount around $183.28" — rather than leaving somebody to divide $142.60 by twelve.	UNCHECKED
B-49	48	$88.20	Why you are behind Attribution, not just arithmetic. "June and July used $88.20 more than the same months last year" is actionable; "you are behind" is not.	UNCHECKED
B-50	49	$84.20	If you leave it here, your next bill is $84.20 smaller and we tell you so on it.	UNCHECKED
B-51	50	15 kgal	Showing "Average water month 15 kgal" while Electric is selected is the defect that reached a live screen this week; the fix is that no summary is rendered outside the block that owns its data.	UNCHECKED
B-52	50	5% · 86 kWh	Cognitive load Comparisons are computed: "5% less than July", "+86 kWh against last August".	UNCHECKED
B-53	51	800 kWh · 842 kWh · 790 kWh	Phone · 390 ← Usage Meter readings ⚡ Electric · meter 8841-C ▾ Jul 31, 2026 Read by us 41,208 800 kWh used Jun 30, 2026 Read by us 40,408 842 kWh used May 31, 2026 ⚠ Estimated — meter not reachable 39,566 790 k	UNCHECKED
B-54	53	15%	Attach something, if it helps 📎 Add a file — a photo, a letter, a document Send my question This may already be answered 👁 Help paying your bill — senior discount, 15% off every bill 👁 What if I cannot pay my b	UNCHECKED
B-55	56	$47.50	Aug 13 · You The water reading looks about double what we normally use… The disputed $47.50 is not due while this is open.	UNCHECKED
B-56	56	$47.50	While this is open The disputed $47.50 is not due and carries no late fee.	UNCHECKED
B-57	56	$143.50	The remaining $143.50 is still due on Aug 22.	UNCHECKED
B-58	58	$2.00	Phone · 390 ← My details How we contact you Your bill Email On Paper On · $2.00 a month One of these must stay on.	UNCHECKED
B-59	58	$2.00 · $24.00	Your bill · one of these must stay on By email — to m.bell@example.com On ▾ On paper — posted to your service address On · $2.00 a month ▾ Turning paper off saves $24.00 a year.	UNCHECKED

C · Every screen, with its exact contents

Extracted from the document's own markup. The last column is the finding: **NOT NAMED** appears 37 times.

#	ROUTE	STATES	PANELS	FIELDS	ACTIONS	PILLS	HOW YOU GET HERE

01	/:tenant/portal	Nothing wrong · Portal off · Already signed in · Branding unset	Pay your bill · Already have a sign-in? · Or do this without signing in · Sign in · Struggling to pay?	—	Pay a bill → · Sign in · Find this bill	—	It is the door. Everything a signed-out visitor reaches starts here or from the guest bar.
02	/:tenant/portal	One language · Partly translated · Chosen · Storage blocked	Language · Idioma · Ngôn ngữ · Language · Idioma · Ngôn ngữ · 语言 · Langue · What it changes · If we have not translated something	—	—	Current · Now	NOT NAMED
03	/:tenant/portal/sign-in	Loading · Wrong details · Locked out · Portal off	No account?	Email · Password	Sign in · Pay a bill →	—	The landing page (its own sign-in form is embedded there) and the Sign in word in the guest top bar.
04	/:tenant/portal/enrol	No match · Already enrolled · Email in use · Confirm pending	Where the account number is · Not ready to sign up?	Account number · ZIP code of the service address · Your email · Choose a password	Create my sign-in · Pay without signing in →	—	The landing page — one of the three doors it carries beneath the sign-in form — and the guest payment receipt , offered after somebody has paid withou
05	/:tenant/portal/forgot-password	Sent · Link expired · No email on file · Failed to send	—	Email	Send the link	—	NOT NAMED
06	/:tenant/portal/pay-now	No match · Already paid · Newer bill exists · Past due · Closed account	Is this the right bill? · What you can see here · Worth 60 seconds	Bill number · ZIP code of the service address · Pay from	Find this bill · Create a sign-in instead	—	NOT NAMED

07	/:tenant/portal/pay-now	Cleared a notice · Did not clear it · Pending · Email failed	Write this down · Where you stand · Next time, in 60 seconds · Keep this reference	—	↗ Email it to me · Create a sign-in · ↓ Download receipt	Clear	The end of the quick-pay flow. It is not linked from anywhere else, which is right — it is a receipt for one payment, not a page to revisit.
08	/:tenant/portal/fees	A change is coming · Historic · Not published · Different by size	💧 Water · what you use · 🚰 Sewer · One-off fees · 💧 Water · 🔥 Fire line · sprinkler supply · One-off and monthly fees	—	—	—	NOT NAMED
09	/:tenant/portal/report	Sent · Already known · Outside our area · Photo failed	Gas smell, or water flooding a road? · Already known about · What happens after you report	What is happening? · Where · A photo helps · Your phone, if we need to call · How bad? · Anything else	Report it	—	NOT NAMED
10	/:tenant/portal/track	Not found · Several found · Fixed · Overdue · Not ours	What has happened · Where it is up to · Others reported this too	Reference · Or a phone number you gave us	Look it up · Send	Crew on the way	NOT NAMED
11	/:tenant/portal/help	Closed now · No articles · Tip out of season · No results · One office	Talk to someone · Common questions · Come and see us	Search	—	—	NOT NAMED
12	/:tenant/portal/help/:slug	No such article · Not signed in · Marked unhelpful · Out	See it for your own bill · Did this help? · Related	—	Why my August bill costs this	—	NOT NAMED

		of date	Related				
13	/:tenant/portal/visit	One location · No location shared · Search finds nothing · Two or three places · All closed · None configured	Looking to pay cash? · Do you need to come in at all?	Find a place · What do you need to do?	Show 11 more · Pay online instead	Open now · Opens Tue · 24 hours	NOT NAMED
14	/:tenant/portal/visit/:slug	Closed now · Closed today only · Temporarily closed · No map	Where · Opening hours · What you can do here	—	—	—	Nothing. Nothing in the portal links to an individual service centre — /visit/:slug has no inbound link of any kind, constructed or literal. Where to
15	/:tenant/portal/start-service	Not our area · Address not recognised · Already has service · Unit needed	Where do you need service? · Already a customer?	Where do you need service? · Street address · Town · ZIP code · Is there a unit or apartment number?	Check this address · Continue · 📍 Use my location	—	NOT NAMED
16	/:tenant/portal/start-service	Date too soon · Business chosen · No optional services · No estimate available	Which services? · What it costs to start · On the day · A typical monthly bill here	Start from · Is it a home or a business? · Home or business? · Which services?	Continue	—	NOT NAMED
17	/:tenant/portal/start-service	File too large · Wrong format · Deposit required · Signed in	Why we ask for each of these · Your documents are private	Your name · Email · Phone · Date of birth · Proof of identity · First name · Last name · Email	Send it later instead · Continue · Send my ID later	—	NOT NAMED

				— where your bill will be			
18	/:tenant/portal/start-service	Deposit required · ID not attached · Address taken meanwhile · Sent	Service · You · What you will be charged · What happens next	—	Send my request	—	NOT NAMED
19	/:tenant/portal/start-service/:draft	Expired · Address taken meanwhile · Date now past · Nothing left but the ID	Already done · About you — the part you did not finish · What it will cost to start	Your name · Phone · Date of birth · Proof of identity · First name · Last name · Email — where your bill will be sent ·	Finish and send · Save and come back later	—	NOT NAMED
20	/:tenant/portal/stop-or-restart	One account, all required · Landlord account · Already scheduled · Cannot pause	Which property? · Not sure which you need?	Which property? · Stop everything, or just part?	Continue	—	Nothing. /stop-or-restart has no door anywhere in the portal — not from Home, not from My details, not from Your account, not in the nav. The route is
21	/:tenant/portal/stop-or-restart	Date already billed · Date too soon · Far future · Property empty	On the day · If you are coming back	Last day you need service · Why, if you would like to say	Continue	—	NOT NAMED
22	/:tenant/portal/stop-or-restart	No deposit held · Money owed · No forwarding address · Email only	The final bill · Why we ask twice	Email — we will send it here too · Send my refund to · Town · State and ZIP · Email — we send a copy here as well · Send	Continue	—	NOT NAMED

23	/:tenant/portal/stop-or-restart	Balance outstanding · Landlord account · Confirmed · Autopay off	What will happen · Then · What you will owe · What happens next	—	Stop service on Sep 30	—	NOT NAMED
24	/:tenant/portal/final-bill	You owe us · Refund sent · No deposit · Estimated final read	How it worked out · Where the bill went · The final bill · Sep 1 – Sep 30, 2026 · And then · Where we sent it	—	—	—	NOT NAMED
25	/:tenant/portal	Loading · Nothing due · Past due · Past due · Failed to load · One account · Fewer than six bills · An older month chosen · No ID on file	Amount due · Your account · Next meter read · Service	—	Pay $191.00 now	Active	NOT NAMED
26	/:tenant/portal/home	—	—	—	—	—	NOT NAMED
27	/:tenant/portal/accounts	One account · Many accounts · A closed account · Access removed	Total owed	—	+ Add an account · Pay all three · $438.30	Past due · Paid up	NOT NAMED
28	/:tenant/portal/account	Closed · Pending start · Not in your name · Past due	Amount due · This account · Go to · Recent	—	Pay $191.00 now	—	NOT NAMED
29	/:tenant/portal/accounts/add	No match · Already added · Different name · Added	What this does	Account number · ZIP code of that service address	Add it	—	NOT NAMED

30	/:tenant/portal/bills	Loading · No bills yet · Failed · Many bills	—	—	—	Due Aug 22 · Paid Jul 19 · Paid Jun 20	NOT NAMED
31	/:tenant/portal/bills/:number	Paid · Estimated read · Corrected · Not yours	Amount due · Electric · Water · Sewer · This bill	—	Pay $191.00 now · Why does it cost this? →	—	NOT NAMED
32	/:tenant/portal/bills/:number/comparison	Cheaper · No previous bill · Prices did change · Estimated	The difference · Where it came from · Prices did not change · The last 12 months · Where the difference came from · Your last 12 bills	—	—	—	NOT NAMED
33	/:tenant/portal/bills/:number/document	Generating · Not available · Multi-page · Blocked	This document · Need it elsewhere?	—	↓ Download PDF · 🖶 Print	—	Bills and One bill — both build the link from the bill number.
34	/:tenant/portal/bills/:number/dispute	Sent · Already disputed · Too late · Photo too large	What happens next	What looks wrong? · Tell us more · A photo, if it helps · Which service?	Send it	—	NOT NAMED
35	/:tenant/portal/pay	Processing · Declined · Nothing due · Card expired	How much · Pay from · What you will pay	—	Pay $191.00	No fee	Payments , and the quick-pay flow. Home links to /pay-now , the guest route, rather than here.
36	/:tenant/portal/pay/check	Amount changed · Method expired · Fee applies ·	From · Then · What you are paying · After this payment	—	Pay $191.00 · Go back and change something	—	NOT NAMED

		Session timed out					
37	/:tenant/portal/pay/done	Cleared the notice · Did not clear it · Pending · Partly paid	Where you stand · Your receipt · Next time	—	Set up autopay so this is automatic · ↓ Download receipt · ↗ Email it to me · Set up autopay	Clear	NOT NAMED
38	/:tenant/portal/payments	Pending · Returned · Refunded · None yet	—	—	—	Cleared	NOT NAMED
39	/:tenant/portal/payment-methods	None on file · Expiring soon · Expired · Removing the last one	Fees	—	+ Add a way to pay	No fee	Payments (an errand card), Pay now and Autopay . Not My details — that screen has no link to it.
40	/:tenant/portal/autopay	Off · No method · Card expiring · Last one failed	What happens next · Settings · You stay in control	—	Turn autopay off · Save	On	Payments (an errand card) and Payment methods . Not My details .
41	/:tenant/portal/overdue	Late, not yet noticed · Notice issued · Protected · Already disconnected	Past due · Three ways out · What is past due · What makes up the $247.30 · Three ways to stop this	—	Pay $247.30 now · Ask for a payment plan · See if you qualify for help · Ask for a payment plan — from $20.61	—	Bills — the Where things stand list at the foot of the bills page. That is the only door. Home does not link here, and it is not in the nav.
42	/:tenant/portal/ask-for-a-plan	Approved instantly · Needs review · Already on a plan · Not eligible	If you miss one · There may be help too	How many months?	Ask for 3 months · Ask for this plan · See help paying →	—	Past due , Help paying and Home — three doors, the most of any screen in this group, which is right for the

							thing a struggling customer most needs.
43	/:tenant/portal/plan-offer	Counter-offer · Expired · Declined · Accepted	6 months · What you agree to · The schedule · On top of this, your normal bills continue · There may be help as well	—	Accept this plan · Ask for different terms	—	Payments — one of the seven errand cards. Not from Past due, which is where somebody who has just asked for a plan would look for the answer.
44	/:tenant/portal/plan	On track · Missed one · Broken · Finished	Next payment · Where you are · The schedule	—	Pay $82.44 now · Pay the whole $164.86	Paid · Due next · Paid Sep 1	Payments — one of the seven errand cards. That is the only door.
45	/:tenant/portal/help-paying	Already receiving · Application open · Season closed · None configured	Energy assistance · Senior discount · Low-income credit · One-off emergency help · Energy assistance — the biggest one · Senior discount · 15% off eve	—	Check if you qualify	—	Past due and Bills .
46	/:tenant/portal/protections	Protected · Not protected · Application pending · Expiring	What protects you · Before any shut-off · Every protection, and whether it applies to you · What must happen before any shut-off	—	Something went wrong — tell us	Applies · Applies to you	Past due — the only door, so this screen is two clicks behind one that Home does not link to.
47	/:tenant/portal/level-pay	Already on it · Not enough	You would pay · Your last 12	—	Start budget billing	—	Help paying — the only door , and this is the

history · Not eligible · Settle-up due

bills · The honest part · Your last 12 bills, against the budget amount · How

finding worth acting on: budget billing is a mainstream product for anyone with a lumpy bill, and it is