SMARTBillHub

Blueprint · read of 2.232.0

01 Charge codes
02 Taxes & fees
03 Rate schedules
04 Discounts
05 Plans
06 Every stated absence
07 The specification register
08 What this pass changed
09 Appendix

SMARTBILLHUB · PLANS & RATES BLUEPRINT · ANALYSIS ONLY, NOTHING BUILT

The price of a utility, screen by screen

Every screen a clerk uses to make, read or change a price — drawn against the running product, with the design decision, the server work and the open question behind each one.

READ AT	PRODUCT NOW	SCREENS DRAWN	SPECIFICATIONS	OUT OF SCOPE
2.232.0 · d2d493e4	could not check	39	26	11

RULES WITH NO HOME
7

READ AT ONE MOMENT · RE-VERIFY BEFORE ACTING

Every **as-built** statement here was true at version **2.232.0**, commit **d2d493e4**, on **8 September 2026**, and must be re-verified before it is trusted or acted on.

Whether the product has moved on, I could not check. This checkout has no default branch — `origin/HEAD` does not resolve — and 47 remote branches. Naming one of them as "the product now" would be a guess, so the figure above says so instead of quietly refreshing itself.

One statement I already know to be stale, corrected: the earlier masthead promised that "the tabs, the steps and the three shells all stay where they are". Four objects have since lost tabs and the tax wizard lost a step, on rulings recorded in the decision log.

What this warning does and does not cover. Descriptions go stale. **Rulings do not** — a decision stays decided until another decision supersedes it, and the ones in appendix D2 are dated and recorded. Open questions stay open until somebody answers them, not until the code changes.

DESCRIPTION — GREY RAIL

A statement about what the code does today, including an honest statement that something is missing. It commits nobody to anything.

COMMITMENT — ACCENT CARD

A change specification: a named piece of work, what it waits on, the screens it changes, and what a person would be able to do and see once it is done.

If a thing is not in a commitment card, nobody has undertaken to build it.

The four state chips, and only four. EXISTS BEHIND the screen is drawn and the data behind it is served · NEW READ the screen exists and something on it has no read · NEW BUILD a specification changes this screen · BLOCKED a specification here waits on a decision nobody has made. A screen no specification covers carries NO COMMITMENT — and that absence is the finding, not an oversight.

---

01 CHARGE CODES

First, because nothing else can be built without one. A rate schedule reads its base from a charge code and a plan shows that code's amount read-only.

6 screens — 3 to create or edit, 3 to view. 4 commitments touch them.

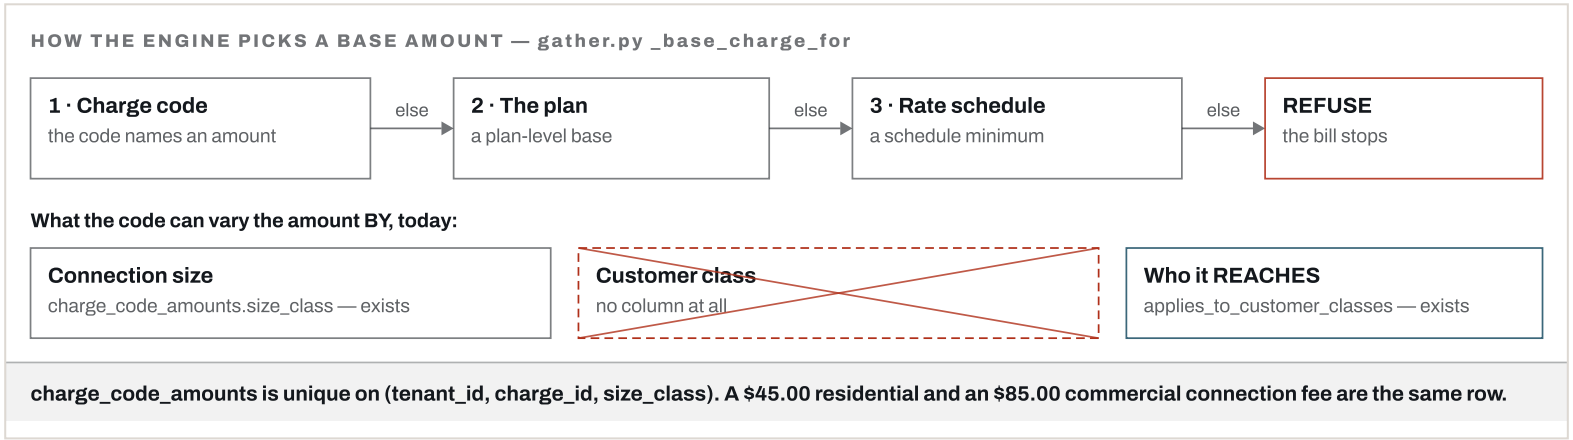


Figure 1 · **a class cannot be a row.** The engine's precedence runs charge code → plan → schedule → refuse, and the code is the first answer for every base on every bill. The column that would let a code differ

by customer class does not exist, so the grid on screen 02 cannot be stored until PRB-01 lands.

01 Create · Step 1 · Basics NEW BUILD COMMITMENT PRB-03

What is this charge called, and what kind of charge is it? `/:tenant/plans-rates/charge-codes/new`

> **What was wrong.** Seven fields carried eight lines of help; the type was five radio cards with prose on each; the customer class sat three fields away from the size table that narrows the same amount; and nothing said that the type decides what the next step asks for.

NEW CHARGE CODE

Cancel | Save draft & exit

Add a fee, deposit, or adjustment.

Charge codes are the non-usage line items on a bill. Three steps · takes about 2 minutes.

1 **Basics** | 2 Amount & behaviour | 3 Review & save

Name the charge and pick its type.

CODE*

Uppercased on save. Unique for this utility.

CONN

DESCRIPTION (SHOWN ON THE BILL)*

Connection fee

TYPE*

One-time ˅

APPLIES TO SERVICE

Any service ˅

☐ **This is the base charge for its service**

For the classes and sizes set on the next step.

What the type decides

The type is not a label. It changes what the next step asks you for.

TYPE	WHAT IT IS	STEP 2 THEN ASKS
Recurring	A standing charge on every bill	How often it is charged · part-period charging
One-time	Connection, disconnection	Part-period charging
Refundable	A deposit, held and returned	Deposit terms
Penalty	Late payment, returned payment	What raises it
Adjustment	A credit or a correction	— Nothing type-specific: an adjustment has no recurrence, no deposit and no trigger.

NOT DRIVEN BY TYPE

Two more sections appear regardless of type: an outside-city amount once a service is chosen, and who may waive it once the charge is waivable.

Continue

FOR

A clerk setting up what a utility charges beyond usage. In a new utility this is the **first** screen in Plans & Rates that can be finished — a rate schedule cannot show a base until a charge code owns one.

HOW YOU GET HERE

Charge codes tab → **+ New charge code**. Also from the plan builder's Charges step, which offers *Not listed? Define it in Charge codes* → and returns you here.

PRIMARY ACTION

Continue. One filled button. There is deliberately no Save-draft: a charge code has no draft state — it is active or deactivated — and the button says so rather than sitting greyed.

WHAT CHANGED · THE REASONING

Seven fields carried eight lines of help and the screen was a wall of text. Help now appears only where it prevents a refusal: the code is uppercased and must be unique, and blank customer classes means every class. Everything else is said by its own label — *Description (shown on the bill)* needs no sentence explaining that it is shown on the bill.

WHAT CHANGED · TYPE IS A DROPDOWN

Five radio cards with a five-word hint each occupied a third of the screen to ask one question with one answer. It is a select. The hints are not lost — they are the *What it is* column below, where they can be read side by side, which is how a person actually picks between five things.

WHAT CHANGED · THE TYPE DECIDES THE NEXT STEP

You asked whether the screen changes with the type. It does, and nothing said so. `stepTwoSections` in the wizard maps each type to the sections step 2 will ask for, and a clerk met that for the first time after pressing Continue. The table states it before the choice is made — which also makes the choice reversible while it is still cheap.

ADJUSTMENT ASKS FOR NOTHING EXTRA, AND THAT IS SHOWN

It is the one type with no type-specific section. Drawing it as a dash with the reason is what stops a clerk wondering whether the screen failed to load.

WHAT CHANGED · CLASSES MOVED TO STEP 2

Customer class narrows the AMOUNT, so it belongs beside the amount. It sat here, three fields away from the per-size table that narrows the same figure the same way — a clerk setting one price for households and another for industry had to hold the two halves in their head across a step boundary. They are one box on the next step now. This step is identity only: what it is called, what kind of charge it is, and what it attaches to.

COGNITIVE LOAD

Five inputs, two lines of help, one table. Nothing is drawn twice and no option carries prose.

STATES

Editing, unbilled	Every field open.
Editing, already billed	The code locks and says why: it is on issued bills and can no longer change. Everything else stays open.
Any service chosen	The base-charge tick is disabled and says a base charge belongs to a service.
Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.

COMPONENTS

`WizardFrame` `StepHead` `TextField` `SelectField` `CheckboxField` `ClassPicker` `TypeEffectTable` `NamedAbsence`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only


signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A control that changes a later screen says so before it is used.

Route corrected this pass: the document read `/plans-rates/charge-codes/new`; the router registers `/:tenant/plans-rates/charge-codes/new`.

02 Create · Step 2 · Amount & behaviour NEW BUILD COMMITMENT PRB-01 COMMITMENT PRB-02 COMMITMENT PRB-03

What does it cost, and what makes it differ? `/:tenant/plans-rates/charge-codes/new`

> **What was wrong.** A different deposit, connection fee or penalty could not be set for a different class on one screen — the class was a list on the code and the size a flat table, so the grid a utility actually prices in could not be written. The cost and its behaviour were also two panels asking one question, and three panels of dashes carried a heading and a paragraph each over nothing a clerk could touch.

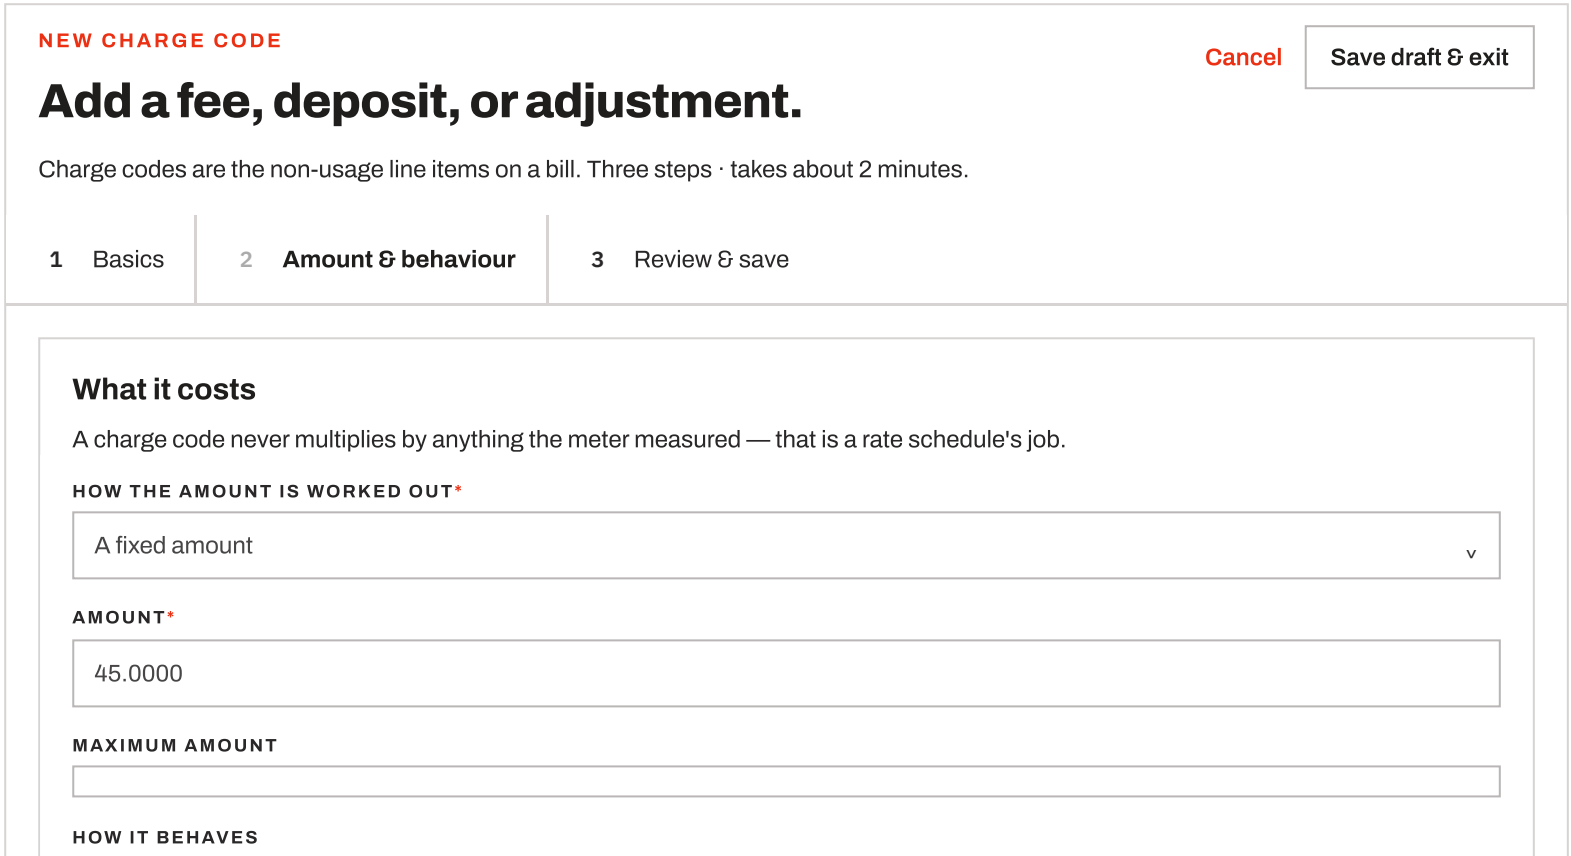

☑ May be taxed ☑ Apply automatically ☑ Staff may waive it ☑ Show as its own line on the bill

May be taxed is permission, not an attachment.

What makes it differ

A connection is not one price. The same fee differs by class and by capacity, and both are decided here.

AMOUNT BY CUSTOMER CLASS AND CONNECTION SIZE

Leave a cell blank and that class is not served at that size — a bill for it is refused, not charged $0.00.

CUSTOMER CLASS	2"	4"	6"	8"
Residential	45.0000	60.0000	— Not served	— Not served
Commercial	85.0000	110.0000	140.0000	— Not served
Industrial	— Not served	150.0000	220.0000	340.0000
Every other class	45.0000	60.0000	— Not served	— Not served

+ Add a class row | + Add a size column

WHY A GRID AND NOT A NUMBER

A connection fee, a disconnection fee, a deposit and a penalty all differ by who is being charged and how big the connection is. One grid answers both, on the code that owns the fee.

WHAT THIS COSTS

This needs ONE COLUMN the amount table does not have. It is keyed by charge and size today, so a class cannot be a row. Until that column exists a utility declares one code per class — CONN-RES, CONN-IND — each with its own size amounts, which prices correctly and reads as a workaround.

Where class already varies a charge, today

Read this before deciding a fee cannot be set: it may already be set somewhere else.

WHAT	HOW IT VARIES BY CLASS	WHERE YOU SET IT
Deposit	**Already a grid** — one amount per customer	**The plan**, on its Discounts & billing

	category	step
Late fee	Its percentage, minimum and grace	**The plan**, on its Discounts & billing step
Connection · disconnection · other fees	One charge code per class	Here — the class list on this code
Base charge	One charge code per class, then per size	Here — the class list, then the grid above

> **TWO PLACES, ONE QUESTION**
> The same question — what does this cost for this class — is answered in two places, and no screen said which. A deposit is not on a charge code at all; it is a plan rule keyed by customer category, and it has been all along.

Not stored on a charge code

Said once, so the screen is not three panels of dashes.

—

Three things this screen cannot record. Part-period charging, who may approve a waiver, and a staff-only description have no column, so the full amount is charged, anyone who may change Plans & Rates can waive it, and there is one description.

Continue

FOR	The same clerk, one step on. This is the only screen in the product where what a fee costs is decided.
HOW YOU GET HERE	Continue from Basics, or the rail. On an edit the rail opens with every step reachable — a clerk correcting a price should not walk three screens to reach it.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · ONE BOX FOR THE QUOTE	**The amount and how it behaves were two panels asking one question.** The four behaviour ticks have no meaning apart from the figure above them — *may be taxed*, *show as its own line* and *staff may waive it* are all properties of that amount on a bill. One box.

WHAT CHANGED · ONE GRID, CLASS BY SIZE

You cannot set a different deposit, connection fee or penalty for a different class on one screen, and that is the finding. The engine narrows an amount by service, **class** and **size**, and only two of the three could be expressed: the class was an inclusion list on the code and the size was a flat table underneath it, so *residential 2" is $45 and industrial 6" is $220* could not be written down as one thing. It is a grid — classes down, sizes across — because that is the shape of the question a utility actually asks.

WHAT THE GRID COSTS, STATED PLAINLY

One column. `charge_code_amounts` is keyed by charge and size, so a class cannot be a row. Until that column exists the supported answer is one code per class — CONN-RES, CONN-IND — each carrying its own size amounts. That prices correctly and reads as a workaround, which is why it is drawn as the alternative rather than the design.

WHERE CLASS VARIATION ALREADY LIVES

A deposit is not a charge code at all. `plan_deposit_rules` is keyed by plan and customer category and has been all along, so different deposits per class already work — on the plan's own step, which is not where anyone looked. The late fee is the same shape. Both are named on this screen so a clerk stops hunting for them here.

WHAT CHANGED · THREE PANELS OF DASHES BECAME ONE LINE

You could not do anything on them. *Part-period charging* and *Who may waive it* were full panels, each with a heading, an explanation of why it had appeared, a dash and a paragraph — over nothing a clerk could touch. They are one line naming all three gaps. Nothing is hidden and nothing pretends to be a control.

THE CONDITIONS ARE GONE FROM THE HEADINGS, DELIBERATELY

Saying *shown because the type is One-time* above an empty panel explained why a clerk was reading something useless. With the panel gone the explanation goes with it — and the table on step 1 already says what each type brings, before the choice is made, which is where that belongs.

BLANK IS NOT ZERO

Said on the row it applies to: a size with no row is **not served** and a bill for it is refused, while zero means free. Getting this wrong bills nothing and looks identical.

COGNITIVE LOAD

Three boxes: what it costs, what makes it differ, and what cannot be recorded. The amount fields appear and disappear with the rule above them, so a clerk never sees a box that cannot apply.

STATES

Fixed amount	One amount box, and the size table.
Percentage	A percentage box and a minimum; no size table, because a

Percentage	A percentage box and a minimum, no size table, because a percentage of a size makes no sense.
Prices by size	The single Amount box goes read-only and says the amount is set per size below.
Formula	Offered and permanently disabled — the type is agreed and nothing prices it, so choosing it would be refused on save.
Any service	No size table: a connection size is a property of a service, and an account-level code like a late fee has none. The class picker stays — a late fee can still differ by class.
Recurring or Refundable	The middle box is unchanged; only the third line differs, naming how-often or deposit terms among the gaps.

WHAT THE SERVER NEEDS

One new column, and it is the whole of this screen. `charge_code_amounts` is unique on `(tenant_id, charge_id, size_class)` and carries **no customer-class column at all**, so the class × size grid drawn here cannot be stored today: a $45.00 residential connection fee and an $85.00 commercial one are the same row. It needs an account-type column, that column in the unique key, and a migration. **The narrowing is NOT the same thing and already exists** — `charges.applies_to_customer_classes` says WHO a code reaches; this says WHAT each of them pays.

COMPONENTS

`WizardFrame` `SelectField` `MoneyTextField` `CheckboxRow` `ClassPicker` `SizeAmountTable` `NamedAbsence`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A panel a clerk cannot act on is a line, not a panel.

Route corrected this pass: the document read `/plans-rates/charge-codes/new`; the router registers `/:tenant/plans-rates/charge-codes/new`.

03 Create · Step 3 · Review & save NEW READ NO COMMITMENT

Is this what I just typed? `/:tenant/plans-rates/charge-codes/new`

> **What was wrong.** The review read back the amount already in force instead of the one just typed, and

nothing recorded why a fee moved.

NEW CHARGE CODE

Cancel | Save draft & exit

Add a fee, deposit, or adjustment.

Charge codes are the non-usage line items on a bill. Three steps · takes about 2 minutes.

1 Basics | 2 Amount & behaviour | 3 **Review & save**

Review and save.

Everything that is changing, beside what it is changing from.

	NOW	SAVING	CHANGE
Amount	$45.0000	$52.0000	+$7.0000
Applies to service	Any service	Any service	
May be taxed	No	Yes	changed

CODE
CONN

DESCRIPTION (SHOWN ON THE BILL)
Connection fee

TYPE
One-time

THIS IS THE BASE CHARGE FOR ITS SERVICE
No

HOW THE AMOUNT IS WORKED OUT
A fixed amount

AMOUNT PER CONNECTION SIZE
One amount for every connection size.

GL ACCOUNT
4200-01 — Connection revenue

WHY THIS CHANGED*

Kept with the change. It is what the next person reads when they ask why this fee moved.

WHAT SAVING DOES

Saving changes what this code charges from now on. A bill already issued is never re-priced.

Save charge code


FOR	A clerk about to commit a price change that reaches every plan carrying this code.
HOW YOU GET HERE	Continue from step 2, or the rail.
PRIMARY ACTION	**Save charge code.**
WHAT CHANGED	**The read-back was the stored amount, not the typed one.** A clerk retyped 45 → 52, reached this screen and read back 45. It now reads back what is about to be saved, beside what it replaces, with the difference in the last column — the shape you signed off for the rate wizard, applied here for the same reason.
WHY THIS CHANGED	**New.** There was no reason box anywhere in this wizard, so changing what a fee costs recorded nothing about why. It is required, and it is on the screen where the commit happens rather than three steps back.
COGNITIVE LOAD	Only what is changing is in the comparison table. Everything unchanged drops to the plain grid below it, so a three-field change does not read as a nineteen-field one.
STATES	**Creating** — No comparison table — there is nothing to compare against. The grid alone, and no reason box. **Editing, nothing changed** — The comparison table is absent rather than showing three unchanged rows. The Save button stays live: a clerk may have come only to add the reason.
COMPONENTS	`WizardFrame` `OldNewTable` `FieldGrid` `TextArea` `ConsequenceNote`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A review screen states what saving does before the button, never after.

Route corrected this pass: the document read `/plans-rates/charge-codes/new`; the router registers `/:tenant/plans-rates/charge-codes/new`.

04 View · Overview NEW BUILD COMMITMENT PRB-04

What is this charge, what does it cost, and when does it apply? `/:tenant/plans-rates/charge-codes/:id`

> **What was wrong.** Three tabs answered one question between them; the amount was a figure on one tab and a table on another; the classes that decide whether the code reaches anybody were on no tab at all; and the count said accounts where a plan is assigned to a unit.

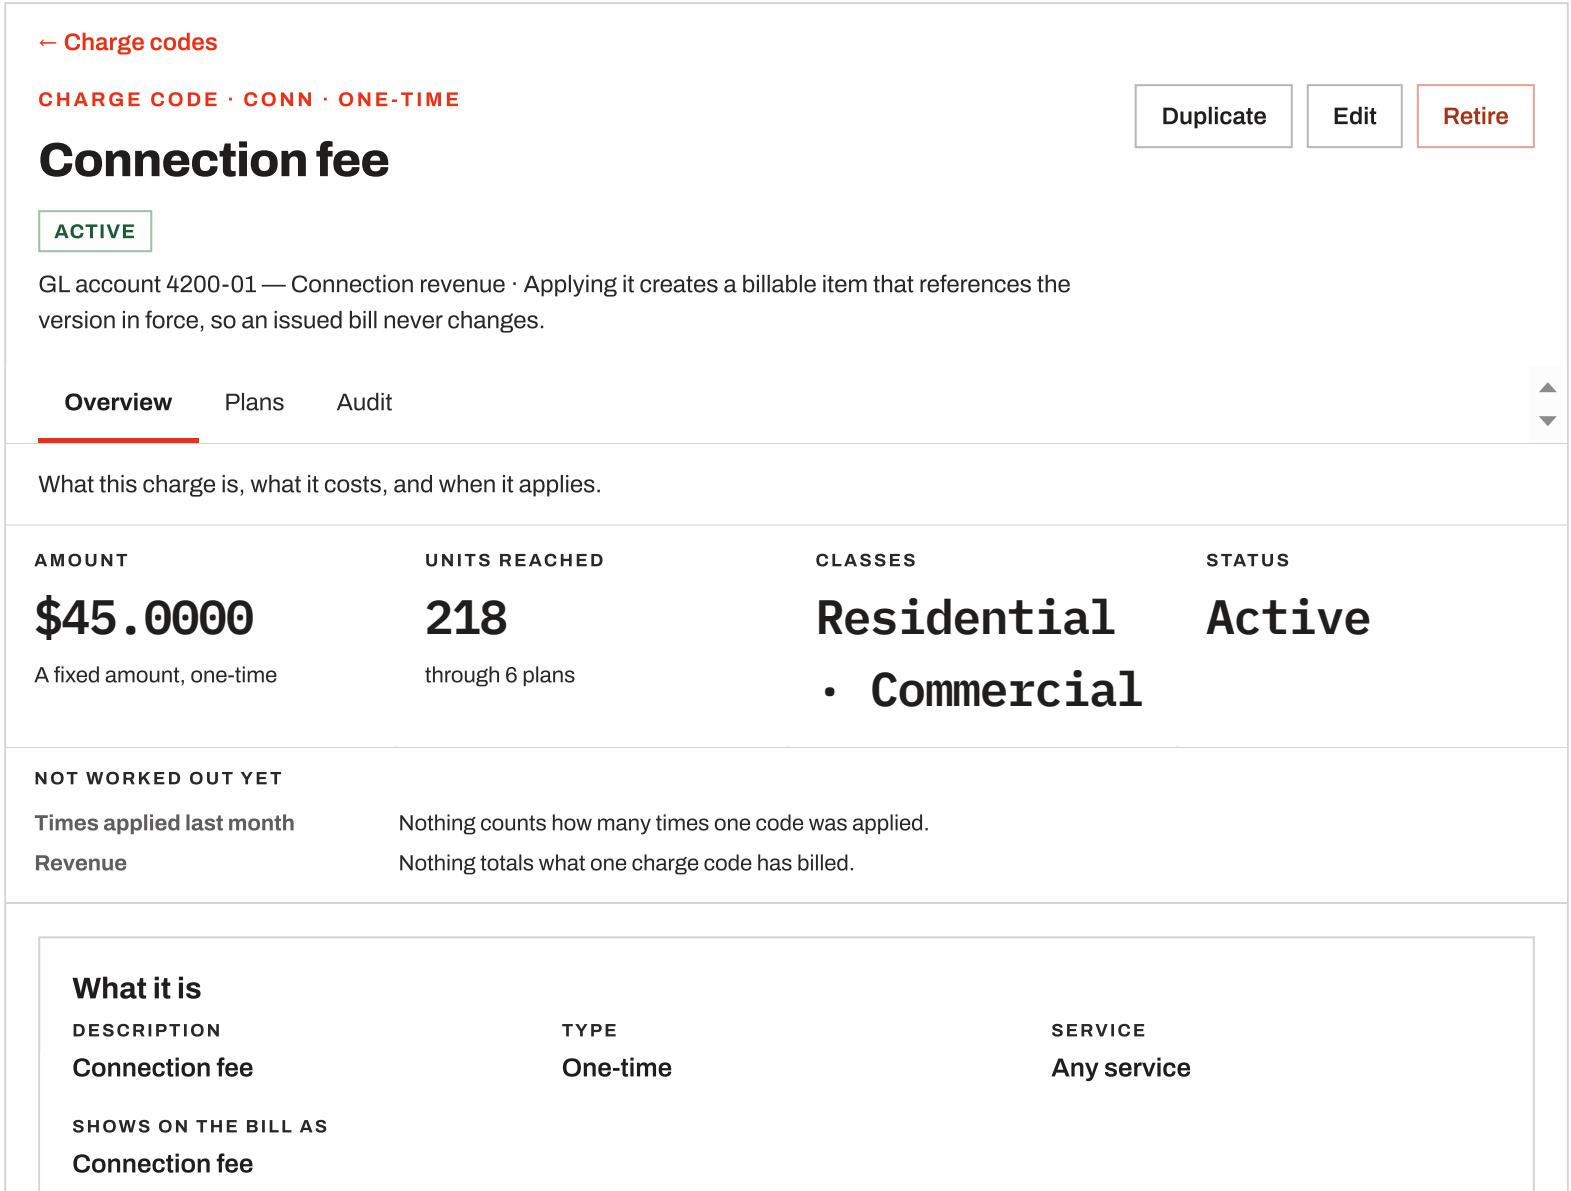

What it costs

One grid: who is charged, and how big the connection is.

CUSTOMER CLASS	2"	4"	6"
Residential	$45.0000	$60.0000	— Not served
Commercial	$85.0000	$110.0000	$140.0000

HOW THE AMOUNT IS WORKED OUT

A fixed amount, narrowed by class and connection size. A blank cell is not served — a bill for it is refused, not charged $0.00.

When it applies

Five facts about how this charge behaves on a bill, and where the money is posted.

APPLIES TO
Any service

TAXABLE BY DEFAULT
Taxable

APPLY AUTOMATICALLY
Yes

STAFF MAY WAIVE IT
Yes

SHOW AS ITS OWN LINE ON THE BILL
Yes

GL ACCOUNT
`4200-01 — Connection revenue`

FOR

Anyone who has been sent a code and needs to know what it is — a clerk on the phone, a supervisor checking a bill query.

HOW YOU GET HERE

Charge codes tab, clicking the name. Also from a plan's Charges tab, and from a rate schedule's base column, both of which name this code as the source of an amount.

PRIMARY ACTION

Edit.

WHAT CHANGED · THREE TABS BECAME ONE

Overview, Amounts and Applicability answered one question between them. A clerk asking *what is this and what does it cost* opened Overview, found the amount repeated from a tile, and went to Amounts; a supervisor asking *can we take this off a bill* went to a third. They are one tab in three blocks, in the order a person arrives: **what it is**, **what it costs**, **when it applies**. Plans and Audit stay — they answer different questions and the PO said so.

WHAT CHANGED · UNITS, NOT ACCOUNTS

The count said accounts. A charge reaches a customer through a plan, and a plan is assigned to a **unit** — so counting accounts undercuts by every vacant unit, and a vacant unit's base charge lands on a landlord's bill. Same ruling as the rate schedule.

WHAT CHANGED · THE AMOUNT IS A GRID HERE TOO

It was a single figure with the per-size detail on another tab. The read screen shows the same grid the edit screen sets, so a clerk never has to hold two shapes for one fact.

WHAT CHANGED · THE CLASSES ARE A TILE

Which classes a code applies to decides whether it reaches a customer at all, and it was on no tab. It is a headline figure, beside the amount.

TAXABLE READS TAXABLE, NOT YES

A yes/no answers a question the label does not ask. Same correction as the tax screen's basis fields.

STATES

Never used	*Units reached* reads 0, plainly. Zero here is a real zero.
Every class	*Classes* reads *Every class* rather than listing all eight.
One amount for every size	The grid collapses to a single row and says so, rather than repeating one figure across four columns.
Deactivated	The status pill changes and the header says from when. Edit stays live — a deactivated code's wording may still need fixing.
Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.

COMPONENTS

`PageHeader` `KPIStrip` `AbsenceBar` `Panel` `FieldGrid` `AmountGrid` `Callout accent`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A read screen shows a fact in the shape the edit screen sets it.

Route corrected this pass: the document read `/plans-rates/charge-codes/:id`; the router registers `/:tenant/plans-rates/charge-codes/:id`.

05 View · Plans EXISTS BEHIND NO COMMITMENT

Where does this charge actually reach customers? `/:tenant/plans-rates/charge-codes/:id?tab=plans`

> **What was wrong.** The tab said it could not name the plans, over a headline count that read 0 for a code reaching 132 units as a rate schedule's base.

← Charge codes

CHARGE CODE · CONN · ONE-TIME

Connection fee

Duplicate | Edit | Retire

ACTIVE

GL account 4200-01 — Connection revenue · Applying it creates a billable item that references the version in force, so an issued bill never changes.

Overview | **Plans** | Audit

Where this charge reaches customers.

AMOUNT	UNITS REACHED	CLASSES	STATUS
$45.0000	218	Residential · Commercial	Active
A fixed amount, one-time	through 6 plans		

NOT WORKED OUT YET

Times applied last month	Nothing counts how many times one code was applied.
Revenue	Nothing totals what one charge code has billed.

Where this reaches

Every plan that carries this code, and how it gets there.

PLAN	CODE	REACHED BY	UNITS
Sample — Residential	SCW-RES	Named on the plan	74

Sample — Commercial	SCW-COM	Named on the plan	12
Sample — Residential water	—	**The base of a rate schedule**	132

TWO ROUTES

A charge code reaches a customer by two routes: named on a plan, or read as the base of a rate schedule that a plan carries. Both are counted here, and they behave differently under a change.

FOR	A clerk about to change a price, asking the only question that matters first: *who does this hit?*
HOW YOU GET HERE	The **Plans** tab.
PRIMARY ACTION	None. This tab exists to be read before a decision is made elsewhere.
WHAT CHANGED	**This tab used to say it could not name anything** — one sentence reading *the tile above counts the plans; naming them one by one needs a read that does not exist yet*, over a screen whose whole job is to answer that. Worse, the count above it read **0** for a code that was every water size's base, because only the plan route was counted.
REACHED BY	Two routes behave differently under a change: renaming a plan's charge is local; changing a base moves every size on a schedule. Naming the route is what stops a clerk mistaking one for the other.
STATES	**Nothing carries it** — *No plan carries this charge code, and no rate schedule reads it as a base.* Both routes named, so a zero is not ambiguous. **Reached only as a base** — The plan column shows the schedule's plans; the code column is a dash, because the plan does not name this code. **Beyond one page** — States how many were checked out of how many **carrying this code** — never out of every plan in the utility.
COMPONENTS	`Panel` `ReachTable` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed


reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A count names what it counts.

Route corrected this pass: the document read `/plans-rates/charge-codes/:id?tab=plans`; the router registers `/:tenant/plans-rates/charge-codes/:id?tab=plans`.

06 View · Audit EXISTS BEHIND NO COMMITMENT

What has this charge cost, and who changed it? `/:tenant/plans-rates/charge-codes/:id?tab=audit`

> **What was wrong.** The tab rendered a sentence explaining that its own content did not exist yet, under a name no other module uses.

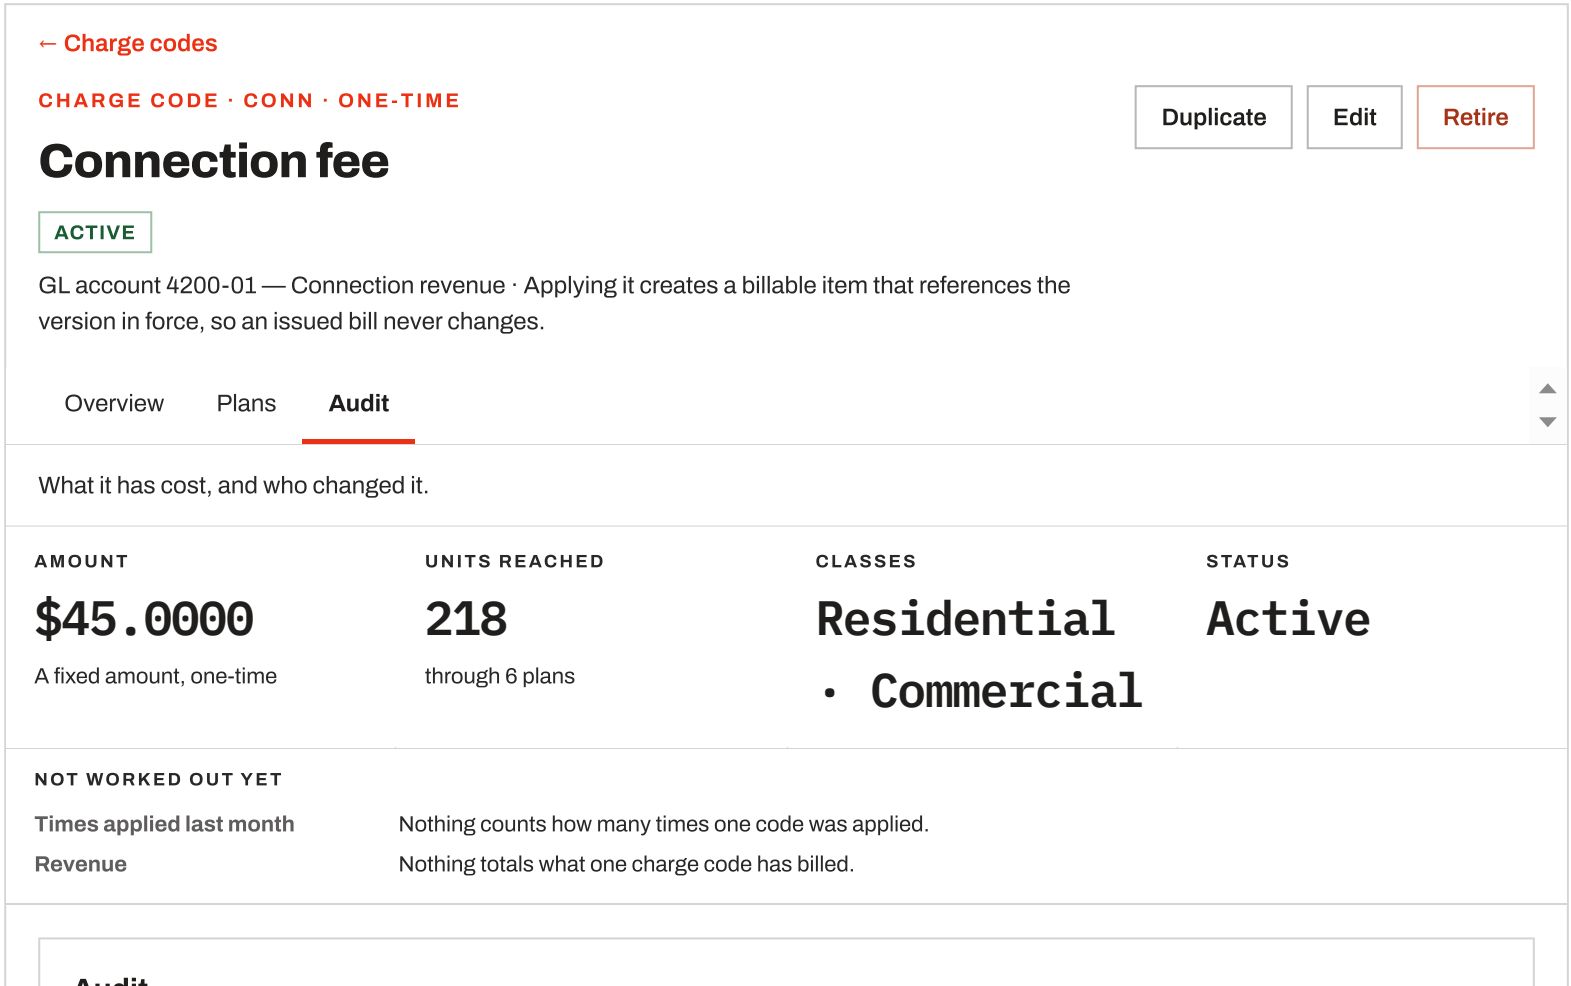

Audit

EFFECTIVE	AMOUNT	WHY IT CHANGED	BY
06/01/2026	$45.0000	Annual review — cost recovery	Dana Whitfield
01/01/2025	$38.0000	— Nothing was written against this version.	—

DATED

Bills always use the version in force on the usage date. Changing a price never re-prices a bill already issued.

FOR	Anyone answering *why was I charged $38 and my neighbour $45*.
HOW YOU GET HERE	The **Audit** tab.
PRIMARY ACTION	**Edit**, from the header, which creates the next row here.
WHAT CHANGED · THE NAME	It was *Versions*. Eight detail screens in this product call this tab **Audit**; Plans & Rates was the only module using its own word. Same correction as the rate schedule — **say if you would rather it stayed Versions here** and it is one string.
WHAT CHANGED · THE CONTENT	**The tab rendered a sentence explaining that no endpoint served it.** It shows what the code has cost and from when, and the *why* column is filled by the reason box added to the save screen — the two changes only work together.
THE REASON IS OPTIONAL, SO A DASH IS A REAL ANSWER	A version can legitimately carry none. The cell says *nothing was written against this version* rather than looking broken.
STATES	**One version** — The row reads *First recorded* and the By column is a dash where nothing was stored — history is never invented backwards. **The person has left** — *No longer has an account*, rather than a blank or a stale name.
COMPONENTS	`Panel` `VersionTable` `Callout dated`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only

signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does.

Route corrected this pass: the document read `/plans-rates/charge-codes/:id?tab=audit`; the router registers `/:tenant/plans-rates/charge-codes/:id?tab=audit`.

Commitments in this section

Each card names what the work waits on and what a person would be able to do once it is done. Nothing outside a card is undertaken.

PRB-01 **A charge code's amount can differ by customer class** UNVERIFIED

Waits on: A new `account_type_id` column on `charge_code_amounts`, that column inside the unique key, and a migration. Nothing else on this list can be drawn until it lands.

Screens: 02 · 36 · 37

WHAT DONE LOOKS LIKE ON SCREEN

A clerk opens CONN, types 45.0000 against Residential and 85.0000 against Commercial in one grid, saves, and a commercial move-in is quoted $85.00 while a residential one is quoted $45.00 on the same charge code.

PRB-02 **Who may approve a waiver, recorded on the charge code** UNVERIFIED

Waits on: A column on `charges`. No ruling exists on who the approvers are, so the field records a role rather than a person.

Screens: 02

WHAT DONE LOOKS LIKE ON SCREEN

A clerk opens LATE, sets the waiver approver to Supervisor, saves, and the charge code's page reads "Waived by: Supervisor" where it read an em-dash.

PRB-03 **A staff-only description on a charge code** UNVERIFIED

Waits on: A column on `charges`. Distinct from the bill label, which the customer reads.

Screens: 01 · 02

WHAT DONE LOOKS LIKE ON SCREEN

A clerk types "Use for reconnections after a non-payment cut, not for new service" on CONN, saves, and the next clerk sees it on the charge code's page while the bill still reads "Connection fee".

PRB-04 How often a charge code was applied, and what it billed

UNVERIFIED

Waits on: Two reads over invoice lines grouped by charge. Both tiles say "nothing totals this" today.

Screens: 04

WHAT DONE LOOKS LIKE ON SCREEN

CONN's page reads "Applied 31 times last month · $1,395.00" in the two tiles that currently read an em-dash with a sentence under them.

---

02 TAXES & FEES

Second, because a tax attaches by jurisdiction and service and never by plan. It can be set up before a single price exists.

6 screens — 3 to create or edit, 3 to view. 4 commitments touch them.



The step that disappeared held no frozen field at all — and the one frozen field on it, the effective date, was buried among seven that are not.

Figure 2 · **the wizard asks for what a bill can freeze, and stops.** Nineteen of the thirty-seven fields become uneditable the moment a tax goes live; the other eighteen never do. That line — the server's own, not this document's — is what turned four steps into three.

07 Create · Step 1 · What it is NEW BUILD COMMITMENT PRB-05

What is this tax, and who does it reach? `/:tenant/plans-rates/taxes-fees/new`

> **What was wrong.** Eight blocks of explanation on one step, three of them for fields that are editable for ever and did not need to be asked here at all — including one paragraph written only to stop two adjacent fields being confused with each other.

NEW TAX OR FEE

Cancel | Save draft & exit

Add a tax, franchise fee, or surcharge.

Three steps · takes about 2 minutes. Filing details are added later, on the tax itself.

1 **What it is** | 2 How much | 3 Review & save

The tax

NAME ON THE BILL*

TX State Utility Tax

AUTHORITY*

Texas State — or add your own

Who it reaches

WHERE A PREMISE HAS TO BE

Everywhere in this utility

CUSTOMER CLASSES

Every customer class

Every customer class

SERVICES

All services

As it stands this tax reaches all 1,284 premises, every customer class and every service.

Continue

FOR	A clerk recording a levy the utility is obliged to collect. Often the first Plans & Rates screen a new utility touches, because it needs no prices to exist.
HOW YOU GET HERE	**Taxes & fees** tab → **+ New tax or fee**.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE PRINCIPLE	**The wizard asks for what can never be changed afterwards; everything else moved to the tax's own page.** Nineteen fields are frozen the moment a tax goes live, because a bill issued at a rate has to work out to that rate forever — the basis, the rate, what is taxed, who it reaches, and the dates. Those are the two steps. The other eighteen — the filing form, the account number, the bookkeeper's email — stay editable for the life of the tax, so asking for them before the first bill was asking early and asking twice.
WHAT CHANGED · FOUR STEPS BECAME THREE	**The whole Remittance step left the wizard.** Every field on it — remitted to, filed how often, on what form, the due-date rule, your account number, the collection allowance, who gets the reminder — is editable for ever, and the tax's own page already has a **Remittance & filings** block where they live, are read, and are now entered. The one field on that step that is *not* editable for ever, the effective date, was the one buried among them; it moves to step 2 beside the rate it dates.
WHAT CHANGED · THREE FIELDS LEFT THIS STEP	Code, bill label and tax type are all editable for ever, so none of them belongs in front of a clerk who has not yet said what the tax charges. They move to **On the bill** on the tax's page. That also dissolves the paragraph this screen used to need — *tax type is not the same as the basis on the next step* — because the two are never shown together any more. **A sentence written**

to undo a collision is cheaper to fix by removing the collision.

WHAT CHANGED · SIX EXPLANATIONS BECAME ONE SENTENCE

This step carried eight blocks of prose: what a jurisdiction is, that authorities are yours to enter, that overlapping boundaries are expected, what a code is for, what a bill label is for, and how a tax type differs from a basis. One sentence survives, and it is the only one that names a number — *all 1,284 premises* — because it tells the clerk what they have just done rather than what a word means.

THE PREMISES COUNT

Shown while you choose, not after you save. A boundary that matches nobody is the commonest and most expensive mistake on this screen — the tax is set up, looks correct, and reaches no one. The count answers it before the clerk leaves the step, and it now counts all three narrowings together rather than the boundary alone.

DEFINING YOUR OWN AUTHORITIES

The picker's last option is **+ Add an authority**, which takes a name and a level inline; the full list is in Settings → Reference data. There is no shared registry to look one up in, so the screen shows the way to add one instead of a sentence saying none exists.

COGNITIVE LOAD

Five controls, two of them required, three arriving already answered with the safe answer. Nothing on this step has to be typed to continue except the name and the authority.

STATES

No boundary	Says plainly that every premises is in scope, with the number.
A boundary nothing can evaluate	County, district and named-list boundaries are recorded and cannot be checked, so the screen says the tax reaches **nobody** — deliberately, because a boundary we cannot check must never be read as applying to everyone.
Zero matches	*No premises match. Check this before entering a rate — as it stands this tax would reach nobody.*
Count unavailable	Says the count could not be read and that nothing is wrong with the boundary, so a clerk does not chase a fault that is not there.

WHAT THE SERVER NEEDS

Two more parameters on one existing read. `GET /taxes/matched-premises` takes the boundary and nothing else — `premises_scope_kind` and `premises_scope_value`. The count on this step now narrows on the customer classes and the services as well, so it needs both passed in. Until it is, the number on screen is the BOUNDARY's count and not the tax's reach, which is the one way this safeguard can mislead rather than fail.


COMPONENTS	`WizardFrame` `TextField` `SelectField` `MatchedPremisesNote` `Panel`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.


Route corrected this pass: the document read `/plans-rates/taxes-fees/new`; the router registers `/:tenant/plans-rates/taxes-fees/new`.

08 Create · Step 2 · How much NEW READ NO COMMITMENT

What is the rate, what is it charged on, and from when? `/:tenant/plans-rates/taxes-fees/new`

> **What was wrong.** The two options for how a discount interacts with tax were labelled the opposite way round from the values they stored, and the effective date — which can never be changed afterwards — was two steps away on a page of fields that can be changed any day.

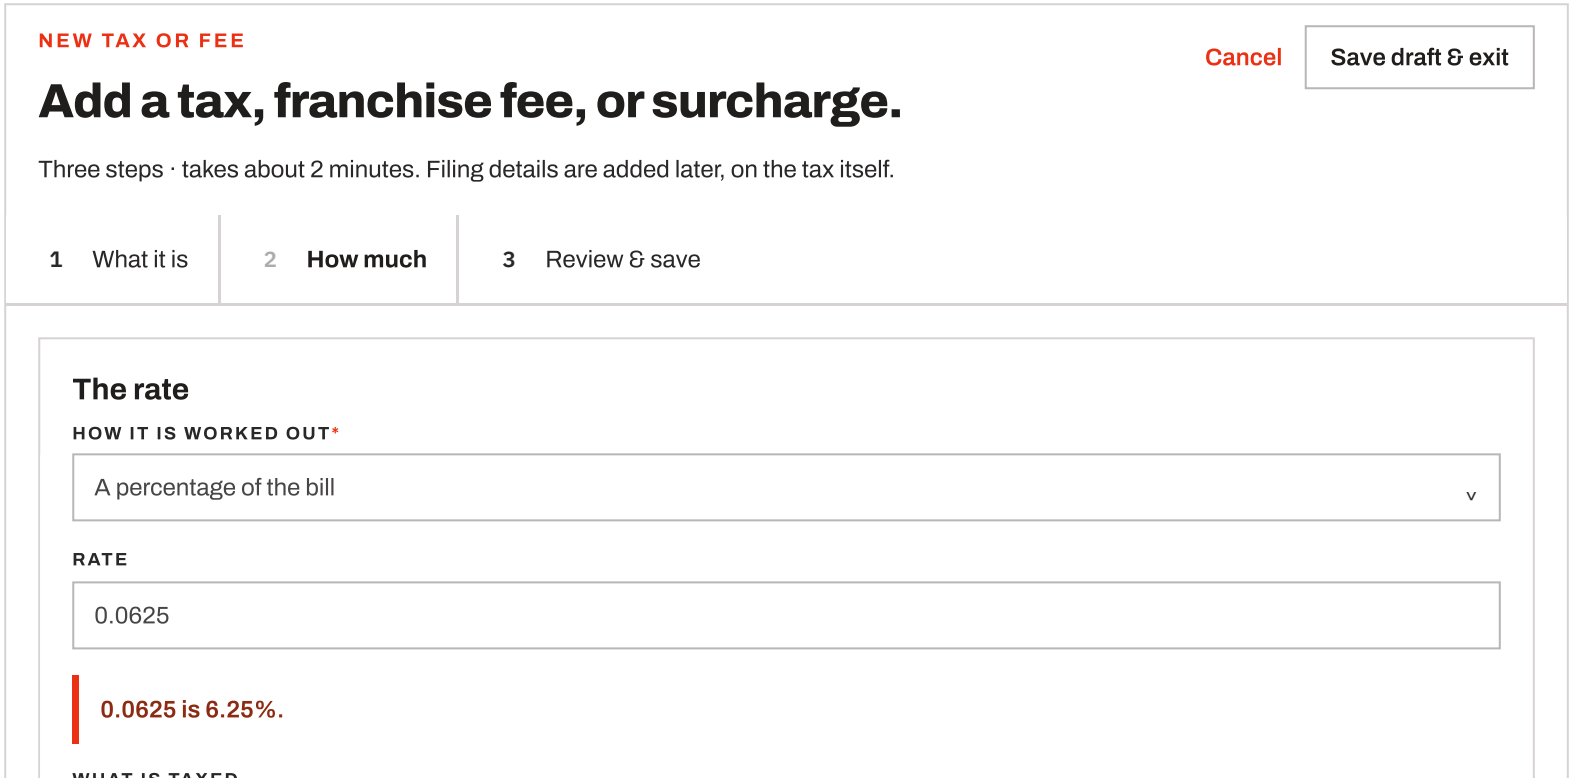

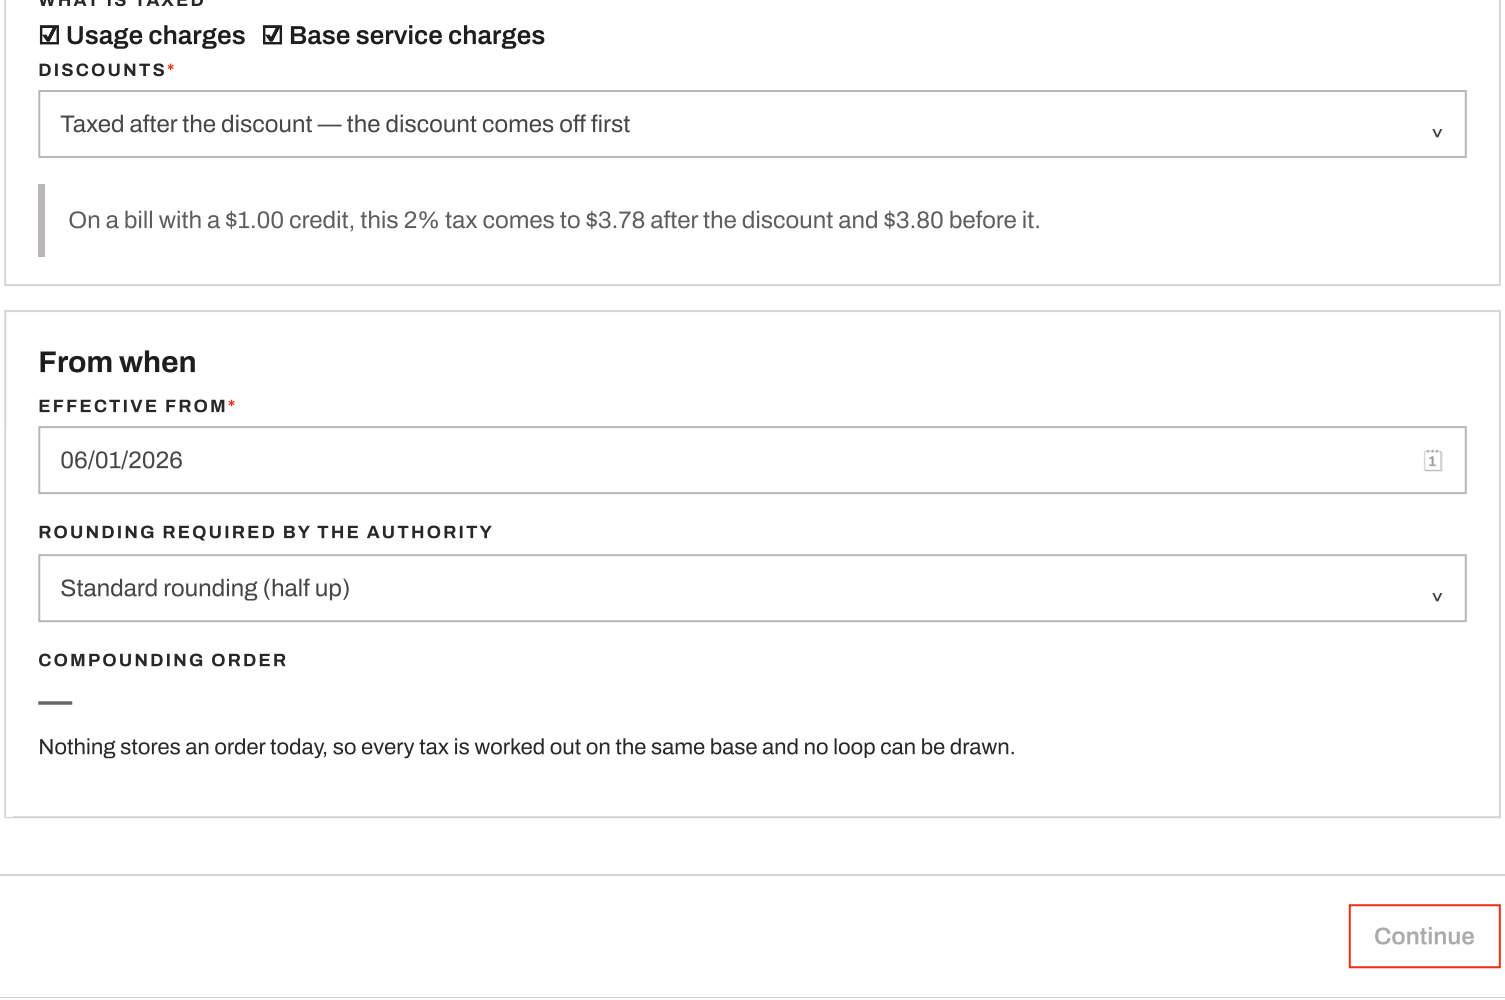

FOR	The clerk entering the figure the authority published.
HOW YOU GET HERE	Continue from What it is.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE EFFECTIVE DATE CAME HERE	It sat on the Remittance step, which is now gone — and it was the one field on that step that can never be changed once a bill is issued, sitting among seven that can be changed any day. It belongs beside the rate it dates, which is also where a clerk looks for it.
WHAT CHANGED · THE DISCOUNT OPTIONS WERE LABELLED BACKWARDS	Choosing *taxed after discounts* stored *before*, and the reverse — while the worked example underneath was correct. A careful clerk reading the example picked the option whose label contradicted it. The labels now say what they do, and the example stays directly under them

as the check.

WHAT CHANGED · THE RATE BOX SAYS WHAT YOU TYPED	*Stored as a fraction, so 6.25% is written 0.0625* was a sentence telling a clerk what to do. It is now a line under the box that reads back what they did: **0.0625 is 6.25%.** A scale typed wrong is invisible in a fraction and obvious in a percentage.
THE WORKED EXAMPLE	**Kept, and it is the design.** Two sentences of rule cannot be checked; *$3.78 against $3.80* can. A clerk verifies their choice against a number rather than against a definition.
COGNITIVE LOAD	The rate box and the basis tick-boxes change with the method above them: a per-meter tax shows no unit field at all, because a meter is counted, not measured.
STATES	**A percentage** — A rate box, its percentage echo, and the two basis ticks. **A fixed amount per bill** — An amount and a frequency; the basis ticks are absent, because there is no base to take a percentage of. **An amount per unit** — An amount, a unit that must be stated explicitly and is never guessed from the service, and an optional threshold. **Rounding set** — A note appears saying it is recorded only and bills still use standard rounding — the setting does not change arithmetic yet.
COMPONENTS	`WizardFrame` `SelectField` `MoneyTextField` `CheckboxGroup` `InlineCheck` `WorkedExample` `NamedAbsence`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/taxes-fees/new`; the router registers `/:tenant/plans-rates/taxes-fees/new`.

09 Create · Step 3 · Review & save NEW BUILD COMMITMENT PRB-05

Is this right before it reaches a bill? `/:tenant/plans-rates/taxes-fees/new`

What was wrong. A clerk who finished the wizard was never told that eight of the fields they had just

What was wrong. A clerk who finished the wizard was never told that eight of the fields they had just filled in could have waited, or where the ones that were removed now live.

NEW TAX OR FEE

Cancel | Save draft & exit

Add a tax, franchise fee, or surcharge.

Three steps · takes about 2 minutes. Filing details are added later, on the tax itself.

1 What it is | 2 How much | 3 **Review & save**

What will be saved

NAME ON THE BILL
TX State Utility Tax

AUTHORITY
Texas State

HOW IT IS WORKED OUT
A percentage of the bill

RATE
`0.0625 — 6.25%`

WHAT IS TAXED
Usage charges and base service charges

DISCOUNTS
Taxed after the discount

WHERE A PREMISE HAS TO BE
Everywhere in this utility

CUSTOMER CLASSES
Every customer class

SERVICES
All services

EFFECTIVE FROM
06/01/2026

> The rate is shown exactly as you typed it. Bills and the catalogue show the rounded figure the server sends back.

Before you save

WHAT SAVING DOES

This tax matches all 1,284 premises. Saving puts it in force now — save it as a draft instead if you are not ready, and a draft charges nobody until you activate it.

WHAT COMES NEXT

Nothing above can be changed once a bill is issued at this rate. Everything else — the filing form, your account number with the authority, the collection allowance, who gets the reminder — is added on the tax's own page and stays editable.

Save tax or fee

FOR	The clerk committing a levy that will appear on every bill in scope from the effective date.
HOW YOU GET HERE	Continue from How much.
PRIMARY ACTION	**Save tax or fee.**
THIS SCREEN IS THE MODEL	**Nothing was wrong here and that is why it is worth naming.** Alone among the five review screens, this one already read back what was about to be saved: it uses the stored figure only while the clerk has not retyped it, and echoes a retyped rate verbatim with a note saying so. The other four now copy this behaviour. It is the pattern, not the exception.
WHAT CHANGED · THE REVIEW SAYS WHAT IS STILL OPEN	A wizard that stops asking for eight fields owes the clerk a sentence saying where they went. The second note names them and says they stay editable — so a clerk who needs a filing form this afternoon knows it exists and knows it is not lost.
THE FROZEN LINE, DRAWN ONCE AND STATED HERE	Every field in the grid above is one the product refuses to change on a live tax. That is not this document's rule: it is the server's, and it is the same list the wizard was built from. Saying it on the last screen is what makes the two steps make sense.
THE PREMISES COUNT, AGAIN	Drawn by the same component as step 1, so the two counts cannot disagree. One reader, one number.
COGNITIVE LOAD	Ten facts, then two sentences: what the button does, and what is still to come. Nothing new is introduced on a review screen.

STATES

In force now	*Saving puts this tax in force now.*
Dated ahead	*Dated to start on 01/01/2027. It will show as Scheduled and charges nobody until then.*
Matches nobody	The zero-match warning from step 1 is repeated here, because this is the last moment to catch it.

COMPONENTS	`WizardFrame` `FieldGrid` `MatchedPremisesNote` `ConsequenceNote`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A review screen states what saving does before the button.


Route corrected this pass: the document read `/plans-rates/taxes-fees/new`; the router registers `/:tenant/plans-rates/taxes-fees/new`.

10 View · Overview

NEW BUILD · COMMITMENT PRB-05 · COMMITMENT PRB-06 · COMMITMENT PRB-07 · COMMITMENT PRB-23

What is this tax, what is taxed, and who does it reach? `/:tenant/plans-rates/taxes-fees/:id`

> **What was wrong.** Three tabs answered one question; Edit was disabled for every role over a wizard that was routed and working; two fields read Yes and No, which does not say what was asked; and the discount treatment — which changes the arithmetic — appeared on no read screen at all.

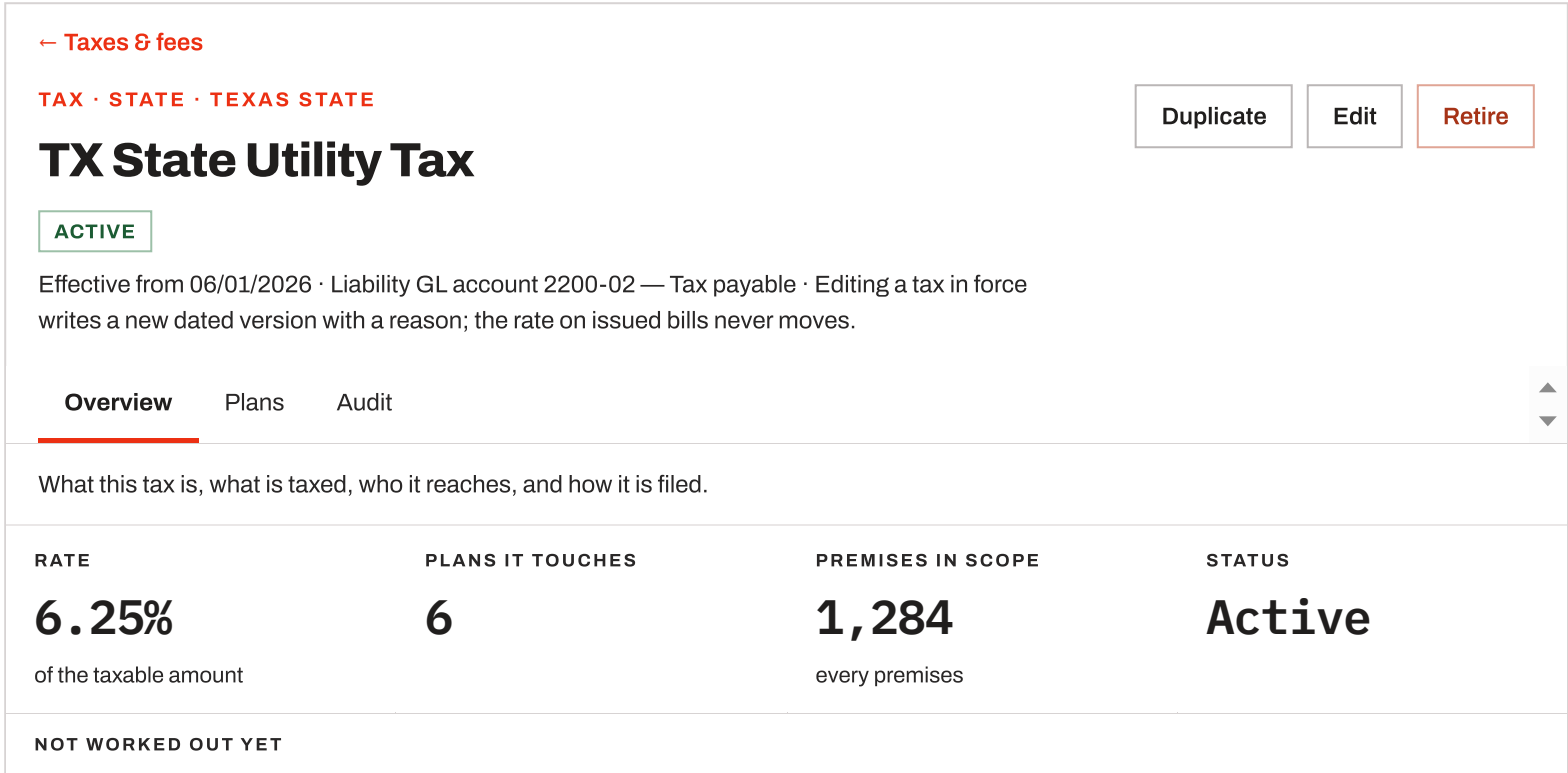

Taxable base per month	Nothing totals the base one tax is charged on.
Collected per month	Nothing totals what one tax has collected. The remittance worksheet in Finance is where a filing figure comes from.

What it is

NAME ON THE BILL
TX State Utility Tax

AUTHORITY
Texas State

LEVEL
State

HOW IT IS WORKED OUT
A percentage of the bill

On the bill

CODE
`TX-UTIL`

BILL LABEL
State Utility Tax
What the customer reads. Blank shows the name above.

EDITABLE
These two can be changed at any time, so the wizard no longer asks for them.

What is taxed

The rate, and exactly what it is charged on.

RATE
6.25% of the taxable amount

USAGE CHARGES
Taxed

BASE SERVICE CHARGES
Taxed

DISCOUNTS
Taxed after the discount — the discount comes off first

APPLIES ABOVE
—
No threshold: every unit is taxed.

ROUNDING
Standard (half up)
Recorded only; bills use standard rounding.

Who it reaches

A tax attaches by jurisdiction and service. A plan cannot leave one off a bill.

SERVICES
All services

CUSTOMER CLASSES
Every customer class

HOW A PREMISE IS DECIDED TO BE IN SCOPE
Everywhere in this utility · 1,284 premises

EFFECTIVE FROM
06/01/2026

EFFECTIVE TO
—

Runs until a new version starts.

Remittance & filings

TAX TYPE
Utility tax

REMITTED TO
Texas Comptroller

FILED
Monthly

FILING FORM
01-339

YOUR ACCOUNT NUMBER WITH THE AUTHORITY
TX-4402-118

DUE-DATE RULE
20th of following month

COLLECTION ALLOWANCE YOU KEEP
0.5%
On $2,400.00 remitted that is $12.00 of your own income.

LIABILITY GL ACCOUNT
2200-02 — Tax payable

WHO GETS THE FILING REMINDER
books@pinehill.example

EDITABLE
Every field in this block can be changed at any time, on a live tax, without a new version. Filings themselves are recorded by the remittance worksheet in Finance.

FOR	A clerk answering a customer asking what a line on their bill is, and an auditor checking a statutory tax reaches everyone it should.
HOW YOU GET HERE	**Taxes & fees** tab, clicking the name.
PRIMARY ACTION	**Edit.** On a tax in force it opens a new dated version with a reason; on a scheduled one it changes the row in place. The line under the title says which.
WHAT CHANGED · THE TWO FIELDS THE WIZARD STOPPED ASKING FOR	**Code and bill label are editable for ever, so they were moved off the wizard and onto this page** — in their own block, with a line saying they can be changed at any time. A field a clerk can fix in ten seconds next week does not belong in front of a clerk who has not yet said what the tax charges.
WHAT CHANGED · FOUR TABS BECAME ONE	**Overview, Rate & basis, Applicability and Remittance & filings were four tabs and one object.** One tab, five blocks, in the order a question about a tax arrives: **what it is**, **on the bill**, **what is taxed**, **who it reaches**, **remittance & filings**.
THIS REVERSES AN ARGUMENT MADE EARLIER THIS SAME DAY	**I argued for keeping Remittance its own tab** — a different job, often an outside bookkeeper

who never opens the rest of the product. Your ruling is that it folds in, and it is written here rather than quietly dropped, because the earlier reasoning is on this page and a reader deserves to know which one won. **The practical answer to the bookkeeper is a link straight to this page**, which lands them on everything about the tax rather than on one tab of it — and the block keeps its own heading, so it is still found by looking for the word.

WHAT CHANGED · ONE ACTION SET, EVERYWHERE

Five detail screens offered five different action sets. The same button was called *Edit* here, *Edit rates* on a schedule, *Edit as new version* on a plan and *Correct with a new version* on a tax; two screens put Retire in the middle and two put it last; and the same button was a quiet outline on three screens and the loud primary on two. It is **Duplicate · Edit · Retire** everywhere now, in that order, at that weight. **What editing does still differs — and that belongs in a sentence, not in a fourth name for the same button.** On a tax in force **Edit** opens the correction flow, and the line under the title says so before anyone presses it.

WHAT CHANGED · EDIT WAS GREYED OVER A WORKING WIZARD

It was disabled for every role, and the sentence beneath said the wizard *arrives with* a future release. It had arrived, and the same clerk could reach it from the list one click away. Edit is live now, and on a tax in force it opens a new dated version — because a rate a bill was issued at has to stay computable forever — with the line under the title saying so before it is pressed.

WHAT CHANGED · TAXED, NOT YES

Usage charges: Yes answers a question the label does not ask. A column of Yeses tells a reader nothing about what was being asked.

WHAT CHANGED · THE DISCOUNT TREATMENT APPEARED ON NO READ SCREEN

It changes the arithmetic and it was only ever on the edit wizard. Same wording as the wizard, so the two cannot disagree.

PREMISES IN SCOPE

A tax that reaches nobody looks identical to one that reaches everybody until you count. Drawn by the same reader the wizard uses, so the two counts cannot disagree.

STATES

A boundary nothing can evaluate	Reads 0 with the reason. County, district and named-list boundaries are recorded and cannot be checked, so the screen says the tax reaches nobody — deliberately, because a boundary we cannot check must never read as applying to everyone.
Scheduled	Edit is live; nothing has billed at this rate yet.
Specific services or classes	Named, comma-joined, in the utility's own order — never *All* when it is not.

Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.


WHAT THE SERVER NEEDS	**Nothing.** `update_tax` already refuses only the nineteen rate-history fields and allows every remittance field to change on a live tax, which is exactly what the editable blocks here need. Folding four tabs into one moves no data.
COMPONENTS	`PageHeader` `KPIStrip` `AbsenceBar` `Panel` `FieldGrid` `MatchedPremisesNote`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A held control names a condition that is still true.

Route corrected this pass: the document read `/plans-rates/taxes-fees/:id`; the router registers `/:tenant/plans-rates/taxes-fees/:id`.

11 View · Plans EXISTS BEHIND NO COMMITMENT

Which plans carry this tax to customers? `/:tenant/plans-rates/taxes-fees/:id?tab=plans`

> **What was wrong.** The tab rendered a sentence saying it could not list what it exists to list, and counted accounts rather than units.

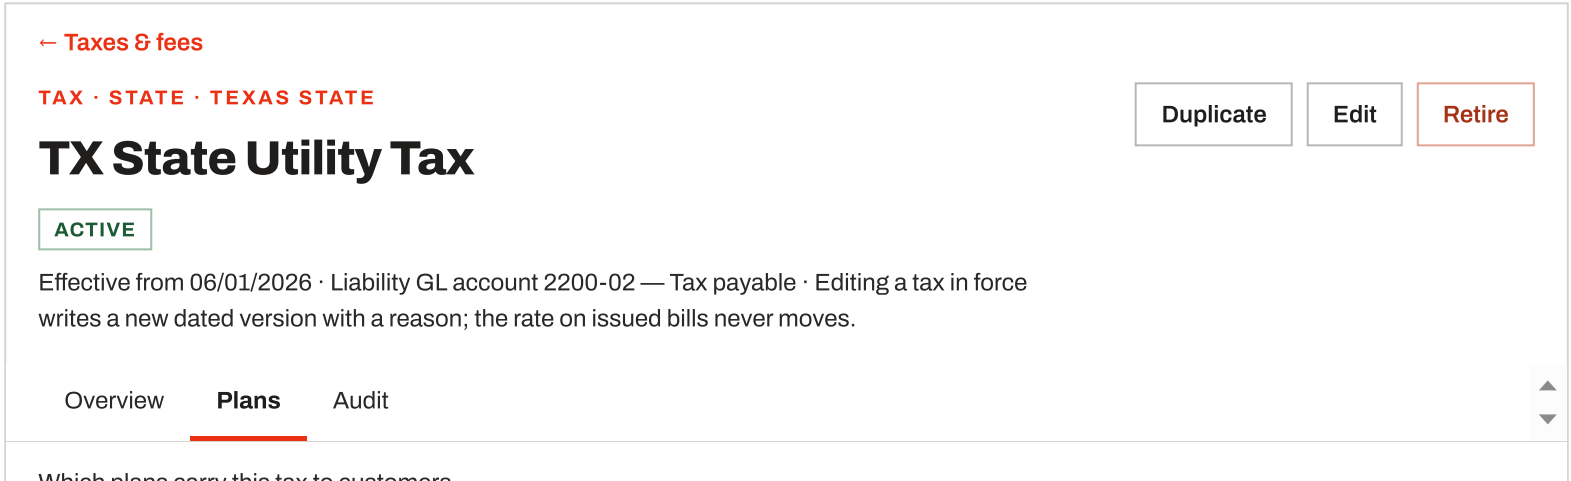

Which plans carry this tax to customers.

RATE	PLANS IT TOUCHES	PREMISES IN SCOPE	STATUS
6.25%	**6**	**1,284**	**Active**
of the taxable amount		every premises	

NOT WORKED OUT YET

Taxable base per month	Nothing totals the base one tax is charged on.
Collected per month	Nothing totals what one tax has collected. The remittance worksheet in Finance is where a filing figure comes from.

Where this reaches

PLAN	REACHED BY	UNITS
Sample — Residential	Its authority is bound to the plan	74
Sample — Commercial	Its authority is bound to the plan	12
Sample — Industrial	Attached on the plan	1

A PLAN CANNOT OPT OUT

A plan may not leave off a tax its bound authority levies. Attaching adds; nothing on a plan can detach.

FOR	A clerk or auditor checking that a statutory tax is actually reaching everyone it should.
HOW YOU GET HERE	The **Plans** tab.
PRIMARY ACTION	None.
WHAT CHANGED	**The tab said naming them needed a read that does not exist.** It names them, and — more usefully — *how* each one gets the tax, because a bound authority and an individual attachment behave differently when the authority changes. The count is units, not accounts.
STATES	**Bound nowhere** — *No plan binds this authority, so this tax reaches nobody through a plan.* **Bound but levies** — Says so: the authority is bound and levies nothing on the services


	nothing those plans carry.
COMPONENTS	`Panel` `ReachTable` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A count names what it counts.

Route corrected this pass: the document read `/plans-rates/taxes-fees/:id?tab=plans`; the router registers `/:tenant/plans-rates/taxes-fees/:id?tab=plans`.

12 View · Audit EXISTS BEHIND NO COMMITMENT

What has this rate been, and who changed it? `/:tenant/plans-rates/taxes-fees/:id?tab=audit`

> **What was wrong.** Rate history rendered a sentence about its own absence, on the object whose own header calls rate history an audit artefact.

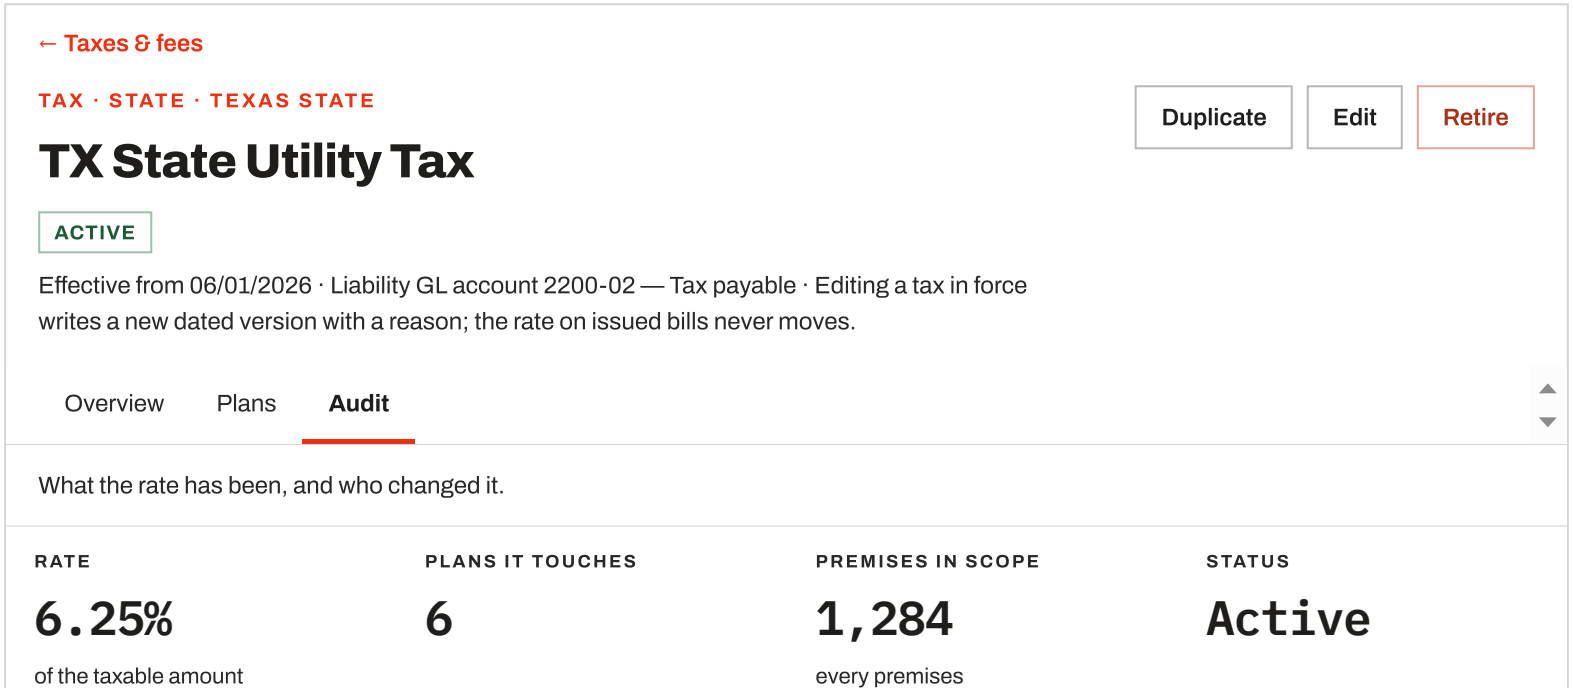

NOT WORKED OUT YET

Taxable base per month	Nothing totals the base one tax is charged on.
Collected per month	Nothing totals what one tax has collected. The remittance worksheet in Finance is where a filing figure comes from.

Audit

EFFECTIVE	RATE	WHY IT CHANGED	BY
06/01/2026	6.25%	State rate increase, HB-1441	Dana Whitfield
01/01/2024	6.00%	First recorded	—

DATED

A bill issued last month has to work out to the same figure forever. That is why a tax in force is corrected with a new version and never edited in place.

FOR	An auditor, or a clerk defending a figure on an old bill.
HOW YOU GET HERE	The **Audit** tab.
PRIMARY ACTION	**Edit**, from the header, which writes the next row here.
WHAT CHANGED	**The tab explained that no endpoint served it — on the object where rate history is most load-bearing**, since this screen's own header calls it an audit artefact. It shows the rates and their reasons, under the product's own word for this tab.
STATES	One version — *First recorded*, and a dash where nobody was stored. History is never filled in backwards. A future version — Listed above the one in force, marked Scheduled with its start date.
COMPONENTS	`Panel` `VersionTable` `Callout dated`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only

signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does.

Route corrected this pass: the document read `/plans-rates/taxes-fees/:id?tab=audit`; the router registers `/:tenant/plans-rates/taxes-fees/:id?tab=audit`.

Commitments in this section

Each card names what the work waits on and what a person would be able to do once it is done. Nothing outside a card is undertaken.

PRB-05 **The premises count narrows on class and service, not just the boundary**

UNVERIFIED

Waits on: Two more parameters on `GET /taxes/matched-premises`, which takes `premises_scope_kind` and `premises_scope_value` and nothing else.

Screens: 07 · 09 · 10

WHAT DONE LOOKS LIKE ON SCREEN

A clerk sets the boundary to "Everywhere", ticks Commercial only, and the count falls from 1,284 premises to 212 before they leave the step.

PRB-06 **What one tax is charged on, and what it collected**

UNVERIFIED

Waits on: Two reads over invoice tax lines. The remittance worksheet DEF-385 names is the consumer.

Screens: 10

WHAT DONE LOOKS LIKE ON SCREEN

The State Utility Tax page reads "Taxable base $38,204.16 · collected $2,387.76" for last month, where both tiles currently say nothing totals them.

PRB-07 **The remittance worksheet**

UNVERIFIED

Waits on: DEF-385 filed it and its own suggested fix says the columns and the worksheet ship together. The columns shipped; the worksheet did not.

Screens: 10

WHAT DONE LOOKS LIKE ON SCREEN

A bookkeeper opens Finance, picks Texas Comptroller and August, and gets a worksheet reading "$2,387.76 collected · $11.94 allowance kept · $2,375.82 to remit on form 01-339 by 20 September".

PRB-23 **Waivers granted and exemption certificates are recorded** UNVERIFIED

Waits on: Neither half of the count can be worked out because neither is stored. DEF-383 built the exemption CATEGORY object; the certificates and the waivers are the other half.

Screens: 37 · 10

WHAT DONE LOOKS LIKE ON SCREEN

The plan's page reads "3 waivers granted · 11 accounts hold a certificate, 2 expiring within 60 days".

---

03 RATE SCHEDULES

Third. A schedule prices exactly one service and reads its base from a charge code, so both groups above have to exist first.

8 screens — 5 to create or edit, 3 to view. 3 commitments touch them.

13 Create · Step 1 · Basics NEW READ NO COMMITMENT

What is this formula called, what does it price, and in what unit? `/:tenant/plans-rates/rates/:id/edit`

> **What was wrong.** The unit every price is expressed in was optional and unchecked, and the customer-class picker was missing over a column that exists — so two classes could not be priced separately.

separately.

PLANS & RATES

Cancel | Save draft & exit

New version of Sample — Residential water

One pricing formula for one service. The name is internal: customers see the plan name, not this one.

1 **Basics** | 2 Base rates | 3 Rates | 4 Effective & approval | 5 Review & activate

Basics

What this formula is called, which service it prices, in what unit, and for whom.

SCHEDULE NAME*

Internal only — never shown to a customer.

Sample — Residential water (inclining tiers)

SERVICE*

This schedule is already in force, so its service cannot change.

Water

UNIT OF MEASURE*

Only units set up for this service are offered. Every price below is expressed in this unit.

kgal

CUSTOMER CLASS

Leave blank and this schedule prices every class. Set one and it prices only that class — and the base charge on the next step is the one declared for it.

Residential

Continue

FOR — A clerk creating a pricing formula, or opening an existing one to change its prices.

HOW YOU GET HERE	**Rate schedules** tab → **+ New rate schedule**, or **Edit** from a schedule's own page. The plan builder also offers *Create a rate schedule* where a service has none, and returns here.
PRIMARY ACTION	**Continue.**
WHAT CHANGED	**The unit of measure is now required and checked here.** It was optional and ungated, so a schedule could reach the last step priced in a unit the service is not billed in — which surfaced as a warning on every later screen and blocked billing entirely. Every price on the next two steps is expressed in this unit; asking for it later would be asking after the fact.
WHAT CHANGED · CUSTOMER CLASS	**The picker was missing and the column was there.** The step's own note admitted it: *a rate schedule can be limited to one customer class, and this screen does not offer the picker yet.* Without it a utility cannot run a residential water schedule and an industrial one side by side — and it is the field that decides which base charge the next step reads, so its absence is what made the base look like one fixed number per service.
COGNITIVE LOAD	Four questions, and two of them can only ever be answered once. The service and class fields say so on the screen rather than refusing later.
STATES	**Creating** — The service help reads *a schedule prices exactly one service, and this cannot be changed later*. **Editing a live schedule** — The same field says *this schedule is already in force, so its service cannot change*, and the control is locked rather than merely warned about. **No units set up** — Says where to add them — Configure → Reference data → Units of measure — and refuses rather than offering an empty list. **Read-only role** — A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.
COMPONENTS	`WizardFrame` `Panel` `TextField` `SelectField` `Disclosure`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility

classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/rates/:id/edit`; the router registers `/:tenant/plans-rates/rates/:id/edit`.

14 Create · Step 2 · Base rates NEW BUILD COMMITMENT PRB-08

What does each connection size pay before a drop is used? `/:tenant/plans-rates/rates/:id/edit`

> **What was wrong.** Every screen read as though one service had one base charge, so two customer classes could not be priced separately; a minimum typed here is saved and read by no bill; and the read-only base gave no way to reach the place it can be changed.

PLANS & RATES

Cancel | Save draft & exit

New version of Sample — Residential water

One pricing formula for one service. The name is internal: customers see the plan name, not this one.

1 Basics | 2 **Base rates** | 3 Rates | 4 Effective & approval | 5 Review & activate

Base rates

The base belongs to charge code BASE-W and is read-only here. Change it there and every schedule and plan carrying it follows.

WHICH BASE APPLIES

This schedule prices the Residential class, so its base comes from BASE-W-RES. An industrial schedule for the same service reads BASE-W-IND — one service, two bases, one per class.

SIZE	BASE CHARGE	MINIMUM RATE	PER-SIZE ROW
2"	$8.0000 BASE-W-RES · Residential	18.50	Remove row
4"	$8.0000 BASE-W-RES · Residential	24.00	Remove row
6"	$8.0000 BASE-W-RES · Residential	— No row — this size uses the schedule's single minimum rate.	Add row

Open BASE-W-RES to change the base

NOT READ BY BILLING YET

A minimum typed here is saved and no bill reads it. Billing takes the minimum from the plan, not from this schedule — so until that is wired, these boxes change nothing a customer pays.

Blank is not zero: a blank minimum rate means none on that size. A size the charge code has no amount for is not served, and a bill for it is refused rather than charged $0.00.

Continue

FOR	A clerk who has already set the base on a charge code and is now saying what each size pays as a floor.
HOW YOU GET HERE	Continue from Basics.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · ONE BASE PER CLASS, NOT PER SERVICE	**You are right, and the product already supports it — the screens did not.** A base is narrowed by **three** things before the engine resolves it: the service, the meter size, and **the customer class**. The class column is on the charge code and has been for weeks; its own note quotes your earlier words and gives the exact case — *water base is $8.00 residential and $15.00 commercial, one service and two amounts*. What was missing was the class picker on the charge code and the class picker on this schedule, so every screen read as though one service had one base. Both are added. This screen now names the code **and** the class it resolved from, so a clerk can see at a glance that a residential schedule is reading the residential base.
WHY THE BASE STILL CANNOT BE TYPED HERE	**Because this screen is not where it lives — and that is your own ruling.** 2026-08-20: *the charge code owns the base amount; a plan displays it, never defines it.* 2026-08-31, naming the order: *plan → charges code → base scharges.* The billing engine asks the charge code first and stops there; the schedule's own base column is a last resort used only where neither the charge code nor the plan states one, and the rule that made the change calls a schedule still carrying a base *a migration artefact that must be refused*. Making it editable here would

create a second place to type one number — which is how every bill in this product once charged $0.00 for base. What was wrong was not that it is read-only; it was that the class picker was missing, so it looked like one number for a whole service.

WHAT CHANGED · A WAY THROUGH

The cell said *change it there* and gave no way to get there. A link opens the right charge code — the one for this schedule's class — and comes back.

WHERE TWO WOULD BOTH APPLY

The engine refuses and names both rather than choosing. Two codes surviving the narrowing is a configuration fault, not a precedence question, and it stops one account rather than mispricing every one of them.

WHAT CHANGED · THE LABEL

Minimum bill is now Minimum rate, on your instruction. One caution, stated once: this figure is a floor on what the whole formula produces rather than a rate per unit, so *minimum rate* reads as the second to some people. Your call, and it is applied here, on the next step, and on the schedule's own page so all three agree.

WHAT CHANGED · THE HONEST WARNING

A minimum typed on this screen is read by nobody. It is saved, published to the engine, and the engine ignores it: billing takes its minimum from two plan columns and the schedule's figure is deliberately left unread, because nothing signed says what a schedule that also carries one means. So the control is live, accepts a number, and changes no bill. It is drawn with that stated, rather than quietly — **and it needs a decision from you: wire it, or take the boxes away.**

BLANK IS NOT ZERO

Stated once, plainly, under the table — the same sentence as the charge code screen, deliberately word-for-word. Two screens, one fact, one wording.

WHAT BILLING ACTUALLY READS

Base charge: the charge code, first and normally only. **Minimum:** the plan — *never* this schedule. Both answers are read off the engine's own code, not inferred from the screen.

COGNITIVE LOAD

Add a row only where a size differs. A size with no row is priced by the schedule's single minimum on the next step, and the empty cell says exactly that instead of looking unfinished.

STATES

No base charge code	The base column says no code is marked as this service's base and that the schedule cannot be activated until one is. It is a refusal stated three steps before it would otherwise fire.
A size the code does	Says the size is not served and a bill for it is refused.

not price

No size classes set up	Says where to add them rather than showing an empty table.

COMPONENTS	`WizardFrame` `SizeMatrix` `ReadOnlyCell` `BulkSetField` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A control that changes nothing on a bill says so on itself.

Route corrected this pass: the document read `/plans-rates/rates/:id/edit`; the router registers `/:tenant/plans-rates/rates/:id/edit`.

15 Create · Step 3 · Rates BLOCKED COMMITMENT PRB-10

How do the prices step up as usage rises? `/:tenant/plans-rates/rates/:id/edit`

> **What was wrong.** Three structural rules were only checked on the final press, and nine boxes invited a price that bills ignore.

PLANS & RATES

Cancel | Save draft & exit

New version of Sample — Residential water

One pricing formula for one service. The name is internal: customers see the plan name, not this one.

1 Basics | 2 Base rates | 3 **Rates** | 4 Effective & approval | 5 Review & activate

Rates

Blocks of usage, each with its own price. Every unit is priced through the tiers.

STRUCTURE

One structure per schedule. Changing it replaces the numbers below.

Tiered ˅

FROM	TO	RATE	
0	2	4.4096	Remove
2	10	7.1656	Remove
10		8.8192	Remove

Blank on the last row means no upper limit.

+ Add tier

Tier 2 starts at 2 and tier 1 ends at 3. Tiers must run on from one another with no gap and no overlap.

Sizes that price these blocks differently

Awaiting your decision — see the note beside this screen.

NOT BILLED YET

Per-size block prices are recorded and bills do not read them yet — every size is billed at the standard block prices above. Until the engine reads them, adding one changes nothing on a bill.

Price a size differently HELD

Continue

FOR	The clerk entering the numbers a council or a board approved.
HOW YOU GET HERE	Continue from Base rates.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE NAME	**The step was called *Pricing formula*.** It is called **Rates** — it is where the rates are typed, and a step a clerk repeats down the phone should be the word they would use. Renamed in the strip, the panel heading and the review summary; nothing else moves.

WHAT CHANGED · THE CHECKS	**Contiguity, inverted tiers and an open middle tier are checked here, where the numbers are typed.** All three were server refusals discovered on the last step. The message names the two tiers and the two numbers, so the fix is visible without re-reading the table.
WHAT CHANGED · THE NINE BOXES	**This is the one that still needs your word.** Nine controls invited a per-size block price and one line of small print said bills ignore them — and adding a size copied the standard prices in, so a clerk who changed nothing still saved an override. Drawn here as the safer of your two options: the section stays, states plainly that it is not billed yet, and the control is held. **The other option is to remove it until the engine reads it.** Holding keeps a signed requirement visible; removing stops a clerk recording a price that does nothing.
COGNITIVE LOAD	One structure, one table. The editor changes completely with the structure above it, so a clerk never sees a field belonging to a shape they did not pick.
STATES	**Seasonal** — A red banner first: it can be built and saved and a bill run will refuse it by name, because a period crossing a season boundary has an unsigned rule. Said before the fields, not after. **Demand** — The ratchet and power-factor options are off by default and say a bill run refuses a schedule with either ticked — billing the raw peak instead would undercharge every bill with nothing on the document to show it. **Base only** — Offered and permanently disabled: it is part of the agreed set and nothing prices it. **Time-of-use** — Each window must name the meter register it bills from, so a bill never has to guess.
COMPONENTS	`WizardFrame` `SelectField` `TierTable` `InlineCheck` `Callout accent` `HeldButton`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A control that changes nothing on a bill says so on itself, not in small print underneath.

Route corrected this pass: the document read `/plans-rates/rates/:id/edit`; the router registers `/:tenant/plans-rates/rates/:id/edit`.

16 Create · Step 4 · Effective & approval BLOCKED COMMITMENT PRB-10

When does this pricing start, and who does it reach? `/:tenant/plans-rates/rates/:id/edit`

> **What was wrong.** Four fields arrived pre-filled with the previous version's answers, two of them making a refusal certain; two reason boxes wrote to two places; and the two dates that decide when a price starts were plain text with no picker and no format hint.

PLANS & RATES

Cancel | Save draft & exit

New version of Sample — Residential water

One pricing formula for one service. The name is internal: customers see the plan name, not this one.

1 Basics | 2 Base rates | 3 Rates | 4 **Effective & approval** | 5 Review & activate

Impact of this change

Who this change reaches, and by how much. Worked out from the effective date you type below.

ACCOUNTS AFFECTED	WORST-CASE BILL CHANGE	AVERAGE BILL CHANGE	SECOND APPROVAL
74	+11.4%	+$3.18	Required
across 3 plans	one account, Sample — Commercial	a month	worst case is above the 10% bar

NOT WORKED OUT YET

Annualised revenue change	Nothing projects a year of revenue from a rate change.

Effective & approval

When this pricing starts, and the regulator reference behind it.

EFFECTIVE FROM*

Must be after 06/01/2026, when the version in force starts.

01/01/2027

EFFECTIVE TO

Leave blank to run until the next version starts.

dd/mm/yyyy

VERSION LABEL

Such as v4 or 2027-A. Blank numbers versions in date order.

WHAT CHANGED

Optional. Shown against this version in the rate's history and on the schedule's own page — a version with nothing written against it simply shows a dash.

STARTING BLANK

The previous version's note and label are deliberately not carried forward. A new version is a new statement.

Continue

FOR	The clerk who has the numbers approved and now has to say from when.
HOW YOU GET HERE	Continue from Rates.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE PREFILLS	**Four boxes arrived carrying the old version's answers and two of them guaranteed a refusal.** The start date came in holding the live version's own start date, and a new version may not begin on or before the current one — so the first refusal was certain. Fixing it put the carried end date behind the new start, causing the second. Both are now blank, and the start date's help states the earliest date that will be accepted rather than waiting to refuse one.
WHAT CHANGED · ONE REASON BOX, AND IT IS OPTIONAL	There were two — *what changed* and *reason for this change* — written to two different places, and the server quietly used one for the other when the second was empty. One box now, written to both the version history and the compliance record. **Optional, on your instruction:**

a version with nothing written against it shows a dash in its history rather than blocking the change. The history tab is drawn for that case.

WHAT CHANGED · DATE PICKERS

Both dates were plain text boxes. No picker, no format hint — so a clerk had to know whether this utility writes 06/01/2026 or 01/06/2026, on the two fields that decide when a price starts. They are pickers in the utility's own format, matching every other date in the module.

WHAT CHANGED · THE IMPACT

The analysis declared a per-account reason for being unpriceable and never assigned one, so it printed a generic list of possibilities. Where a reason is known it is named; where it is not, the count says so and the screen states that impact was unknown, which is recorded on the version.

COGNITIVE LOAD

Impact first, because it is what decides whether the date is acceptable. Dates second. The regulator filing folds away — it is a record and nothing on the screen depends on it.

STATES

Creating	No impact panel at all — there is nothing yet to compare against, and an empty panel of em-dashes is worse than none.
Nothing could be priced	*None of the 74 accounts could be priced, so we cannot say whether the second-approval bar applies. That is not the same as being under it.* Activation records that impact was unknown.
Second approval needed	A danger strip naming the percentage and the bar, before the button, not after.
Date on or before the current version	Checked here: the field says the earliest date that would be accepted.

COMPONENTS

`WizardFrame` `KPIStrip` `AbsenceBar` `DatePickerField` `TextArea` `InlineCheck` `Callout accent`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A field that can be refused states its own condition where it is typed.

Route corrected this pass: the document read `/plans-rates/rates/:id/edit`; the router registers `/:tenant/plans-rates/rates/:id/edit`.

17 Create · Step 5 · Review & activate NEW BUILD COMMITMENT PRB-09

Is this the pricing I just typed? `/:tenant/plans-rates/rates/:id/edit`

> **What was wrong.** One comparison table mixed three figures from three different sources, the read-back showed the prices already in force, activating silently shortened a filed future version, and nothing offered to tell the customers.

PLANS & RATES

Cancel | Save draft & exit

New version of Sample — Residential water

One pricing formula for one service. The name is internal: customers see the plan name, not this one.

1 Basics | 2 Base rates | 3 Rates | 4 Effective & approval | 5 **Review & activate**

Base charges

What each size pays before a drop is used.

SIZE	IN FORCE TODAY	FROM 01/01/2027	CHANGE
2"	$8.0000	$8.0000	
4"	$8.0000	$8.0000	
6"	$8.0000	$8.0000	

OWNED BY BASE-W

Not changing, and it cannot change here. The base belongs to charge code BASE-W; edit it there and every schedule and plan carrying it follows on the same date.

Minimum rates

The floor for each connection size.

SIZE	IN FORCE TODAY	FROM 01/01/2027	CHANGE

2"	$18.50	$19.25	+$0.75
4"	$24.00	$24.95	+$0.95
6"	— No row	— No row	

NOT READ BY BILLING YET

A minimum on a schedule is saved and no bill reads it — billing takes its minimum from the plan. These figures are recorded and change nothing a customer pays until that is wired.

Rates

What each block of usage costs.

BLOCK	IN FORCE TODAY	FROM 01/01/2027	CHANGE
0–2 kgal	$4.4096	$4.5860	+4.0%
2–10 kgal	$7.1656	$7.4522	+4.0%
10 kgal and above	$8.8192	$9.1720	+4.0%

Telling customers

Both are optional and neither is a legal notice — your regulator's notice period is a separate obligation.

☑ Show a notice in the customer portal ☐ Email every affected customer

74 accounts across 3 plans. A notice appears when they next sign in; an email goes to the 61 who have an address on file.

RECORDED, NOT SENT

Neither is built yet. The portal and email channels exist and nothing fires on a rate change — the only plan-related notice in the product tells a customer their account moved to a different plan, which is not this. Ticking a box records the intention against this version.

What activating does

ONE VERSION IS SHORTENED

Version v3 runs to 12/31/2026 today with no end date. Activating this closes it on 12/31/2026.

☐ I understand v3 will be closed on 12/31/2026

> 74 accounts across 3 plans re-price from 01/01/2027. Nothing already billed is re-priced.

Activate this version ✓

FOR	The clerk one press away from changing what 74 households pay.
HOW YOU GET HERE	Continue from Effective & approval.
PRIMARY ACTION	**Activate this version ✓**, and it stays disabled until the tick is made.
WHAT CHANGED · THREE BLOCKS	**One table became three, on your instruction: base charges, minimum rates, rates.** Each shows what is in force today, what applies from the new date, and the change. Three blocks rather than one because they come from three different places and behave differently — the base is owned elsewhere and cannot move here, the minimum is saved and unread, and only the rates actually reach a bill. Merging them into one table made all three look equally live.
BASE CHARGES, SHOWN AND UNCHANGING	**Deliberately included even though it never changes on this screen.** A clerk reviewing a price rise wants to see the whole of what a customer pays, and its absence was read as *the base is changing too*. It is shown with its source and a link to where it is edited.
WHAT CHANGED · THE READ-BACK	**This screen showed the prices already in force, not the ones about to be saved.** A clerk typed 4.4096 → 4.5860, walked here, and read back 4.4096. Every block now reads back the draft beside what it replaces, with the change in the last column — your ruling. The change is a percentage on rates because a percentage is what a council approves, and money on the minimums because those are typed as money.
WHAT CHANGED · TELLING CUSTOMERS	**New, on your question, and the honest answer is that neither channel fires today.** The portal and email machinery both exist; nothing in the product raises a notice when a rate schedule's prices change. The only plan-related notice that exists tells a customer their *account* moved to a different plan, which is a different event and the code says so in as many words. So the tick boxes record the intention against this version and send nothing until the

notice is built. **It is a new requirement, not a wiring job.**

WHY TWO BOXES AND NOT A CHOICE

A portal notice and an email are not alternatives. One is passive and free and reaches whoever signs in; the other is active, costs money and reaches the 61 with an address. A utility raising rates 4% may want both, or only the quiet one — so it is two ticks, with the reach of each stated beside it.

WHAT CHANGED · THE SHORTENED VERSION

Activating silently truncated a future version already filed. The version being shortened is named with its new end date, before the button, and the tick is required. Your ruling: contiguity stays; silence about it does not.

COGNITIVE LOAD

Five panels, each answering one question: what the base is, what the floors are, what the rates are, who gets told, and what the button does. Nothing unchanged appears in a comparison table.

STATES

Creating	No comparison at all — nothing to compare against. One table of the new figures, no ticks.
Only rates changed	The minimum-rates block shows three unchanged rows rather than being hidden, because a clerk needs to confirm the floors did *not* move.
No email addresses on file	The email tick is held, and says how many of the 74 have no address.
Nothing shortened	The version panel and its tick are absent, not shown saying nothing is affected.
Impact unknown	The screen says so and states that activating records impact as unknown against this version.

COMPONENTS

`WizardFrame` `OldNewTable` `NotifyChoice` `ConsequenceNote` `ConfirmTick`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A review reads back what is about to be saved, in as many blocks as it has sources.

Route corrected this pass: the document read `/plans-rates/rates/:id/edit`; the router registers `/:tenant/plans-rates/rates/:id/edit`.

18 View · Overview NEW BUILD COMMITMENT PRB-08

What does this schedule price, for whom, and at what? `/:tenant/plans-rates/rates/:id`

> **What was wrong.** Three tabs answered one question; the customer class was on no screen at all; the count said accounts where a plan is attached to a unit; the GL account was called a revenue account here and nowhere else; and the list and this page disagreed about whether sizes were priced separately.

← Rate schedules

RATE SCHEDULE · WATER · RESIDENTIAL · TIERED · V3

Sample — Residential water (inclining tiers)

Duplicate | Edit | Retire

ACTIVE

In force from 06/01/2026 · GL account 4100-01 — Water revenue · Rate changes save as a new version; a version in force is never edited.

Overview | Plans | Audit

What this schedule prices, for whom, and at what.

IN FORCE	UNITS	SIZES	NEXT CHANGE
v3	74	9	01/01/2027
from 06/01/2026	across 3 plans	all priced the same	+4.0%, filed

NOT WORKED OUT YET

Revenue	Nothing totals billed revenue for one rate schedule.

What it prices

SERVICE	CUSTOMER CLASS	STRUCTURE
Water	Residential	Tiered
	Only accounts in this class are priced by it.	

UNIT OF MEASURE

kgal

Every price below is in this unit.

The rates

Every priced row. The block ranges are the column headings, so a price is read where a clerk looks it up.

SIZE	BASE CHARGE	MINIMUM RATE	0–2 KGAL	2–10 KGAL	10+ KGAL
2"	$8.0000 BASE-W-RES	$18.50	$4.4096	$7.1656	$8.8192
4"	$8.0000 BASE-W-RES	$24.00	$4.4096	$7.1656	$8.8192
6"	$8.0000 BASE-W-RES	— No row — the schedule's single minimum applies.	$4.4096	$7.1656	$8.8192

WHERE THE BASE COMES FROM

The base comes from charge code BASE-W-RES, the one declared for the Residential class. All 74 units are counted in the header; nothing counts units per connection size.

How it bills

Three behaviours that are the same for every schedule, and where the money is posted.

PART-PERIOD BILLS

Prorated automatically

Engine behaviour. There is no setting.

ROUNDING

Two decimals at finalisation

One rule for the whole product.

CURRENCY

USD

The utility's own, in Settings.

GL ACCOUNT

`4100-01 — Water revenue`

Set in Settings, under Accounting.

What a schedule may and may not do

Fixed behaviour, not settings. Nothing here can be changed on any screen.

- One service and one class per schedule: this one prices Water for Residential and nothing else.
- Activating a new version supersedes this one from its effective date. A version in force is never edited.
- A draft cannot be attached to a plan until it is activated.

- Once a schedule has billed or is referenced by a plan it can be retired but not deleted.

FOR

Anyone asking what a service costs — a clerk on the phone, a supervisor checking a query, a new starter learning the tariff.

HOW YOU GET HERE

Rate schedules tab, clicking the name. Also from a plan's Rate schedules tab and a charge code's Where-this-reaches tab.

PRIMARY ACTION

Edit.

WHAT CHANGED · THREE TABS BECAME ONE

Overview, Rate matrix and Billing rules were three tabs answering one question. A clerk checking a price opened Overview, saw a chart and no numbers, and went to Rate matrix; a clerk asking how a quantity becomes money went to a third. They are one tab in four blocks, ordered the way a person arrives: **what it prices** (identity), **the rates** (the chart and every row), **how it bills** (behaviour and where money is posted), **what it may and may not do** (policy). Five tabs are three.

WHAT CHANGED · CUSTOMER CLASS

It was on no screen at all — not the header, not a field, not the list. It is in the eyebrow beside the service and it is a field in its own right, because it decides which base charge applies and therefore what a customer pays. A schedule with no class says *every class* rather than nothing.

WHAT CHANGED · GL ACCOUNT

This screen said *Revenue account*. Every other screen in the product — Finance, the ledger, charge codes, taxes, plans, Settings — says **GL account**. One outlier, now corrected.

WHAT CHANGED · THE CHART IS GONE

The tier chart came out on your instruction and the table is enough. It plotted three bars a clerk had already read as numbers on the row beneath, and it could only ever draw one shape — a flat, seasonal or time-of-use schedule has nothing to stack. The table carries the same three prices, in the same order, beside the size and base they belong to, and it survives every structure. The vertical space it used goes to rows.

THE BLOCK RANGES ARE THE COLUMN HEADINGS

0–2 kgal · 2–10 kgal · 10+ kgal rather than *Tier 1 · Tier 2 · Tier 3*. A clerk looking up a price knows the usage, not the tier number — which is also what the chart's captions were for, so nothing is lost with it.

WHAT CHANGED · THE EM-DASH TILES	Sizes read an em-dash saying sizes are not priced separately while the list claimed 9 sizes; both now say *9 sizes, all priced the same*. *Revenue* moves to the absence line. In their place: which version is in force, and whether a change is already dated.
COGNITIVE LOAD	Four blocks with one-line intros, so a reader learns the shape before reading a value. Nothing repeats between blocks, and the behaviours are grouped precisely so they are not mistaken for unset settings.
STATES	**No version in force** — The header reads *no version is in force yet* and the rates block says *no pricing entered yet* rather than an empty table. **No class set** — *Every customer class*, and the base block says which code resolves where more than one could. **Sizes priced differently** — *9 sizes, 2 priced differently* — the same wording the list uses, from the same source. **Unit mismatch** — A strip above the blocks: this schedule prices in one unit and the service is billed in another with no conversion on file. **Read-only role** — A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.
COMPONENTS	`PageHeader` `KPIStrip` `AbsenceBar` `RateMatrix` `Panel` `FieldGrid` `PolicyList`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. One fact has one wording everywhere. A behaviour is not drawn as an empty setting.

Route corrected this pass: the document read `/plans-rates/rates/:id`; the router registers `/:tenant/plans-rates/rates/:id`.

19 View · Plans EXISTS BEHIND NO COMMITMENT

Which plans carry this schedule to customers? `/:tenant/plans-rates/rates/:id?tab=plans`

What was wrong. A header figure and the table beneath came from two different reads, and nothing

What was wrong. A header figure and the table beneath came from two different reads, and nothing showed where a plan's class disagrees with the schedule's.

← Rate schedules

RATE SCHEDULE · WATER · RESIDENTIAL · TIERED · V3

Sample — Residential water (inclining tiers)

Duplicate | Edit | Retire

ACTIVE

In force from 06/01/2026 · GL account 4100-01 — Water revenue · Rate changes save as a new version; a version in force is never edited.

Overview | **Plans** | Audit

The plans that carry this schedule to customers.

IN FORCE	UNITS	SIZES	NEXT CHANGE
v3	74	9	01/01/2027
from 06/01/2026	across 3 plans	all priced the same	+4.0%, filed

NOT WORKED OUT YET

Revenue	Nothing totals billed revenue for one rate schedule.

Plans using this schedule

PLAN	CODE	CLASS	STATUS	UNITS
Sample — Residential	SCW-RES	Residential	PUBLISHED	74
Sample — Commercial	SCW-COM	Residential	PUBLISHED	12
Sample — Industrial	SCW-IND	Residential	DRAFT	0

WHEN A CLASS DOES NOT MATCH

A plan whose class differs from this schedule's is named here, because bills priced by it may not match what those customers were offered.

FOR	A clerk about to change prices, checking what a change reaches.
HOW YOU GET HERE	The **Plans** tab.
PRIMARY ACTION	None.
WHAT CHANGED · THE CLASS COLUMN	**New, and it is the reason this tab is worth opening now.** A schedule prices one class; a plan targets one class. Where the two differ, customers are billed by a formula written for somebody else — the plan builder already warns about it and this was the one screen that could show it across every plan at once.
WHAT CHANGED · UNITS, NOT ACCOUNTS	**The count said accounts and a plan is not attached to an account.** A plan is assigned to a **unit** — `units.rate_plan_id`, and `unit_plan_assignments` records every assignment with its dates. The account is billed *because* it occupies the unit, so counting accounts undercounts by every vacant unit on the schedule, and those vacant units are exactly the ones whose base charge lands on a landlord's bill. Units is the true count and the one a price change is measured in.
WHAT CHANGED · ONE READ	The header tile and this table came from two different reads and could disagree, under a note that counted every plan in the utility rather than the plans carrying this schedule. One server answer serves both.
STATES	**Nothing carries it** — *No plan carries this rate schedule yet.* A schedule with no plan prices nobody. **A draft plan carries it** — Listed, 0 units, Draft pill — it reaches nobody and the row shows why. **A class mismatch** — The row is marked and the note above explains the consequence.
COMPONENTS	`Panel` `ListTable` `StatusPill` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason


and never drawn at the weight of one that does. Two surfaces showing one fact read it from one source.

Route corrected this pass: the document read `/plans-rates/rates/:id?tab=plans`; the router registers `/:tenant/plans-rates/rates/:id?tab=plans`.

20 View · Audit EXISTS BEHIND NO COMMITMENT

What has this schedule charged, who changed it, and what was filed? `/:tenant/plans-rates/rates/:id?tab=audit`

> **What was wrong.** The tab used a name no other module uses, and two of its six columns showed an em-dash on every row.

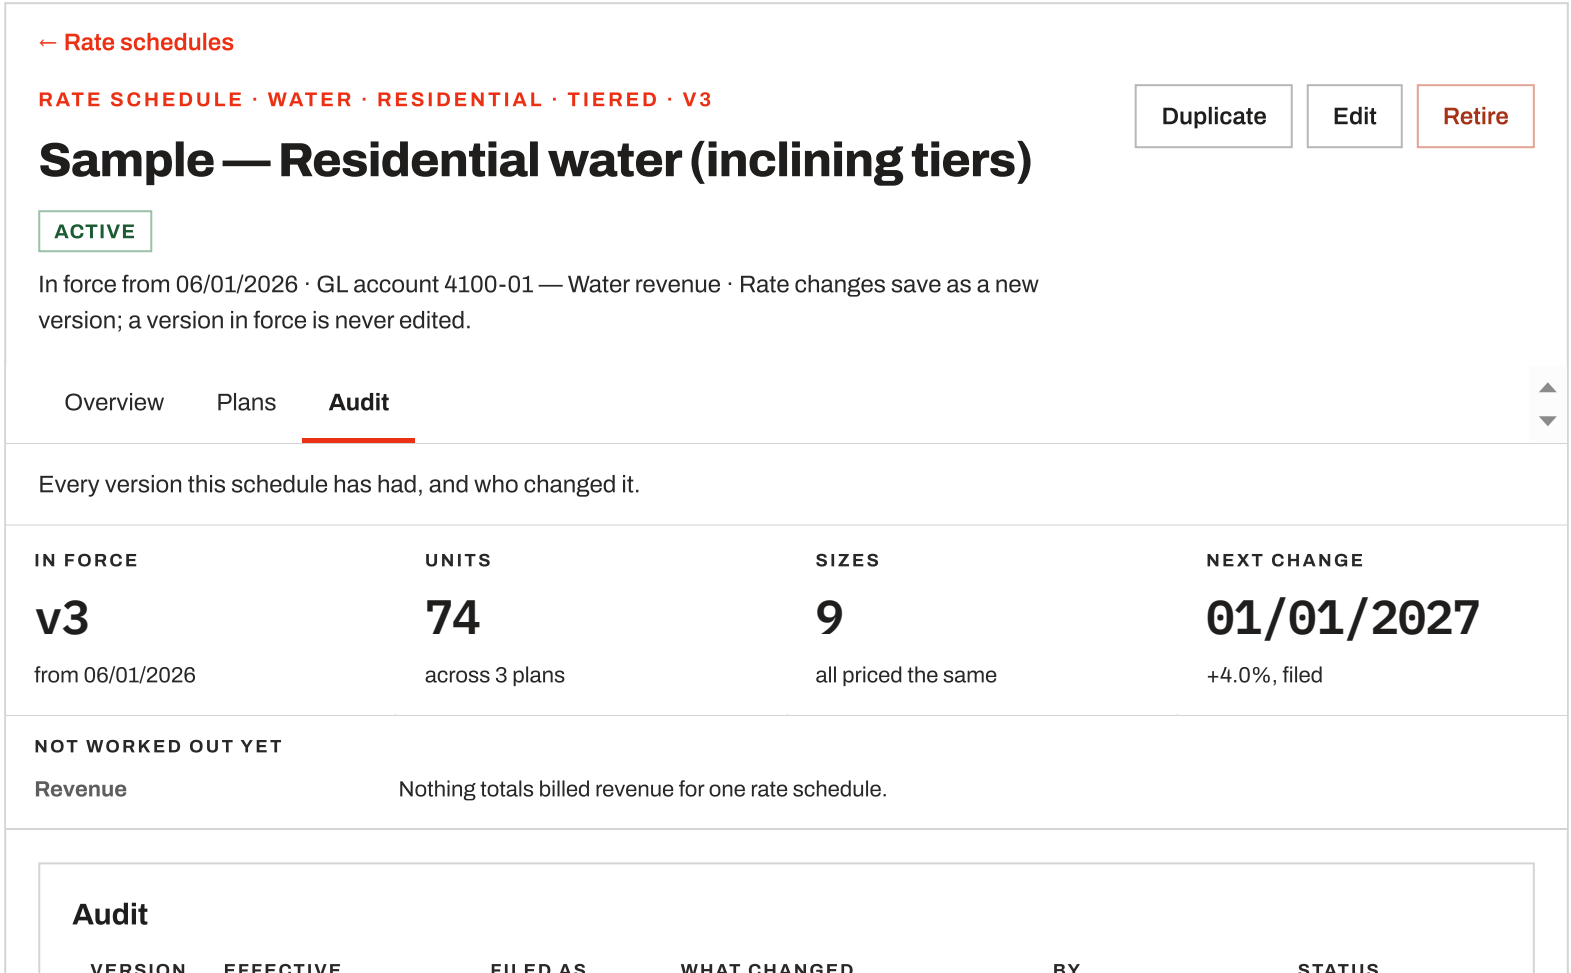

VERSION	EFFECTIVE	FILED AS	WHAT CHANGED	BY	STATUS
2027-A	01/01/2027 →	PUC 2026-4417	Annual inflation adjustment, +4.0%	Dana Whitfield	SCHEDULED
v3	06/01/2026 – 12/31/2026	PUC 2026-1180	Rebalance after the summer review	Dana Whitfield	ACTIVE
v2	01/01/2026 – 05/31/2026	—	— Nothing was written against this version.	— No longer has an account	SUPERSEDED

> **DATED**
> Bills always price usage with the version in force on the read date — a January bill for December usage uses v3 even after 2027-A starts.

FOR	An auditor, a regulator's question, or a clerk defending an old bill.
HOW YOU GET HERE	The **Audit** tab.
PRIMARY ACTION	**Edit**, from the header, which creates the next row here.
WHAT CHANGED · THE NAME	**It was called *Versions & filings*.** Eight detail screens in this product call this tab **Audit** — assets, bills, customer accounts, premises, units, cycles, routes, work orders. Plans & Rates was the only module using its own word. It is Audit.
WHAT CHANGED · TWO EMPTY COLUMNS	*What changed* and *By* each showed an em-dash and a sentence explaining that nothing records them. They are filled, because the reason box on the change screen writes to the version. The two changes only work together — the box without this tab records nothing anyone reads.
THE REASON IS OPTIONAL, SO A DASH IS A REAL ANSWER	On your instruction the change note is not required, so a version can legitimately carry none. The cell says *nothing was written against this version* rather than looking broken.
SEVEN COLUMNS BECAME SIX	*Superseded* was its own column showing the next version's start. It is folded into *Effective* as a range, which is how a person reads a date span.

STATES	No version activated	*No version has been activated yet.*
	A future version	Listed above the one in force, marked Scheduled with its start date.
	The person has left	*No longer has an account*, rather than a blank or a stale name.
COMPONENTS	`Panel` `VersionTable` `StatusPill` `Callout dated`	
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does.	

Route corrected this pass: the document read `/plans-rates/rates/:id?tab=audit`; the router registers `/:tenant/plans-rates/rates/:id?tab=audit`.

Commitments in this section

Each card names what the work waits on and what a person would be able to do once it is done. Nothing outside a card is undertaken.

PRB-08 A rate schedule's minimum reaches the engine — UNVERIFIED

Waits on: DEF-2446 — a minimum typed on a rate schedule is published to the engine and read by nobody. This is a live defect, not a new feature.

Screens: 14 · 18

WHAT DONE LOOKS LIKE ON SCREEN

A schedule with a $12.00 minimum bills a customer who used 1 kgal $12.00 rather than $4.24, and the bill line says which minimum topped it up.

PRB-09 Somebody is told when a price changes — UNVERIFIED

Waits on: Nothing in the product raises a notice when a rate schedule's prices change. The portal and the email machinery both already exist.

Screens: 17

WHAT DONE LOOKS LIKE ON SCREEN

A clerk activates the 2027 water rates, ticks "tell customers", and 74 accounts get a portal notice reading "Your water rates change on 1 January 2027" — with the 9 that have no email address named before the tick is pressed.

PRB-10 **Per-size block prices are billed, or the section goes** UNVERIFIED

Waits on: ⚠ NOBODY HAS RULED THIS. Nine per-size block prices are typed, stored, published to the engine and read by nothing. The document's own footer names it as the one decision still open.

Screens: 15 · 16

WHAT DONE LOOKS LIKE ON SCREEN

A 2" connection using 6 kgal is billed at the 2" block price of $6.5000 rather than the schedule's single rate, and the bill line names the size that selected it.

---

04 DISCOUNTS

Fourth. A discount is an overlay on a plan's normal rates — it never clones a schedule.

8 screens — 5 to create or edit, 3 to view. 5 commitments touch them.

21 Create · Step 1 · Basics & type NEW READ NO COMMITMENT

What is this programme, and what kind of reduction is it? `/:tenant/plans-rates/discounts/new`

> **What was wrong.** Five option buttons shared one explanation line the reader had to count across to use, and four fields carried a helper sentence that only restated the field's own label.

NEW DISCOUNT

Define an overlay.

Cancel | Save draft & exit

Five steps · discounts reference the plan's normal rates and reduce them — never a cloned schedule.

1 **Basics & type** | 2 Value | 3 Eligibility & verification | 4 Effective & approval | 5 Review

The programme

A discount reduces what a customer pays and never changes the plan's rates, so the bill shows the full amount and the reduction on its own line.

CODE*

SENIOR

BILL LINE LABEL*

Senior citizen discount

PROGRAMME OWNER

FUNDING SOURCE

Rate-payer funded

TYPE*

Percentage — a share of what the scope selects

Continue

FOR	A clerk setting up an assistance or loyalty programme, often to satisfy a regulator's assistance filing.
HOW YOU GET HERE	**Discounts** tab → **+ New discount**. Also from a plan's Discounts step, which returns here.

PRIMARY ACTION	Continue.
WHAT CHANGED · THE TYPE IS A DROPDOWN	**Five radio buttons in a row, with a second line underneath explaining all five at once.** A reader had to count across to match the third sentence to the third button. Each option now carries its own sentence — *Percentage — a share of what the scope selects*, *Charge waiver — removes the whole of the scope* — so the explanation is read at the moment of choosing and the helper line is gone.
WHAT CHANGED · FOUR HELPER LINES REMOVED	**Every helper sentence that explained a field's own label is gone.** What survives is what a clerk cannot work out from the control: a number read back to them, a blank-versus-zero distinction, and a stated absence. Nothing that was refused, checked or warned about has been removed. Here that meant *what the customer reads on the reduction line of their bill* under a field labelled **Bill line label**, and three more of the same shape.
THE OVERLAY SENTENCE	Kept, and it is now the only sentence on the screen. It is the one thing about discounts people get wrong — they expect a cloned rate — and it explains why the bill shows two lines.
COGNITIVE LOAD	Five controls, two required. From seven blocks of prose to one.
STATES	**Editing** — Code, label, owner, funding and the filing flag lock, with a banner saying why: editing drafts a new dated **version**, and a version carries the value and the rules, not the identity. **Rate override or Usage allowance chosen** — Says plainly that this type can be written down and cannot be priced yet, so a version of it is refused at activation rather than at save. The type stays offered because removing it would delete a signed requirement. **Read-only role** — A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.
COMPONENTS	`WizardFrame` `TextField` `SelectField` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/discounts/new`; the router registers `/:tenant/plans-rates/discounts/new`.

22 Create · Step 2 · Value NEW READ NO COMMITMENT

How much comes off, and off what? `/:tenant/plans-rates/discounts/new`

> **What was wrong.** A rule a clerk had to hold in their head while typing, written in capitals, where a read-back of what they typed makes the mistake visible instead.

NEW DISCOUNT

Cancel | Save draft & exit

Define an overlay.

Five steps · discounts reference the plan's normal rates and reduce them — never a cloned schedule.

1 Basics & type | 2 **Value** | 3 Eligibility & verification | 4 Effective & approval | 5 Review

The reduction

The type decides the unit; the scope decides what the reduction is taken from.

PERCENTAGE POINTS*

10

10 is a 10% reduction — points, not a fraction.

APPLIES TO

Subtotal before taxes

CAP PER BILL

CAP PER YEAR

LIFETIME CAP

BILL FLOOR

Blank means uncapped. Zero on the floor means this programme may take a bill to nothing.

STACKING PRECEDENCE

Lower runs first.

1

BEFORE AND AFTER

—

A figure worked out here would not be the figure the bill uses.

Continue

FOR	The clerk turning a policy into a number.
HOW YOU GET HERE	Continue from Basics & type.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE POINTS WARNING BECAME A READ-BACK	**Two sentences in capitals telling a clerk what to type** — *percentage POINTS, not a fraction; charge codes and taxes store a fraction and discounts do not* — is a rule to remember while typing. It is now a line under the box that reads back what they actually typed: **10 is a 10% reduction.** Type 0.15 and it says *0.15 is a 0.15% reduction*, which is wrong on the face of it and needs no rule to spot.
WHAT CHANGED · ONE SENTENCE FOR FOUR FIELDS	**Every helper sentence that explained a field's own label is gone.** What survives is what a clerk cannot work out from the control: a number read back to them, a blank-versus-zero distinction, and a stated absence. Nothing that was refused, checked or warned about has been removed. The four bounded fields shared one distinction — blank against zero — and it was written under only one of them. It is one line under all four.
CAPS AND THE FLOOR	Blank is uncapped and zero is a decision: the same wording as blank-is-not-zero on the charge code, because it is the same distinction.
COGNITIVE LOAD	The value field's label changes with the type — *percentage points*, *amount off*, *units allowed free* — so a clerk never has to translate.


STATES	Charge waiver	No value box at all, and a sentence: a waiver removes the whole of whatever the scope selects.
	Usage allowance	Warned that an allowance is counted in the service's own unit, so it must apply to one service, and told to choose that scope above.
	Named charge codes scope	A checkbox list of priced codes; empty says none are priced on this tenant yet and where to add one.
COMPONENTS	`WizardFrame` `MoneyTextField` `SelectField` `InlineCheck` `CheckboxList` `NamedAbsence`	
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.	

Route corrected this pass: the document read `/plans-rates/discounts/new`; the router registers `/:tenant/plans-rates/discounts/new`.

23 Create · Step 3 · Eligibility & verification NEW BUILD COMMITMENT PRB-11 COMMITMENT PRB-14

Who qualifies, and how is it proved? `/:tenant/plans-rates/discounts/new`

> **What was wrong.** Two controls could express a fourth combination that means nothing, and the product spent its best refusal message policing a state the form should never have offered.

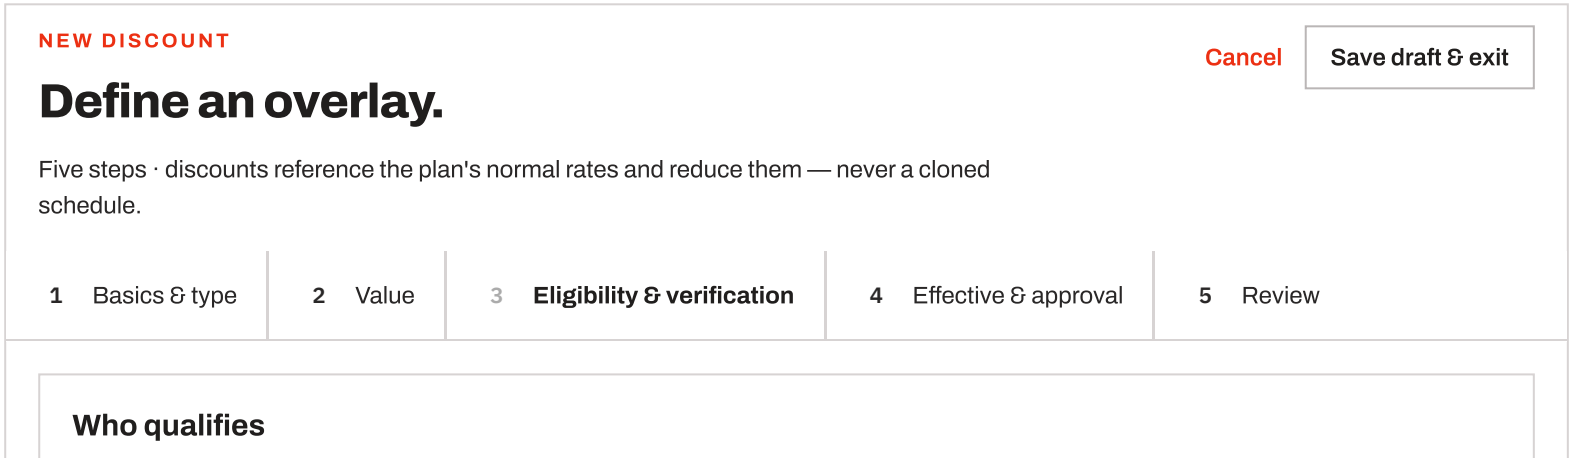

A discount applies because of a fact about the customer, so this programme owns its own proof and renewal rules.

WHO QUALIFIES, IN PLAIN LANGUAGE

Age 65 or over.

HOW PEOPLE JOIN*

Apply and approve, with proof

VERIFICATION*

One-time proof at enrolment

STRUCTURED ELIGIBILITY RULE

—

The rule builder is not built; enrolment is recorded by a member of staff.

Continue

FOR	The clerk deciding how much administration this programme will cost to run.
HOW YOU GET HERE	Continue from Value.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · TWO CONTROLS BECAME ONE DROPDOWN, AND A REFUSAL STOPPED BEING NEEDED	**Enrolment was two buttons and a separate tick-box, and one of the four combinations was impossible.** Automatic enrolment that also demands a document either enrols nobody or asks for nothing, and which one it did depended on whichever check ran first — so the screen refused it, in place, with the best refusal message in the product. **The three real answers are now three options in one dropdown** — *Automatic*, *Apply and approve*, *Apply and approve, with proof* — and the impossible fourth cannot be expressed. **A refusal that can no longer fire is a better outcome than a refusal written well.**
THE REFUSAL IS NOT LOST · IT IS REPAID	That message was the model every inline check in this document was written from, and those all remain. What has gone is the one place it was needed, which is the point of writing it.
WHAT CHANGED · THE EXAMPLES MOVED INTO THE BOX	**Every helper sentence that explained a field's own label is gone.** What survives is what a

clerk cannot work out from the control: a number read back to them, a blank-versus-zero distinction, and a stated absence. Nothing that was refused, checked or warned about has been removed. *Age 65 or over* and *income at or below 150% of the federal poverty guideline* were help text under an empty box. They are the placeholder in the box, where a clerk is looking when they need them.

RESTRICTED PROOF

Four of the ten proof kinds are badged Restricted. Choosing one puts every such document behind a role rule and out of the general lists a clerk browses — said on the screen, because a clerk ticking *income statement* is making a data-protection decision without realising it.

COGNITIVE LOAD

Three controls and one stated absence. The step went from five prose blocks to one.

STATES

Automatic	The proof options and the whole renewal block are absent — nothing to prove and nothing to renew.
Apply and approve, with proof	The proof kinds open and recertification appears.
Never expires	Recertification months, notice and grace all collapse — a programme that never expires has no renewal to configure.

WHAT THE SERVER NEEDS

One refusal, moved to where it is true for every caller. The impossible combination — automatic enrolment that also demands proof — is now unrepresentable in the dropdown, and a client that cannot express a state is not the same as a server that refuses it. The API still accepts the two fields separately, so it should refuse the pair, for the reason `DEF-384` gives about a different endpoint: a client-side refusal is not a refusal.

COMPONENTS

`WizardFrame` `TextArea` `SelectField` `NamedAbsence`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. Where a combination is impossible, make it unrepresentable rather than refused.

Route corrected this pass: the document read `/plans-rates/discounts/new`; the router registers `/:tenant/plans-rates/discounts/new`.

24 Create · Step 4 · Effective & approval BLOCKED COMMITMENT PRB-13

When does it run, what may it cost, and who signs it off? `/:tenant/plans-rates/discounts/new`

> **What was wrong.** The two date fields were plain text with no picker and no format hint, in a module where every other date has one — and the note beneath them ran to five sentences.

NEW DISCOUNT

Define an overlay.

Cancel | Save draft & exit

Five steps · discounts reference the plan's normal rates and reduce them — never a cloned schedule.

1 Basics & type | 2 Value | 3 Eligibility & verification | 4 **Effective & approval** | 5 Review

Dates and budget

A discount attached to a plan is available, not granted — nothing here enrols anybody.

EFFECTIVE FROM*

01/01/2027

EFFECTIVE TO

No planned end

BUDGET CAP

Blank means unbounded, which always needs a second approval.

7332.00

BUDGET PERIOD*

Annual

WHEN THE BUDGET RUNS OUT*

Suspend the discount

WHAT CHANGED, AND WHY*

SECOND APPROVAL — OPEN

Two approved policies disagree about when a second approval is needed, and this $7,332 a year — $611 a month — falls between them. This one is with you.

Continue

FOR	The clerk who needs a sign-off before this can go live.
HOW YOU GET HERE	Continue from Eligibility & verification.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE DATES WERE PLAIN TEXT BOXES	Every other date in Plans & Rates is a picker in the utility's own format; these two had no picker, no format hint and no help at all on the *from* box, so a clerk had to guess whether this utility writes 06/01/2026 or 01/06/2026. They are pickers now, matching the rest of the module — **and the format hint went with the helper line, because a picker shows the format by existing.**
WHAT CHANGED · FIVE SENTENCES BECAME TWO	**Every helper sentence that explained a field's own label is gone.** What survives is what a clerk cannot work out from the control: a number read back to them, a blank-versus-zero distinction, and a stated absence. Nothing that was refused, checked or warned about has been removed. The open-question note was five sentences and is now two. It keeps both figures, because the figures are the question.
THE SECOND-APPROVAL CONTRADICTION	**Left on the screen, deliberately, and it is a question for you rather than a defect.** Two signed policies test different things against different bars, and the worked figure falls between them. Choosing one quietly would make one policy disappear.
COGNITIVE LOAD	Dates, then money, then the reason. One helper line survives, on the only field where blank means something other than empty.
STATES	Creating — The reason box is absent — there is no previous version to have changed from.

No budget cap	The panel says a discount with no cap always needs the second approval, whatever the figure.
Editing	The reason box is required and checked here, on the step it lives on — this wizard was already the only one that got that right.

COMPONENTS

`WizardFrame` `DatePickerField` `MoneyTextField` `SelectField` `TextArea` `Callout accent`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A date is a picker in the utility's own format, everywhere.

Route corrected this pass: the document read `/plans-rates/discounts/new`; the router registers `/:tenant/plans-rates/discounts/new`.

25 Create · Step 5 · Review NEW READ NO COMMITMENT

Is this what I just typed? `/:tenant/plans-rates/discounts/new`

> **What was wrong.** The Value row read back the stored figure and ignored the retyped one; two permanently disabled buttons sat where a control should be; and the consequence note said the same thing in two sentences.

NEW DISCOUNT

Cancel | Save draft & exit

Define an overlay.

Five steps · discounts reference the plan's normal rates and reduce them — never a cloned schedule.

1 Basics & type | 2 Value | 3 Eligibility & verification | 4 Effective & approval | 5 **Review**

What is changing

	IN FORCE NOW	SAVING AS V3	CHANGE
Value	10%	15%	+5 points
Applies to	Subtotal before taxes	Subtotal before taxes	
Budget cap	$5,000.00	$7,332.00	+$2,332.00

CODE
SENIOR

BILL LINE LABEL
Senior citizen discount

TYPE
Percentage

HOW PEOPLE JOIN
Apply and approve, with proof

VERIFICATION
One-time proof at enrolment

STACKING PRECEDENCE
1

What saving does

NOTHING CHANGES YET

This saves version 3 as a draft — the 31 enrolled accounts keep 10% until you activate it.

Save new version

FOR

The clerk committing a change to a programme that 31 households are already receiving.

HOW YOU GET HERE

Continue from Effective & approval.

PRIMARY ACTION

Save new version.

WHAT CHANGED · THE VALUE NOW READ BACK THE WRONG FIGURE

It showed the stored value and ignored the one just retyped — on the one field a discount is actually about. It now reads back the draft beside what it replaces, the same treatment as the rate schedule and the charge code, so all five review screens behave the same way.

WHAT CHANGED · TWO SENTENCES BECAME ONE

Every helper sentence that explained a field's own label is gone. What survives is what a clerk cannot work out from the control: a number read back to them, a blank-versus-zero distinction, and a stated absence. Nothing that was refused, checked or warned about has been removed. *This saves version 3 as a draft. A draft prices nothing and enrols nobody — 31 enrolled accounts keep the current 10%…* said the same thing twice. One sentence keeps the

version, the 31 people and the 10%.

TWO DISABLED BUTTONS REMOVED — *Submit for approval* and *Activate* sat here permanently disabled with a sentence explaining they live somewhere else. A disabled control that has never once been usable is not a control; the sentence is now the note above, which says where to go and why nothing changes yet.

COGNITIVE LOAD — Only what changes is compared. Everything else is a plain grid, and the panel intro is gone because the table's own heading says what it is.

STATES

Creating	No comparison table and no reason — nothing exists to change from. The grid alone.
Nothing changed	The comparison is absent rather than showing unchanged rows.

COMPONENTS — `WizardFrame` `OldNewTable` `FieldGrid` `ConsequenceNote`

RULES — Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A review screen reads back what is about to be saved.


Route corrected this pass: the document read `/plans-rates/discounts/new`; the router registers `/:tenant/plans-rates/discounts/new`.

26 View · Overview

NEW BUILD · COMMITMENT PRB-11 · COMMITMENT PRB-12 · COMMITMENT PRB-20

What is this programme, what is it worth, and who qualifies? `/:tenant/plans-rates/discounts/:id`

> **What was wrong.** Three tabs answered one question, ten fields of two different kinds ran as one flat list, the count that decides take-up was missing, and the count said accounts where a plan is assigned to a unit.

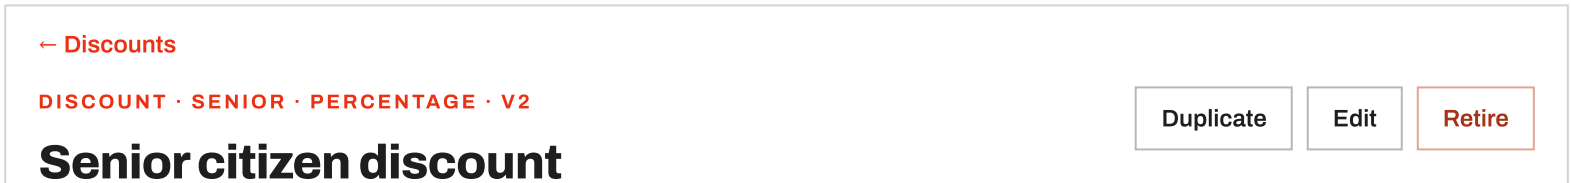

ACTIVE

Effective from 01/01/2026 · A discount references the plan's normal schedules and reduces what is owed. The bill shows the full tariff amount and the reduction as its own line, so the subsidy granted is reportable.

Overview | Plans | Audit

What this programme is, what it is worth, and who qualifies.

VALUE	ENROLLED UNITS	BUDGET REMAINING	STATUS
10%	31	$2,180.00	Active
of the subtotal before taxes	of 86 eligible	of $5,000.00 this year	

NOT WORKED OUT YET

Programme cost per month — Nothing works out a month's subsidy for one programme. The lifetime figure below is what is recorded.

What it is

DISCOUNT
Senior citizen discount

TYPE
Percentage

PROGRAMME OWNER
—
Nobody is recorded as answering for this programme.

FUNDING SOURCE
—
Not recorded.

What it is worth

What comes off, and everything that bounds it.

VALUE
10% of the subtotal before taxes

STACKING PRECEDENCE
1
Runs before any discount with a higher number.

BILL FLOOR
$0.0000
This programme may take a bill to nothing.

CAP PER BILL
—
No cap.

CAP PER YEAR
—
No cap.

BUDGET
$2,180.00 left of $5,000.00 a year

Who qualifies

The counter script: what to ask, and what to accept.

ELIGIBILITY	ENROLMENT	VERIFICATION
Age 65 or over, on the account holder's own record.	**Apply and approve**	**One-time proof at enrolment**
ACCEPTED PROOF	**RECERTIFICATION**	**EFFECTIVE TO**
Government ID · Birth certificate	**Never expires**	**—** No planned end.

FOR	A clerk on the phone to somebody asking whether they qualify, and a finance lead checking what a programme is costing.
HOW YOU GET HERE	**Discounts** tab, clicking the name. Also from a plan's Discounts tab.
PRIMARY ACTION	**Edit.**
WHAT CHANGED · THREE TABS BECAME ONE	**Overview, Value & rules and Applicability were three tabs and one question.** Overview repeated the value from a tile and said little else; the caps were on a second tab; who qualifies was on a third. One tab, three blocks, in the order a call goes: **what it is**, **what it is worth**, **who qualifies**.
WHAT CHANGED · ENROLLED AGAINST ELIGIBLE	**31 alone is trivia; 31 of 86 is take-up**, and low take-up on an assistance programme is a finding. It is one tile now.
WHAT CHANGED · UNITS, NOT ACCOUNTS	Same ruling as the rate schedule and the charge code: a plan is assigned to a unit, so a count of accounts undercounts by every vacant one.
WHAT CHANGED · THE BUDGET AS A FRACTION	A bare $2,180 does not say whether that is comfortable or nearly out. *of $5,000.00 this year* does, in the same tile — and this is the figure that decides whether the programme suspends itself.
THE BILL FLOOR SHOWS $0.0000, NOT A BLANK	A stored zero is a decision — it says this programme may take a bill to nothing — and drawing it as empty would hide a policy somebody signed.


STATES	Suspended, funding exhausted	The pill says so in those words and the budget tile reads $0.00 left. A bill run can set this status by itself, and the edit screen names which setting allows that.
	No budget cap	*Unbounded*, not a dash, with the note that unbounded always needs a second approval.
	Automatic enrolment	The proof fields are absent, not empty — the two cannot coexist and the edit screen refuses the combination.
	Draft	No enrolments possible; the tile reads 0 and the header offers the lifecycle buttons.
	Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.
COMPONENTS	`PageHeader` `KPIStrip` `AbsenceBar` `Panel` `FieldGrid`	
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does.	

Route corrected this pass: the document read `/plans-rates/discounts/:id`; the router registers `/:tenant/plans-rates/discounts/:id`.

27 View · Plans EXISTS BEHIND NO COMMITMENT

Which plans offer this, and to how many people? `/:tenant/plans-rates/discounts/:id?tab=plans`

> **What was wrong.** The tab rendered a sentence saying it could not name what it exists to name.

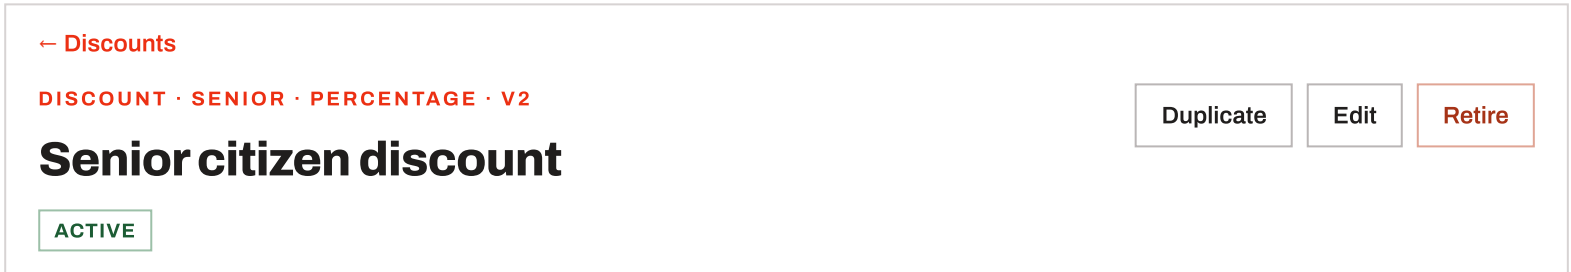

Effective from 01/01/2026 · A discount references the plan's normal schedules and reduces what is owed. The bill shows the full tariff amount and the reduction as its own line, so the subsidy granted is reportable.

Overview **Plans** Audit

Where this discount is offered, and how many took it.

VALUE	ENROLLED UNITS	BUDGET REMAINING	STATUS
10%	**31**	**$2,180.00**	**Active**
of the subtotal before taxes	of 86 eligible	of $5,000.00 this year	

NOT WORKED OUT YET

Programme cost per month — Nothing works out a month's subsidy for one programme. The lifetime figure below is what is recorded.

Where this is offered

PLAN	OFFERED	ELIGIBLE UNITS	ENROLLED
Sample — Residential	Whenever the discount is available	74	28
Sample — Commercial	From 01/01/2026	12	3

OFFERED, NOT GIVEN

Attaching a discount to a plan makes it available. It reduces nobody's bill until an account is enrolled — which is why the last two columns are different numbers.

FOR	A programme owner asking whether take-up is any good.
HOW YOU GET HERE	The **Plans** tab.
PRIMARY ACTION	None.
WHAT CHANGED	**The tab said naming the plans needed a read that does not exist.** It names them, and adds the comparison that makes it worth opening: how many could have it against how many took it. Twenty-eight of seventy-four is the sentence a programme owner came for.


STATES	Offered nowhere	*No plan offers this discount, so nobody can enrol.*
	Offered within a window	The plan's own window is shown, which can be narrower than the discount's.
COMPONENTS	`Panel` `ReachTable` `Callout accent`	
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A count names what it counts.	

Route corrected this pass: the document read `/plans-rates/discounts/:id?tab=plans`; the router registers `/:tenant/plans-rates/discounts/:id?tab=plans`.

28 View · Audit EXISTS BEHIND NO COMMITMENT

What has this been worth, and who changed it? `/:tenant/plans-rates/discounts/:id?tab=audit`

> **What was wrong.** The tab rendered a sentence about its own absence, under a name no other module uses.

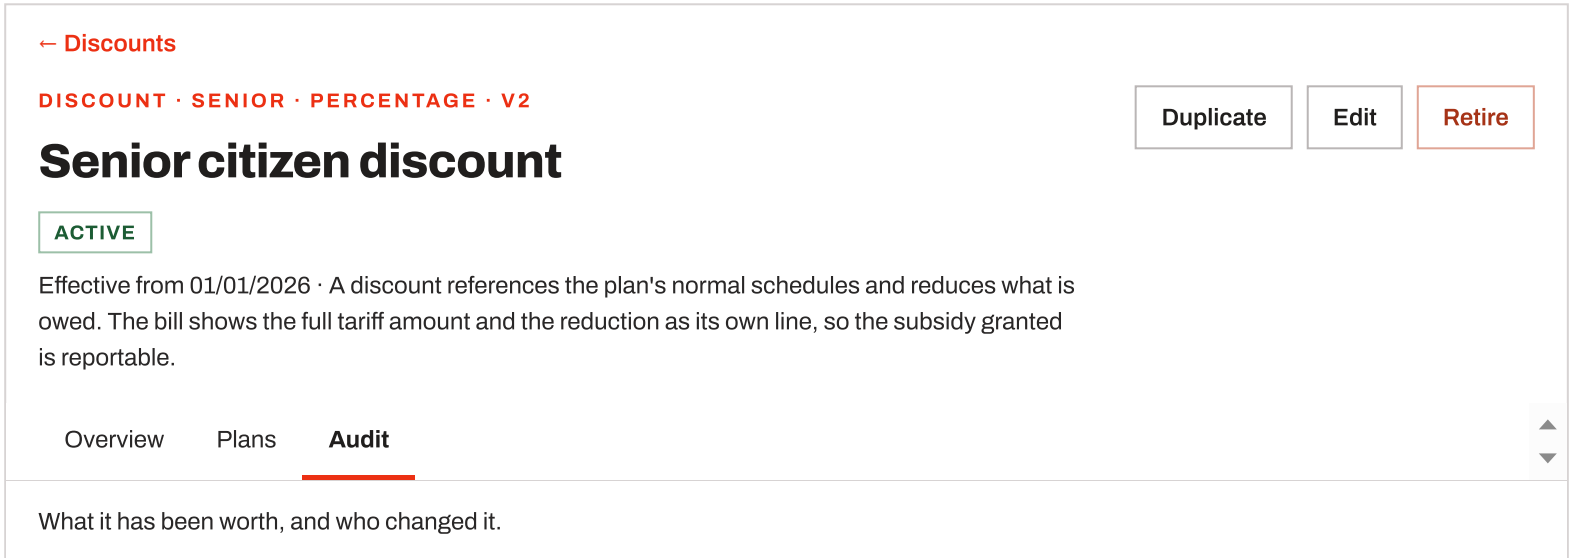

VALUE	ENROLLED UNITS	BUDGET REMAINING	STATUS
10%	**31**	**$2,180.00**	**Active**
of the subtotal before taxes	of 86 eligible	of $5,000.00 this year	

NOT WORKED OUT YET

Programme cost per month — Nothing works out a month's subsidy for one programme. The lifetime figure below is what is recorded.

Audit

VERSION	EFFECTIVE	VALUE	WHY IT CHANGED	BY	STATUS
v2	01/01/2026 →	10%	Raised from 5% after the 2026 assistance review	Dana Whitfield	ACTIVE
v1	01/01/2025 – 12/31/2025	5%	First version	Dana Whitfield	SUPERSEDED

DATED

A version prices from its own effective date. A bill already issued is never re-priced.

FOR	A regulator's assistance filing, or a customer asking why their reduction changed.
HOW YOU GET HERE	The **Audit** tab.
PRIMARY ACTION	**Edit**, from the header, which drafts the next version.
WHAT CHANGED	**The tab explained that no endpoint served it**, on the object whose history was closest to working — this wizard already required a reason and already stored it. The name follows the product's own word, as on the rate schedule and the charge code.
STATES	**One version** — *First version*, and no comparison to draw. **A draft version** — Listed above the active one, marked Draft, with a note that a draft prices nothing and enrols nobody.

COMPONENTS

`Panel` `VersionTable` `StatusPill` `Callout dated`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does.

Route corrected this pass: the document read `/plans-rates/discounts/:id?tab=audit`; the router registers `/:tenant/plans-rates/discounts/:id?tab=audit`.

Commitments in this section

Each card names what the work waits on and what a person would be able to do once it is done. Nothing outside a card is undertaken.

PRB-11 The structured eligibility rule builder on a discount

UNVERIFIED

Waits on: It is named as unbuilt on the discount wizard. Enrolment is a member of staff recording a fact until it exists.

Screens: 23 · 26

WHAT DONE LOOKS LIKE ON SCREEN

A clerk builds "age ≥ 65 AND account type = Residential", saves, and the discount's page lists 86 accounts matching it beside the 31 enrolled.

PRB-12 What a discount programme costs per month

UNVERIFIED

Waits on: A read over discount lines. The tile says nothing works it out.

Screens: 26

WHAT DONE LOOKS LIKE ON SCREEN

SENIOR's page reads "$418.20 last month" where it reads an em-dash, and the budget tile reads "$2,180 of $5,000.00 this year" against it.

PRB-13 The second-approval test is settled

UNVERIFIED

Waits on: ⚠ TWO APPROVED POLICIES DISAGREE and the document leaves both on screen deliberately. One measures projected monthly subsidy against $500; the other measures the budget cap against a setting defaulting to $10,000. A $7,332 annual budget is $611 a month — over the first bar, under the second.

Screens: 24

WHAT DONE LOOKS LIKE ON SCREEN

A clerk saves a discount with a $7,332 annual budget and the screen states one test with one figure — "needs a second approval: $611 a month is over the $500 threshold" — instead of naming two policies and asking the reader to choose.

PRB-14 The impossible enrolment pair is refused by the server

UNVERIFIED

Waits on: The dropdown makes automatic-plus-proof unrepresentable in the screen. A client that cannot express a state is not a server that refuses it — DEF-384's own lesson on a different endpoint.

Screens: 23

WHAT DONE LOOKS LIKE ON SCREEN

A POST setting enrolment automatic and proof required comes back 422 naming both fields, where today it is accepted and stored.

PRB-20 How many accounts are ELIGIBLE for a discount

UNVERIFIED

Waits on: Nothing in the product works out eligibility. Until this exists, take-up cannot be stated and the cell shows the enrolled count with the gap named.

Screens: 26 · 37


WHAT DONE LOOKS LIKE ON SCREEN

The plan's page reads "SENIOR · 28 of 74" where it reads "28" with no denominator.

05 PLANS

Last, because a plan composes and prices nothing itself. It can carry only what already exists.

11 screens — 8 to create or edit, 3 to view. 10 commitments touch them.

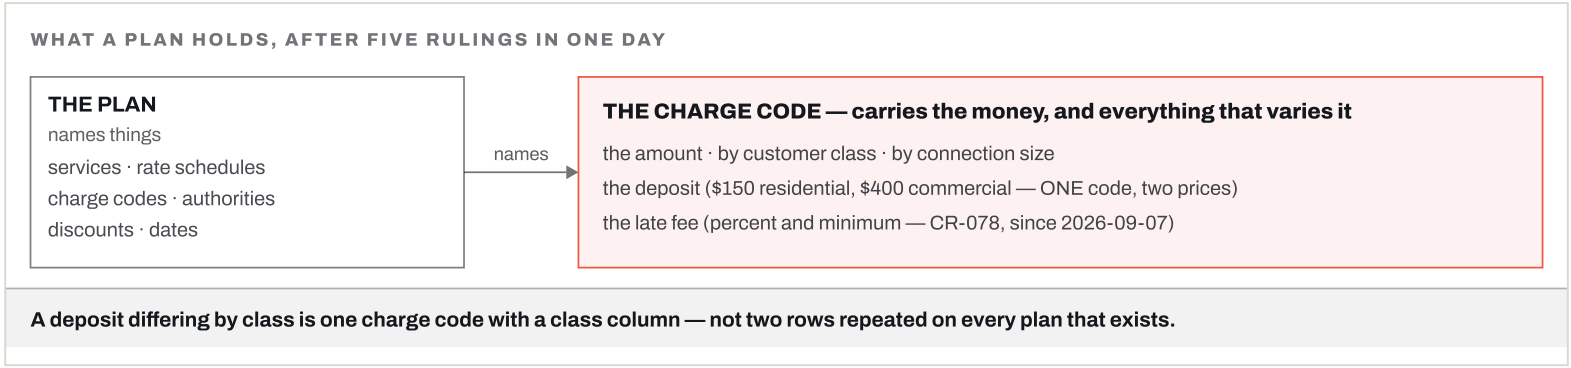


`Figure 3` · **a plan names, a charge code prices.** Five separate rulings on 2026-09-08 all resolved the same way. Reading them as one rule is what makes the sixth predictable.

29 Create · Step 1 · Basics NEW BUILD COMMITMENT PRB-15

What is this plan called, and who is it for? `/:tenant/plans-rates/plans/new`

> **What was wrong.** Five blocks of explanation on a four-field screen, three of them describing where a value would later appear rather than what to type.

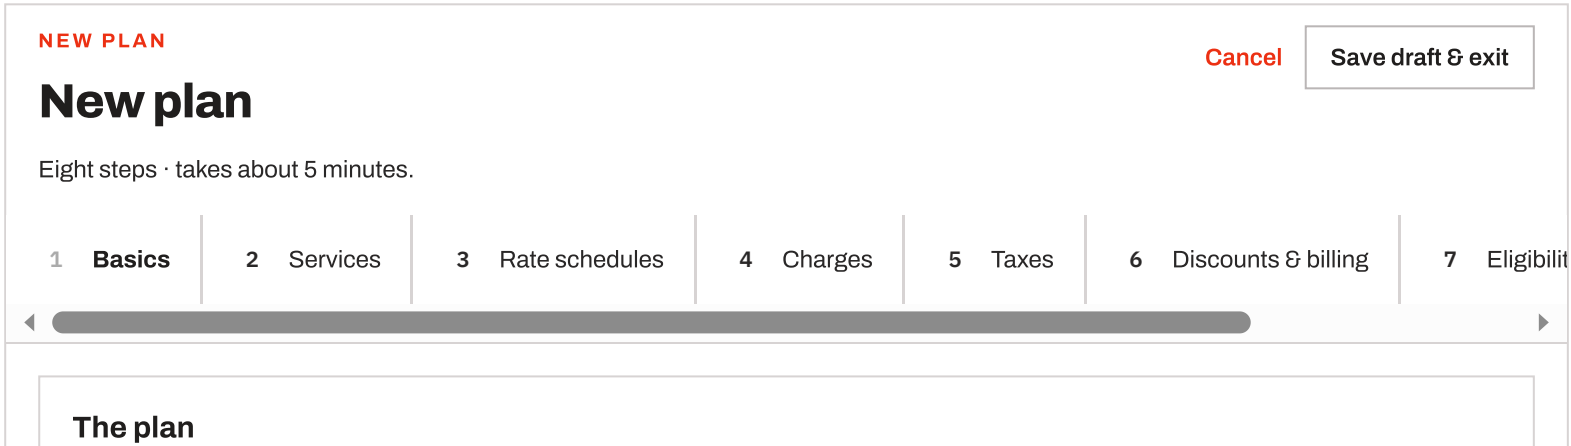

The name is what customers see on their bills, so keep it plain.

PLAN NAME (CUSTOMER-FACING)*

Residential Standard

PLAN CODE (INTERNAL)*

SCW-RES

CUSTOMER CLASS*

Chosen once — it narrows every later step.

Residential

DESCRIPTION SHOWN TO CUSTOMER

Everyday water and power for a single home.

Continue

FOR	A clerk building the thing a customer actually subscribes to.
HOW YOU GET HERE	**Plans** tab → **+ New plan**.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THREE EXPLANATIONS BECAME ONE	The intro was two sentences of advice, the class carried two more, and the description carried two about where it appears. One sentence survives — the one a clerk can act on while typing the name. The class keeps a single clause because *chosen once* is a consequence, not a definition.
TWO NAMES, SAID AS TWO	*Customer-facing* and *internal* are in the labels, not in help text underneath. It is the commonest confusion on this screen and a label fixes it for free.
COGNITIVE LOAD	Four fields, three required. From five blocks of prose to one.
STATES	No classes set up — The field degrades to a read-only note saying where they are

No classes set up	The field degrades to a read-only note saying where they are managed, rather than an empty select.
Editing	All four pre-fill. The code stays editable until the plan is published.
Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.

COMPONENTS `WizardFrame` `StepHead` `TextField` `SelectField` `TextArea`


RULES Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

30 Create · Step 2 · Services NEW BUILD COMMITMENT PRB-16 COMMITMENT PRB-24

Which services does this plan cover? `/:tenant/plans-rates/plans/new`

> **What was wrong.** Five tick-boxes for a list of eleven, and a surcharge field that asked a clerk to type 1.15 — where typing 15, the number in the label, would have charged fifteen times the bill.

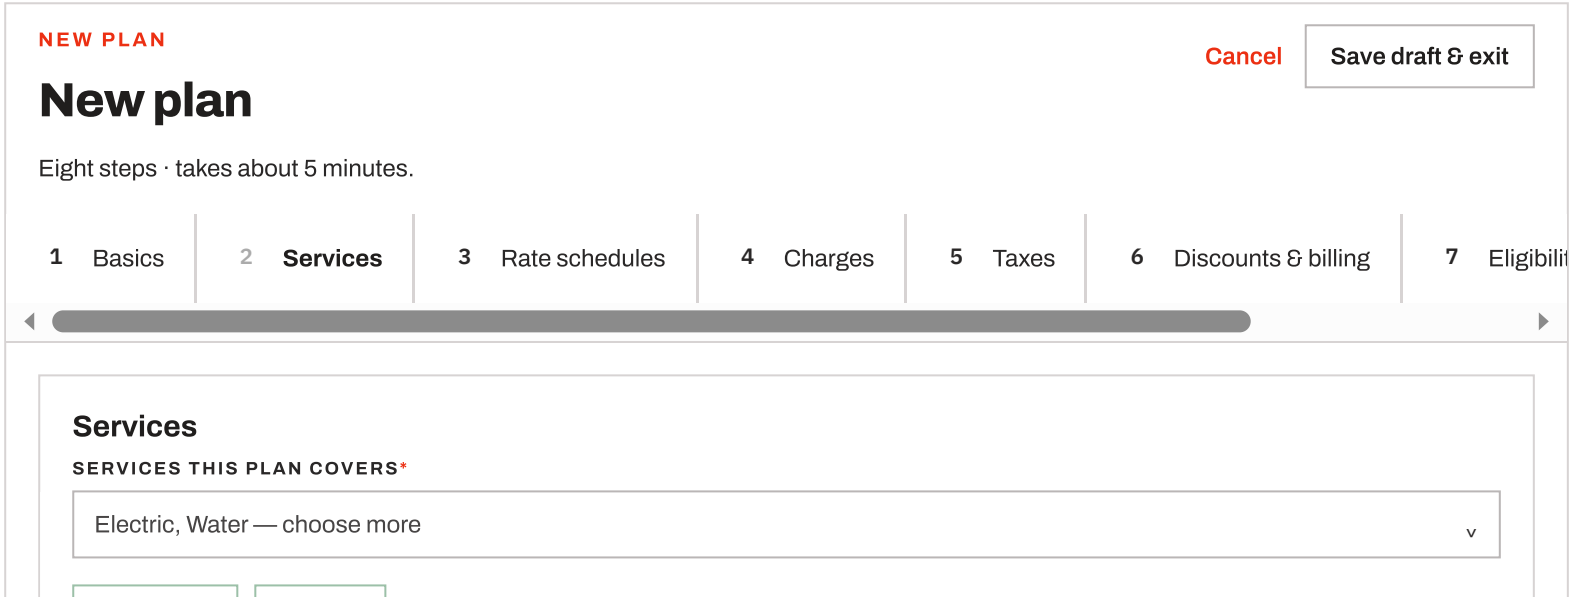

ELECTRIC × WATER ×

2 chosen. Sewer is offered but has no rate schedule for Residential yet, so it could not be billed until one exists.

The list holds the 5 services this utility has switched on; the other 6 are named in it, greyed, with where to switch them on.

Outside the city limits

DO PREMISES OUTSIDE THE CITY LIMITS PAY MORE?*

Yes — a percentage more

HOW MUCH MORE

15

15% more. A $100.00 bill outside the city becomes $115.00.

Continue

FOR	The same clerk, choosing scope.
HOW YOU GET HERE	Continue from Basics.
PRIMARY ACTION	**Continue**, blocked with no service chosen.
WHAT CHANGED · A DROPDOWN THAT TAKES MORE THAN ONE	**Five tick-boxes in a row could only ever show five.** This utility has eleven services and a twelfth is possible, so the row either grows until it wraps or quietly stops being the whole list. It is one multi-select now: what is chosen shows as chips underneath, and the services this utility has switched OFF are named inside the list, greyed, with where to switch them on — which is where a clerk is looking when they wonder where a service went, rather than in a note under the form.
WHAT CHANGED · THE SURCHARGE STOPPED ASKING FOR ARITHMETIC	***Multiply charges for premises outside the city limits by* — type 1.15 to charge 15% more.** That is a multiplier a clerk has to compute, in a product where a nearby field takes a percentage and another takes a fraction; 15 typed into it would have charged fifteen times. It

is now a plain question with two answers, and when the answer is yes the field takes the **percentage** and reads back what it does: *a $100.00 bill outside the city becomes $115.00*.

THE WARNING ARRIVES BEFORE THE CHOICE

A service with no schedule for this class is named **here**, with what it would mean, rather than at step 8. Choosing it is still allowed — a clerk building a plan ahead of its rates is a real case — but nobody discovers it seven screens later.

COGNITIVE LOAD

Two questions. The surcharge panel collapses to the one question when the answer is no, which is the overwhelming majority of plans.

STATES

Nothing chosen	Continue is refused here.
No surcharge	The second field disappears and the plan never looks at whether a premises is inside the city.
A surcharge set	Says a premises nobody has answered stops that one bill rather than guessing — which is the behaviour, and it is worth knowing before choosing.

WHAT THE SERVER NEEDS

A percentage in, a multiplier stored — and the conversion belongs on the server. The plan stores an outside-city MULTIPLIER (1.15); this screen now asks for the PERCENTAGE (15), because asking a clerk for 1.15 is what made the old field dangerous. Either the API accepts a percent and converts once, or the column changes. **It must not be converted in the browser** — a scale conversion in a screen is the same trap one layer up, and two screens would eventually disagree about which one they were sending.

COMPONENTS

`WizardFrame` `MultiSelectField` `ChipList` `InlineCheck` `SelectField` `PercentField`

RULES


Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

31 Create · Step 3 · Rate schedules NEW BUILD COMMITMENT PRB-18

Which rate schedule prices each service? `/:tenant/plans-rates/plans/new`

> **What was wrong.** A read-only Base charge column showed one base per service where a service can have several, and a service left with no rate schedule was only refused five screens later.

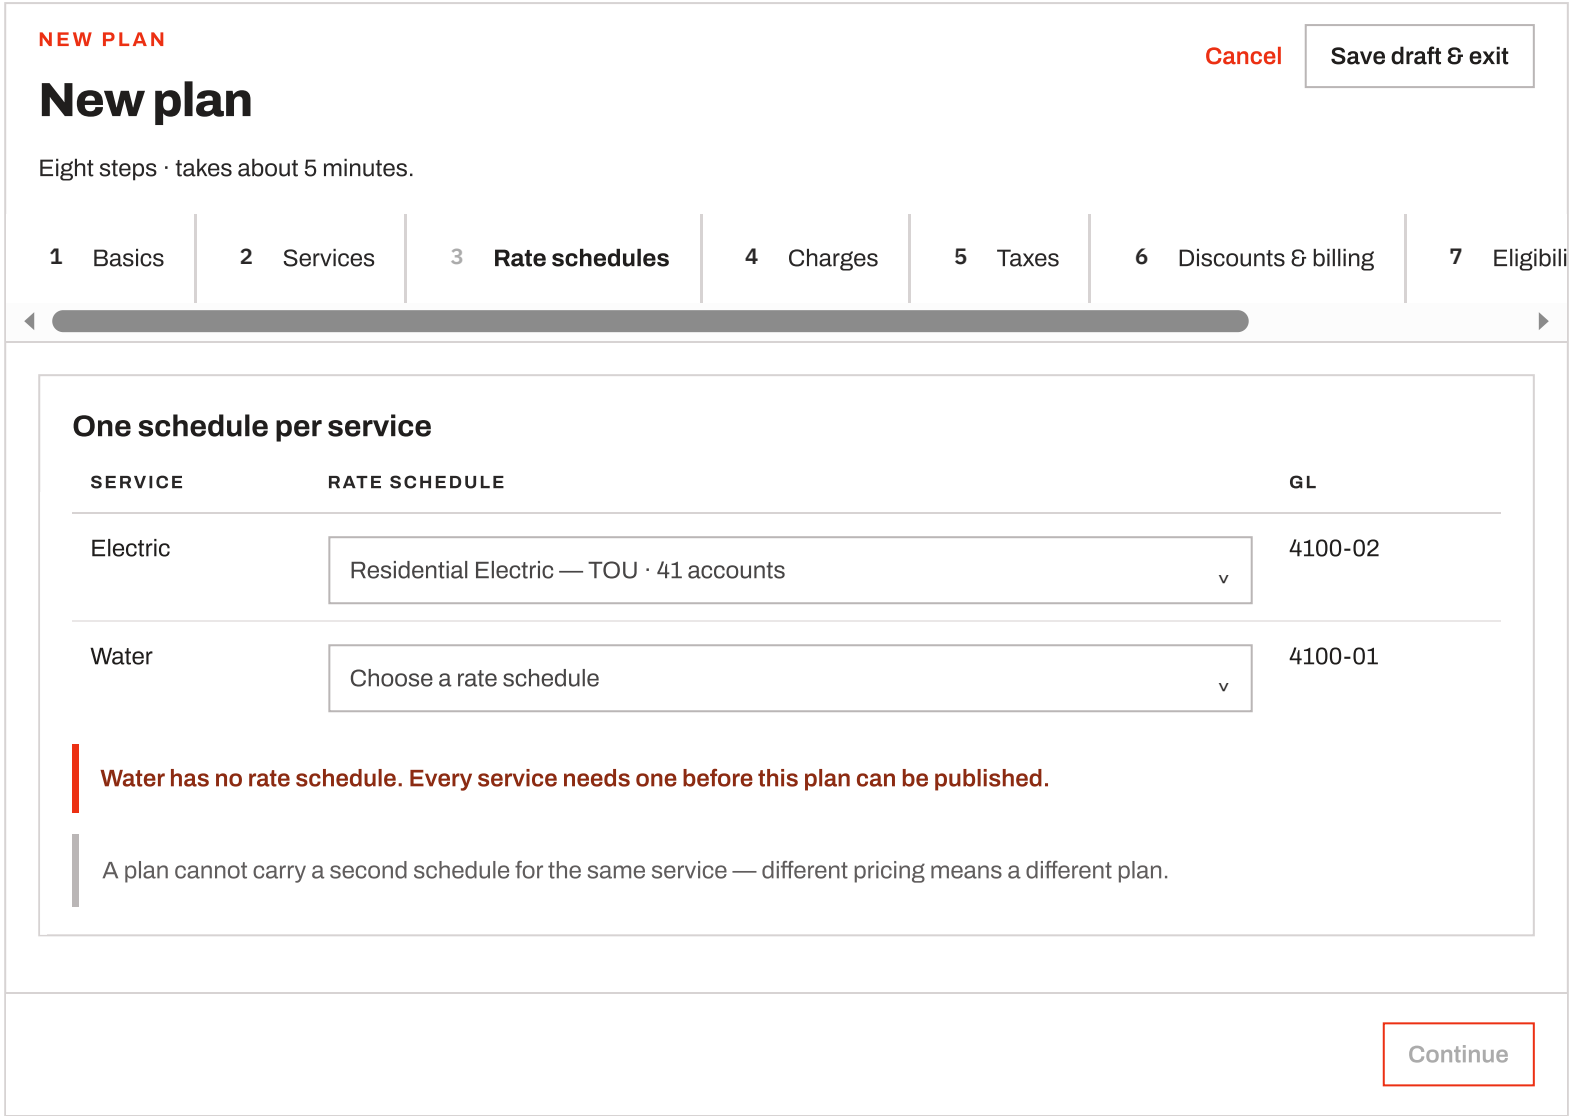

FOR	The clerk joining the plan to the prices.
HOW YOU GET HERE	Continue from Services.


PRIMARY ACTION	Continue.
WHAT CHANGED · THE BASE CHARGE COLUMN LEFT THIS STEP	It showed ONE base charge per service and a service can have several — a base is picked by charge code, and the code can differ by customer class and by connection size, so *Electric · $12.0000 from BASE-E* was one row's answer printed as if it were the service's. Nothing is chosen here anyway: the column was read-only. The bases now appear on the **review**, where every one that applies can be listed against the service it belongs to.
WHAT CHANGED · AN EMPTY ROW WALKED TO STEP 3	Nothing on this step refused it; the refusal — *every service needs a rate schedule* — arrived five screens later on the final press. It is checked here, named by service, where the choice is made. A clerk may still leave and save a draft; what has gone is discovering it at the end.
COGNITIVE LOAD	A row per service, three columns, one of them a choice. The schedule options carry their structure and account count, so a clerk picks by recognising the tariff rather than by name alone.
STATES	**A schedule for another class** — The row warns that bills priced by it may not match what this plan's customers were offered. **No schedule exists** — A link to create one, which returns here with the row still filled. **No services yet** — *Pick the services first; each one then gets its own rate schedule here.*
COMPONENTS	`WizardFrame` `BindingTable` `SelectField` `InlineCheck`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

32 Create · Step 4 · Charges NEW BUILD COMMITMENT PRB-17

Which charge codes does this plan carry? `/:tenant/plans-rates/plans/new`

What was wrong. Rows could be removed and never added, so a plan built with the wrong charge code had to be started again.

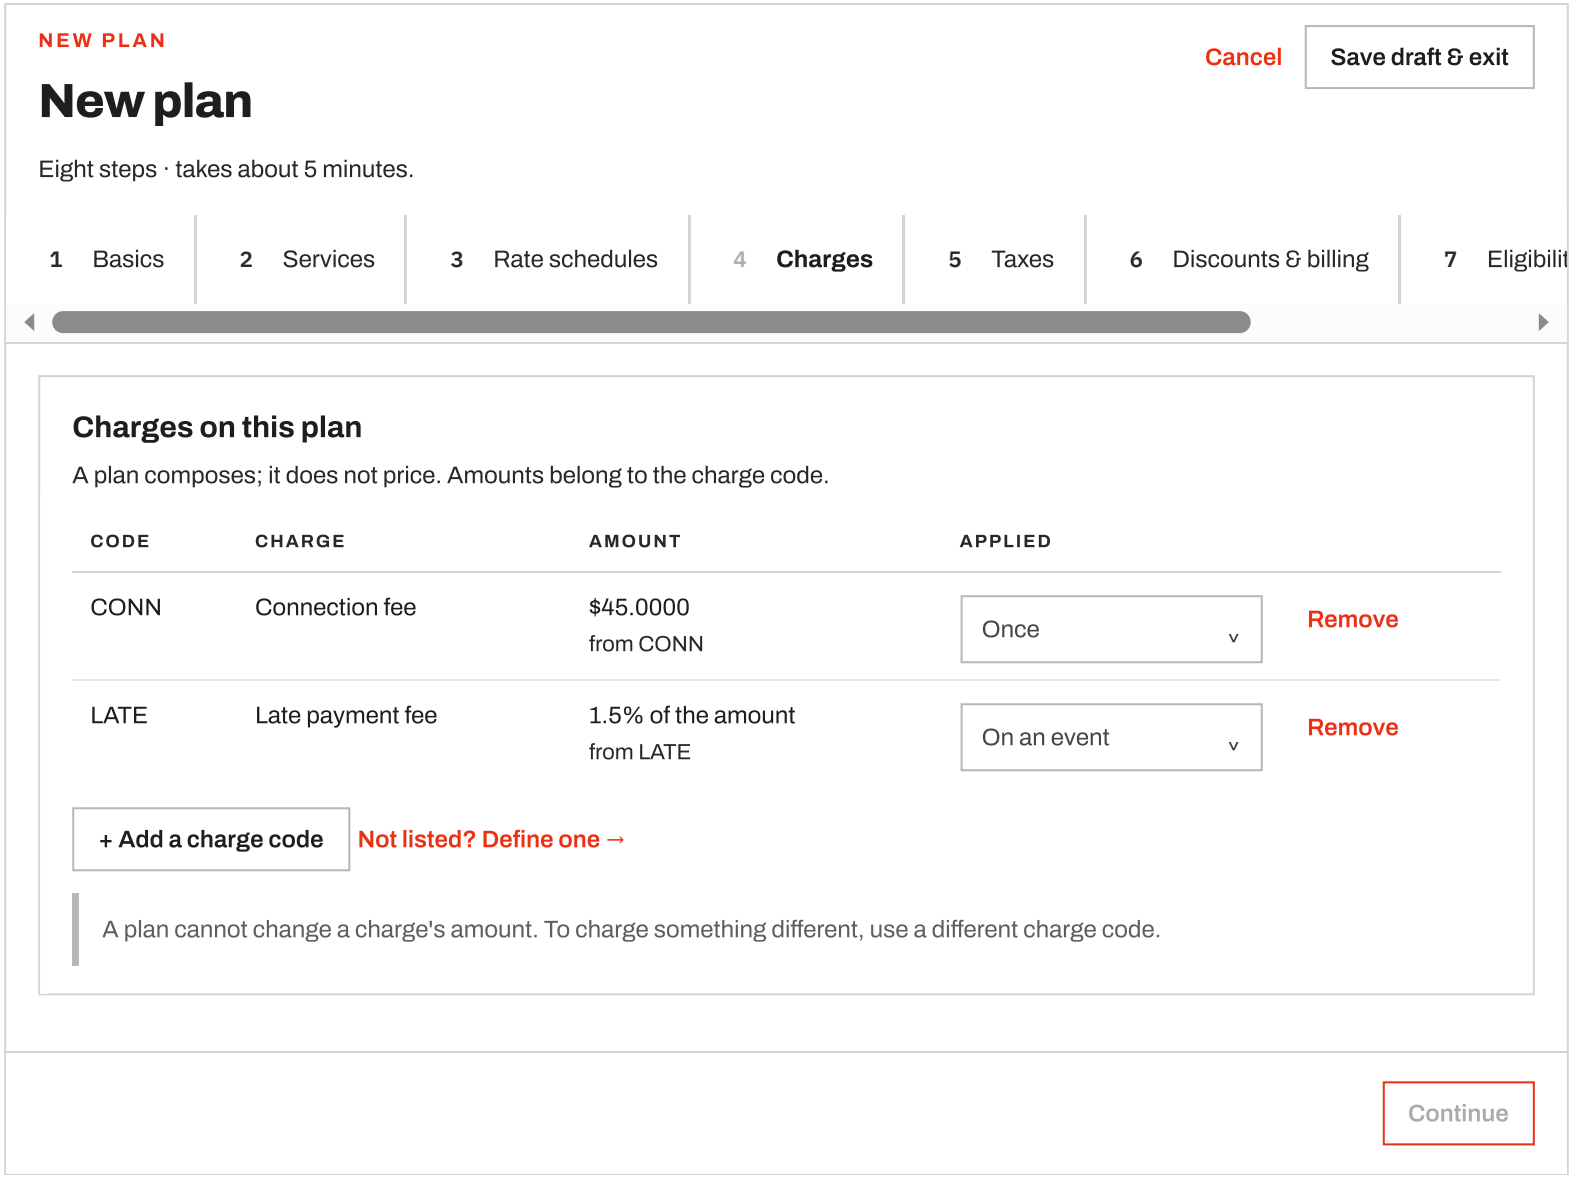

FOR	The clerk attaching the fees this plan carries.
HOW YOU GET HERE	Continue from Rate schedules.
PRIMARY ACTION	**Continue.**

WHAT CHANGED · THERE WAS NO WAY TO ADD ONE	A plan is composed by adding, so there is an **Add** button and rows are removed one at a time. Before this, a row could only be taken away — a plan built with the wrong thing had to be started again. **+ Add a charge code** opens the catalogue filtered to this plan's class and services, shows each code's amount, and adds the ones chosen. *Not listed? Define one →* stays beside it for the case the catalogue genuinely lacks it.
A PLAN DOES NOT PRICE	Said once, at the top. There is no amount box and no taxable tick — both were removed when the rule was signed, and the screen explains rather than leaving a clerk hunting.
COGNITIVE LOAD	The plan's own list, one Add button, and the only editable thing per row is how often it lands.
STATES	**No charge codes exist** — Add is held, saying the catalogue is empty and where to fill it. **A code the catalogue no longer returns** — Kept on the plan, saved unchanged, and says it may have been deactivated — never silently dropped. **A base code with no amount** — Warns that those services would carry no base at all, and names them.
WHAT THE SERVER NEEDS	**A catalogue read, filtered.** The Add button needs the charge codes this plan could carry — narrowed to its customer class and its services. `applies_to_customer_classes` is already stored and already served on a charge row, so the filter is expressible today; what does not exist is an endpoint that takes a plan and answers with the codes it may add.
COMPONENTS	`WizardFrame` `AttachedTable` `AddFromCatalogue` `SelectField`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

33 Create · Step 5 · Taxes NEW BUILD COMMITMENT PRB-17

Which tax authorities does this plan carry? `/:tenant/plans-rates/plans/new`

What was wrong. Authorities could be removed and never added, so a plan missing a county tax had to be started again.

NEW PLAN

Cancel | Save draft & exit

New plan

Eight steps · takes about 5 minutes.

1 Basics | 2 Services | 3 Rate schedules | 4 Charges | 5 **Taxes** | 6 Discounts & billing | 7 Eligibilit

Taxes on this plan

A plan chooses what applies — never at what rate.

AUTHORITY	TAX OR FEE	RATE	SERVICES	
Texas State	TX State Utility Tax	6.25%	All services	Brought by jurisdiction
Bexar County	Local · Bexar County	1.0%	All services	Remove

+ Add an authority

A PLAN CANNOT OPT OUT

Attaching adds — it never removes. A tax a bound authority mandates stays on the bill whether or not anyone added it, and nothing on this step can detach it.

Continue

FOR	The clerk making sure the statutory levies reach this plan's customers.
HOW YOU GET HERE	Continue from Charges.
PRIMARY ACTION	Continue

WHAT CHANGED · THERE WAS NO WAY TO ADD ONE	A plan is composed by adding, so there is an **Add** button and rows are removed one at a time. Before this, a row could only be taken away — a plan built with the wrong thing had to be started again. **+ Add an authority** lists the authorities this utility has set up, each with what it levies and at what rate, and marks the ones already arriving by jurisdiction so nobody adds a duplicate.
ATTACHING ADDS, NEVER REMOVES	Stated as its own note, because a clerk who thinks this screen can take a tax off a bill is about to make a compliance error. There is no exempt tick and the screen says marking a plan exempt is not available — a plan may not skip a statutory tax.
COGNITIVE LOAD	Grouped by authority, because that is how a tax arrives — a city and a county both apply and each is decided on its own.
STATES	**No authorities set up** — Add is held, saying this is a setup gap and not a property of the plan, and points at Taxes & fees. The distinction matters: one is a missing step, the other is a decision. **Bound but levies nothing** — *Bound, but this authority levies nothing on the services this plan carries.* **A base code marked not taxable** — Warns that the bill would be short by that tax, and names the codes.
COMPONENTS	`WizardFrame` `AttachedTable` `AddFromCatalogue` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

34 Create · Step 6 · Discounts & billing BLOCKED COMMITMENT PRB-17 COMMITMENT PRB-26

Which discounts does it offer, and on what billing terms? `/:tenant/plans-rates/plans/new`

What was wrong. The same money could be set in two places — a late fee and a deposit on the plan, and the same figures on the charge code the plan already names — and discounts could be removed but never added.

NEW PLAN

New plan

Cancel | Save draft & exit

Eight steps · takes about 5 minutes.

1 Basics | 2 Services | 3 Rate schedules | 4 Charges | 5 Taxes | 6 **Discounts & billing** | 7 Eligibil

Discounts offered

CODE	DISCOUNT	VALUE	OFFERED FROM	OFFERED UNTIL	
SENIOR	Senior citizen discount	10%	09/08/2026	dd/mm/yyyy	Remove

+ Add a discount

OFFERED, NOT GIVEN

Adding a discount here offers it. Nobody's bill changes until an account is enrolled on it.

Other terms

☐ Offer budget billing on this plan

MINIMUM BILL FOR THE WHOLE PLAN

Applied after the per-service minimums, to top the total up.

BILLING CYCLE, FREQUENCY AND DUE-DATE OFFSET

—

These come from the utility's billing defaults and cannot be set per plan yet.

SET ON THE CHARGE CODE

Late fees and deposits are not set here. They are charge codes — added on step 4, priced by customer class on the code itself —

and step 8 shows what this plan ends up with.

Joining or leaving part-way through a cycle

WHEN SOMEONE JOINS OR LEAVES MID-CYCLE

Charge the days they had it — 16th of a 30-day month bills 15/30

A $30.50 base charge from the 16th of a 30-day month bills $15.25.

PROPOSED — AWAITING A FINANCE RE-SIGN

Drawn for your decision and NOT built. Today every plan does exactly what this box says, because it is a finance-signed rule rather than a setting: proration is by calendar days and the base charge is always prorated. Offering a plan any other answer changes a signed figure, which needs a finance re-sign before a line of code is written.

Continue

FOR	The clerk setting what happens when a bill is late, and what help is on offer.
HOW YOU GET HERE	Continue from Taxes.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · LATE FEES AND DEPOSITS LEFT THIS STEP ALTOGETHER	**A plan names charge codes; the charge code carries the money.** Both were drawn here and both are gone, on your ruling. A deposit varies by customer class — *$150.00 Residential, $400.00 Commercial* — and the charge code now has a class column, so that is **one** charge code with two prices rather than two rows repeated on every plan that exists. The late fee is the same shape and was already half-done: the engine has read its percentage and its minimum off the charge code since **2026-09-07**, so the picker here was a second place to name a code the plan already names on step 4.
NOTHING IS LOST BY REMOVING THEM	*LATE · Late payment fee · 1.5% of the amount · On an event* sits on step 4 with every other charge code this plan carries. Removing the second picker removes the duplicate, not the capability — and **step 8 lists the late fee and every deposit**, read-only, sourced from the attached codes, the same treatment you ruled for base charges.

attached codes, the same treatment you ruled for base charges.

WHAT CHANGED · A DISCOUNT COULD NOT BE ADDED

A plan is composed by adding, so there is an **Add** button and rows are removed one at a time. Before this, a row could only be taken away — a plan built with the wrong thing had to be started again.

NEW · WHAT HAPPENS MID-CYCLE · DRAWN BUT NOT BUILT

You asked for this to be selectable and it is drawn so you can see what you would be choosing — but it is not a setting today and cannot become one on a chat instruction. The gap was put to you as *proration lives on the charge code*, and that was wrong: it lives on neither. The charge code names *part-period charging* as something it does not store, and what actually decides it is a **finance-signed rule** — by calendar days, one factor for the whole account, the base charge always prorated, usage prorated only when there was no move-in read. A move-in on the 16th of a 30-day month with a $30.50 base bills **$15.25**, and that figure is signed. A plan offering *charge the whole period* would contradict *always prorated* on a signed number, so it needs a finance re-sign first. **The cheaper version, if you want it:** the plan states which of the existing answers applies to it, read-only — documentation rather than a choice, and no re-sign.

COGNITIVE LOAD

Two blocks, and the second is three controls. The old screen was one list of nine in which a deposit, a grace day and a budget-billing tick sat at the same weight.

STATES

No discounts set up	Add is held: *this utility has not set up any discounts yet.*
Removing one with people on it	Refused, naming the count: removing a discount from a plan while people are receiving it has not been decided.
No late-fee charge code on step 4	Step 8 says so plainly: *this plan charges nothing for a late bill.* That is the ruled behaviour and not an oversight.
No deposit charge code	Step 8 says no deposit is taken on this plan, rather than showing an empty table.

COMPONENTS

`WizardFrame` `AttachedTable` `AddFromCatalogue` `DatePickerField` `InlineCheck` `MoneyTextField` `NamedAbsence`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility


classes, adding nothing to a stylesheet. A field states its own allowed range where it is typed.


Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

35 Create · Step 7 · Eligibility NEW BUILD COMMITMENT PRB-25

Who is this plan meant for, and from when? `/:tenant/plans-rates/plans/new`

> **What was wrong.** A heading that read as a permission sat four inches above a sentence saying it refuses nobody, with the same fact stated a third time below — and the dates, which are not eligibility, were buried in the same block.

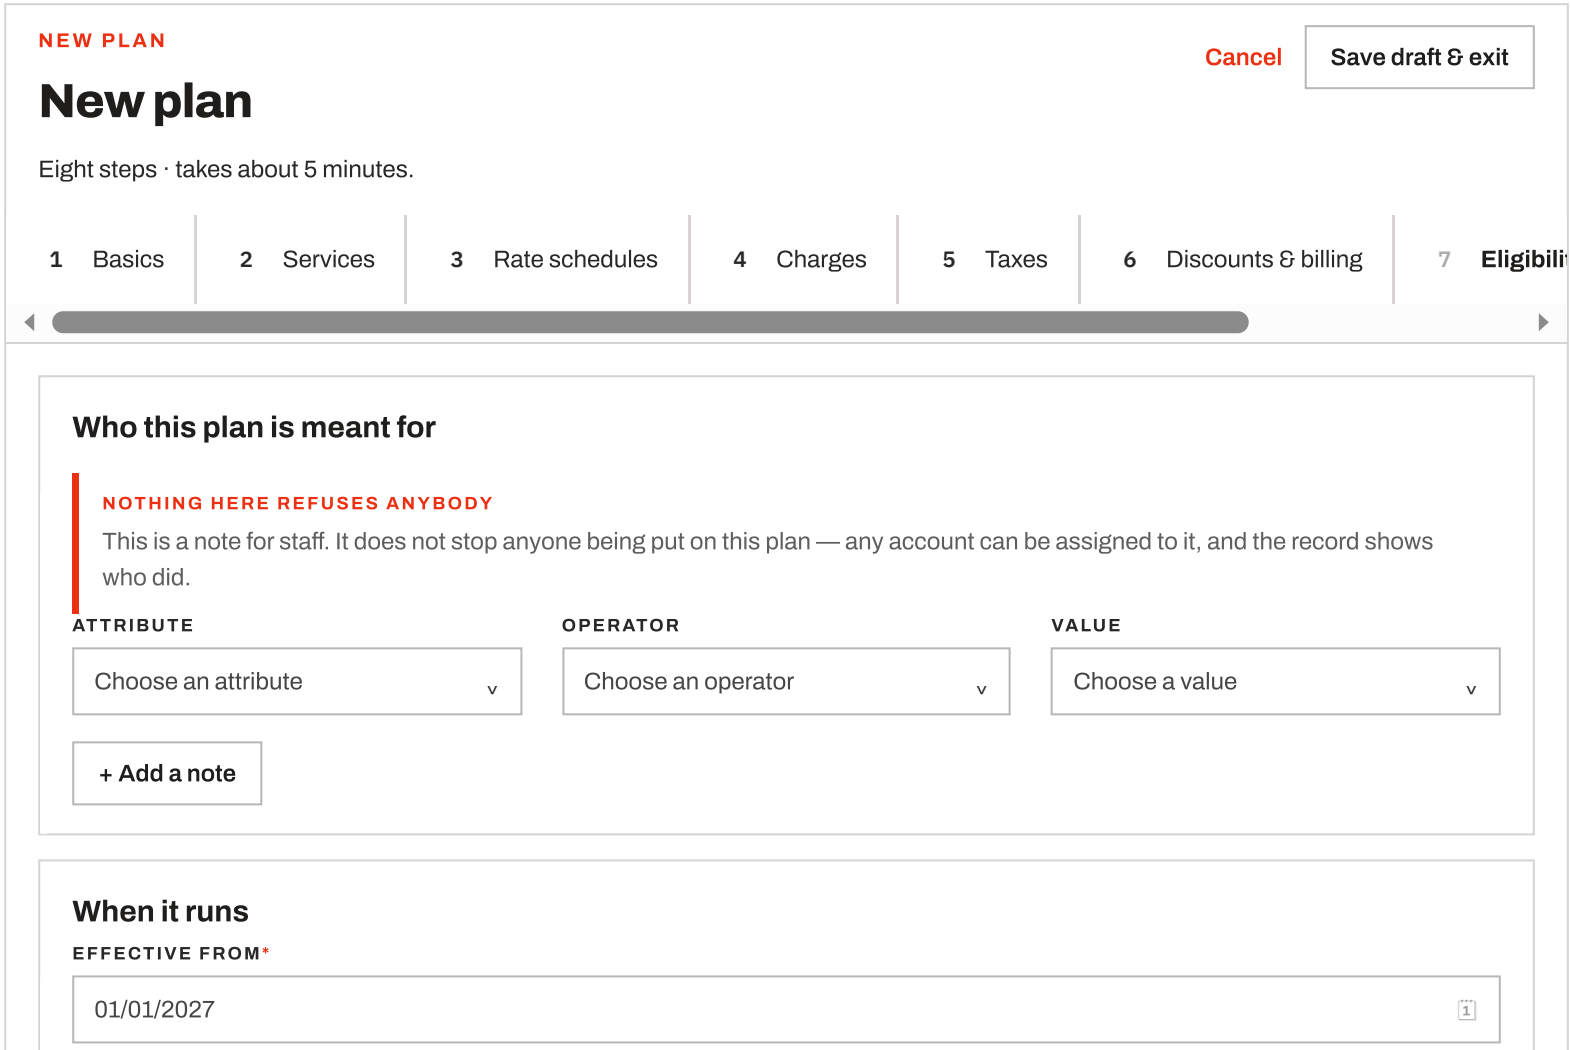

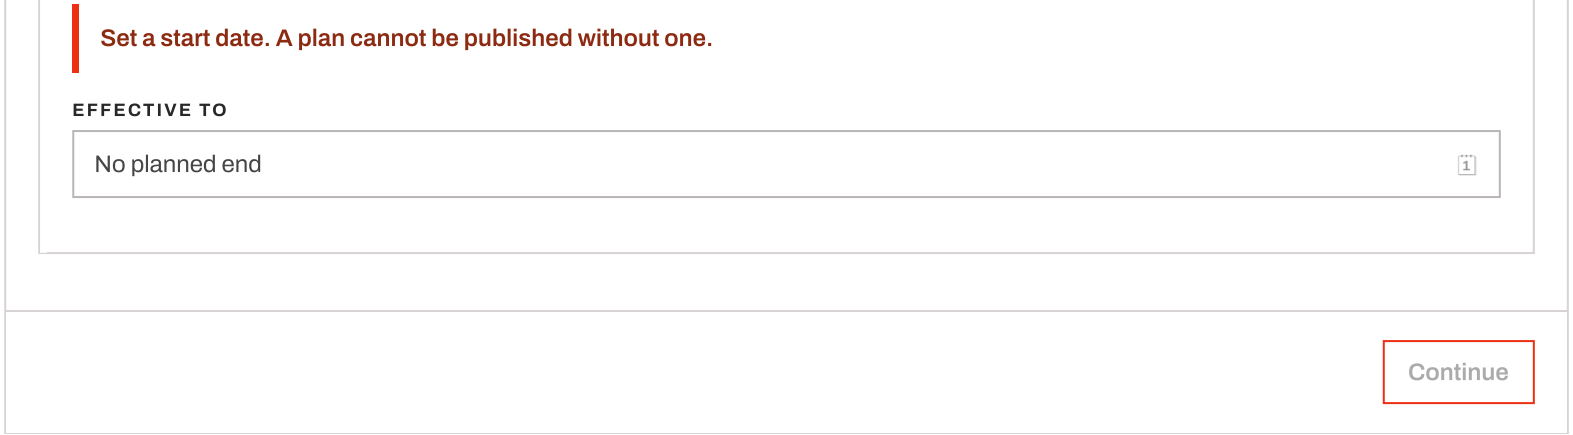

FOR	The clerk recording who a plan is aimed at, and when it starts.
HOW YOU GET HERE	Continue from Discounts & billing.
PRIMARY ACTION	**Continue.**
WHAT CHANGED · THE SCREEN CONTRADICTED ITSELF IN TWO LINES	~~***Who may be put on this plan* is a permission. *They never block an assignment in this version* is the opposite,~~ and both were on the screen, four inches apart, with a third sentence saying the same thing again lower down. A reader could not tell whether this was a gate. It is not, so the heading now says **who this plan is meant for**, the one note says **nothing here refuses anybody**, and the third sentence is gone. Same fact, said once, in a heading that agrees with it.
WHAT IS ACTUALLY RECORDED, IN PLAIN WORDS	A row like *Meter size · 5/8 inch* is a written note about the kind of customer this plan was designed for. It is stored, it shows on the plan's page and in the audit trail, and **nothing reads it at billing time** — a clerk can put any account on any plan and the product will price it. It is documentation, not a rule.
WHAT CHANGED · A REQUIRED DATE WAS UNCHECKED HERE	~~A blank start date passed Continue~~ and surfaced on step 8 as *set a start date before publishing this plan* — one screen from the end, for a field on this one. It is checked here, and the dates are their own block because they are not eligibility at all.
ONLY REAL ATTRIBUTES ARE OFFERED	The list holds only what the product can actually read off an account. Meter size, jurisdiction, premise type, income programme and demand are named as absent rather than offered and ignored.

COGNITIVE LOAD	Two blocks: the note, and the dates. They were one, which is why the dates were hard to find.	
STATES	No notes	*No notes yet. Every account qualifies for this plan.* Which is the truth, and is not a warning.
	Older boolean flags stored	Kept, saved unchanged, and named — new limits are written as rows above.
	A count against accounts	Not shown: nothing evaluates one of these or counts accounts against it. Said, rather than left as an empty figure.
COMPONENTS	`WizardFrame` `RuleBuilder` `DatePickerField` `Callout accent`	
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet.	


Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

36 Create · Step 8 · Review & activate

NEW BUILD · COMMITMENT PRB-01 · COMMITMENT PRB-18 · COMMITMENT PRB-19

Is everything right before this plan can be assigned? `/:tenant/plans-rates/plans/new`

> **What was wrong.** The last screen before a plan became assignable was seven one-line summaries — a receipt rather than a review — arranged by the step that collected each answer rather than by the order a bill is made in.

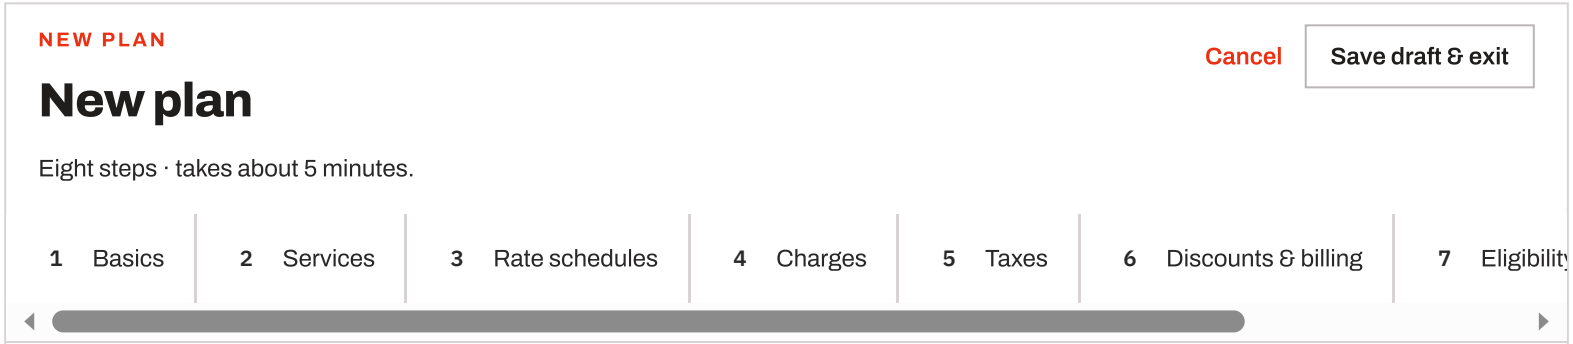

Residential Standard

CODE
SCW-RES

CUSTOMER CLASS
Residential

RUNS
01/01/2027 — no planned end

SHOWN TO CUSTOMERS
Everyday water and power for a single home.

WHO IT IS MEANT FOR
No notes recorded
Assignable to any account either way.

Edit basics Edit dates Edit who it is for

Plan, rates, charges, discounts and taxes THE PRICE

effective before the first bill

RATE SCHEDULE

SERVICE	BASE	USAGE	RATE
Water	8.00 / month	tiered by kgal	4.0000 · 6.5000 · 8.0000
Electric	12.00 / month	time of use	0.1100 peak · 0.0700 off-peak
Sewer	*none*	share of water usage	40%

CHARGE CODES the five that reach this bill

CODE	NAME	AMOUNT	WHEN IT APPLIES
BASE-W	Water monthly base	8.00	every bill, while the service is on
BASE-E	Electric monthly base	12.00	every bill, while the service is on
LATE	Late payment fee	1.5% · min 5.00	after the due date
CONN	Connection fee	45.00	once, at move-in
DEP	Deposit	150.00 residential · 400.00 commercial	once, before service starts

DISCOUNTS offered, not granted

CODE	NAME	VALUE	ON THIS PLAN

SENIOR	Senior citizen discount	15%	offered from 09/08/2026
AUTOPAY	Autopay discount	*set by the utility*	*not offered*
PAPERLESS	Paperless billing	*set by the utility*	*not offered*

TAXES

LEVEL	AUTHORITY	RATE	APPLIES TO
State	Texas State — TX State Utility Tax	6.25%	all services · by jurisdiction
County	Bexar County — Local	1.0%	all services
City	*not set*	*no rate*	–
Special district	*not set*	*no rate*	–

OTHER TERMS

Outside the city limits	premises beyond the boundary		15% more	every service
Budget billing	*not offered*		–	–
Minimum bill	*no plan minimum*		–	–
Cycle and due date	from the utility's billing defaults	*not settable per plan*		–

What publishing does

NOBODY MOVES BY ITSELF

Publishing makes this plan available for staff to assign from 01/01/2027. No live customer is affected right now — accounts move onto a plan one at a time.

A SPECIMEN BILL

—

A sample bill is produced by the billing service and cannot be rendered for a plan that has never billed.

Publish plan ✓

FOR	The clerk one press from making a plan assignable.
HOW YOU GET HERE	Continue from Eligibility, or any Edit link and back.
PRIMARY ACTION	**Publish plan ✓.**
WHAT CHANGED · ONE CARD, IN BILL ORDER, NOT EIGHT STEP SUMMARIES	Each of the seven rows was one line of text — *2 charge codes · $45.00 once, 1.5% on an event* — **which is a receipt, not a review.** The whole price is now **one continuous card** with a band above each part: rate schedule, charge codes, discounts, taxes, other terms. **That is the order a bill is made in**, so a clerk checking a plan against a tariff sheet reads down it once rather than jumping between panels that mirrored the eight steps.
WHY THE PLAN'S IDENTITY SITS OUTSIDE THE CARD	The card is titled *the price* and holds only what reaches a bill. Name, code, class, dates and who the plan is meant for are **facts about the plan**, not prices, so they stay in a plain block above it. Mixing them in was what made the old review read as a list of eight unrelated things.
EVERY FIGURE RIGHT, EVERY CONDITION BESIDE IT	Amounts and rates are right-aligned and set in the monospaced face so a column of them can be scanned; each row's last cell says **when it applies** in plain words — *every bill, while the service is on*, *after the due date*, *once, at move-in*. A number without its condition is the thing a clerk has to go and look up.
AN ABSENCE IS ITALIC, NEVER BOLD	*none*, *not set*, *no rate*, *not offered*. A grey italic reads as nothing-here at a glance; the same words in the body face read as a value, which is how a plan with no city tax looked identical to one with a city tax of zero.
THE BASE CHARGES AND THE DEPOSITS READ BACK HERE	This is where step 3's base column and step 6's late-fee and deposit blocks went. Every base a service can carry is listed, every deposit by customer class, and a clerk can see what the plan ends up with without being able to set it in two places.
COGNITIVE LOAD	One header, one card, one consequence. Five bands rather than five panels, so the whole price is a single scroll and the borders between parts are a label rather than a box.
STATES	**A service without a schedule** — The Rate schedule band shows the service with *no schedule* in italic, and publishing is refused — but it has already been named on step 3.

More than one base for a service	Every one listed with the class and size that selects it — the case a single read-only cell on step 3 could never show.
A level with no authority	*not set* and *no rate*, so a missing county tax is visible rather than absent from the list entirely.
Editing a published plan	A required reason box appears above the button: every change becomes a new version with this reason in the compliance record.
Base total	Worked out by the server on save; the screen says so rather than adding it up in the browser.

WHAT THE SERVER NEEDS

Two reads that do not exist, and one sum that must not happen in the browser. Every base charge that applies to a service — by customer class and connection size — is the read behind *What it prices*, and it depends on the class column named on the charge-code screen. The combined tax rate (7.25%) is a sum: the server states it, for the same reason the base total is worked out on save. Nothing else on this card is new; the rest is already served.

COMPONENTS

`WizardFrame` `FieldGrid` `PriceCard` `BandLabel` `RightAlignedTable` `NamedAbsence` `ConsequenceNote`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A review screen is a summary, not the place a fault is first met. An absent value is stated in italic and never drawn at the weight of a real one.

Route corrected this pass: the document read `/plans-rates/plans/new`; the router registers `/:tenant/plans-rates/plans/new`.

37 View · Overview

NEW BUILD · COMMITMENT PRB-01 · COMMITMENT PRB-18 · COMMITMENT PRB-19 · COMMITMENT PRB-20 · COMMITMENT PRB-22 · COMMITMENT PRB-23 · COMMITMENT PRB-24 · COMMITMENT PRB-25

What does this plan charge, and who is it for? `/:tenant/plans-rates/plans/:id`

> **What was wrong.** Seven tabs answered one question — what does this plan charge — so reading one plan took seven clicks, and three of those tabs had columns that could print an apology because the row and its cells came from two different reads.

← Plans & Rates

PLAN · SCW-RES · V1

Residential Standard

Duplicate HELD | Edit | Retire

PUBLISHED

Effective from 06/01/2026 · Residential class · Editing a published plan writes a new version; this one keeps its own history.

Overview | Units | Audit

Everything this plan charges, on one page.

UNITS	SERVICES	MONTHLY BASE	CHANGE ALREADY DATED
74	2	$20.0000	01/01/2027
on this plan today	Electric · Water	Electric $12.00 · Water $8.00	Water rates, +4.0%

NOT WORKED OUT YET

Revenue	Nothing adds up what this plan has billed. This is not zero — no figure exists.
Waivers and exemptions	Waivers granted and tax exemption certificates are not recorded, so neither half of the count can be worked out.
Units inside / outside the city	Splitting the 74 by city limits needs a figure nothing works out yet.

What this plan is

CODE
SCW-RES

CUSTOMER CLASS
Residential

RUNS
06/01/2026 — no planned end

BUDGET BILLING
Yes

MEANT FOR
No rules recorded
Any account can be assigned to it.

> WHAT CUSTOMERS ARE TOLD
> Everyday water and power for a single home.

Plan, rates, charges, discounts and taxes THE PRICE

in force today

RATE SCHEDULE

SERVICE	BASE	USAGE	RATE	CHANGE ALREADY DATED
Water	8.00 / month BASE-W	tiered by kgal	4.0000 · 6.5000 · 8.0000	01/01/2027 · +4.0%
Electric	12.00 / month BASE-E	time of use	0.1100 peak · 0.0700 off-peak	*nothing dated*

CHARGE CODES what each one lands on

CODE	NAME	AMOUNT	APPLIED	TAXED
CONN	Connection fee	45.00	once, at move-in	yes
LATE	Late payment fee	1.5% · min 5.00	after the due date	no
DEP	Deposit	150.00 residential · 400.00 commercial	once, before service starts	no

DISCOUNTS offered · eligible · enrolled

CODE	DISCOUNT	VALUE	OFFERED	TAKE-UP
SENIOR	Senior citizen discount	10%	whenever available	28 of 74

TAXES 7.25% combined

LEVEL	AUTHORITY	RATE	APPLIES TO
State	Texas State — TX State Utility Tax	6.25%	all services · by jurisdiction
County	Bexar County — Local	1.0%	all services
City	*not set*	*no rate*	–
Special district	*not set*	*no rate*	–

OTHER TERMS

Outside the city limits	premises beyond the boundary	15% more	every service
Minimum bill	*no floor is set on this plan*	–	–
Cycle and due date	from the utility's billing defaults	*not settable per plan*	–

CHANGE ALREADY DATED

CHANGE ALREADY DATED

A rate schedule can change what this plan charges without the plan itself changing. When a dated change arrives, bills move to the new prices and this plan stays on the version it is on.

Not recorded on a plan yet

—

Seven limits a plan has nowhere to record. None of them restricts anything today.

- Area or zone
- Connection size limits
- Occupancy limits
- Proof required
- How often proof is renewed
- Chosen by the customer or by staff
- Pre-selected at move-in

FOR	A clerk answering *what does this customer pay, and why* — usually with the customer on the phone.
HOW YOU GET HERE	**Plans** tab, clicking the name.
PRIMARY ACTION	**Edit**, from the header, which writes a new version.
WHAT CHANGED · SEVEN TABS BECAME ONE	**Overview, Rate schedules, Base rates, Charges, Taxes, Discounts and Eligibility were seven tabs answering one question: what does this plan charge.** A clerk with a customer on the phone was clicking seven times to read one plan, and each tab was a table of two or three rows. It is **one banded card** now, in the order a bill is made: rate schedule, charge codes, discounts, taxes, other terms.
THE SAME SHAPE BEFORE AND AFTER PUBLISHING	**This card and the review on step 8 are the same component with the same bands in the same order.** A clerk who checks a plan before publishing it recognises the page afterwards, and a figure cannot be laid out one way on the wizard and another way on the record.
WHAT WAS FOLDED IN, AND WHAT EACH TAB WAS HIDING	*Base rates* was two columns printing the same number, kept only so a rare disagreement would show — it is one **Base** column with the code beneath it. *Rate schedules*, *Charges* and *Taxes* each had a column that could read *this was not in the list this page read*, because the row and its cells came from two different reads; one read serves each row now. *Discounts*

gained **28 of 74** in place of a bare 28, because take-up is the finding. *Taxes* gained the combined **7.25%**, which a clerk was adding up in their head on every call.

ELIGIBILITY KEEPS ITS HONESTY AND LOSES ITS TAB

It was a tab to say *nothing here refuses anybody*. That fact is now one line in the block above — *meant for: no rules recorded · any account can be assigned to it* — and the seven limits a plan cannot record are still listed in full at the foot, because a supervisor who believes those exist will skip the check that matters.

AN ABSENCE IS ITALIC, NEVER BOLD

not set, *no rate*, *nothing dated*, *no floor is set on this plan*. A plan with no city tax used to look identical to one with a city tax of zero.

COGNITIVE LOAD

Two blocks and a card. Seven clicks became none.

STATES

A service with no schedule	The row shows the service with *no schedule* in italic rather than being absent from the card.
A dated change	Carried in the rate row with its size — *01/01/2027 · +4.0%*. A date says something is coming; the percentage says whether to care.
A plan carrying its own base	The older stored figure is shown beside the code's, because that is the disagreement a bill run stops an account for.
Read-only role	A role that may read but not change Plans & Rates sees every figure and no button. The refusal names the role, not the screen.

WHAT THE SERVER NEEDS

The take-up figure has no read anywhere. *28 of 74* needs a count of accounts ELIGIBLE for a discount beside the count enrolled, and nothing in the product works out eligibility — the plan's own page already says so in its *not worked out yet* bar. Until that read exists this cell shows the enrolled count alone and says what is missing, rather than printing a ratio one half of which is a guess.

COMPONENTS

`PageHeader` `KPIStrip` `AbsenceBar` `FieldGrid` `PriceCard` `BandLabel` `RightAlignedTable` `Callout accent`

RULES

Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility

classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A row is served by one read. One figure has one column.

Route corrected this pass: the document read `/plans-rates/plans/:id`; the router registers `/:tenant/plans-rates/plans/:id`.

38 View · Units NEW BUILD COMMITMENT PRB-21

Which units does this plan price? `/:tenant/plans-rates/plans/:id?tab=units`

> **What was wrong.** A plan showed a count of 74 with no way to see what was in it, nothing said whether 74 meant units, accounts or customers, and the services were spelled out in full where every other screen in the module draws the coloured badge.

← Plans & Rates

PLAN · SCW-RES · V1

Residential Standard

Duplicate HELD | Edit | Retire

PUBLISHED

Effective from 06/01/2026 · Residential class · Editing a published plan writes a new version; this one keeps its own history.

Overview | **Units** | Audit

The units this plan prices, and what each one is.

UNITS	SERVICES	MONTHLY BASE	CHANGE ALREADY DATED
74	2	$20.0000	01/01/2027
on this plan today	Electric · Water	Electric $12.00 · Water $8.00	Water rates, +4.0%

NOT WORKED OUT YET

Revenue	Nothing adds up what this plan has billed. This is not zero — no figure exists.
Waivers and exemptions	Waivers granted and tax exemption certificates are not recorded, so neither half of the count can be worked out.
Units inside / outside the city	Splitting the 74 by city limits needs a figure nothing works out yet.

Units on this plan

Every unit this plan prices, whether or not somebody lives there.

UNIT	PREMISES	SERVICES	ACCOUNT	ON THIS PLAN SINCE
Unit 1	101 Silver Creek Rd	E W	AC-2026-00001	06/01/2026
Unit 2	101 Silver Creek Rd	E W	— Vacant — base charges still bill to the owner.	06/01/2026
Unit A	88 Quarry Hill Ct	E W S	AC-2026-00014	07/01/2026

WHY UNITS AND NOT ACCOUNTS

A plan is attached to a UNIT, not to an account — so a vacant unit is still on this plan and its base charges still reach the owner's bill. That is why this tab counts 74 units and not 74 customers.

FOR

A clerk asked how many customers a price change will touch, and a supervisor checking a vacant property is still billing its standing charge.

HOW YOU GET HERE

The **Units** tab.

PRIMARY ACTION

None.

WHAT CHANGED · THIS TAB DID NOT EXIST

The plan counted 74 and never said 74 of what, and nothing listed them. A plan attaches to a unit, so the count is units — and a vacant unit is the case that matters, because it has no account, no customer and a base charge that still reaches the owner. The tile, this tab and the count on the rate schedule all say **units** now, in the same word.

SERVICES ARE THE BADGE THE PRODUCT ALREADY SHIPS

E and W in the service's own colour, from `ratingShared`'s own map — not the full names spelled out, which is what this row had. Three badges fit where three name chips wrapped to a second line and pushed every row taller, and it is the same 20-pixel square r10 drew and the plan list already uses, so a service looks the same wherever a clerk meets it. **The letter is never derived from the name:** six of the eleven services collide on their initial — Sewer, Solar and Storm water all give S, Trash and Thermal both give T, Broadband and Battery both give B — so the four that arrived after r10 take two characters in the same square. The full name is still the tooltip and the accessible name; a letter alone is not something a screen reader can announce.

THE VACANT ROW IS THE POINT	*Vacant — base charges still bill to the owner* in place of an empty Account cell. A clerk who reads a dash concludes nothing is billed, which is the opposite of the truth.
COGNITIVE LOAD	One table, five columns, sorted by premises so the units of one building sit together.
STATES	**No units** — *No unit is on this plan yet, so a price change here reaches nobody.* **More than a page** — Paged from the server, and the tile's count is the total rather than the page's. **A unit whose account is closed** — Named as closed rather than blank, with the date.
WHAT THE SERVER NEEDS	**A new list read — the count exists and the list does not.** Rating counts unit-plan assignments already (that is where 74 comes from) and there is no endpoint that returns them: unit, premises, services, account or vacancy, and the date it joined the plan. It must be paged from the server (`NFR-3`) and its total must be the whole set rather than the page, or the tile and the table will disagree the moment a plan passes one page.
COMPONENTS	`Panel` `ListTable` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason and never drawn at the weight of one that does. A count names what it counts.

Route corrected this pass: the document read `/plans-rates/plans/:id?tab=units`; the router registers `/:tenant/plans-rates/plans/:id?tab=units`.

39 View · Audit EXISTS BEHIND NO COMMITMENT

What has this plan said, and from when? `/:tenant/plans-rates/plans/:id?tab=audit`

> **What was wrong.** The Effective column was an em-dash on every row but one, explaining that a plan version has no start date of its own.

← Plans & Rates

PLAN · SCW-RES · V1

Residential Standard

Duplicate HELD | Edit | Retire

PUBLISHED

Effective from 06/01/2026 · Residential class · Editing a published plan writes a new version; this one keeps its own history.

Overview | Units | **Audit**

What this plan has said, and from when.

UNITS	SERVICES	MONTHLY BASE	CHANGE ALREADY DATED
74	2	$20.0000	01/01/2027
on this plan today	Electric · Water	Electric $12.00 · Water $8.00	Water rates, +4.0%

NOT WORKED OUT YET

Revenue	Nothing adds up what this plan has billed. This is not zero — no figure exists.
Waivers and exemptions	Waivers granted and tax exemption certificates are not recorded, so neither half of the count can be worked out.
Units inside / outside the city	Splitting the 74 by city limits needs a figure nothing works out yet.

Audit

VERSION	EFFECTIVE	WHAT CHANGED, AND WHY	BY	STATUS
v2	01/01/2027 →	Water schedule rebound after the 2027 filing	Dana Whitfield	PUBLISHED
v1	06/01/2026 – 12/31/2026	— This plan's first version predates the version history, so nothing was stored about who set it or why. Every change since is recorded in full.	—	SUPERSEDED

WHAT THIS IS AND IS NOT

This history is a record of what the plan said. Which version a bill is priced from is a separate question and nothing here changes what an account is charged.

FOR	An auditor, or a clerk asked why a plan changed.
HOW YOU GET HERE	The **Audit** tab.
PRIMARY ACTION	**Edit**, from the header, which creates the next row.
WHAT CHANGED · THE NAME	It was *Versions*. Eight detail screens in this product call this tab **Audit**, and Plans & Rates was the only module using its own word — corrected on all four objects, not just the one that was asked about.
WHAT CHANGED	**The Effective column was an em-dash on every row but one**, with the sentence *a plan version does not carry its own start date*. It carries a range now, taken from the next version's start — which is what a date span means and needed no new column.
THE HONEST FIRST ROW	A plan whose first version predates the history says so, once, in full: nothing was stored about who or why, and every change since is recorded. History is never invented backwards, and saying it once beats an em-dash on every field.
WHAT THIS IS AND IS NOT	Its own note. This tab records what the plan said; it does not decide what a bill charges. Confusing the two is how somebody concludes a bill is wrong.
STATES	**Never versioned** — *No version of this plan has been recorded yet. Version history began on 21 August 2026 and is never filled in backwards.* **A reason nobody wrote** — An em-dash with *no reason was written down* — a fact about the record. **The person has left** — *No longer has an account.*
COMPONENTS	`Panel` `VersionTable` `StatusPill` `Callout accent`
RULES	Money shows two decimals and is stored to four; a percentage six. Colour is never the only signal — every state carries its word. A code a clerk reads down the phone is a printed reference, not a database id, so it is shown; a database id never is. Built in the shared utility classes, adding nothing to a stylesheet. A figure that does not exist is stated with its reason

and never drawn at the weight of one that does.

Route corrected this pass: the document read `/plans-rates/plans/:id?tab=audit`; the router registers `/:tenant/plans-rates/plans/:id?tab=audit`.

Commitments in this section

Each card names what the work waits on and what a person would be able to do once it is done. Nothing outside a card is undertaken.

PRB-15 A plan can be built for a customer sub-type

UNVERIFIED

Waits on: ⚠ RULED NOT REQUIRED by the PO on 2026-09-08 — kept here only because the COLUMN exists and is written by nothing, which is the shape of a field with no writer. See the out-of-scope register.

Screens: 29

WHAT DONE LOOKS LIKE ON SCREEN

Not applicable — see PRB-15 in the out-of-scope register.

PRB-16 The outside-city surcharge is entered as a percentage

UNVERIFIED

Waits on: The plan stores a multiplier (1.15); the screen asks for the percentage (15). The conversion belongs on the server — a scale conversion written into a screen is the trap one layer up.

Screens: 30

WHAT DONE LOOKS LIKE ON SCREEN

A clerk types 15, the screen reads "a $100.00 bill outside the city becomes $115.00", and the stored multiplier is 1.150000 without the browser having computed it.

PRB-17 The charge-code catalogue can be asked what a plan may add

UNVERIFIED

Waits on: `applies_to_customer_classes` is stored and served on a charge row, so the filter is expressible; no endpoint takes a plan and answers with the codes it may carry.

Screens: 32 · 33 · 34

WHAT DONE LOOKS LIKE ON SCREEN

A clerk presses "+ Add a charge code" on a Residential electric plan and sees 6 codes with their amounts, not the 41 codes the utility has.

PRB-18 Every base charge that applies to a service, listed

UNVERIFIED

Waits on: Depends on PRB-01. A base is picked by customer class AND connection size, so one service can carry several.

Screens: 31 · 36 · 37

WHAT DONE LOOKS LIKE ON SCREEN

The review lists Water against BASE-W-RES $8.0000 for 5/8" and BASE-W-RES $18.5000 for 2", where the wizard used to show one figure and call it the service's.

PRB-19 The combined tax rate is stated by the server

UNVERIFIED

Waits on: 6.25% and 1.0% is a sum a clerk was doing in their head on every call. The base total is already worked out on save for the same reason.

Screens: 36 · 37

WHAT DONE LOOKS LIKE ON SCREEN

The plan's page reads "Taxes · 7.25% combined" in the band label, and the figure comes from the same response as the rows under it.

PRB-21 The units on a plan can be listed

UNVERIFIED

Waits on: Rating counts unit-plan assignments already — that is where 74 comes from — and no endpoint returns them. Must be paged from the server (NFR-3) with the total being the whole set, not the page.

Screens: 38

WHAT DONE LOOKS LIKE ON SCREEN

The Units tab lists Unit 1 · 101 Silver Creek Rd · E W · AC-2026-00001 · since 06/01/2026, and Unit 2 on the same premises reading "Vacant — base charges still bill to the owner".

PRB-22 **What a plan has billed** UNVERIFIED

Waits on: A read over invoice lines grouped by plan. The tile says this is not zero — no figure exists.

Screens: 37

WHAT DONE LOOKS LIKE ON SCREEN

The plan's page reads "$14,208.44 billed last month" in the tile that currently carries a sentence about why it is empty.

PRB-24 **A plan's units can be split by city limits** UNVERIFIED

Waits on: `premises` carries city, state and postal code and no `inside_city_limits` flag — the tax model's own docstring says the flag does not exist yet. The surcharge on step 2 resolves off the recorded city name until it does.

Screens: 30 · 37

WHAT DONE LOOKS LIKE ON SCREEN

The plan's page reads "74 units · 61 inside the city, 13 outside", and the outside-city surcharge names the same 13.

PRB-25 **The seven limits a plan cannot record** UNVERIFIED

Waits on: Area or zone, connection size, occupancy, proof required, how often proof is renewed, chosen by customer or staff, pre-selected at move-in. All seven are listed on the plan's page as having nowhere to live.

Screens: 35 · 37

WHAT DONE LOOKS LIKE ON SCREEN

A clerk records "connection size 5/8" only" on a plan and the plan's page shows it in the same block that today lists seven things it cannot hold.

PRB-26 **A plan states its own billing cycle and due-date offset** UNVERIFIED

Waits on: ⚠ NOBODY HAS RULED THIS. The wizard says these come from the utility's billing defaults and cannot be set per plan yet — a statement of fact with no decision behind it.

cannot be set per plan yet — a statement of fact with no decision behind it.

Screens: 34

WHAT DONE LOOKS LIKE ON SCREEN

A commercial plan bills monthly on the 1st with 21 days to pay while the residential plan bills on the 15th with 14, and each plan's page states its own.

---

06 EVERY STATED ABSENCE, AND ITS ONE DECISION

Every sentence in this document saying something does not exist, is not served, has no read, is inert or is deliberately left out — each with exactly one outcome. There is no third category.

26 newly specified · 0 folding into a specification minted earlier · 11 out of scope. Nothing was left unresolved. Where the judgement was close, the rule was: **if the document records a ruling that a thing waits, it is out of scope and the ruling is quoted; if nobody has ruled, it is a specification that names what it waits on** — because shelving something needs a person's decision and this document does not have one. Two rows are marked in their own text as having no ruling behind them at all (PRB-10, PRB-26); they are specifications for that reason, not because anyone asked for them.

WHAT IS ABSENT	WHERE IT IS STATED	DECISION	REASON, AND WHO RULED IT
A charge code's amount can differ by customer class	02 · 36 · 37	PRB-01	A new `account_type_id` column on `charge_code_amounts`, that column inside the unique key, and a migration. Nothing else on this list can be drawn until it lands.
Who may approve a waiver, recorded on the charge code	02	PRB-02	A column on `charges`. No ruling exists on who the approvers are, so the field records a role rather than a person.
A staff-only description on a charge code	01 · 02	PRB-03	A column on `charges`. Distinct from the bill label, which the customer reads.

How often a charge code was applied, and what it billed	04	PRB-04	Two reads over invoice lines grouped by charge. Both tiles say "nothing totals this" today.
The premises count narrows on class and service, not just the boundary	07 · 09 · 10	PRB-05	Two more parameters on `GET /taxes/matched-premises`, which takes `premises_scope_kind` and `premises_scope_value` and nothing else.
What one tax is charged on, and what it collected	10	PRB-06	Two reads over invoice tax lines. The remittance worksheet DEF-385 names is the consumer.
The remittance worksheet	10	PRB-07	DEF-385 filed it and its own suggested fix says the columns and the worksheet ship together. The columns shipped; the worksheet did not.
A rate schedule's minimum reaches the engine	14 · 18	PRB-08	DEF-2446 — a minimum typed on a rate schedule is published to the engine and read by nobody. This is a live defect, not a new feature.
Somebody is told when a price changes	17	PRB-09	Nothing in the product raises a notice when a rate schedule's prices change. The portal and the email machinery both already exist.
Per-size block prices are billed, or the section goes	15 · 16	PRB-10	⚠ NOBODY HAS RULED THIS. Nine per-size block prices are typed, stored, published to the engine and read by nothing. The document's own footer names it as the one decision still open.
The structured eligibility rule builder on a discount	23 · 26	PRB-11	It is named as unbuilt on the discount wizard. Enrolment is a member of staff recording a fact until it exists.
What a discount programme costs per month	26	PRB-12	A read over discount lines. The tile says nothing works it out.
The second-approval test is settled	24	PRB-13	⚠ TWO APPROVED POLICIES DISAGREE and the document leaves both on screen deliberately. One measures projected monthly subsidy against $500; the other measures the budget cap against a setting defaulting to $10,000. A $7,332 annual budget is $611 a month — over the first bar, under the second.
The impossible	23	PRB-14	The dropdown makes automatic-plus-proof unrepresentable in the

enrolment pair is refused by the server			screen. A client that cannot express a state is not a server that refuses it — DEF-384's own lesson on a different endpoint.
A plan can be built for a customer sub-type	29	PRB-15	⚠ RULED NOT REQUIRED by the PO on 2026-09-08 — kept here only because the COLUMN exists and is written by nothing, which is the shape of a field with no writer. See the out-of-scope register.
The outside-city surcharge is entered as a percentage	30	PRB-16	The plan stores a multiplier (1.15); the screen asks for the percentage (15). The conversion belongs on the server — a scale conversion written into a screen is the trap one layer up.
The charge-code catalogue can be asked what a plan may add	32 · 33 · 34	PRB-17	`applies_to_customer_classes` is stored and served on a charge row, so the filter is expressible; no endpoint takes a plan and answers with the codes it may carry.
Every base charge that applies to a service, listed	31 · 36 · 37	PRB-18	Depends on PRB-01. A base is picked by customer class AND connection size, so one service can carry several.
The combined tax rate is stated by the server	36 · 37	PRB-19	6.25% and 1.0% is a sum a clerk was doing in their head on every call. The base total is already worked out on save for the same reason.
How many accounts are ELIGIBLE for a discount	26 · 37	PRB-20	Nothing in the product works out eligibility. Until this exists, take-up cannot be stated and the cell shows the enrolled count with the gap named.
The units on a plan can be listed	38	PRB-21	Rating counts unit-plan assignments already — that is where 74 comes from — and no endpoint returns them. Must be paged from the server (NFR-3) with the total being the whole set, not the page.
What a plan has billed	37	PRB-22	A read over invoice lines grouped by plan. The tile says this is not zero — no figure exists.
Waivers granted and exemption certificates are recorded	37 · 10	PRB-23	Neither half of the count can be worked out because neither is stored. DEF-383 built the exemption CATEGORY object; the certificates and the waivers are the other half.
A plan's units can be split by city limits	30 · 37	PRB-24	`premises` carries city, state and postal code and no `inside_city_limits` flag — the tax model's own docstring says the flag does not exist yet. The surcharge on step 2 resolves off the recorded city name until it does.

The seven limits a plan cannot record	35 · 37	PRB-25	Area or zone, connection size, occupancy, proof required, how often proof is renewed, chosen by customer or staff, pre-selected at move-in. All seven are listed on the plan's page as having nowhere to live.
A plan states its own billing cycle and due-date offset	34	PRB-26	⚠ NOBODY HAS RULED THIS. The wizard says these come from the utility's billing defaults and cannot be set per plan yet — a statement of fact with no decision behind it.
~~Part-period charging on a charge code~~	Charge code · step 2, and the charge-code page	**OUT OF SCOPE**	Proration is B4.3 — ❁ FROZEN and finance-signed: calendar days, one factor for the whole account, the base always prorated, usage prorated only where there was no move-in read. GT-3 pins a move-in on day 16 of 30 with a $30.50 base at $15.25. A per-code or per-plan answer changes a signed figure. PO asked for it selectable on 2026-09-08 and the collision was reported the same hour; it needs a finance re-sign through HUMAN-GUIDE §6 before any code is written.
~~Compounding order between taxes~~	Tax wizard · step 2	**OUT OF SCOPE**	PO ruling 2026-08-21, option C, verbatim: *"Per-meter now (it's a small change), stacking later — because that one needs care to avoid a tax that taxes itself in a circle."* Deferred as DEF-381 with its reason. Every tax is worked out on the same base and no loop can be drawn.
~~A rounding rule the engine honours~~	Tax wizard · step 2, and the tax page	**OUT OF SCOPE**	OQ-309, open, and it is a FINANCE question rather than ours. B4's rounding is ❁ FROZEN. Worked so the size is visible: a base of $99.28 at 6.25% is $6.2050000 — B4's half-up gives $6.21 and an authority mandating half-even gives $6.20. One cent per bill per authority, in the direction a regulator audits. The column stores the authority's stated rule and the engine does not read it.
~~A boundary the product cannot evaluate~~	Tax wizard · step 1, and the tax page	**OUT OF SCOPE**	Deliberate and argued on the page. County, district and named-list boundaries are recorded and cannot be checked, so the screen says the tax reaches NOBODY — hard-won law 3, defaults fail closed. Under-charging is recoverable; over-charging a real customer is a refund and a support call.
~~A before-and-after figure on an unsaved discount~~	Discount wizard · step 2	**OUT OF SCOPE**	Deliberate. Nothing prices a discount that has not been saved, and a figure worked out in the browser would not be the figure the bill uses. The screen states the absence rather than showing a number nobody can reproduce.
~~Rate override and~~	Discount wizard · step	**OUT OF**	The types stay offered because removing them would delete a signed

~~usage allowance discounts, priced~~	1	**SCOPE**	requirement. A version of either is refused at ACTIVATION rather than at save, and the screen says so where the type is chosen.
~~A specimen bill on a plan that has never billed~~	Plan wizard · step 8	**OUT OF SCOPE**	Mechanical. A sample bill is produced by the billing service from a real run; a plan with no run has nothing to render. Stated rather than drawn as a broken button.
~~Eligibility rules that refuse an assignment~~	Plan wizard · step 7, and the plan page	**OUT OF SCOPE**	PO ruling 2026-09-08: these are a note for staff, not a gate. A row like "Meter size · is · 5/8 inch" is stored, shown on the page and in the audit trail, and read by nothing at billing time. The screen's heading was changed to agree with the fact.
~~A customer sub-type on a plan (PRB-15)~~	Plan wizard · step 1	**OUT OF SCOPE**	PO ruling 2026-09-08, verbatim: *"Customer sub-type is never asked, and the plan stores one - not required; - i will add it as charge code"*. A utility needing different pricing inside a class expresses it as a charge code, which is PRB-01. `rate_plans.account_subtype_id` therefore stays a column written by nothing — recorded here so the next reader meets the ruling rather than re-proposing the field.
~~A late fee or deposit set on the plan~~	Plan wizard · step 6	**OUT OF SCOPE**	PO ruling 2026-09-08: both leave the plan; a plan names charge codes and the charge code carries the money. The late fee half was already built — CR-078 / BR-RAT-1011, 2026-09-07, finance re-signed, shipped as 2.228.0: the engine reads percent and minimum off the charge code the plan names, and a plan naming none charges $0.00. The leftover dead columns are DEF-RAT-4660.
~~The "Formula" amount type and the "Base only" rate structure~~	Charge code · step 2; rate schedule · step 3	**OUT OF SCOPE**	Both are part of the agreed set and nothing prices either. Offered and permanently disabled, each naming its own reason, because removing an agreed type is a change to the agreement rather than a screen decision.

07 THE SPECIFICATION REGISTER

One row per specification, no exceptions. Every one appears both here and as a card in the section that owns it.

This document had no specification index before; this table fills a gap rather than replacing one. Every status reads UNVERIFIED, and none of them is a guess: engineering fills

this column in from the code, one row at a time. **Several are expected to come back already done** — the reads behind two or three of these tiles may exist under another name. Nothing here was marked built from a change log or from a memory of having written it.

SPEC	TITLE, AND WHAT IT WAITS ON	SCREENS	WHAT DONE LOOKS LIKE ON SCREEN	STATUS
PRB-01	**A charge code's amount can differ by customer class** A new `account_type_id` column on `charge_code_amounts`, that column inside the unique key, and a migration. Nothing else on this list can be drawn until it lands.	02 · 36 · 37	A clerk opens CONN, types 45.0000 against Residential and 85.0000 against Commercial in one grid, saves, and a commercial move-in is quoted $85.00 while a residential one is quoted $45.00 on the same charge code.	UNVERIFIED
PRB-02	**Who may approve a waiver, recorded on the charge code** A column on `charges`. No ruling exists on who the approvers are, so the field records a role rather than a person.	02	A clerk opens LATE, sets the waiver approver to Supervisor, saves, and the charge code's page reads "Waived by: Supervisor" where it read an em-dash.	UNVERIFIED
PRB-03	**A staff-only description on a charge code** A column on `charges`. Distinct from the bill label, which the customer reads.	01 · 02	A clerk types "Use for reconnections after a non-payment cut, not for new service" on CONN, saves, and the next clerk sees it on the charge code's page while the bill still reads "Connection fee".	UNVERIFIED
PRB-04	**How often a charge code was applied, and what it billed** Two reads over invoice lines grouped by charge. Both tiles say "nothing totals this" today.	04	CONN's page reads "Applied 31 times last month · $1,395.00" in the two tiles that currently read an em-dash with a sentence under them.	UNVERIFIED
PRB-05	**The premises count narrows on class and service, not just the boundary** Two more parameters on `GET /taxes/matched-premises`, which takes `premises_scope_kind` and `premises_scope_value` and nothing else.	07 · 09 · 10	A clerk sets the boundary to "Everywhere", ticks Commercial only, and the count falls from 1,284 premises to 212 before they leave the step.	UNVERIFIED
PRB-06	**What one tax is charged on, and what it collected** Two reads over invoice tax lines. The remittance worksheet DEF-385 names is	10	The State Utility Tax page reads "Taxable base $38,204.16 · collected $2,387.76" for last month, where both tiles currently say nothing totals them.	UNVERIFIED

	the consumer.			
PRB-07	**The remittance worksheet** DEF-385 filed it and its own suggested fix says the columns and the worksheet ship together. The columns shipped; the worksheet did not.	10	A bookkeeper opens Finance, picks Texas Comptroller and August, and gets a worksheet reading "$2,387.76 collected · $11.94 allowance kept · $2,375.82 to remit on form 01-339 by 20 September".	UNVERIFIED
PRB-08	**A rate schedule's minimum reaches the engine** DEF-2446 — a minimum typed on a rate schedule is published to the engine and read by nobody. This is a live defect, not a new feature.	14 · 18	A schedule with a $12.00 minimum bills a customer who used 1 kgal $12.00 rather than $4.24, and the bill line says which minimum topped it up.	UNVERIFIED
PRB-09	**Somebody is told when a price changes** Nothing in the product raises a notice when a rate schedule's prices change. The portal and the email machinery both already exist.	17	A clerk activates the 2027 water rates, ticks "tell customers", and 74 accounts get a portal notice reading "Your water rates change on 1 January 2027" — with the 9 that have no email address named before the tick is pressed.	UNVERIFIED
PRB-10	**Per-size block prices are billed, or the section goes** ⚠ NOBODY HAS RULED THIS. Nine per-size block prices are typed, stored, published to the engine and read by nothing. The document's own footer names it as the one decision still open.	15 · 16	A 2" connection using 6 kgal is billed at the 2" block price of $6.5000 rather than the schedule's single rate, and the bill line names the size that selected it.	UNVERIFIED
PRB-11	**The structured eligibility rule builder on a discount** It is named as unbuilt on the discount wizard. Enrolment is a member of staff recording a fact until it exists.	23 · 26	A clerk builds "age ≥ 65 AND account type = Residential", saves, and the discount's page lists 86 accounts matching it beside the 31 enrolled.	UNVERIFIED
PRB-12	**What a discount programme costs per month** A read over discount lines. The tile says nothing works it out.	26	SENIOR's page reads "$418.20 last month" where it reads an em-dash, and the budget tile reads "$2,180 of $5,000.00 this year" against it.	UNVERIFIED
PRB-13	**The second-approval test is settled** ⚠ TWO APPROVED POLICIES DISAGREE and the document leaves both on screen deliberately. One measures	24	A clerk saves a discount with a $7,332 annual budget and the screen states one test with one figure — "needs a second approval: $611 a month is over the $500 threshold" — instead of	UNVERIFIED

	projected monthly subsidy against $500; the other measures the budget cap against a setting defaulting to $10,000. A $7,332 annual budget is $611 a month — over the first bar, under the second.		naming two policies and asking the reader to choose.	
PRB-14	**The impossible enrolment pair is refused by the server** The dropdown makes automatic-plus-proof unrepresentable in the screen. A client that cannot express a state is not a server that refuses it — DEF-384's own lesson on a different endpoint.	23	A POST setting enrolment automatic and proof required comes back 422 naming both fields, where today it is accepted and stored.	UNVERIFIED
PRB-15	**A plan can be built for a customer sub-type** ⚠ RULED NOT REQUIRED by the PO on 2026-09-08 — kept here only because the COLUMN exists and is written by nothing, which is the shape of a field with no writer. See the out-of-scope register.	29	Not applicable — see PRB-15 in the out-of-scope register.	UNVERIFIED
PRB-16	**The outside-city surcharge is entered as a percentage** The plan stores a multiplier (1.15); the screen asks for the percentage (15). The conversion belongs on the server — a scale conversion written into a screen is the trap one layer up.	30	A clerk types 15, the screen reads "a $100.00 bill outside the city becomes $115.00", and the stored multiplier is 1.150000 without the browser having computed it.	UNVERIFIED
PRB-17	**The charge-code catalogue can be asked what a plan may add** `applies_to_customer_classes` is stored and served on a charge row, so the filter is expressible; no endpoint takes a plan and answers with the codes it may carry.	32 · 33 · 34	A clerk presses "+ Add a charge code" on a Residential electric plan and sees 6 codes with their amounts, not the 41 codes the utility has.	UNVERIFIED
PRB-18	**Every base charge that applies to a service, listed** Depends on PRB-01. A base is picked by customer class AND connection size, so one service can carry several.	31 · 36 · 37	The review lists Water against BASE-W-RES $8.0000 for 5/8" and BASE-W-RES $18.5000 for 2", where the wizard used to show one figure and call it the service's.	UNVERIFIED

PRB-19	**The combined tax rate is stated by the server** 6.25% and 1.0% is a sum a clerk was doing in their head on every call. The base total is already worked out on save for the same reason.	36 · 37	The plan's page reads "Taxes · 7.25% combined" in the band label, and the figure comes from the same response as the rows under it.	UNVERIFIED