The Accounts menu, audited

Seventeen routes behind one word in the sidebar — which of them a user can actually reach, what runs behind each, what the product says it cannot do, and the two places where a finished, tested write path has no door at all.

READ AT	PRODUCT NOW	ROUTES	DRAWN IN FULL	NOT DRAWN	SECOND ADDRESSES	NAMING NO DOOR
2.234.15 · 2824c2e5	2.234.16 · 857f3abf	17	13 of 17	2	2	0 of 17

JOURNEYS WALKED	JOURNEY ISSUES	RULE VIOLATIONS	SEAMS NOT HEALTHY	FIELDS SERVED	CROSS-MODULE FACTS	SCREENS NOT FIELD-TRACED	SPECIFICATIONS
9 of 14	5	1	2 of 6	17 of 30	13	15 of 17	10

OUT OF SCOPE
6

Read at one moment · and the moment has already moved

Every as-built statement here was true at **2.234.15, commit 2824c2e5**, dated 2026-09-10.

The product has moved on, and this was checked rather than guessed. The repository's default branch is `claude/confirm-understanding-3ktufc`; its tip is now `857f3abf` at version **2.234.16**, **19 commits** ahead of the read. Those commits change **63 files** and **none of them is in the Accounts surface** — they are the property/metering blueprint wave. Two shared components did change, `DataTable.tsx` and `StateFrame.tsx`, and both changes are pure additions of optional `secondaryCta` props that are absent by default, so every existing empty block is byte-for-byte unchanged. No `customers.account*` locale key moved.

What this warning does not cover. Descriptions go stale. Rulings stay decided. Open questions stay open until somebody answers them, not until the code changes — so `OQ-600` below is still open however the screen looks today.

How much of this was seen, and how much was read

The product was booted and driven. PostgreSQL 16.13 on port 5433, the backend in a virtualenv outside the repository, **334 migrations**, then `seed_demo` and `load_sample_data --tenant brazosbend` — **1,647 rows**: 72 accounts, 91 bills over two cycles, 40 payments, a live payment plan, a completed move-out, a parked move-in. The front end was built and served by its own `server.mjs` with `/api/*` passed to Django, which is the same-origin shape the product ships. Signed in as the tenant's owner and driven with Chromium. `git status --porcelain` is empty — nothing in the repository was written.

9 of the 14 in-scope journeys were walked (the repository holds 350 journey files; 14 name an accounts flow), and **5 issues** came back — including one defect that *nothing in this repository could have caught*, because it only exists in a request a browser actually makes. §07 has the register and the proof.

What is still read and not seen, said rather than blurred. Six wizards were opened and their rails read; none was driven through to its write, because each needs data the walk would have had to author. Those steps are drawn in §06 from the code. And two steppers — Change plan and Payment plan — could not be confirmed at all: the running product shows no rail on either entry screen. Every drawing carries the sizes, the shell and the step labels of the running product; the *contents* of an unwalked step are still the code's account of itself.

> **Description**
> A statement about what the code does today, including an honest statement that something is missing. It commits nobody to anything.

> **Commitment**
> A change specification: a named piece of work, what it waits on, the screens it changes, and what a person could do and see once it is done.

If a thing is not in a commitment card, nobody has undertaken to build it. **Five chips exist and no others**, and none of them is typed — each is derived from the register in §12 when this document is assembled, and each links to the row it came from. A screen gets BLOCKED where a commitment naming it waits on a question nobody has answered, NEW BUILD where one needs something built, rewritten or removed, NEW READ where one only puts already-served data somewhere it is not shown, and EXISTS BEHIND where one waits on nothing at all — the server already does it and the screen in front of it is the whole of the work. A screen no commitment names carries NO COMMITMENT, and that absence is the finding rather than an oversight. **Anything else — a severity, a second address, a note on what the code does today — is a DESCRIPTION and reads in the entry's text, never on a heading.**

01

The standards every screen is drawn to

Nothing here is new design philosophy. Each is an existing ratified rule of this repository, or a failure the product has already evidenced. Where two rule sets disagree, the order is fixed: **B14 wins, r10 is its source not its authority, and the build skill is how both are obeyed in this tree.**

```
THE RULE SET, IN PRECEDENCE ORDER

  1  04-docs/02-decisions/14-ui-conventions.md      B14 — ~36 binding rules   ← AUTHORITY
  2  05-prototype/r10-2026-08-16/UI-RULES.md        20 rules, 5 groups        ← B14's SOURCE
  3  .claude/skills/react-tailwind-css-ui-generator  how 1 and 2 are obeyed here

  Where they disagree, B14 wins and the divergence is stamped IN B14.
  Most of B14 is RATIFIED and UNENFORCED — no gate in this repo reads
  rendered output — so a green suite is evidence of nothing here.
```

Figure 1 · Why the precedence matters for this audit: one of the two things that looked like a violation on the Accounts list turned out to be settled inside B14's own amendment, as an open question. Judging against r10 alone would have filed it as a defect.

A · The rules these screens are actually bound by

UI-RULES 7 — dates	Every date uses `.date-input` — calendar affordance, MM/DD/YYYY keyed entry, Today shortcut. Never a bare text input. *The one violation this audit found, and it is repo-wide.*
UI-RULES 12–17 — tables	Toolbar grammar · sorting · column selector with reorder and Reset · row actions as icons capped at two plus overflow · a pagination footer on every list · an empty state on every list.
UI-RULES 11 — consequence preview	Any form that writes money, service state or legal notices shows a "what this will do" box before its commit button.

B14 rule 21 — Tailwind	New UI is Tailwind utilities and adds no class to a stylesheet — **but only in a file listed in** `07-frontend/src/styles/route-b-migrated.txt`. Written anywhere else a utility renders as **nothing at all**, and every check passes on it.
B14 rule 31	No database id is ever the visible value of a field.
B14 rule 32	A screen has a description budget, and no rule id or internal code appears in clerk-facing copy.
BR-SHL-025	A control this role or this deployment cannot honour renders **disabled with its reason**, never hidden.
BR-SHL-044	One page header, exactly one primary action.
NFR-3 / NFR-5	Universal server pagination; no hard caps anywhere. Load-bearing rather than tidy — they are what keeps T4/T3 reachable.
Hard rule 4	Financial immutability: no UPDATE or DELETE on issued invoices, invoice lines, payments or journal entries. **So an edit control on any of those is a finding, not a feature.** One narrowing exists — three columns on `payments` through `POST /payments/{id}/correct-reference` alone.

> **Every drawing says what it is, and the three words mean exactly this**
>
> **AS-BUILT** — the figure was rendered in a browser during the walk of 2026-09-10 at 2.234.15, commit 2824c2e5. Fifteen figures qualify and no others.
>
> **AS-BUILT, FROM CODE** — the surface exists in the product and was never rendered here; the figure is the source's account of itself, and each one says why it was not walked. Thirty-seven figures.
>
> **REDESIGN** — drawn to a ruling and never built, with the date it was published and a line saying what the product does instead today. A hundred and six figures — two thirds of this document.
>
> **A redesign is not drift.** Drift is a product that moved away from what it was built to; a redesign the product never matched is unbuilt work. Only an AS-BUILT figure may be diffed against the running product, and §07 is the only such table here — it names the figures it came from. **No table in this document diffs a redesign against the product**, and that was checked rather than assumed.

02

The register — where a clerk lives

Two screens carry this whole surface: the list a clerk opens twenty times a day, and the account behind one row of it. Everything else in this document is a wizard launched from one of these two.

> **The headline, stated plainly: every route here has a door**
>
> The single highest-value thing this audit does is find screens that are built, routed, tested and unreachable. **On the Accounts surface there are none.** All 17 routes name at least one inbound link read out of the source; `/:tenant/accounts/:accountId` alone has **33**, reaching in from billing, payments, metering and work. The door problem this process exists to catch is not this surface's problem.
>
> The two real findings are the mirror image — a **write path** with no door (§02, PATCH), and a **list that builds the whole tenant** before it pages (§02, NFR-3).


01 Accounts list BLOCKED NEW BUILD EXISTS BEHIND

`/:tenant/accounts · ?tab= × 8 · S17 · AccountsListPage.tsx · A1 ACC-01 · ACC-02`

Commitments ACC-S11 new build · ACC-S21 new build · ACC-S20 exists behind · ACC-S2 blocked · ACC-S22 blocked · ACC-S30 blocked · ACC-S6 new build · ACC-S5 exists behind

> **This screen is drawn twice.** its as-built figure is the list as it opened on 2026-09-10; **R2** in §10 and the worklist drawings in §03–§06 are redesigns published 2026-09-10 and 2026-09-12. **Build the as-built one only to reproduce a defect.** The thing to build is R2.

The question: "*Someone is on the phone and all they've given me is a name, or a number off a bill, or the street. Find them — and tell me what they owe before I have to ask.*"

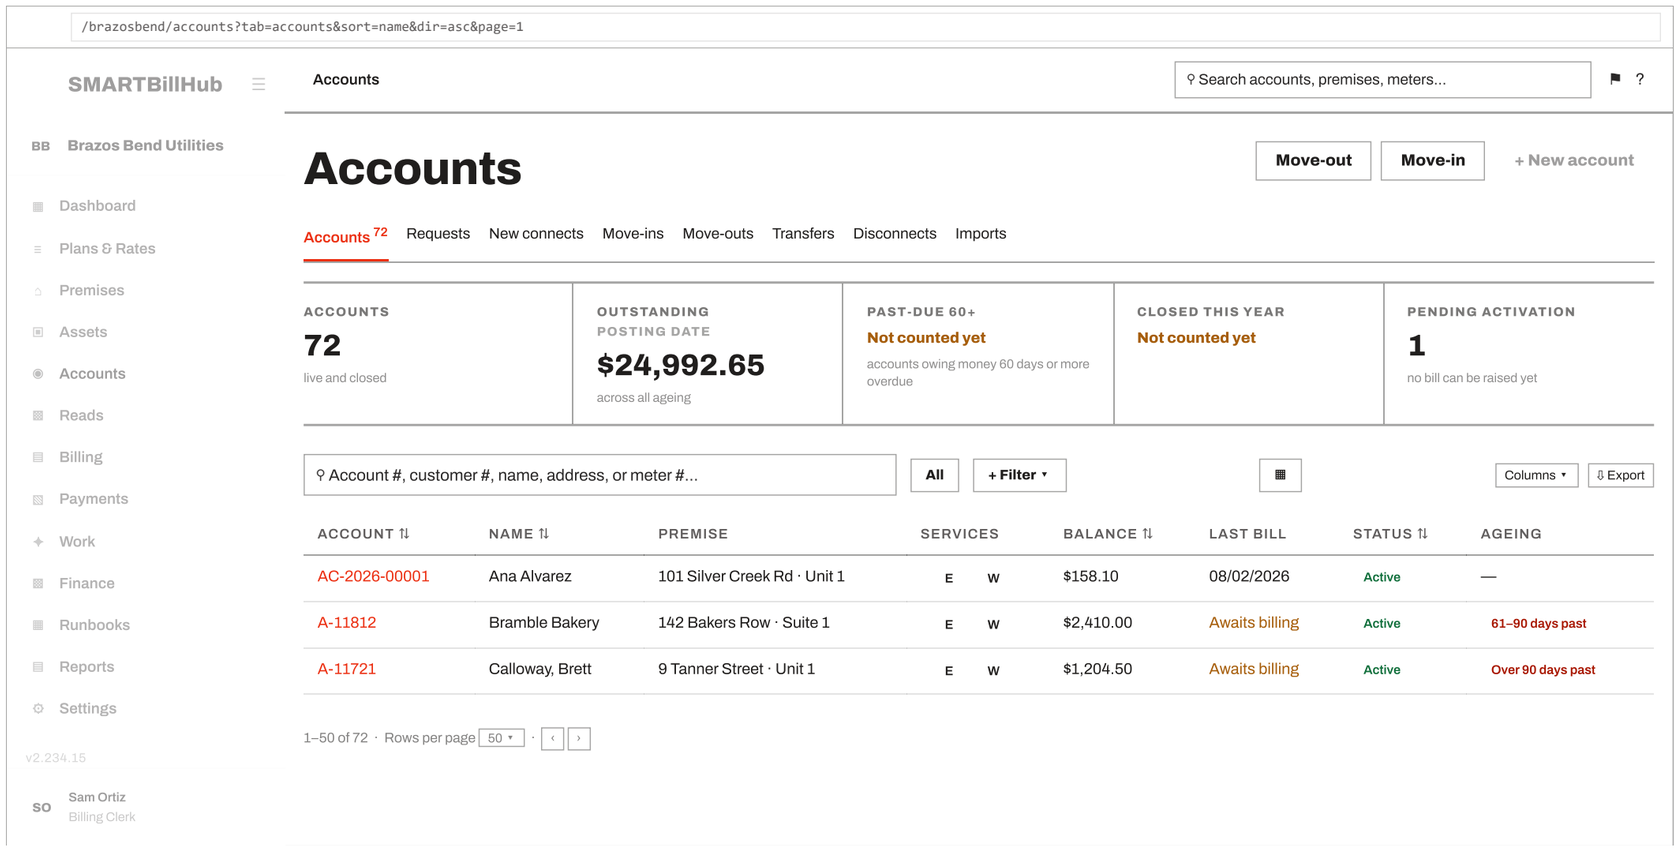

> **AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5.** the list was opened, its eight tabs clicked, and search, sort and paging driven as server parameters.
> **The register, as it opens** · `/brazosbend/accounts?tab=accounts&sort=name&dir=asc&page=1` · 72 accounts, the KPI band, and the eight worklist tabs across the top

For	A billing clerk at a utility of up to 40,000 accounts finding one customer from a fragment, and reading their money position without opening anything.
How you get here	**It is the door** — the sidebar's own nav item (`SHELL_NAV { module:"accounts", path:"/accounts" }`, `AppShell.tsx:216`, rendered `:752`). Also from the Dashboard to-do rows (`DashboardPage.tsx:990`), global search "View all in Accounts" (`GlobalSearchResults.tsx:220`), and as the back-arrow target of eight wizards.
Primary action	**One slot that relabels per tab** — "+ New account" · "+ New request" · "+ New connect" · "Move-in" · "Move-out" · "+ New transfer" · "+ New disconnect" · "↑ New import". Exactly one primary on the page whatever the tab, which is BR-SHL-044 honoured rather than fought.
Tabs	**Eight, all in the URL as `?tab=`** and all with a real body — none renders a note about itself. accounts → this table · requests → `ServiceRequestsListPage urlState=`

	{false} · new-connects → `ParkedDraftsPanel` + `NewConnectsTab` · move-ins / move-outs / transfers / disconnects → the same pairing · imports → `AccountImportsTab`. An unknown `?tab=` falls back to accounts rather than erroring.
Table controls	**Search** SERVER one SQL statement, five OR-legs, gated at 2 characters (`selectors.py:2706-2723`). Two legs are lazy querysets rendered as nested subqueries, so they cost no extra round trip. **Filter** SERVER for status · category · autopay · kind · unit_id · premises_id (`:2726-2747`). IN MEMORY for ageing and balance>0 (`:2795-2802`) — deliberately, because both figures are derived and stored in no column, so a WHERE clause would be a second implementation of the same maths free to disagree with the cell in the same response. **Columns** HEALTHY show/hide, bidirectional reorder, Reset, and **persisted per user server-side** under `table.<screen>.columns` (`DataTable.tsx:381`). The identity column can never be hidden. **Sort & pagination** IN MEMORY — see the finding below. All five sorts run as `rows.sort()` in Python; SQL does only `.order_by("id")`.
Write surfaces	**Detail** the account-number cell is a link to screen 02 (`AccountsListPage.tsx:1018`). **Add** "+ New account" opens the six-step creator and it really posts (`:999`, `:848`) — *not* the usual Add-button-with-no-form. **Edit** NOTHING. **Update** NOTHING FROM ANY SCREEN — see the PATCH finding below.
Walked	**Not walked.** The app could not be booted here (no docker daemon, no systemd, no PostgreSQL, no node_modules). Every statement in this entry is read from source.
Cognitive load	Removes "which number is this?" — one box takes the account number, the customer number, a name, a street or a meter number. And removes the arithmetic of "do they owe us anything", by putting the ledger's own figure on the row rather than a cached column.
States	**Loading** skeleton rows at table height; the KPI tiles render –, not 0. **Empty** the shared empty state with "+ New account" as its CTA (`:1522`). **Failed** a permission failure renders `PermissionDenied` with a way back to the dashboard; the surface is not drawn at all. **Nothing can be owed yet** a pending-activation row reads *Awaiting* in Balance, never $0.00 — the domain state this screen exists to get right.
Words	Chosen: **Awaiting** over a dash or a zero, everywhere a figure is absent rather than nil. Refused: **Current** as a fallback for a null ageing band — that would be a claim about a customer's money. Refused: a **Plan** column, because the snapshot has no DDL and an always-empty column is a worse answer than none.
Components	`PageHeader` · `KPIStrip` · `DataTable` · `FilterBar` · `MoneyCell` · `DateCell` · `StatusPill` · `AwaitsCell` · `AccountServiceChips` · `AgeingCell`
Rules	BR-CUS-015 · 016 · 017 · 048 · 053 · 055 · 059 · 068 · 510 · BR-SHL-010 · 011 · 013 · 023 · 025 · 034 · 044 · NFR-3

Finding · `GET /accounts` builds the whole tenant before it pages

What the code does. `selectors.py:2751` is `accounts = list(qs.order_by("id"))` — every matching account, materialised. Seven batch cross-module reads then run across **all** of those ids (`:2755-2770`): AR positions, last issued invoice dates, ageing segments, customer numbers, contact names, service codes, premise cells. Rows are built for all of them, two filters and all five sorts run in Python, and only then does `api.py:143` slice fifty out.

The docstring says so itself, at `:2752`: "*this function serializes EVERY matching account and the paginator slices afterwards.*"

What it costs. The work is O(tenant), not O(page). There is a measured datum in the file already — the DEF-2723 comment records **562 ms for seventy-three accounts on an idle system**. T5's ceiling is 40,000 accounts, which is roughly 550× the rows built to render the same fifty.

Not overclaimed. The client does receive fifty rows and the envelope count is correct, so this is not a correctness bug — it is a scale breach of `NFR-3`, and the Python sort is the same disposition `CLAUDE.md` already flags on `GET /outstandings`. `CLAUDE.md` names **four** known NFR-3 breaches; this is a **fifth**, and it is on the busiest screen in the product.

Why it is defensible today and not tomorrow. Every Python-side step has a stated, good reason: the derived figures live in no column, and batching per page beat a query per row. At T7 (≤3,000) it is fine. The rule it breaks is the one that exists so T4 and T3 stay reachable.

Where this screen's data comes from

```
accounts.account_no ──→ selectors.account_row()          (customers)
                    └↳ GET /:tenant/accounts               50 of N, sliced in Python
                    └↳ getAccounts() → <DataTable/>        field ①            WHOLE

ledger journal lines ─→ selectors._ar_positions_for()     (customers ⇄ ledger)
                    └↳ row.balance + row.balance_currency
                    └↳ <MoneyCell/>                        field ⑤            WHOLE

billing invoices ────→ seams.last_issued_invoice_dates()  (customers ⇄ billing)
                    └↳ row.last_bill_at                    field ⑥   null today  BREAKS AT billing
                                                           renders "Awaiting", never a dash

account_opening_buckets → selectors.ageing_segments_for()  (customers)
                    └↳ row.ageing_segment (4 bands)        field ⑧            WHOLE
                       row.aging  ← billing's OWN vocabulary, still null       FORKED
```

#	Field	Comes from	Owned by	Health
①	Account #	`accounts.account_no via GET /accounts`	customers	SERVED
②	Name	`contacts.full_name via primary_contact_names_for()`	customers	SERVED
③	Premise	`premises.address_line1 (+ unit label) via premise_cells_for()`	customers ⇄ metering	SERVED
④	Services	`service_agreements.service_code via service_codes_for_accounts()`	customers ⇄ rating	SERVED
④	Services *badge colour + letter*	`a literal badge map in features/rating/ratingShared.tsx`	—	HARDCODED
⑤	Balance	`ledger journal lines via _ar_positions_for() — NOT accounts.balance`	customers ⇄ ledger	SERVED
⑥	Last bill	`billing invoices via seams.last_issued_invoice_dates()`	customers ⇄ billing	SERVED
⑦	Status	`account_statuses.code via accounts.status_id`	customers	SERVED
⑦	Status filter *options*	`ACCOUNT_SEED_STATUSES — a literal 5-tuple in customersShared.tsx:166. The vocabulary is tenant-EXTENSIBLE and the only route that enumerates it is System-Admin-only, so a clerk's filter cannot offer a tenant-added status`	—	HARDCODED
⑧	Ageing band	`account_opening_buckets via ageing_segments_for()`	customers	SERVED
⑧	row.aging *(the neighbour)*	`billing's own three-state display vocabulary — served null, read by nothing on this screen`	billing ⇄ customers	DEAD

⑨	Category filter *options*	`GET /lookups platform catalogue, fetched (useAccountCategories)`	customers ⇄ tenancy	SERVED
⑩	KPI · Outstanding	`accounts_rollup() — the ledger's Σ with the CHAR(3) the ledger derived`	customers ⇄ ledger	SERVED
⑪	KPI · Past due 60+	`served null ON PURPOSE — needs each open bill's due date, which no module publishes`	billing	NOT SERVED
⑫	KPI · Closed this year	`accounts.closed_at exists; ACCOUNT_FILTERS carries no date dimension, so "closed since January" is unaskable`	customers	NOT SERVED
⑬	KPI · Pending activation	`a SECOND GET /accounts with f.status=pending_activation; the rows come back and are thrown away for the envelope count`	customers	DERIVED

Screen health: NOT SERVED — the worst field on the screen, never an average. 9 SERVED · 1 DERIVED · 3 HARDCODED/DEAD · 2 NOT SERVED · 0 untraced.


02 Account detail BLOCKED NEW BUILD NEW READ EXISTS BEHIND

`/:tenant/accounts/:accountId · ?tab= × 12 · ?order= · S21 · AccountDetailPage.tsx · A1 ACC-03`

Commitments ACC-S13 new build · ACC-S42 new build · ACC-S3 exists behind · ACC-S8 new build · ACC-S14 new build · ACC-S15 new build · ACC-S43 new read · ACC-S16 new build · ACC-S21 new build · ACC-S17 exists behind · ACC-S1 exists behind · ACC-S30 blocked · ACC-S24 blocked · ACC-S23 new build · ACC-S6 new build · ACC-S5 exists behind

> **This screen is drawn twice.** its as-built figures are the twelve tab panels rendered on 2026-09-10; the PROPOSED Overview, and **R1**, **R4**, **R5**, **R6** and **R7** in §10–§11, are redesigns published 2026-09-10 and 2026-09-11. **A builder building this screen builds the redesigns**; the as-built twelve are the baseline they change.

The question: "*I have this customer on the phone. What do they owe, what have they paid, what's on their meter — and what can I actually do for them before I have to say I'll call back?*"

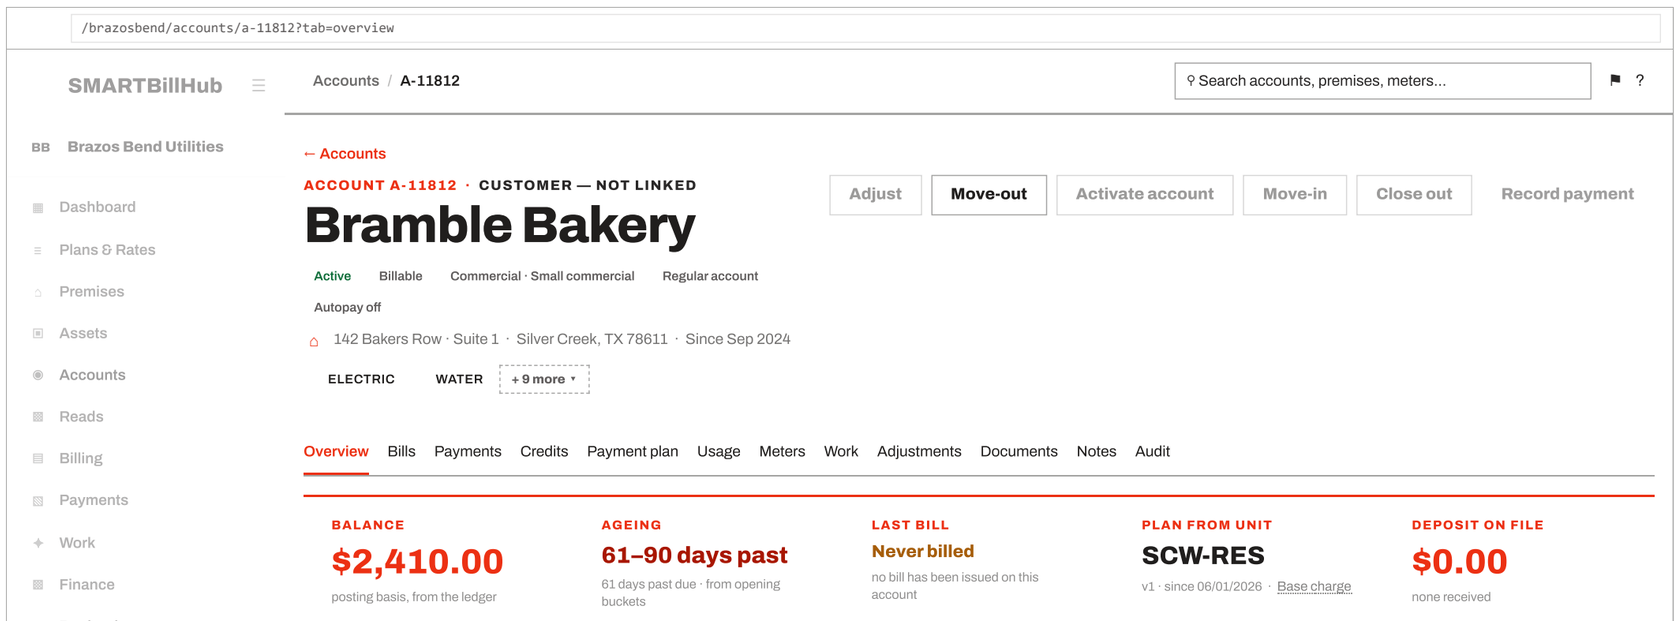

MONEY

Balance	$2,410.00
Basis	Posting date
what the figure counts — not the clearing date	
Source	The ledger
every posted charge, less every posted payment	
Ageing	61–90 days past
Days past due	61
Ageing source	Opening buckets
derived from opening balances, not from each open bill's due date	
Credit tier	*Not computed*
Deposit on file	$0.00
Deposit received	—
Interest accrued	*Not accrued*
Returned payments	0

SERVICE

Filter ▾ ⚲ Search services

Columns ▾ ⇩ Export

SERVICE	STARTED	ENDED
ELECTRIC	09/10/2024	—
WATER	09/10/2024	—

METERS

NO METER IS ASSIGNED
This account holds two service agreements and no measuring asset. Consumption cannot be read and a metered bill cannot be raised until one is assigned.

PLAN

Plan	Sample — Residential
Code	SCW-RES
Version	1
In force since	06/01/2026

HISTORY

All bills →

NO BILL HAS BEEN ISSUED
No bill has been raised on this account yet. The balance above was carried in as an opening figure, which is why the ageing is counted from that rather than from a bill's due date.

CUSTOMER

Full name	Bramble Bakery
Email	—
Phone	—
Date of birth	—
Government ID	—

MAILING ADDRESS — WHERE THE BILL GOES

NO MAILING ADDRESS OF ITS OWN
The bill goes to the service address above. A mailing address is a SEPARATE fact and is shown here only when it differs — two identical addresses on one screen teach a clerk to skip the second.

CUSTOMER RECORD

Customer ID	—
this account is not linked to a customer record, so its contact above is the only one it has	
Linked accounts	0
no other account is grouped with this one	

BILLING PREFERENCES

Autopay	Off
enrolment is recorded here; nothing is collected automatically in this version	
Paperless	Off
Text reminders	Off
Preferred language	—
Notification template	Tenant default

ACCOUNT SETUP

Category	Commercial
Sub-type	small_commercial
Account kind	Regular
Master account	—
this account is not part of a master/sub group	
Behaviour class	Billable
this status raises bills	
Tax exempt	No
Exemption reference	—
Exemption expires	—
Bad address	No
Opened	09/10/2024
Closed	—

PORTAL ACCESS



AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. the account was opened and all twelve tabs clicked; none was blank.

The account, as it opens · `/brazosbend/accounts/a-11812?tab=overview` · the header, the seven-icon rail, and the first of twelve tabs

Every tab on this screen, drawn


Twelve tabs, twelve drawings, one account behind all of them — A-11812, Bramble Bakery, 142 Bakers Row · Suite 1.

> **These twelve are drawn with sample data, and here is exactly what that means**
>
> A-11812 has almost nothing on it in the seeded database: no bill has ever been issued, no meter is fitted, nothing has been read. Drawn truthfully, eleven of the twelve tabs were an empty state — and an empty state shows a reader nothing about the layout. So rows and figures are invented. Every drawing says **sample data** in its own corner, so no figure below is ever quoted back as a finding.
>
> **The rule they are drawn to: mock the data, keep the behaviour.** Rows, amounts, dates and references are invented. What the product can and cannot WORK OUT is not. So the bills carry real tax arithmetic and reconcile to the balance — the three unpaid ones total exactly $2,410.00 — and every one of them still reads *Issued* rather than *Overdue*, because past-due is not computed on this deployment and drawing it would promise a build that cannot be delivered. Every stated absence that no amount of data would fix stays where it was: adjustments have no endpoint, documents have no upload, an audit row has no link back, usage behind a bill is not summed.
>
> **What is real on these drawings, and stays real.** The account, its address, its category and the raw `small_commercial`. The balance of $2,410.00 and 62 days past due. A commercial account sitting on a residential plan. `PY-260911-0076` — $500.00, posted with no clearing date, met nothing, still *Processing*, balance unmoved. And the two dunning notices and disconnect case `DSC-26-0003`, with the audit rows that name them in database words.
>
> **One difference to expect between these and the action drawings below.** Here bills exist, so **Print bill** and **Issue credit** are live in the rail. On the real account they refuse, because a bill is what they need — and the action drawings are deliberately left on the account as it really is, because refusal states are the whole point of that set.

All twelve render, all twelve reflect in the address bar, none is blank and none raised an error. One address is worth noting: **Payment plan is `?tab=plan`**, not `?tab=paymentplan` — a link built by guessing from the label lands on Overview.

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 1 of 12 · Overview · `/brazosbend/accounts/a-11812?tab=overview` · the tab a clerk lands on — every fact under a named group

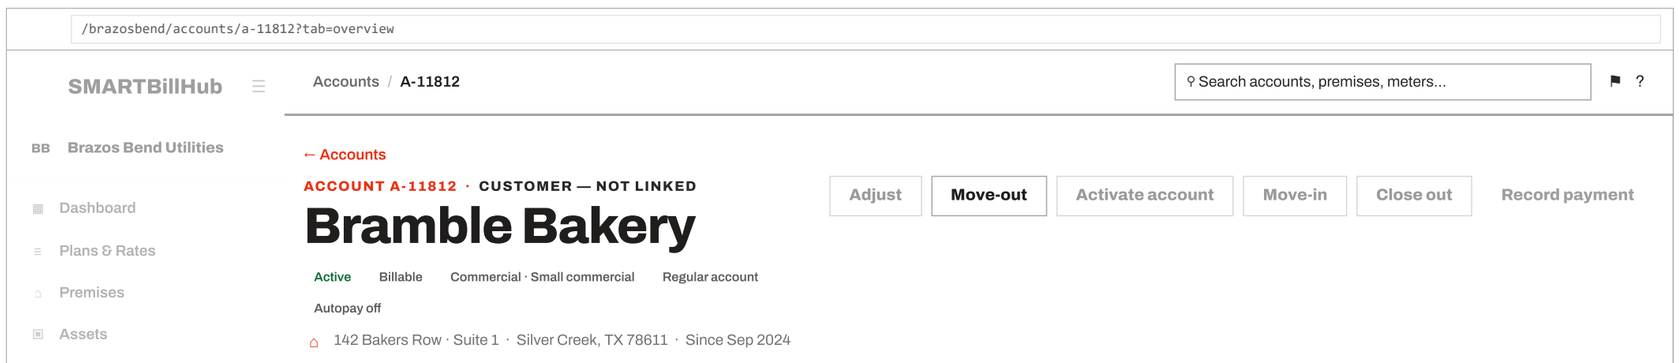

ELECTRIC WATER + 9 more

Overview Bills Payments Credits Payment plan Usage Meters Work Adjustments Documents Notes Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out on this deployment

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026 · Base charge

LAST ACTIVITY
09/11/2026
a payment was recorded

DEPOSIT ON FILE
$450.00
received 09/24/2024

Sample data. The rows and figures on this tab are invented to show the layout working.

MONEY

Balance	$2,410.00
Basis	Posting date
Source	The ledger

every posted charge, less every posted payment — three issued bills stand behind it

Oldest unpaid	62 days
Returned payments	0
Bad address	No

SERVICE

Filter ▾ ⚲ Search services

Columns ▾ ⇩ Export

SERVICE	STARTED	ENDED
ELECTRIC	09/10/2024	Still open
WATER	09/10/2024	Still open

METERS ON THIS UNIT

Filter ▾ ⚲ Search meters

Columns ▾ ⇩ Export

METER	SERVICE	LAST READ	READ ON
E-4417	Electric	61,480 kWh	08/18/2026
W-4417	Water	9,214 kgal	08/18/2026

PLAN — TAKEN FROM THE UNIT, NOT HELD ON THE ACCOUNT

Plan	Sample — Residential
Code	SCW-RES
Version	1
In force since	06/01/2026

a residential plan on a commercial account — the plan follows the unit, and nothing reconciles the two

RECENT BILLS

All bills →

Filter ▾ ⚲ Search bills

Columns ▾ ⇩ Export

ACCOUNT

Number	A-11812
Status	Active
Opened	09/10/2024
Category	Commercial
Sub-type	small_commercial
Cycle	Silver Creek — monthly
Tax exempt	No
Preferred language	English

the sub-type is printed as the value the database stores — this is the one place on the account where an internal string reaches a clerk

CUSTOMER

Full name	Bramble Bakery
Kind	An organisation
Email	accounts@bramblebakery.example
Phone	+1 (512) 555-0117
Trading name	Bramble Bakery
Business ID	Seen 09/10/2024

MAILING ADDRESS — WHERE THE BILL GOES

Goes to: Marchetti & Co, Suite 400
18 Cedar Ridge Way
Silver Creek, TX 78611

their accountant — different from the service address, which is why this is shown at all

CUSTOMER RECORD

NOT LINKED TO A CUSTOMER RECORD
This is one contact on one account. Until it is linked, the panel below can only list the account you are on.

PAYMENT METHOD

On file	ACH · Frost Bank ••••7712
Verified	09/24/2024
Autopay	Off

autopay is recorded on the account and nothing collects on it in this version, so turning it on changes a flag and not a payment

Columns ▾ ⇩ Export

BILL #	ISSUED	DUE	TOTAL	STATUS
BL-2608-000229	08/22/2026	09/11/2026	$811.35	Issued
BL-2607-000204	07/22/2026	08/11/2026	$812.25	Issued
BL-2606-000181	06/22/2026	07/11/2026	$786.40	Issued

USAGE TREND

Usage →

12 months | **24 months**

Filter ▾ ⚲ Search periods

Columns ▾ ⇩ Export

MONTH	ELECTRIC	WATER
Aug 2026	5,510 kWh	62 kgal
Jul 2026	5,083 kWh	58 kgal
Jun 2026	4,870 kWh	55 kgal
May 2026	4,410 kWh	49 kgal
Apr 2026	4,180 kWh	46 kgal
Mar 2026	4,020 kWh	44 kgal

the six most recent months, newest first — averaging 5,140 kWh and 56 kgal a month.

DEPOSIT & CREDIT

Deposit on file	$450.00
Received	09/24/2024
Interest accrued	Not accrued
Credit tier	Not computed

interest and the credit tier are both served as absent — neither is worked out on this deployment

PORTAL ACCESS

Sign-in	Nobody has signed up
Last sign-in	Never signed in
Paperless	Off
Text reminders	Off

there is no customer portal in this version, so none of these four can change

ALL ACCOUNTS FOR THIS CUSTOMER

ACCOUNT	ADDRESS	STATUS	BALANCE
A-11812	142 Bakers Row · Suite 1	Active	$2,410.00

one row, because no customer record is linked

v2.234.15

SO Sam Ortiz
Billing Clerk


ACC-T01 · sample data

Nothing on this tab can be corrected, and the next drawing fixes it

Every fact above is read-only, in every group, forever — a tax certificate that expires, a phone number that changes, a billing address that moves. The drawing below is **the same tab with an edit control on all eleven groups**, and it is a **proposal**: the product has no edit control on any group of this screen today. The five forms behind it are **R5** in §10. Go to R5 →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's Overview tab has no edit control on any group.

Tab 1 of 12 · Overview — PROPOSED, with an edit control on every group · `/brazosbend/accounts/a-11812?tab=overview` · eleven groups, eleven controls — five live, one that opens the Change plan wizard, five disabled with their reason. The forms behind them are R5 →

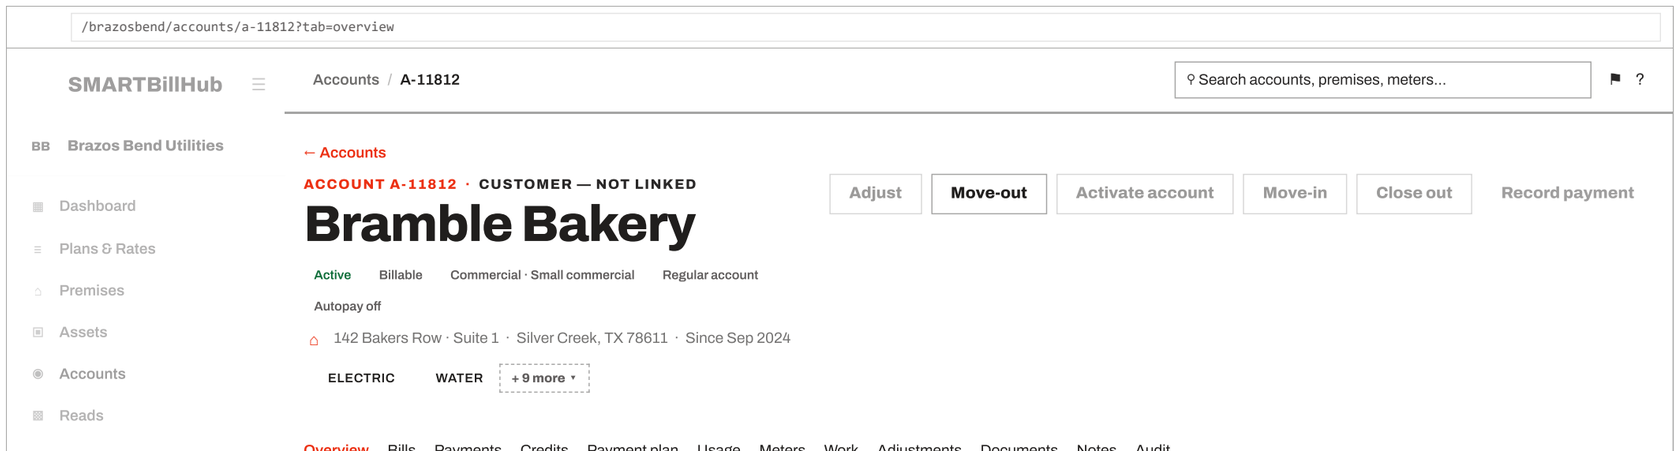

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$450.00
received 09/24/2024

MONEY

Edit

Balance	$2,410.00
Basis	Posting date
Source	The ledger
Oldest unpaid	62 days

SERVICE

Edit

Filter ▾ ⚲ Search services

Columns ▾ ⇩ Export

SERVICE	STARTED	ENDED
ELECTRIC	09/10/2024	Still open
WATER	09/10/2024	Still open

PLAN — TAKEN FROM THE UNIT

Change plan

Plan	Sample — Residential
Code	SCW-RES
Version	1
In force since	06/01/2026

RECENT BILLS

Edit

Filter ▾ ⚲ Search bills

Columns ▾ ⇩ Export

BILL #	ISSUED	DUE	TOTAL	STATUS
BL-2608-000229	08/22/2026	09/11/2026	$811.35	Issued
BL-2607-000204	07/22/2026	08/11/2026	$812.25	Issued
BL-2606-000181	06/22/2026	07/11/2026	$786.40	Issued

USAGE TREND

Edit

Filter ▾ ⚲ Search periods

Columns ▾ ⇩ Export

MONTH	ELECTRIC	WATER
Aug 2026	5,510 kWh	62 kgal
Jul 2026	5,083 kWh	58 kgal
Jun 2026	4,870 kWh	55 kgal

ACCOUNT

Edit

Number	A-11812
Status	Active
Category	Commercial
Sub-type	small_commercial
Tax exempt	No
Preferred language	English

UNIT — WHAT THIS ACCOUNT IS ATTACHED TO

Change unit

Unit	Suite 1
Premises	142 Bakers Row
Service address	142 Bakers Row, Silver Creek, TX 78611
Unit type	Retail unit
Plan the unit carries	SCW-RES v1

the address is the building's and the plan is the unit's — both follow this row, which is why it has a control of its own

CUSTOMER

Edit

Full name	Bramble Bakery
Email	accounts@bramblebakery.example
Phone	+1 (512) 555-0117
Business ID	Seen 09/10/2024

MAILING ADDRESS — WHERE THE BILL GOES

Edit

Goes to: Marchetti & Co, Suite 400
18 Cedar Ridge Way
Silver Creek, TX 78611

PAYMENT METHOD

Edit

On file	ACH · Frost Bank ••••7712
Autopay	Off

DEPOSIT & CREDIT

Edit

Deposit on file	$450.00
Received	09/24/2024
Credit tier	Not computed

PORTAL ACCESS

Edit

May 2026	4,410 kWh	49 kgal

Sign-in	Nobody has signed up
Paperless	Off

v2.234.15

The rule. Every group heading carries the control.

SO Sam Ortiz
Billing Clerk

ACC-T01E

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 2 of 12 · Bills · `/brazosbend/accounts/a-11812?tab=bills` · nine columns, server-sorted on issue date, newest first

`/brazosbend/accounts/a-11812?tab=bills`

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

⌂ 142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more ▾

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

✉ 🖨 $ ⇆ ⚡ 🖩 ✎

Sample data. The rows and figures on this tab are invented to show the layout working.

All | Outstanding | Settled | Filter ▾ | ⚲ Search | **All bills →** | Columns ▾ | ⇩ Export

BILL #	CYCLE	ISSUE DATE ▼	DUE DATE	SUBTOTAL	TAX	TOTAL	STATUS	
BL-2608-000229	Silver Creek — monthly	08/22/2026	09/11/2026	$795.44	$15.91	$811.35	Issued	🖨 …
BL-2607-000204	Silver Creek — monthly	07/22/2026	08/11/2026	$796.32	$15.93	$812.25	Issued	🖨 …
BL-2606-000181	Silver Creek — monthly	06/22/2026	07/11/2026	$770.98	$15.42	$786.40	Issued	🖨 …
BL-2605-000163	Silver Creek — monthly	05/22/2026	06/11/2026	$753.97	$15.08	$769.05	Settled	🖨 …
BL-2604-000147	Silver Creek — monthly	04/22/2026	05/11/2026	$727.63	$14.55	$742.18	Settled	🖨 …

1–5 of 5 · Rows per page 50 | 100 | 200 | 500 | 1000 ‹ ›

Three of these are unpaid and not one says so. Past-due is not worked out on this deployment: whether a bill is met comes from payments and today's date comes from the utility's own clock, and until both are wired every issued bill answers *Issued*.

Columns this tab cannot show

USAGE BEHIND EACH BILL

The design also shows the usage each bill was raised on. Usage is summed from meter reads and that summary is not built, so no number is drawn rather than a zero that would read as "they used nothing".


v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T01E · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 3 of 12 · Payments · `/brazosbend/accounts/a-11812?tab=payments` · expandable rows — each opens onto what the money met

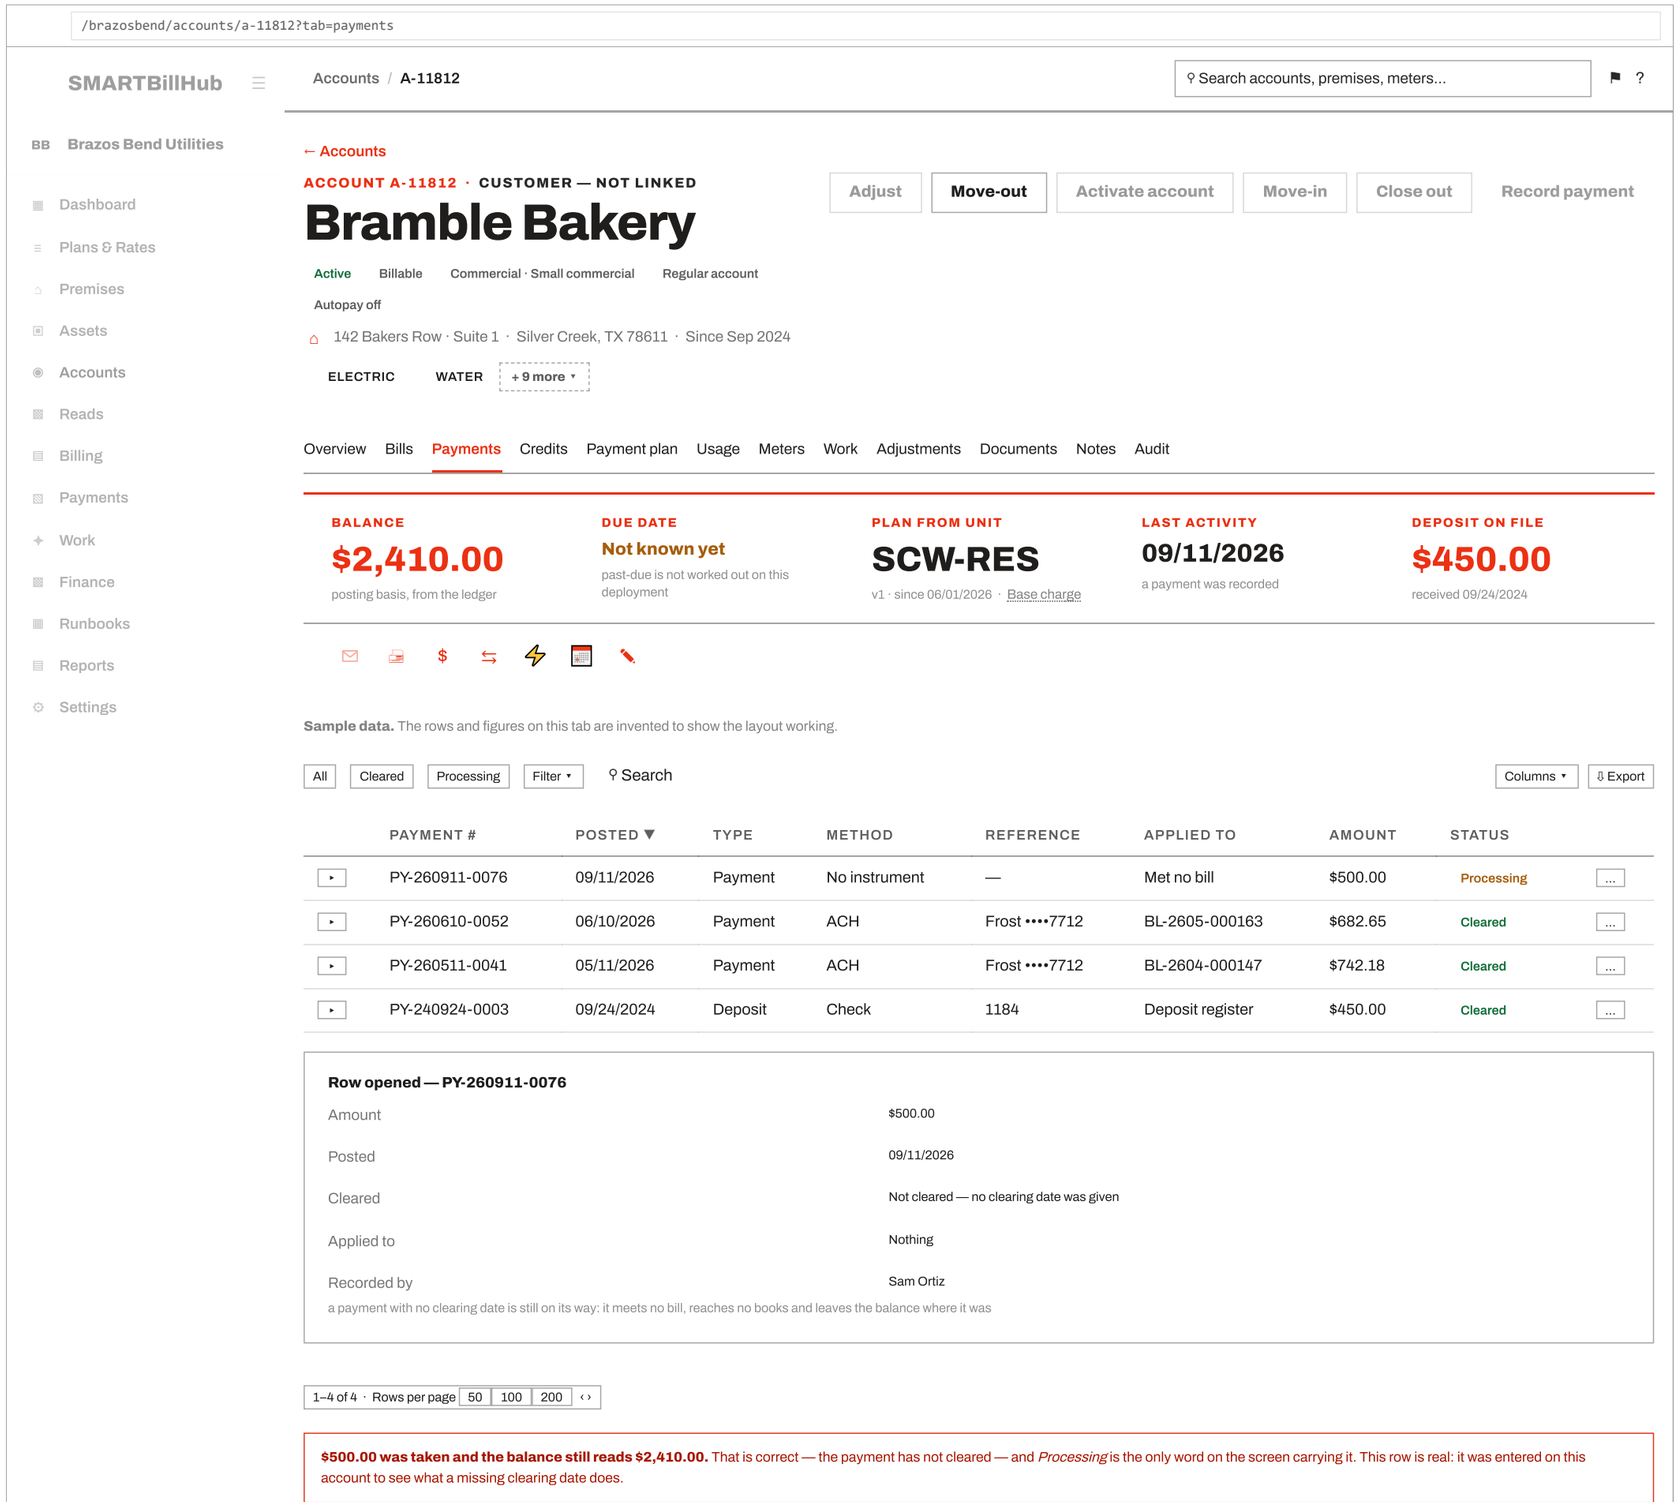

THE DEPOSIT ROW IS DRAWN HERE AND THE PRODUCT WOULD NOT LIST IT

The design shows a held deposit among the payments. Nothing writes the deposit register yet, and whether a held deposit belongs in this list has not been settled.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T03 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 4 of 12 · Credits · `/brazosbend/accounts/a-11812?tab=credits` · two credit notes, each still sitting beside the bill it corrected

/brazosbend/accounts/a-11812?tab=credits

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

$ ⇆ ⚡

Sample data. The rows and figures on this tab are invented to show the layout working.

All | Applied | Open | Filter ▾ ⚲ Search Columns ▾ ⇩ Export

CREDIT NOTE #	ISSUED ▼	REASON	AGAINST BILL	AMOUNT	STATUS
CN-2606-000014	06/28/2026	Water charge billed in error	BL-2605-000163	−$86.40	Applied
CN-2601-000004	01/19/2026	Goodwill — service interruption	BL-2512-000098	−$40.00	Applied

Row opened — CN-2606-000014

Original bill	BL-2605-000163 · $769.05
Credited	−$86.40
Replacement bill	Not raised — the correction was partial
Reason given to the customer	A water charge was billed twice for the period 04/22 — 05/22.
Raised by the original stays on the record beside the credit — a bill is never edited, it is credited and replaced	Dana Whitfield · approved by Priya Raman

1–2 of 2 · Rows per page 50 ‹ ›

A credit is raised from the bill it corrects, never from this tab.


v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T04 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 5 of 12 · Payment plan · `/brazosbend/accounts/a-11812?tab=plan` · note the address: this tab is `?tab=plan`, not `?tab=paymentplan`

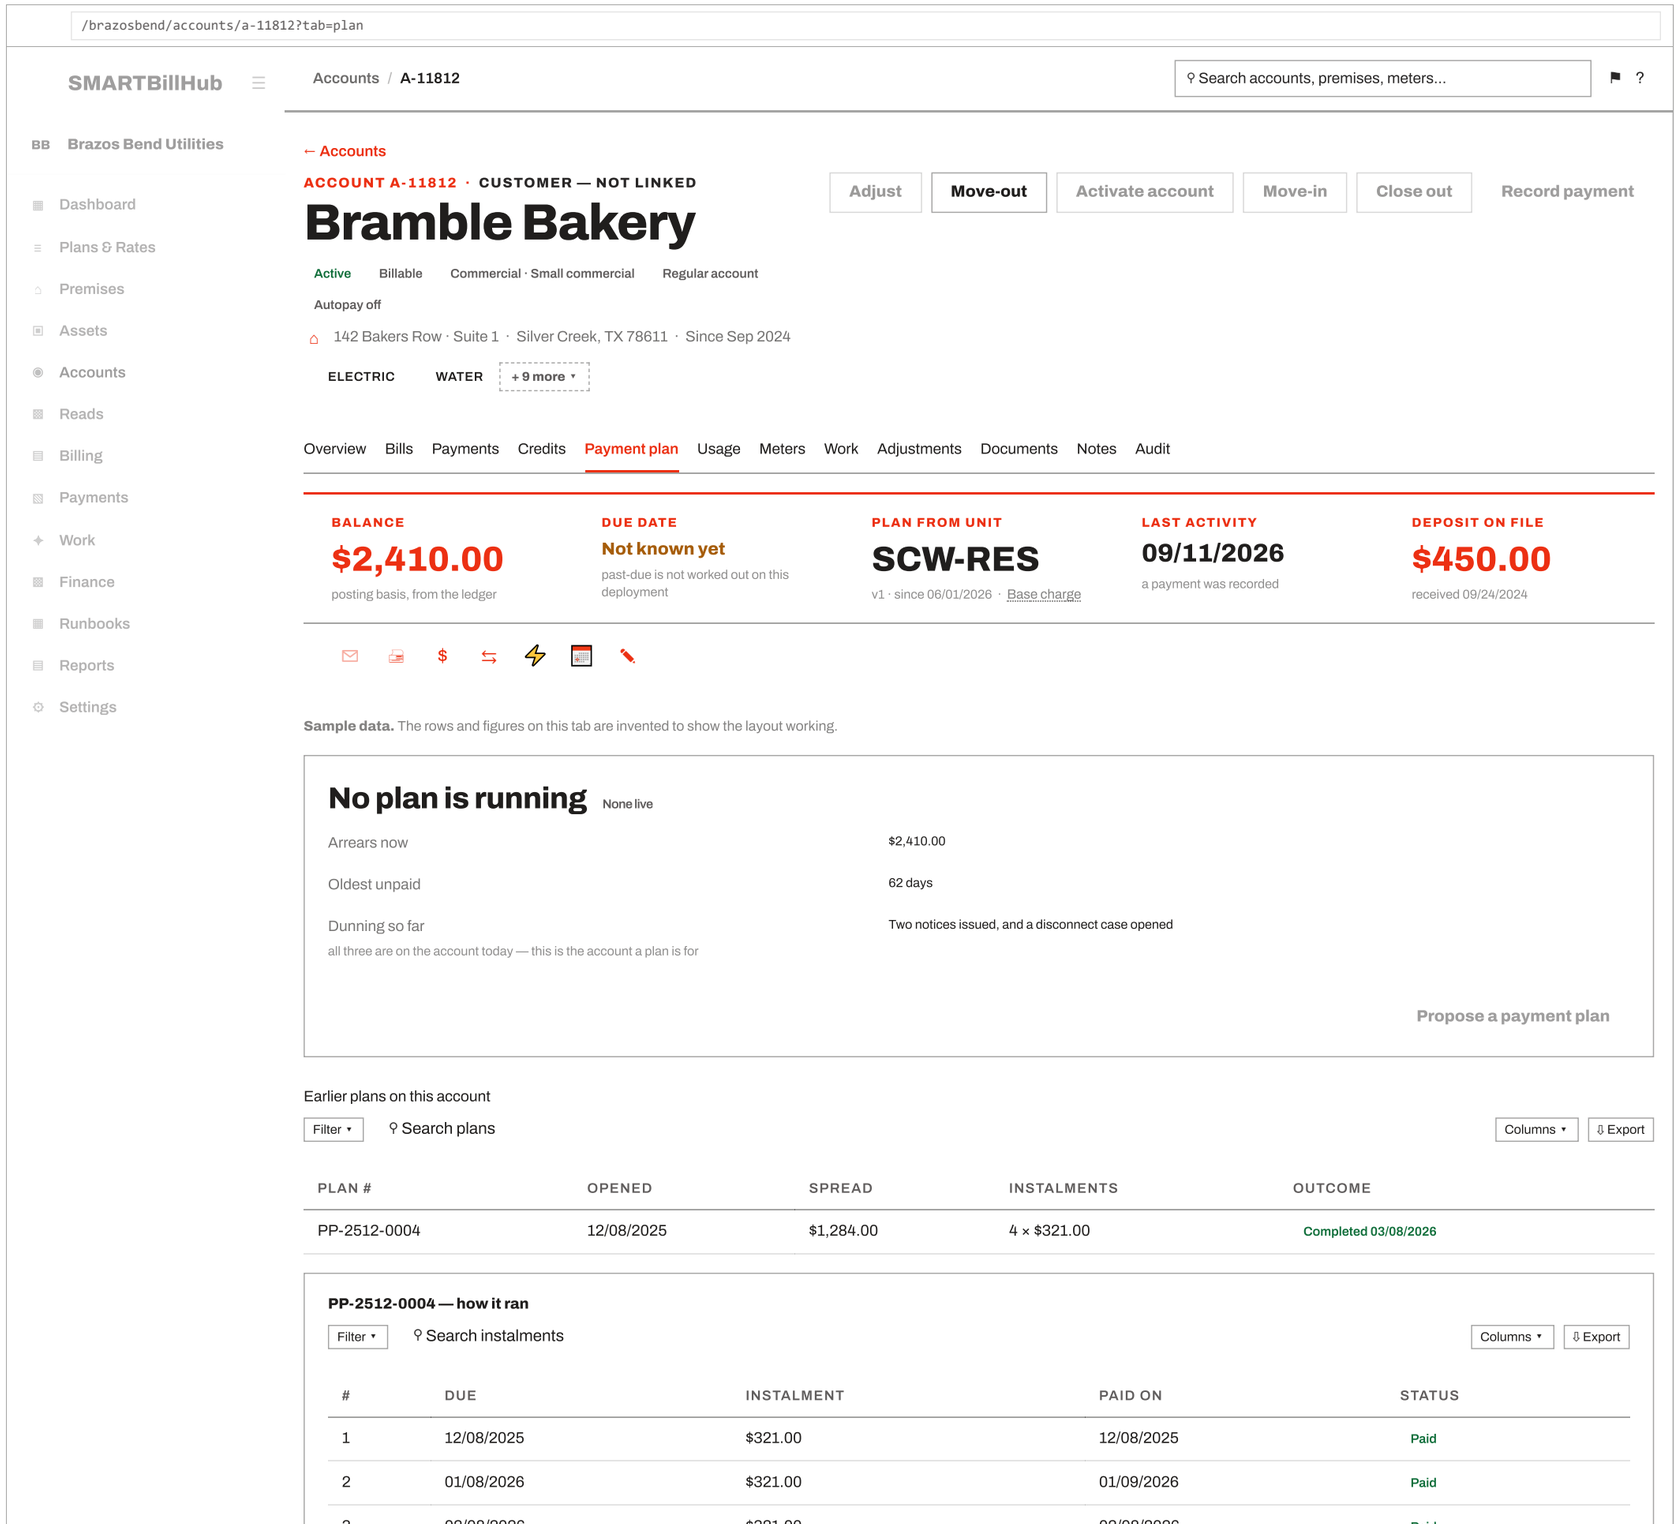

4	03/08/2026	$321.00	03/08/2026	Paid

kept in full — which is worth a clerk knowing before refusing a second one

v2.234.15

This account has kept a plan before and is in arrears again.

SO Sam Ortiz
Billing Clerk

ACC-T05 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 6 of 12 · Usage · `/brazosbend/accounts/a-11812?tab=usage` · a real chart, and the stats beside it are worked out from the same twelve numbers

/brazosbend/accounts/a-11812?tab=usage

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more


Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

Sample data. The rows and figures on this tab are invented to show the layout working.

Electric | Water | All — 12 months | 24 months

Electric · Sep 2025 — Aug 2026

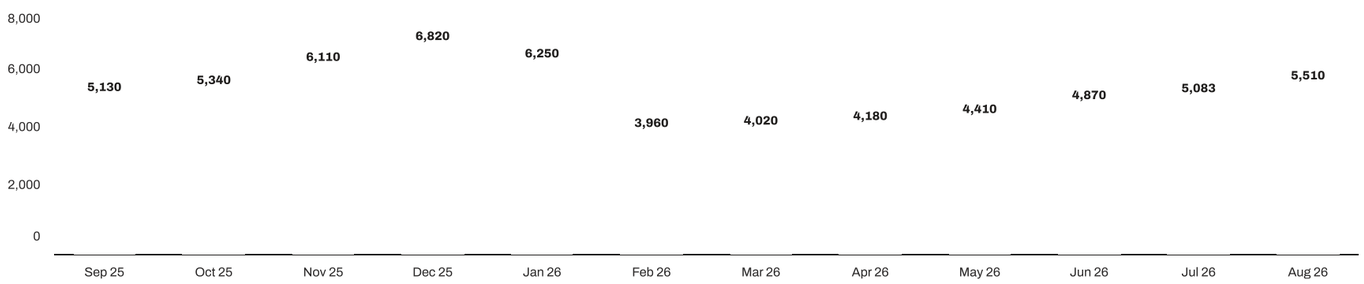

kWh a month

Average	Highest	Lowest	This month vs last
5,140 kWh	6,820 kWh	3,960 kWh	+8.4%
a month	Dec 25	Feb 26	5,510 against 5,083

Month by month

Filter ▾ ⚲ Search periods — Columns ▾ | ⇩ Export

MONTH	ELECTRIC	WATER	READ ON	SOURCE
Aug 2026	5,510 kWh	62 kgal	08/18/2026	Walk-by
Jul 2026	5,083 kWh	58 kgal	07/17/2026	Walk-by
Jun 2026	4,870 kWh	55 kgal	06/18/2026	Walk-by
May 2026	4,410 kWh	49 kgal	05/19/2026	Estimated
Apr 2026	4,180 kWh	46 kgal	04/17/2026	Walk-by
Mar 2026	4,020 kWh	44 kgal	03/18/2026	Walk-by

v2.234.15

A bakery's winter peak is the ovens running longer, and it is the shape a clerk is asked to explain on the phone.

SO Sam Ortiz
Billing Clerk

ACC-T06 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 7 of 12 · Meters · `/brazosbend/accounts/a-11812?tab=meters` · one table — the meters on this unit — searchable, filterable, with the read log as a row action

/brazosbend/accounts/a-11812?tab=meters

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more ▾

Adjust · Move-out · Activate account · Move-in · Close out · Record payment

Overview · Bills · Payments · Credits · Payment plan · Usage · Meters · Work · Adjustments · Documents · Notes · Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

Sample data. The rows and figures on this tab are invented to show the layout working.

All · Electric · Water · Installed · Removed · Filter ▾ · ⚲ Search by meter number or serial · Sort: Meter # ▼ · Columns ▾ · ⇩ Export

METER #	SERVICE	METER TYPE	READ METHOD	INSTALLED	MULTIPLIER	LAST READ	READ ON	STATUS	ACTIONS
E-4417	ELECTRIC	AMR	Walk-by	09/10/2024	×1	61,480	08/18/2026	Installed	☰ Read log …
W-4417	WATER	AMR	Walk-by	11/06/2025	×1	9,214	08/18/2026	Installed	☰ Read log …
W-2288	WATER	Walk-by	Walk-by	09/10/2024	×1	7,902	11/06/2025	Removed	☰ Read log …

1–3 of 3 · Rows per page 50 100 200 ‹ ›

Read log opens that one meter's reads over this unit — date, reading, usage, how it was collected and any note — without leaving the tab. It is a row action rather than a table per meter, because a unit with six meters would otherwise push the list itself off the screen.

The meters belong to the unit, not to the account — they stay when the occupant leaves, which is why a meter removed in November 2025 is still listed here under a tenancy that began in 2024. The services this account holds are a separate fact and live in the Service group on Overview.

v2.234.15

What the filters are. Service, status, meter type, read method and test-due are the ones the register already filters on, in the product's own `f.<name>` grammar. Two of the columns look alike and are not: **meter type** is what the meter IS, **read method** is how the reading is COLLECTED — W-2288 was a walk-by meter read by walking to it, while W-4417 is an AMR meter still being read on foot because the collector has not been fitted.

SO Sam Ortiz
Billing Clerk

ACC-T07 · sample data

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: a row action rather than a tab, so the walk never opened it.

Tab 7 of 12 · Meters — the Read log action, opened · `/brazosbend/accounts/a-11812?tab=meters&meter=e-4417&view=reads` · one meter's reads, over the tab it was opened from

/brazosbend/accounts/a-11812?tab=meters

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

Read log — E-4417

Electric · AMR meter read walk-by · 142 Bakers Row · Suite 1

THE METER

Meter	E-4417	Installed	09/10/2024
Service	ELECTRIC	Multiplier	×1
Meter type	AMR	Status	Installed
Read method	Walk-by	Reads held	24, newest first

the meter is the unit's — this log is every read taken on it, whoever was occupying at the time

THE READS

12 months | 24 months | All | Estimated only | Filter ▾ | ⚲ Search by date or reading

Columns ▾ | ⇩ Export

DATE ▼	CHANNEL	READING	USAGE	EXPORT	HOW IT WAS COLLECTED	STATUS
08/18/2026	Total	61,480	5,510 kWh	—	Walk-by	Committed

07/17/2026	Total	55,970	5,083 kWh	—	Walk-by	Committed
06/18/2026	Total	50,887	4,870 kWh	—	Walk-by	Committed
05/19/2026	Total	46,017	4,410 kWh	—	Estimated	Committed
04/17/2026	Total	41,607	4,180 kWh	—	Walk-by	Committed
03/18/2026	Total	37,427	4,020 kWh	—	Walk-by	Committed
02/17/2026	Total	33,407	3,960 kWh	—	Walk-by	Committed

1–7 of 24 · Rows per page 50 100 200 ‹ ›

Each reading less the one before it is the usage beside it. That is why the register is shown next to the consumption rather than instead of it: a customer disputing a bill is asking about the gap between two numbers, and both are on the row.

05/19/2026 was estimated. Nobody could reach the meter — the job raised for it is WO-26-3980 on the Work tab — so the reading was worked out rather than taken, and every bill raised on it is marked too.

WHAT A READ DOES NOT CARRY

NO READER AND NO NOTE

The log records what was measured and how it was collected, and not who collected it or what they saw. Neither is served, so neither is drawn: a “side gate locked” belongs to the work order, not to the read.

EXPORT IS EMPTY ON THIS METER

The column is the other half of a net-metering pair and fills where a meter exports — solar, chiefly. This one only imports, so every row is a dash rather than a zero, which would read as “it exported nothing”.

Reads are taken and corrected in **Reads**, never here.

Read from the meter’s own record

Export the log Close

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T07R · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 8 of 12 · Work · `/brazosbend/accounts/a-11812?tab=work` · one table — every job at this address, finished ones included

/brazosbend/accounts/a-11812?tab=work

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview Bills Payments Credits Payment plan Usage Meters Work Adjustments Documents Notes Audit


BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out on this deployment

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026 · Base charge


LAST ACTIVITY
09/11/2026
a payment was recorded

DEPOSIT ON FILE
$450.00
received 09/24/2024

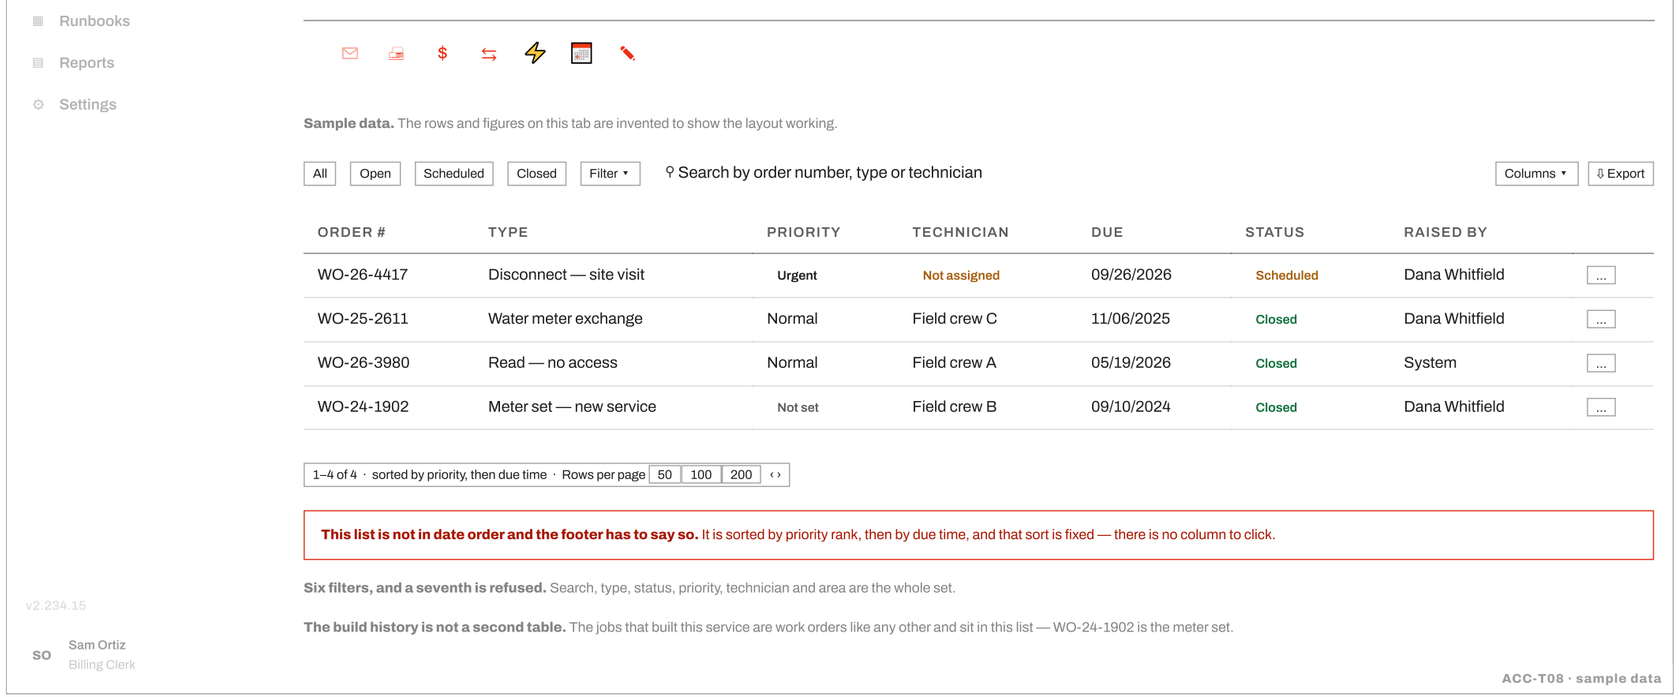

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 9 of 12 · Adjustments · `/brazosbend/accounts/a-11812?tab=adjustments` · the one tab whose own button is disabled — the rows show the shape it waits for

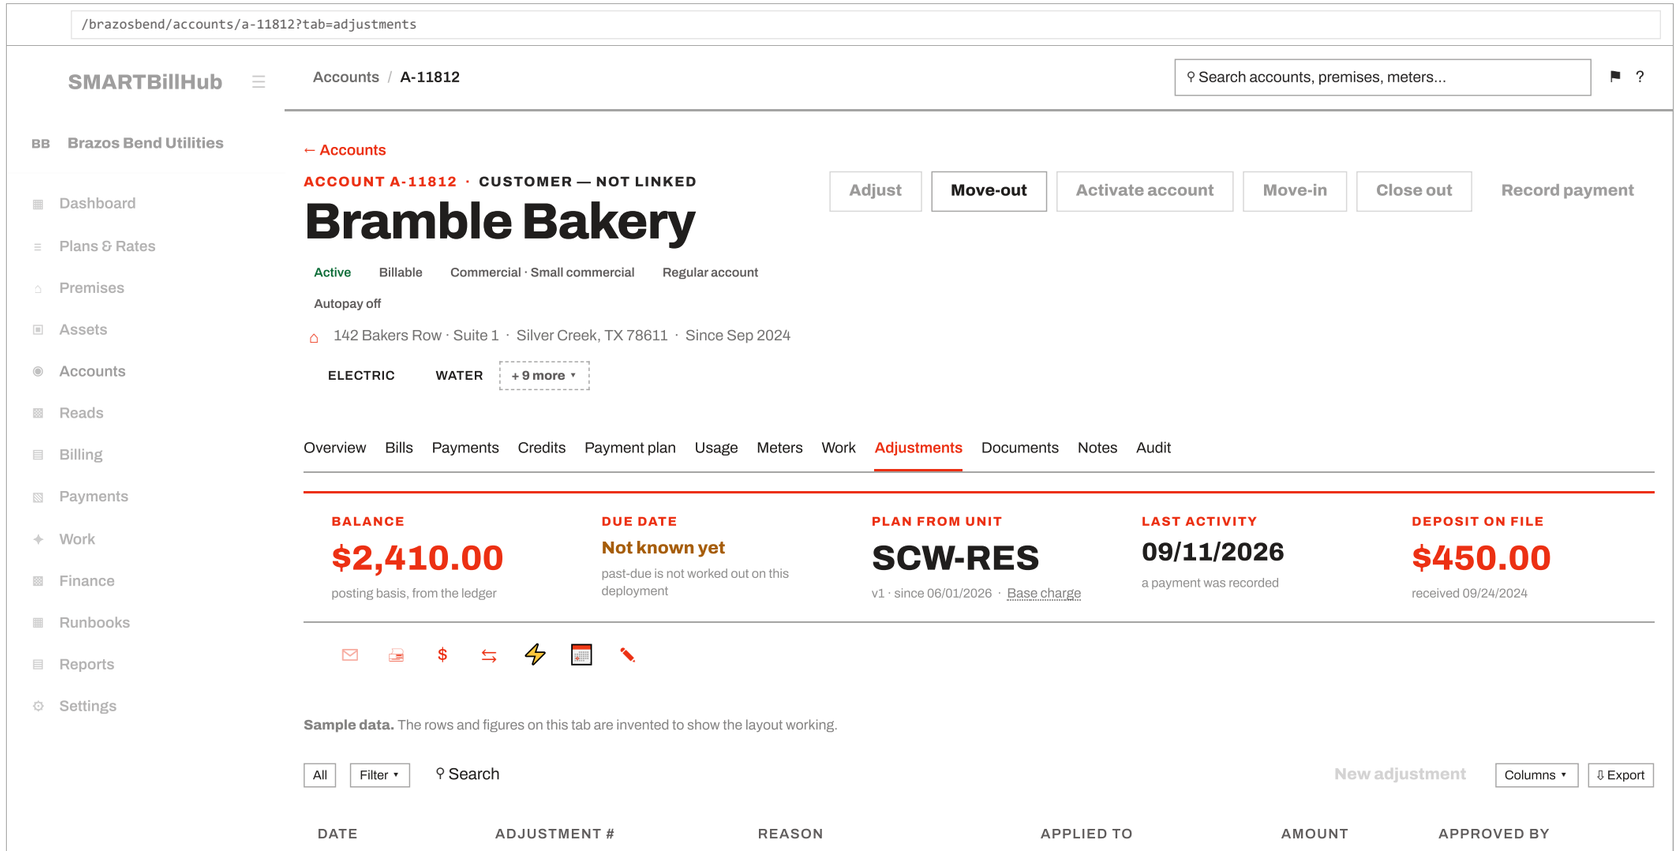

07/03/2026	ADJ-2607-000031	Leak allowance	BL-2606-000181	−$118.25	Priya Raman
02/11/2026	ADJ-2602-000009	Rate applied wrongly	BL-2601-000112	−$63.90	Priya Raman
10/22/2025	ADJ-2510-000004	Missed charge	BL-2510-000073	+$45.00	Dana Whitfield

1–3 of 3 · Rows per page 50 ‹ ›

These rows are the shape, not the state. Adjustments are billing rows and billing is not built: **no endpoint lists an adjustment and none posts one**, so this table cannot be filled from anywhere today.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T09 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 10 of 12 · Documents · `/brazosbend/accounts/a-11812?tab=documents` · the correspondence a collections clerk is asked for, and cannot produce

/brazosbend/accounts/a-11812?tab=documents

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

⌂ 142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more ▾

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	LAST ACTIVITY	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	09/11/2026	$450.00
posting basis, from the ledger	past-due is not worked out on this deployment	v1 · since 06/01/2026 · Base charge	a payment was recorded	received 09/24/2024

Sample data. The rows and figures on this tab are invented to show the layout working.

All | Correspondence | Evidence | Filter ▾ | ⚲ Search | Upload document | Columns ▾ | ⇩ Export

DOCUMENT	TYPE	DATE	UPLOADED BY	SIZE
Ten-day notice — DSC-26-0003	Correspondence	09/10/2026	System	48 KB
Payment reminder	Correspondence	08/27/2026	System	41 KB
Plan agreement PP-2512-0004	Agreement	12/08/2025	Dana Whitfield	112 KB
Business registration	Evidence	09/10/2024	Dana Whitfield	1.2 MB

1–4 of 4 · Rows per page 50 ‹ ›

These rows are the shape, not the state. Account documents have **no table and no upload endpoint**: nothing here can be listed and nothing can be uploaded.


v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T10 · sample data

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 11 of 12 · Notes · `/brazosbend/accounts/a-11812?tab=notes` · one pinned note, then the rest newest first

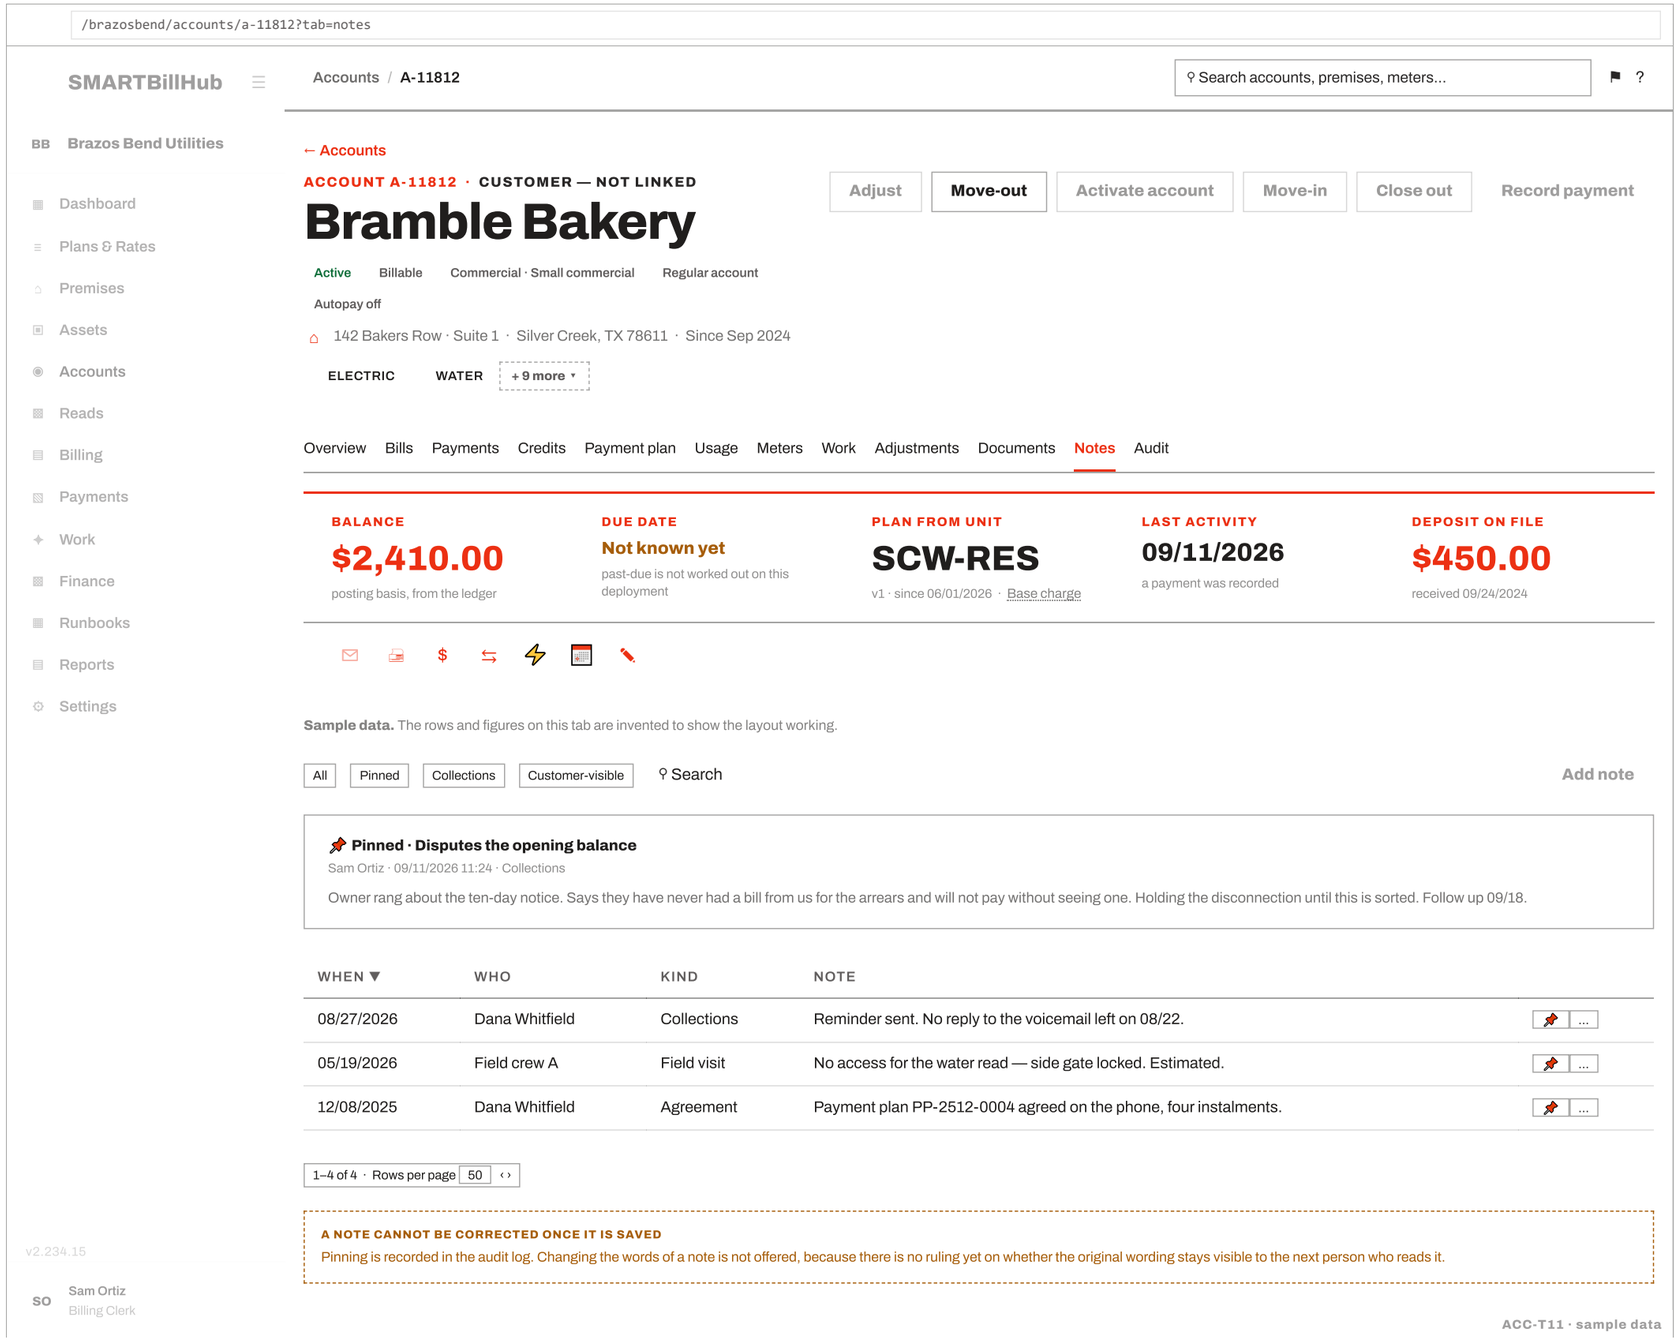

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. one of the twelve tab panels the walk rendered.

Tab 12 of 12 · Audit · `/brazosbend/accounts/a-11812?tab=audit` · every money action writes here — hard rule 7



BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | **Move-out** | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Overview · Bills · Payments · Credits · Payment plan · Usage · Meters · Work · Adjustments · Documents · Notes · Audit

BALANCE $2,410.00
posting basis, from the ledger

DUE DATE Not known yet
past-due is not worked out on this deployment

PLAN FROM UNIT SCW-RES
v1 · since 06/01/2026 · Base charge

LAST ACTIVITY 09/11/2026
a payment was recorded

DEPOSIT ON FILE $450.00
received 09/24/2024

Sample data. The rows and figures on this tab are invented to show the layout working.

All | Money | Status | Collections | Filter | Search | Columns | Export

	WHEN ▼	WHO	WHAT HAPPENED
▸	09/11/2026 11:18	Sam Ortiz	Payment recorded · $500.00
▸	09/10/2026 07:14	Dana Whitfield	Activity recorded · this event type is not described yet
▸	09/10/2026 07:14	Dana Whitfield	Activity recorded · this event type is not described yet
▸	08/22/2026 02:05	System	Bill issued · BL-2608-000229
▸	03/08/2026 09:40	Dana Whitfield	Payment plan completed · PP-2512-0004

Row opened — the third of the three from 09/10

What it shows

sixteen fields, named as the database names them, nine of them empty

Tier *Not set* · State *notice_sent* · Cut on *Not set* · Case no *DSC-26-0003* · Currency *USD* · Delivery *3 recorded* · Sequence *service* · Opened on *2026-09-10* · Scheduler *3 recorded* · Stopped on *Not set* · Next step due *Not set* · Stopped reason *Not set* · Tier reached on *Not set* · Cut scheduled for *Not set* · Amount owed at open *2 recorded* · Case no unavailable *Not set*

This is the most-read screen on a disputed account and it is the least readable. Three events were recorded within the same minute and all three say the same thing — *this event type is not described yet* — so a clerk cannot tell them apart from the list.

LINKS BACK TO THE RECORD ARE NOT SHOWN

An audit row names what happened and not which row it happened to, so a clerk cannot open the disconnect case from the line that announces it, or the bill from the line that issued it.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-T12 · sample data

Every action on this screen, drawn

Thirteen controls — six buttons in the header, seven icons in the rail — in fifteen drawings, because Change plan has three steps and each one is its own screen. Every refusal sentence is the product's own wording, taken from the control itself rather than from the code that writes it.

control itself rather than from the code that writes it.


Seven of the thirteen refuse on this account, which is more than on any account with bills: four of the six buttons, and three of the seven icons. The three icons — Send statement, Print bill, Issue credit — all need an issued bill, and this account has never had one. That is the rail working correctly, and it is also the clearest picture in the document of how much of the screen goes dark when billing has not run.

What the walk found. Adjust is refused on every account in every status — and on this one that means a $2,410.00 opening balance with no bill behind it cannot be corrected from anywhere in the product. Two actions do not open a dialog at all: **Activate account** commits on the click with no confirmation, and **Issue credit**, where it is live, leaves the account entirely and lands on Billing › Fix a bill with an empty bill box. **Close out** is the sharpest of them: it is disabled on every status this deployment seeds, and the one status it exists for — *disconnected* — has no account at all.

Three of the fifteen are drawn on another account, and each says so on its face: Activate account and Move-in cannot be reached from an active account, and Print bill is shown as the refusal it is here.

The truth tables below were measured, not reasoned: each account was opened and each control read for whether it was disabled and what sentence it carried.

> **AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED.** Why: the walk measured whether each control was reachable, and did not open the surface behind it.
> **Action 1 of 13 · Adjust** · `/brazosbend/accounts/a-11812` · disabled in **every** status on **every** account — there is no deployment where it opens

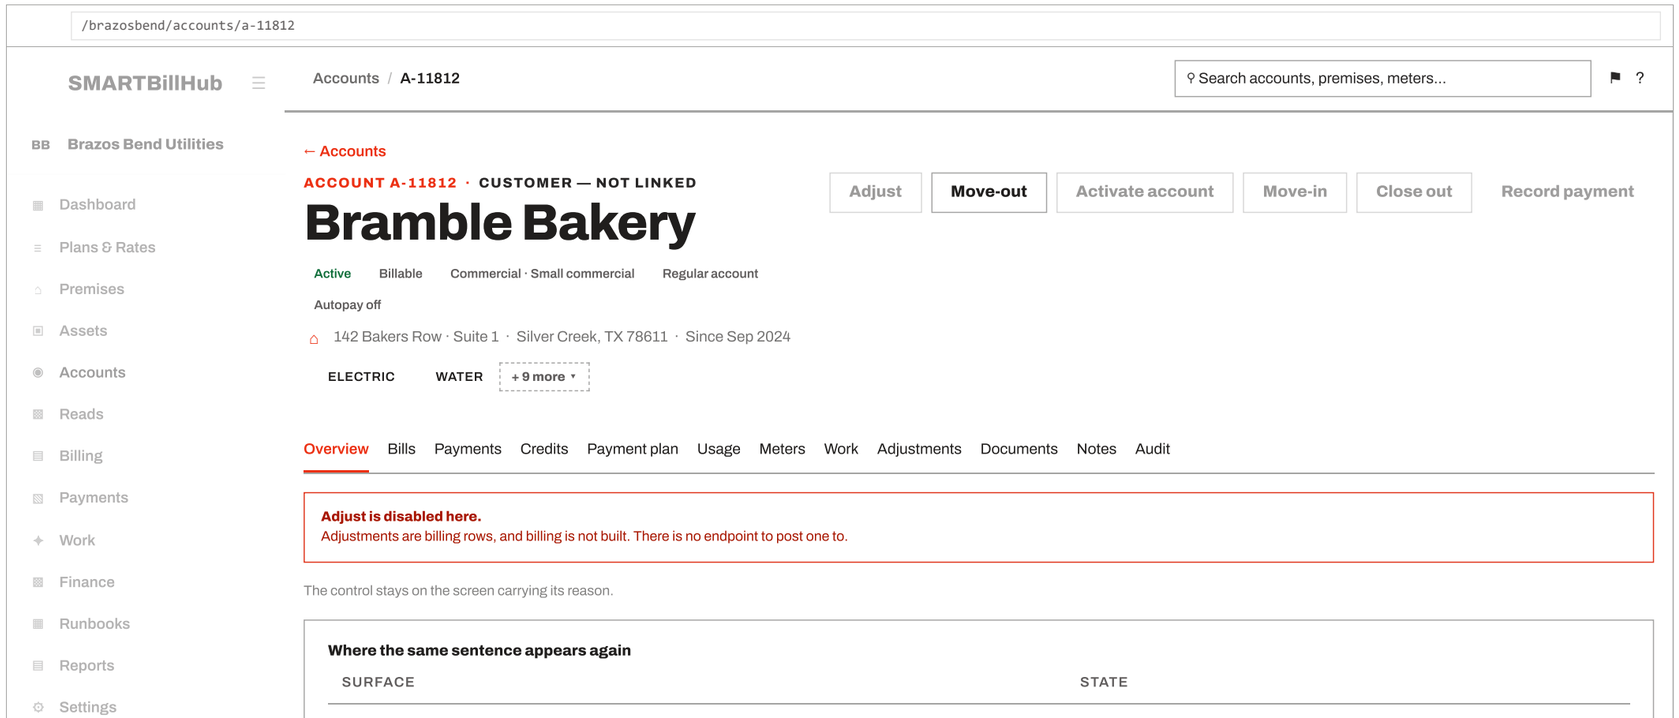

The **Adjust** button, here	Disabled
The **Adjustments** tab	Empty, with the reason
New adjustment, on that tab	Disabled

one absence, three places — each says the same thing in the same words

v2.234.15

It bites hardest on an account like this one.

SO Sam Ortiz
Billing Clerk

ACC-A01

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.
Action 2 of 13 · Move-out, step 1 of 6 · `/brazosbend/accounts/a-11812/move-out` · the step has no search: the account is fixed by the address bar

/brazosbend/accounts/a-11812/move-out

SMARTBillHub

Accounts / A-11812 / Move-out

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Bramble Bakery

MOVE-OUT

Close an account and free the unit.

6 steps · final bill, deposit, and what happens to the unit.

1 Find account | 2 Date & final read | 3 Final bill & deposit | 4 The shortfall | 5 What happens next | 6 Review & close

Which account is moving out?

The account is the one you came from — the server closes the account named in the address bar, so there is no search on this step.

Account	A-11812
Name	Bramble Bakery
Service address	142 Bakers Row · Suite 1

Services	ELECTRIC WATER
Since	09/10/2024
Status	Active
Balance	$2,410.00

worked out from the ledger — every posted charge, less every posted payment

Save & exit | Park | Continue

Step 2 asks for a final read.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-A02

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.
Action 3 of 13 · Activate account · `/brazosbend/accounts/a-12048` · one click, no confirmation, and a partial success it reports honestly · **⚠ corrected:** this header read *Active · Billable* with Activate disabled, over the dialog that activates it

/brazosbend/accounts/a-12048

SMARTBillHub

Accounts / A-12048

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates


← Accounts

ACCOUNT A-12048 · CUSTOMER — NOT LINKED

Kwan, Michael


Adjust | Move-out | Move-in | Close out | Record payment | Activate account

Pending activation · Non-billable · Residential · Single family

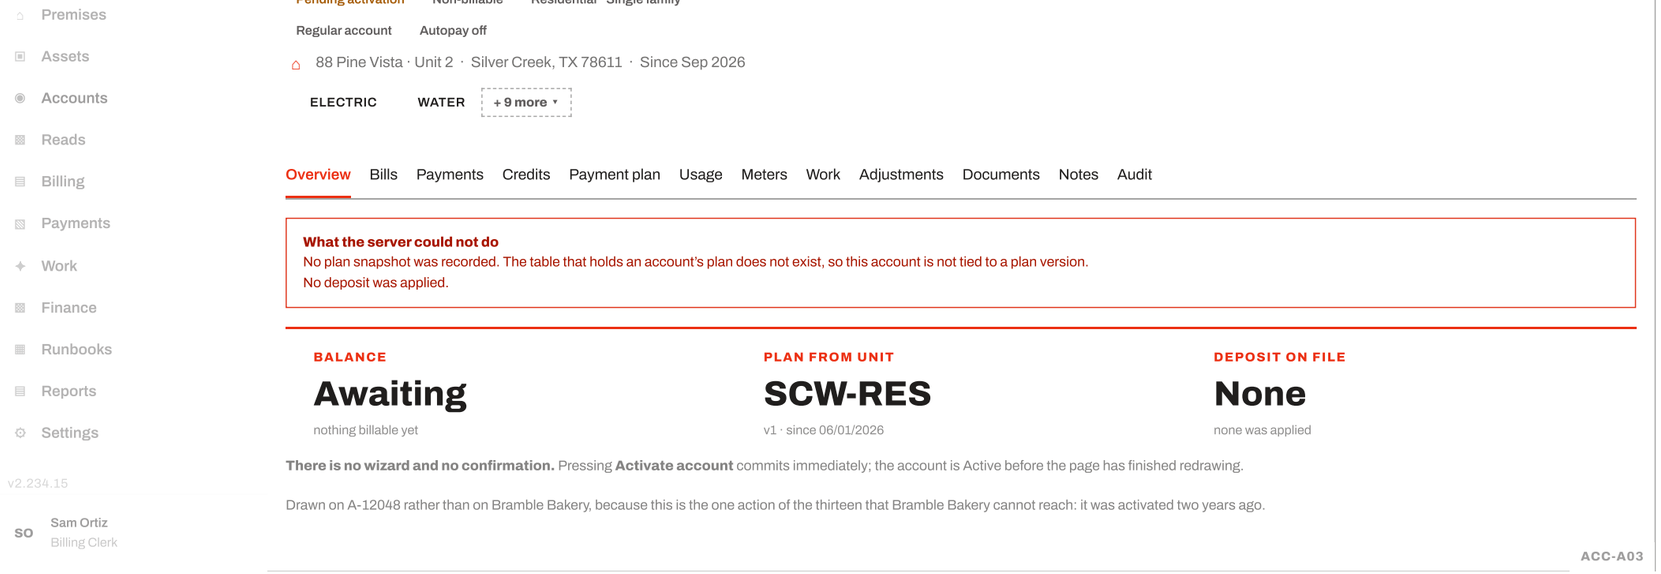

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 4 of 13 · Move-in, step 1 of 5 · `/brazosbend/accounts/ac-2026-00042/move-in` · opens only from a **closed** account — it hands that account's unit on

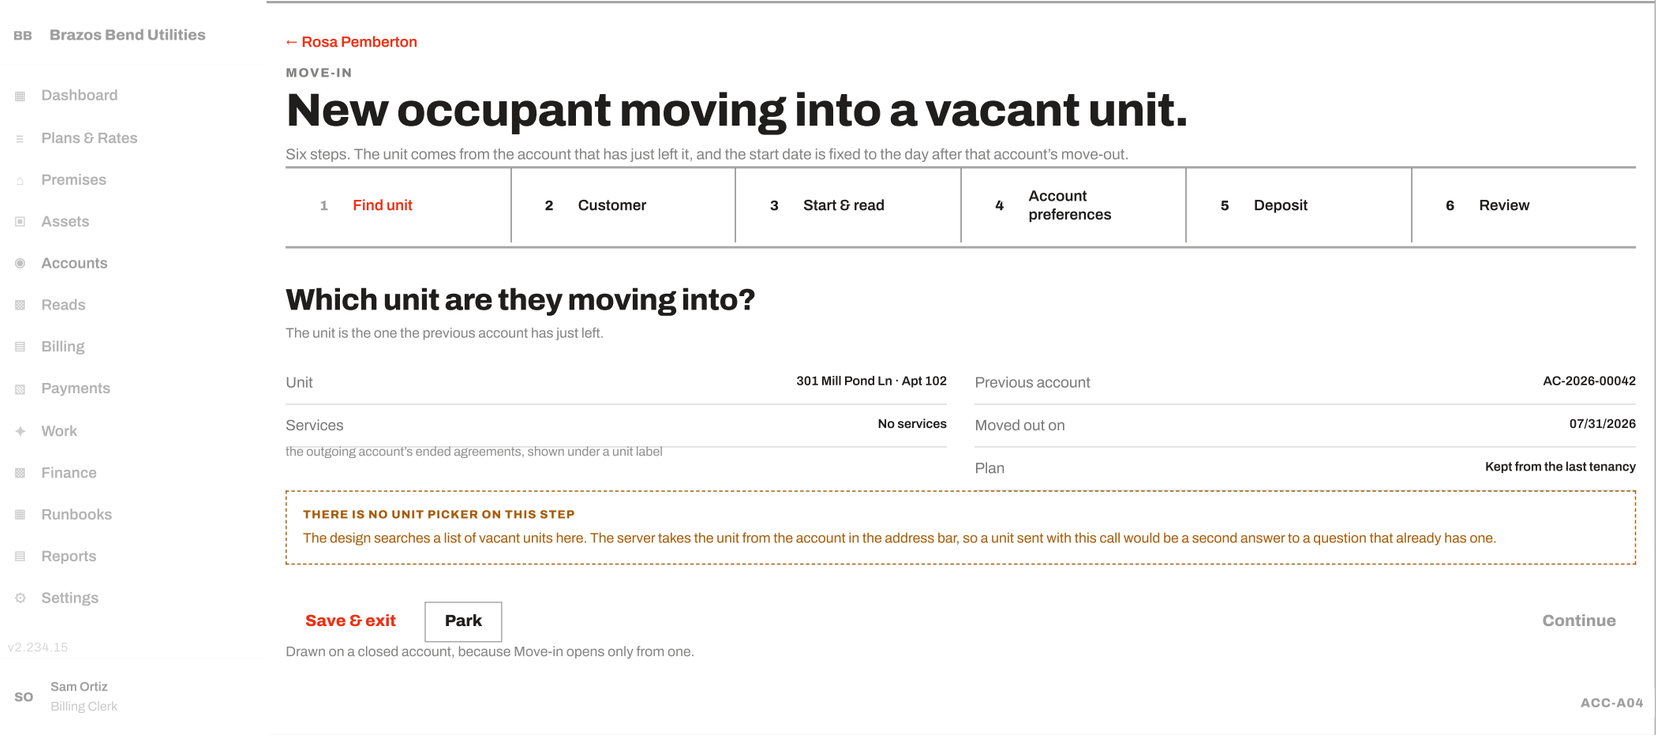

AS-BUILT — MEASURED IN A BROWSER ON 2026-09-10 AT 2.234.15, COMMIT 2824C2E5. the one write this walk drove to a commit — $25.00 posted and the row read back from the database.

Action 5 of 13 · Close out · `/brazosbend/accounts/a-11812` · a control with no reachable state — and one it reaches by mistake

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

Close out is disabled here.
Only an account whose service has been cut is closed out. An occupant leaves by moving out, and a closed account is already finished.

The control stays on the screen carrying its reason.

Close out is disabled on every account this deployment has

ACCOUNT STATUS	SEEDED?	CLOSE OUT
Active	68 accounts, this one among them	Disabled
Marked disconnect	1 account	Disabled
Vacation hold	1 account	Disabled
Closed	1 account	Disabled
Pending activation	1 account	Live — and should not be
Disconnected	none	the one status it is for, and it has no account

the only status that opens this button is the one it was not written for

v2.234.15

SO Sam Ortiz
Billing Clerk

Bramble Bakery is on its way there.

ACC-A05

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 6 of 13 · Record payment · `/brazosbend/accounts/a-11812` · a modal, not a wizard — one step, eight fields, and it commits

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Billing
Payments
Work
Finance
Runbooks
Reports
Settings

Overview Bills Payments Credits Payment plan Usage Meters Work Adjustments Documents Notes Audit

Record a payment

BRAMBLE BAKERY · A-11812

BALANCE

2410.000000 USD

worked out from the ledger — every posted charge, less every posted payment

Amount *
2410.000000
Starts at the balance shown above and can be changed.

What this money is for *
Against bills
Against bills · Deposit · Plan down payment · Prepayment

Posting date *
09/11/2026
The day this payment counts from.

Clearing date
The day the money actually arrived.

Method
Choose a method
ACH · Card · Cash · Check · Lockbox · Money order · Wire.

Reference or cheque number
Whatever the customer can quote back.

Apply to
Oldest open bill first
Oldest open bill first · A specific bill · Carry as account credit · Split across bills

Memo
Kept with the payment and read by anyone asking why later.

Cancel
Record payment

Three faults on this form, all drawn as they are.
The balance reads **2410.000000 USD** and the amount field is pre-filled with the same six decimals. Money displays to two.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-A06

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.
Action 7 of 13 · Send statement · `/brazosbend/accounts/a-11812` · the first rail icon, disabled in every status on every account

/brazosbend/accounts/a-11812

SMARTBillHub
Accounts / A-11812
Search accounts, premises, meters...

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery


Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active Billable Commercial · Small commercial Regular account
Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024


ELECTRIC WATER + 9 more

Overview Bills Payments Credits Payment plan Usage Meters Work Adjustments Documents Notes Audit

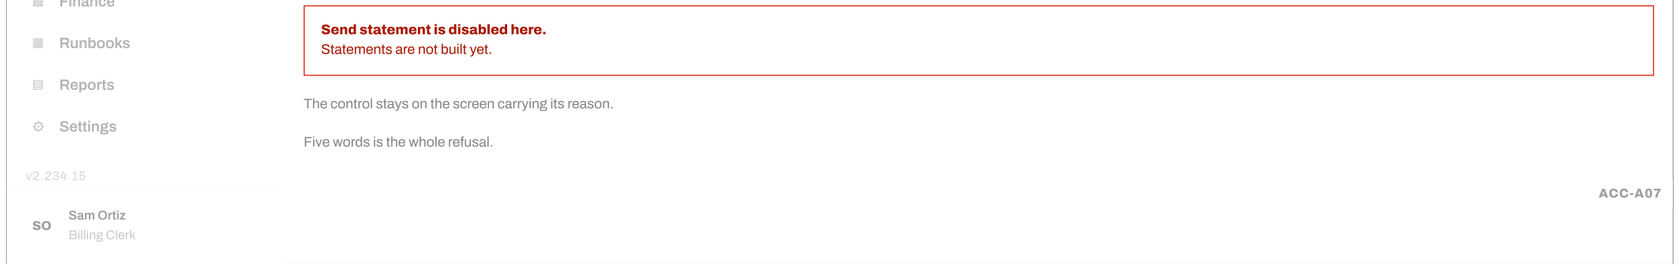

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 8 of 13 · Print bill · `/brazosbend/accounts/a-11812` · live wherever a bill exists — refused here, because none does

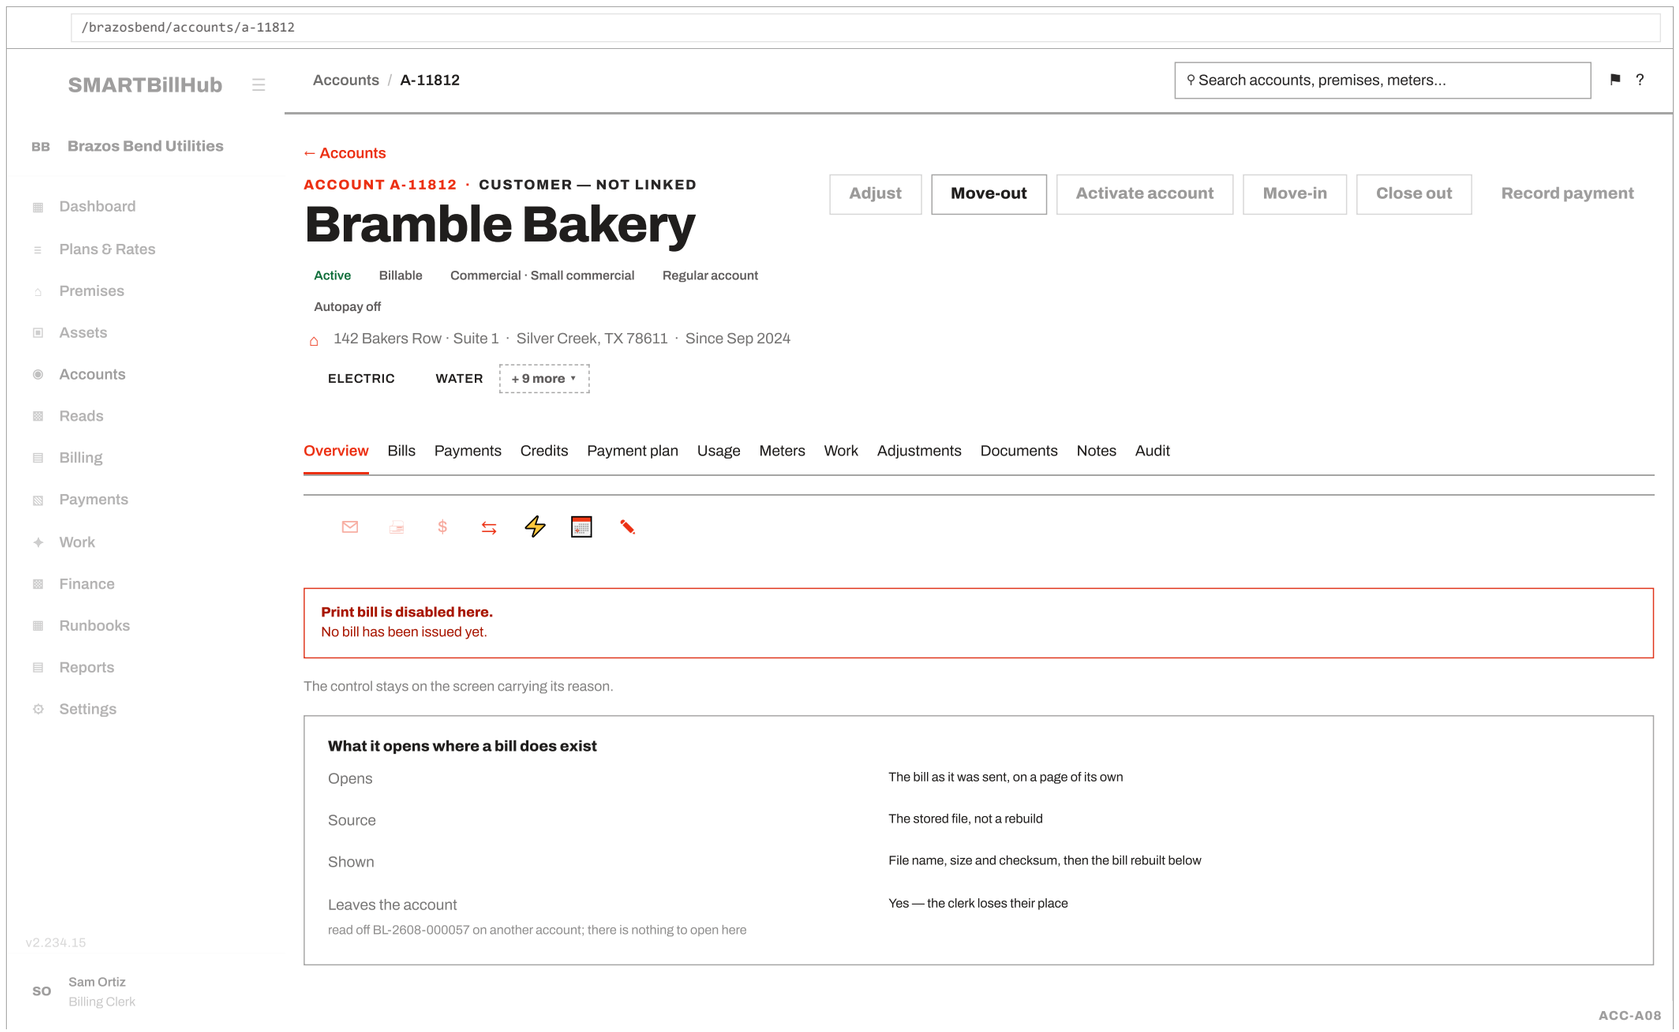

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 9 of 13 · Issue credit · `/brazosbend/accounts/a-11812` · refused here for a good reason, and broken where it is live



BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

Issue credit is disabled here.
A credit needs an issued bill.

The control stays on the screen carrying its reason.

Where it is live, it drops the account on the way. On an account with bills this icon leaves for Billing › Fix a bill with an **empty bill box**, asking the clerk to paste an id they were one click away from — and it lists its eleven reasons as stored values (`charge_billed_in_error`, `wrong_rate_plan`) rather than as sentences.

The refusal here is the correct behaviour: a credit corrects a bill, and this account has never had one.

ACC-A09

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 10 of 13 · Change plan, step 1 of 3 · `/brazosbend/accounts/a-11812/change-plan` · six plans, priced, with the service each one drops

/brazosbend/accounts/a-11812/change-plan

SMARTBillHub

Accounts / A-11812 / Change plan

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Bramble Bakery

ACCOUNT A-11812

Change plan

Current plan — Sample — Residential

Services at this unit — ELECTRIC WATER

1 · Pick the new plan

Filter ▾ ⚲ Search plans — Columns ▾ ⇩ Export

	PLAN	BASE PER MONTH	NOTE
○	Industrial	$180.00	Drops water
○	Residential Standard	$20.00	—
◉	Sample — Commercial	$63.00	—
○	Sample — Industrial	$195.00	—
○	Sample — Residential	$20.00	Current
○	Small Commercial	$15.00	Drops electric

a plan that does not carry a service this unit takes says so on its own row

Continue

There is no step rail on this wizard.

Worth reading twice on this account: a **commercial** bakery is on the **residential** plan, because the plan follows the unit.

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-A10

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 11 of 13 · Change plan, step 2 of 3 · `/brazosbend/accounts/a-11812/change-plan` · the quote is worked and priced, and names what it left out

`/brazosbend/accounts/a-11812/change-plan`

SMARTBillHub

Accounts / A-11812 / Change plan

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Bramble Bakery

ACCOUNT A-11812

Change plan

Current plan — Sample — Residential

Services at this unit — ELECTRIC — WATER

2 · Effective date and what it costs

When it takes effect: On a date I choose

Only a date can be used today.

New plan starts on *: 10/01/2026

A date inside a period already billed is refused: bills already sent are never repriced.

Show what it costs

What this changes

LINE	AMOUNT
Current plan, base charges	$20.00
New plan, base charges	$63.00
Difference on the next bill	**$43.00**

PART-PERIOD LINE	DAYS SERVED	AMOUNT
SCW-RES	17	$11.33
SCW-COM	13	$27.30

These part-period amounts were worked out by the rating engine.

NOT CALCULATED — THE CATEGORY DIFFERENTIAL

One rule says recompute the category differential on a plan change and another says the deposit is not recomputed in v1. Both are CONFIRMED. No differential is stated and none is registered. `Two rules meet here and neither covers the gap`

NOT CALCULATED — USAGE

B4.3 prorates usage as well as base. Pricing usage for a period that has not happened needs a forecast, and no rule says what it should be. `No rule says what the forecast should be`

Net effect on the next bill $43.00

This total leaves out: `deposit_differential`, `usage`.

Back Continue

Six internal strings reach a clerk on this step. Four rule and question ids, a Python module path, and two database column names.


v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-A11


AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 12 of 13 · Change plan, step 3 of 3 · `/brazosbend/accounts/a-11812/change-plan` · the last step recaps every answer — from, to, date, and the worked figures

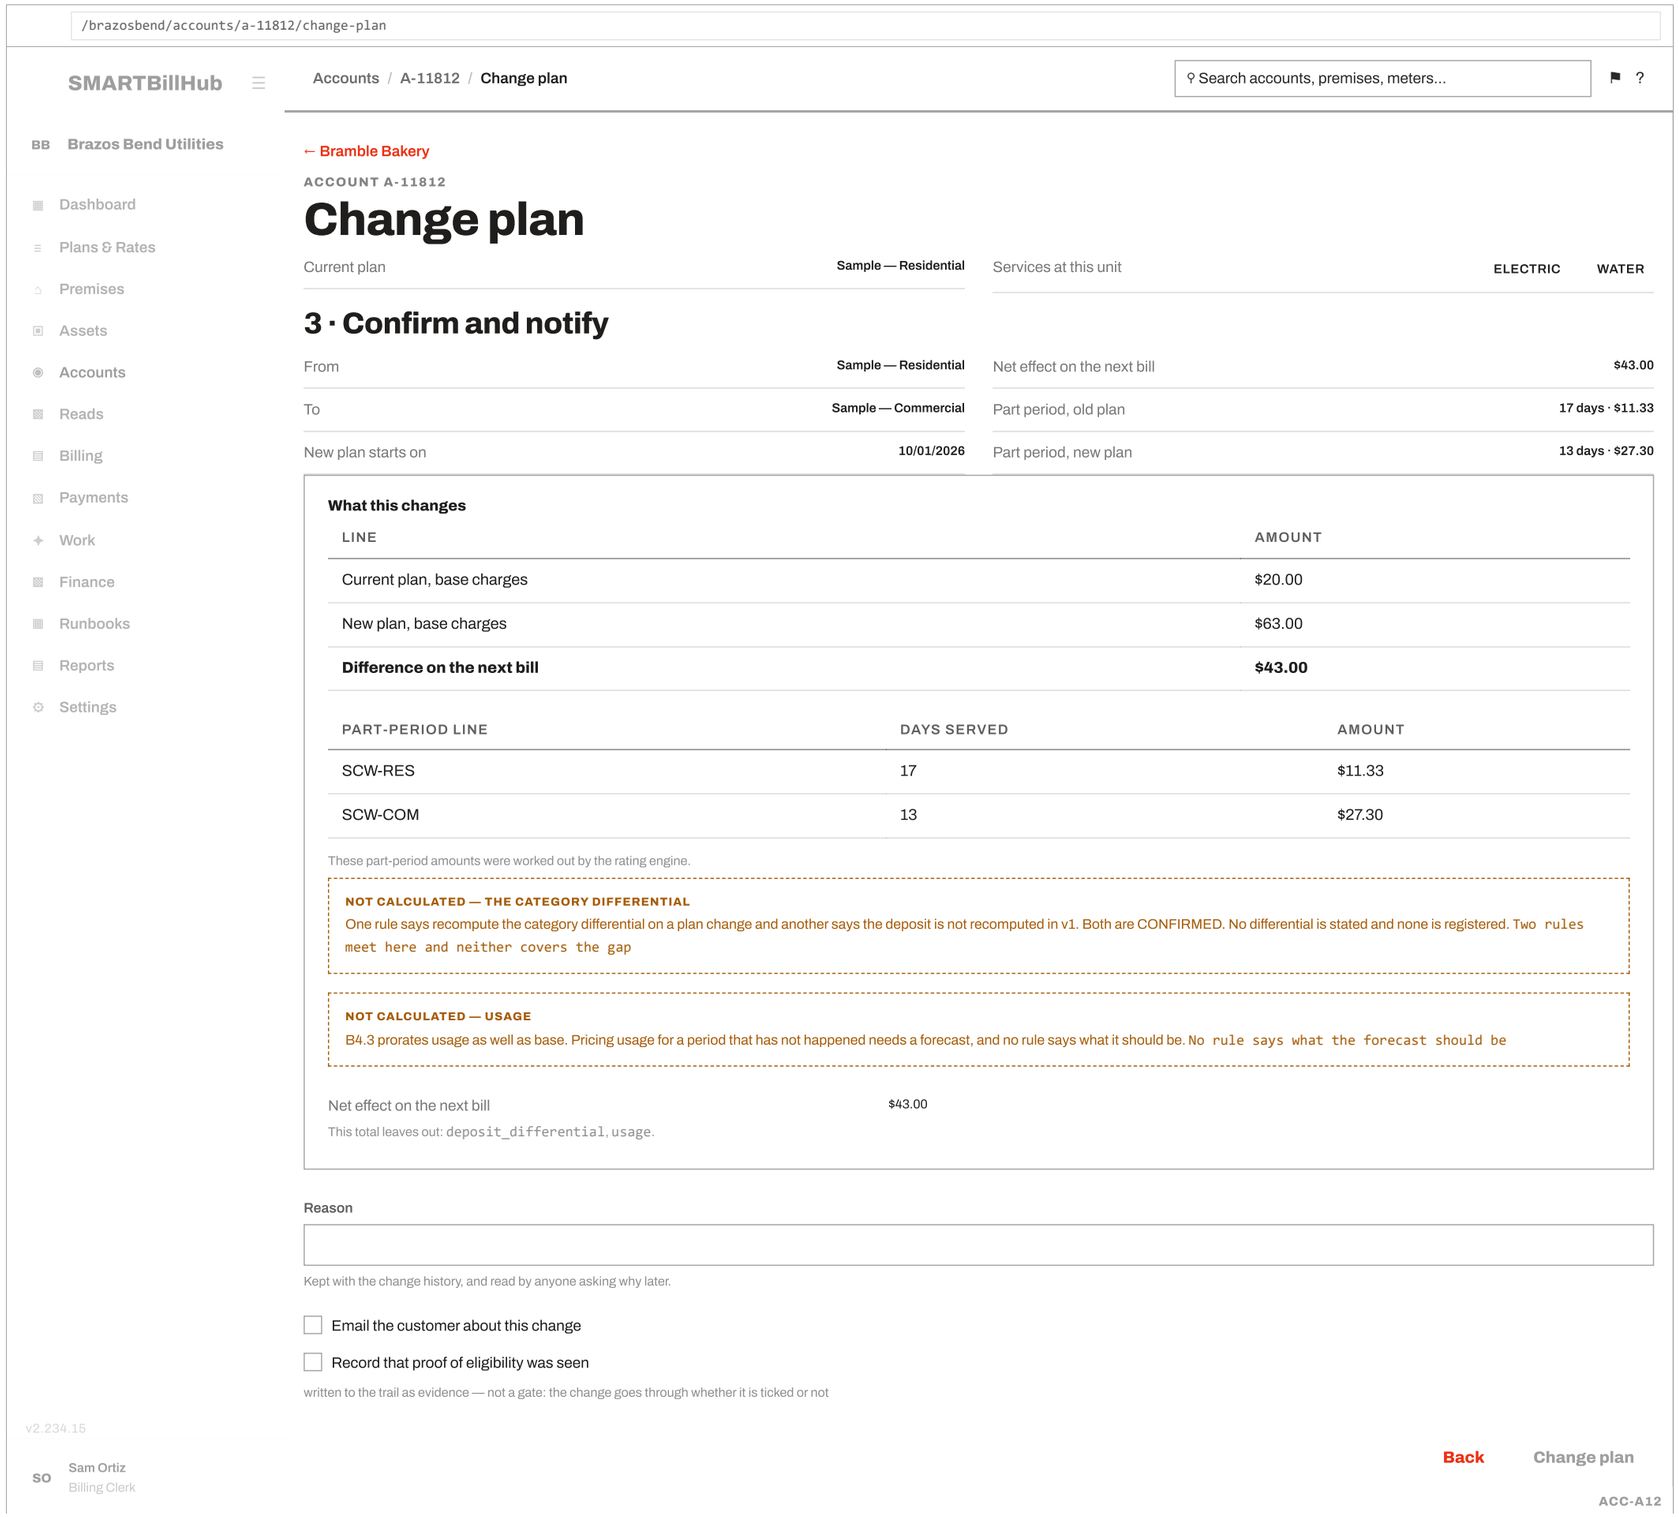


AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 13 of 13 · Disconnect notice, step 1 of 5 · `/brazosbend/disconnects/new` · the only account action that starts with a search, because it is reached from Disconnects too

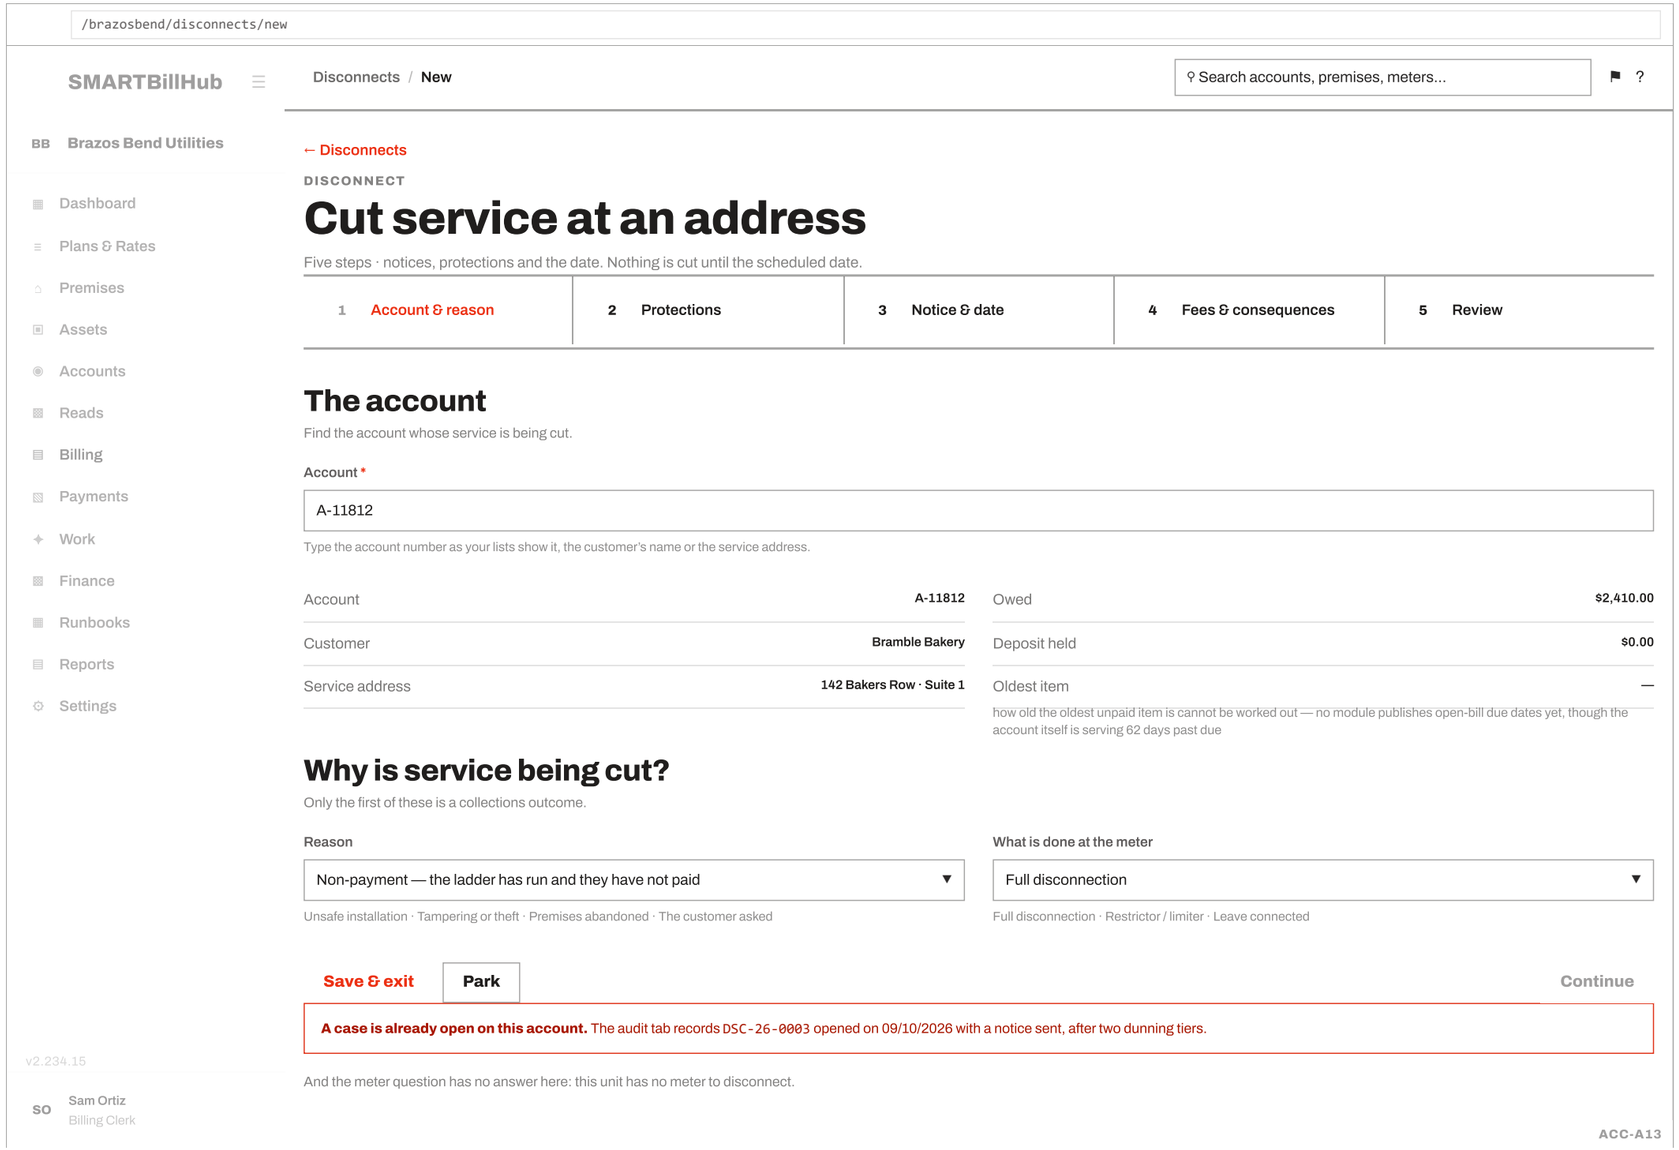

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 14 · Payment plan (rail icon 6 of 7) · `/brazosbend/accounts/a-11812/payment-plan` · live here, and this is the account it was written for

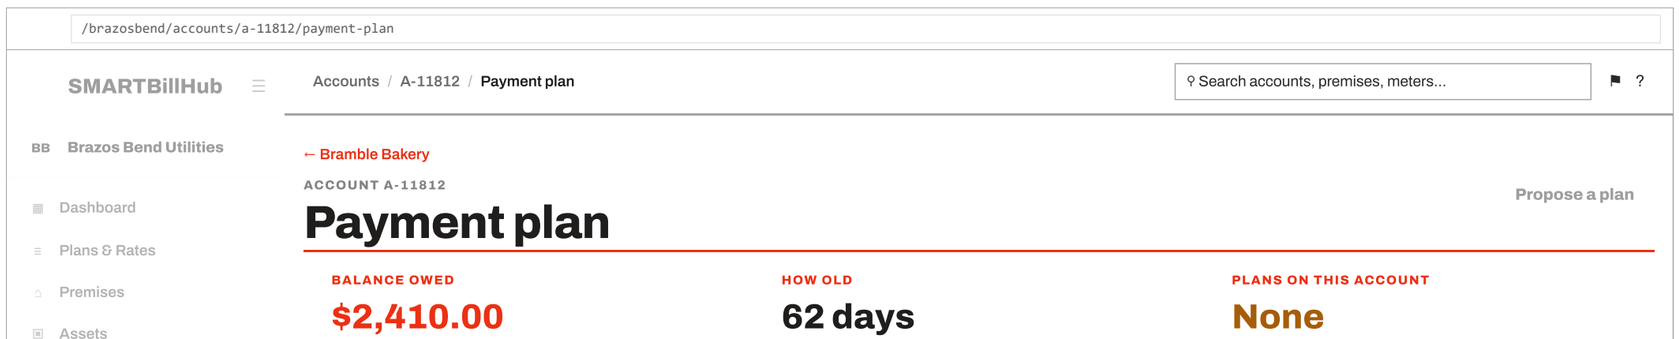

all of it arrears | past due, from opening buckets | nothing has been proposed

THIS ACCOUNT HAS NO PAYMENT PLAN

A plan spreads arrears a customer cannot pay at once. There is $2,410.00 here and two dunning notices have already gone out, so this is the account a plan is for.

On an account that already has a live plan the same icon opens onto that plan and refuses a second one: *a new plan cannot be proposed: this account already has a live payment plan.*

ACC-A14

Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the walk measured whether each control was reachable, and did not open the surface behind it.

Action 15 · Add note (rail icon 7 of 7) · `/brazosbend/accounts/a-11812` · two fields, two flags — and one of the flags does nothing yet

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

v2.234.15

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active | Billable | Commercial · Small commercial | Regular account | Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC | WATER | + 9 more

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

Add note

BRAMBLE BAKERY · A-11812

Title

Fill in a title, a note, or both.

Note

Pin to the top

Visible to the customer

This flag is recorded and does nothing yet: there is no customer portal in this version, so no customer can read the note either way.

Cancel | Save note

Add note is its own modal and stands alone. It is not a step of Record payment: the two open independently, neither carries a stepper, and neither mentions the other.

Two fields and two flags is the whole of what can be written down about an account in collections.

SO Sam Ortiz
Billing Clerk

Two fields and two flags is the whole of what can be written down about an account in collections.

ACC-A15

For	A clerk holding one customer's whole position — money, meters, jobs and history — on one screen, and able to act on it without leaving.
How you get here	**33 doors, the most-linked screen in the product.** The list row (`AccountsListPage.tsx:1018`) · global search · the customers list · **billing** (bill rows, bill detail, pending queue) · **payments** (four separate tabs) · **metering** (unit detail, common areas, owner account) · **work** (build views, awaiting approval, and a `BuildRedirect` resolver) · and every wizard's back arrow and done screen.
Primary action	**Record payment** — and it earned the slot. It carried "Activate account" until payments landed, on the argument that a permanently dead button in the primary slot teaches the wrong thing about a page. The reason expired and the button followed it.
Tabs	**Twelve, all in the URL.** overview · bills (embeds billing's S30 scoped by account) · payments (embeds S33, local table state) · credits · plan · usage · meters · work (`+ ?order=` drawer) · **adjustments — a frame, no endpoint** · **documents — a frame, no endpoint** · notes · audit.
Table controls	Not a list screen. The embedded Bills and Payments tables carry their owning module's controls; the Payments tab's state is deliberately **local, not URL-backed**, because the query string is already spent on `?tab=` and an account deep link should not carry a payments page number.
Write surfaces	**Detail** n/a — this is the detail. **Add** Add note (live) · Record payment (live) · Documents upload disabled with its reason. **Edit** NOTHING for account attributes. A note's pin can change; its text cannot, by rule. **Update** NOTHING FROM ANY SCREEN — see below.
Walked	**Not walked** — the app would not boot here.
Cognitive load	Removes the clerk's need to hold four modules in their head: the bill, the payment, the meter and the job are one page, each read from its owning module rather than copied.
States	**Loading** panel skeletons; money cells hold their height. **Empty** a new account renders every panel with its own stated absence, never a blank. **Failed** `FailedWithRetry` with a cancel back to the list. **Draft (pending activation)** Activate is the only live write; move-out, change-plan, payment-plan and close-out each render disabled *with a sentence saying why*.
Words	Chosen: **"Due date not known yet"** over a blank, and the hover explains that it is the oldest open bill's date and that "which is still open" is the missing half. Refused: showing the unit's plan as though it were the account's — the two are equal only until the first override.
Components	`PageHeader` · `AccountIconRail` · `accountDetailHeader` · `accountDetailTabs` · `AccountUsageTab` · `NotesTab` · `RecordPaymentModal` · `CustomFieldsView` · `WorkOrdersTab` · `BuildTabPanel`
Rules	BR-CUS-016 · 018 · 023 · 028 · 029 · 030 · 034 · 035 · 045 · 054 · 055 · 057 · 058 · 059 · 066 · BR-SHL-020 · 023 · 025 · 034 · 044 · 045

> **These same thirteen, redrawn as forms**
>
> Everything above is the product as it stands. **R4 in §10** draws all thirteen again as dialogs opening over this screen, each carrying every one of its fields rather than a first step — including the confirmation Activate account has never had, the unit search Move-in has never had, and the late fee, credits and outstanding remainder Record payment has never shown. Go to R4 →

The six header buttons, measured on one account per status

Four statuses are seeded and were each opened. *Disconnected* has no account, so the column that would prove Close out is the one column that cannot be filled.

Action	Active	Marked disconnect	Vacation hold	Closed	Disconnected
Adjust	off	off	off	off	`no account`
Move-out	**live**	**live**	**live**	off	`no account`
Activate account	off	off	off	off	`no account`
Move-in	off	off	off	**live**	`no account`
Close out	off	off	off	off	`no account`
Record payment	**live**	**live**	**live**	**live**	`no account`

Record payment is live in every status, deliberately — a payment is always accepted, whatever state the account is in. **Adjust and Close out are live in none.**

> **There is no way to write to the customer from here**
>
> Seven icons and six buttons, and not one of them sends the customer a word. On an account carrying two dunning notices and an open disconnect case, a clerk taking the call cannot answer *what have you already sent me* without leaving for the Notifications queue. **R6 in §10** adds an eighth icon and draws both halves of it. Go to R6 →

The seven rail icons, same four accounts

Icon	Active	Marked disconnect	Vacation hold	Closed
Send statement	off	off	off	off
Print bill	**live**	off	off	**live**
Issue credit	**live**	off	off	**live**
Change plan	**live**	**live**	**live**	off
Disconnect notice	**live**	**live**	**live**	off
Payment plan	**live**	**live**	**live**	off
Add note	**live**	**live**	**live**	**live**

Print bill and Issue credit turn on when a bill exists, not when the account is open — which is why they are live on the closed account and dead on the two open ones that have never been billed. Every icon stays on the screen in every state; only the reason changes.

Finding · the account cannot be edited from anywhere in the product

The write path exists and works. `PATCH /accounts/{id}` is mounted (`apps/customers/api.py:225-228`) and handled by `services.update_account` (`services.py:3204`), which validates the payload, applies a status change through the proper path, saves only the fields that actually changed, and writes an audit row. It is covered by tests — `tests/test_us_cus_003_account_write.py:569, :940` and `tests/test_cr052_w4_delivery_election.py:157`.

No screen calls it. There is no wrapper in `api/endpoints.ts`, so there is no button. The file says so itself, twice — `endpoints.ts:8756`: "*PATCH /accounts/{id} still has no caller and is still not wrapped*", and in its exceptions block: "*still served with no caller and is still deliberately unwrapped (LAW 0 — an unused wrapper is not coverage).*"

What that costs a clerk. Every attribute this screen displays is read-only forever: category, sub-type, tax-exempt flag and its reference and expiry, preferred language, autopay, paperless, SMS reminders, bad address. A tax certificate that gets renewed, a customer who asks for Spanish, a wrong sub-type caught at the counter — none of them has a door. The only ways to change an account are the six wizards and the bulk import.

Why this is the mirror of the usual finding. The classic defect is a button with no form behind it. This is a form's worth of working, tested, audited server with no button in front of it — and it is invisible to every check, because nothing fails.

Finding · a defect fixed on one panel survives on two others

`DEF-CUS-4625` is recorded at `AccountDetailPage.tsx:1301`. The PO opened an account and read a panel saying the portal was out of scope — over an account that had a login. Their words: "*I have login portal for this account - portal access says…*". The Overview's Portal panel was rebuilt to derive every line.

The same false sentence is still on two other tabs of the same screen.

· **Notes tab**, `AccountActions.tsx:516` — "*This flag is recorded and does nothing yet: there is no customer portal in this version, so no customer can read the note either way.*"
· **Audit tab**, `accountDetailTabs.tsx:1180` — "*…There is no customer portal in this version, so no entry can come from a customer.*"

There are **155** `.tsx` files under `07-frontend/src/portal/`. The portal shipped, and the Overview panel two clicks away now reads its live sign-in data. These two sentences are the same defect, unfixed, and a clerk reads them as current.

Where this screen's data comes from

```
accounts.* ──────────────→ selectors.account_detail_dict()      (customers)
                      └→ GET /:tenant/accounts/{id}
                      └→ useQuery → <AccountDetailPage/>                  WHOLE

portal_credentials ──→ customers/portal_seam.portal_access_for_account()
   portal_sessions      returns a DICT of derived scalars, reads only
                      └→ <PortalAccessPanel/>      field ⑮   customers ⇄ portal   HEALTHY SEAM

assets.* ──────────────→ GET /assets/{id} + /assets/{id}/reads, ONE PER METER
                      └→ <AccountMetersTab/>       fields ⑱-⑳  customers ⇄ assets  WHOLE

account_plan_assignments ─╳ NO DDL IN ANY SIGNED DOCUMENT
                      └→ plan: null + plan_snapshot_unavailable:"BR-CUS-029"
                      └→ header PLAN column shows the UNIT's plan instead      FORKED
```

#	Field	Comes from	Owned by	Health
⑭	Balance	`ledger via _ar_positions_for() — not accounts.balance`	customers ⇄ ledger	SERVED

⑭	Balance *due date*	`nothing — needs "which bills are still open", a payments position billing does not publish per account`	billing	NOT SERVED
⑮	Plan *(header)*	`seams.unit_plan_in_force(account.unit_id) — the UNIT's plan, shown because the account's own snapshot has no table`	customers ⇄ rating	DERIVED
⑯	Last activity	`nothing — payments are readable, bills and audit are not joined to them, so showing part of the history would be worse than none`	—	NOT SERVED
⑰	Portal sign-ins	`portal_credentials + portal_sessions via portal_seam.portal_access_for_account()`	customers ⇄ portal	SERVED
⑱	Deposit on file	`accounts.deposit_on_file`	customers	SERVED
⑲	Deposit interest	`no column exists at all (BR-CUS-057)`	—	NOT SERVED
⑳	Credit tier	`accounts.credit_tier — a computed cache with no computer (BR-CUS-058); always null`	customers	STUBBED
㉑	Meter rows	`assets via GET /assets/{id}, one request per meter, cached by asset id`	customers ⇄ assets	SERVED
㉒	Recent bills	`GET /invoices?f.account_id=`	customers ⇄ billing	SERVED
㉓	Gov id	`contacts.gov_id_last4, masked — four digits is all the server holds`	customers	SERVED
㉔	Tenant custom fields	`accounts.custom_data on the row, never a live join`	customers ⇄ tenancy	SERVED
㉕	Adjustments table	`nothing — no endpoint; the tab draws headings and states the absence`	billing	NOT SERVED
㉖	Documents table	`nothing — no table and no upload endpoint`	customers	NOT SERVED

Screen health: NOT SERVED — the worst field on the screen, never an average. 8 SERVED · 1 DERIVED · 1 STUBBED · 5 NOT SERVED · 0 untraced.

Commitments in this section

ACC-S1 EXISTS BEHIND

A clerk can correct an account's details without a wizard

STATUS Unverified

WAITS ON Nothing on the server. `PATCH /accounts/{id}` is mounted, handled, audited and tested. What is missing is a client wrapper and a form. The repo's own note is the blocker's whole text: "*still served with no caller and is still deliberately unwrapped (LAW 0 — an unused wrapper is not coverage).*"

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN On A-10432, an **EDIT** control on the Account panel opens a form carrying Category *Residential*, Preferred language *English*, Tax exempt *Yes · TX-EX-99213 · expires 12/31/2027*. Changing the language to *Spanish* and saving returns to the panel reading *Spanish*, and the Audit tab gains one `account.updated` row naming the field, the old value and the new one.

CLOSES §02 · the Account panel has no edit control

ACC-S2 BLOCKED

The accounts list stays fast at forty thousand accounts

STATUS Unverified

WAITS ON A decision, not a table: the two derived filters and all five sorts run in Python because the figures they order by live in no column. Either those positions get materialised somewhere sortable, or the list accepts SQL sorting on the four stored columns and states that ageing and balance order only within a page.

SCREENS 01

WHAT DONE LOOKS LIKE ON SCREEN On a tenant with 40,000 accounts, opening Accounts and sorting by Balance descending returns the first fifty rows in under a second, and the footer reads *Showing 1–50 of 40,000*. Today the same request builds 40,000 row dicts and seven cross-module batch reads before it slices.

CLOSES §02 · NFR-3, the list sorts derived positions in Python

ACC-S3 EXISTS BEHIND

No screen tells a clerk the customer portal does not exist

STATUS Unverified

WAITS ON Nothing. The portal shipped (**172** files under `07-frontend/src/portal/`) and `DEF-CUS-4625` already fixed this sentence on the Overview's Portal panel.

SCREENS 02 — Notes tab and Audit tab

WHAT DONE LOOKS LIKE ON SCREEN The Notes tab's *Customer visible* hint no longer contains the words "*there is no customer portal in this version*", and neither does the Audit tab's portal-actor hover. Each says what is actually true of a note's visibility and of a portal-originated audit row.

CLOSES §08 · two expired refusals still on the Notes and Audit tabs

---

18 Complaints NEW BUILD

`/:tenant/accounts?tab=complaints` · `no screen id` · `a four-step form on its own page`

Commitments ACC-S32 new build

The question: "*They rang about their bill on Friday. Where does that live, and when did we promise to get back to them?*"

⚠ **This tab does not exist, and everything behind it does.** There is no complaints list, no complaint form and no complaint record anywhere in the front end — but a complaint is already a **work order**: *Consumer Complaint* is one of the nine job types the Product Owner listed themselves, it carries fifteen kinds beneath it, and a job can already stand on an account. **What is missing is the screen, not the record.** These three are drawn from that model and invent nothing; where they show a gap, the gap is in the model and says so.

All 6 screens of this tab, drawn at 1280 and buildable as drawn. Real app shell, real table, real field labels. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

`/brazosbend/accounts?tab=complaints&f.state=open`

SMARTBillHub

Accounts / Complaints

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

ACCOUNTS

The register

+ Log a complaint

10 tabs · Complaints · 4 open, 1 past due

Accounts | Requests | New connects | Move-ins | Move-outs | Transfers | Disconnects | **Complaints** | Services | Imports

OPEN	PAST DUE	URGENT	LOGGED THIS MONTH
4	1	1	9
not yet resolved	the response time has gone	4 hours to respond	opened since 05/01

Open | Past due | Urgent | Resolved | All | Filter ▾ | ⚲ Search by reference, account, customer or address | Columns ▾ | ⇩ Export

REF	ACCOUNT	CUSTOMER	ADDRESS	WHAT ABOUT	SERVICE	PRIORITY	LOGGED	RESPOND BY	STATE	
WO-26-0412	A-11812	Bramble Bakery	142 Bakers Row · Suite 1	Billing Issues	—	High · 8 h	05/09 09:14	05/09 17:14	Open	↗ Open
WO-26-0409	A-11333	Halvorsen, P.	88 Quarry Lane	Odour complaint	Gas	Urgent · 4 h	05/09 07:50	05/09 11:50	In progress	↗ Open
WO-26-0401	A-11602	Ncube, T.	1408 Elm · Unit E	Low Pressure	Water	High · 8 h	05/08 14:02	05/08 22:02	Past due	↗ Open
WO-26-0388	A-11455	Ferraro, L.	1408 Elm · Unit B	Missed collection	Trash	High · 8 h	05/07 11:30	05/07 19:30	Resolved	↗ Open

1–4 of 4 · Rows per page 50 | 100 | 200 ‹ ›

A complaint is a work order, and this tab is a filter on one type. There is no complaints table in this product and there does not need to be: the job types the Product Owner listed include *Consumer Complaint* with fifteen kinds beneath it, and a job can already stand on an account.

Respond by is not a promise this platform makes. It is the moment a job was logged plus the hours this utility set for that priority, and every one of those hours is editable on their own settings.

Priority came from the kind of complaint, not from the clerk. An odour complaint is urgent because gas is urgent; a billing query is high because a bill is not an emergency.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Complaints · the table · `/brazosbend/accounts?tab=complaints` · Work orders of type *Consumer Complaint*, standing on an account

`/brazosbend/complaints/new?step=1`

SMARTBillHub

Complaints / Log a complaint

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts

← Complaints

COMPLAINT

Who is complaining

Save & exit

Step 1 of 4 · Who is complaining

1 Who is complaining	2 What happened	3 How fast we answer	4 Review & log

Search for the account *

⚲ bramble

Account number, customer name, service address or meter number.

	ACCOUNT	CUSTOMER	SERVICE ADDRESS	CATEGORY
◉	A-11812	Bramble Bakery	142 Bakers Row · Suite 1	Commercial
○	A-11333	Halvorsen, P.	88 Quarry Lane	Residential

The account

Account number	**A-11812**
Customer	**Bramble Bakery**
Customer number	**C-00271**
Category	**Commercial · Small commercial**
Status	**Active · billable**
Service address	**142 Bakers Row, Silver Creek, TX 78611**
Unit	**U-000744 · Suite 1**
Services	**Electric · Water**
Balance	**$2,410.00**
Preferred language	**English**

What else is open on it

WHAT	REFERENCE	STATE
Disconnect case	DSC-26-0003	Due to cut 05/14
Complaint	— none open	—

This account is four days from being cut off. A complaint does not pause a collection ladder and the case will not learn this exists — so if it is upheld, somebody has to go and stop the ladder by hand on the disconnect case.

It does not have to be an account

STAND IT ON	WHEN	CHOSEN
An account	Somebody we bill	☑
A premises	A complaint about a property with no account	☐
An asset	A bin, a meter, a hydrant	☐
A build	A connection under construction	☐

A job stands on at least one of four things. A passer-by reporting a smell outside an empty property has no account to hang it on, and the record still has to exist — so the form offers all four and a constraint stops one floating free of every record.

Who told us

Who reported it *

Priya Okafor

Phone

(512) 555-0188

Email

p.okafor@bramblebakery.example

How they told us

Telephone ▾

Telephone · At the counter · Email · The portal · A letter

The reporter is not always the customer. A tenant rings about a landlord-billed property, a neighbour reports a smell.

Cancel Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Who is complaining · `/brazosbend/complaints/new?step=1` · Four anchors — an account, a premises, an asset or a build

`/brazosbend/complaints/new?step=2`

SMARTBillHub ☰ Complaints / Log a complaint ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets

← Complaints

COMPLAINT

What happened

Save & exit

Step 2 of 4 · What happened

✓ Who is complaining — 2 What happened — 3 How fast we answer — 4 Review & log

What the complaint is about

Service: Electric

Kind *: Billing Issues

Or none — a billing complaint is about no single service.

What happened *

Two months of estimated reads and the March bill is four times December's. Wants a real read and the bill re-issued.

In the customer's words where you can.

When it happened: 05/08/2026

Blank means *they are telling us now*.

Where: The service address

Or a unit, or a specific asset.

Anything attached

FILE	SIZE	ADDED BY	
photo-of-bill.jpg	240 KB	S. Ortiz	Remove

+ Attach a file

A photo of the bill, a letter, a picture of the meter. What a customer sends is part of what they said.

The kinds this utility offers

KIND	SERVICE	ARRIVES AT
Billing Issues	—	High · 8 h
Low Pressure	Water	High · 8 h
No Water Supply	Water	Urgent · 4 h
Gas leak call-out	Gas	Urgent · 4 h
Odour complaint	Gas	Urgent · 4 h
Outage report	Electric	Urgent · 4 h
Voltage complaint	Electric	High · 8 h
Missed collection	Trash	High · 8 h
Damaged cart	Trash	High · 8 h
Blocked inlet	Storm water	High · 8 h
Flooding	Storm water	High · 8 h
No service	Broadband	High · 8 h
Slow speed	Broadband	High · 8 h
Blockage	Sewer	High · 8 h
Backup	Sewer	High · 8 h

Fifteen kinds, and this list is not the platform's. It is this utility's own catalogue, maintained on *Settings → Reference data → Work order types* — where a kind is added, renamed, retired or moved under a different heading.

Four of them arrive Urgent in their own right, and that is deliberate. A kind with no response time of its own inherits the heading's.

A CAUSE OR AN OUTCOME TO PICK FROM

There is no vocabulary to offer. A complaint closes with a sentence somebody typed, so this product cannot group complaints by what was wrong or by what was done about it.

← Back — Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

What happened · `/brazosbend/complaints/new?step=2` · The utility's own fifteen kinds, maintained in Settings



Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

How fast we answer

Step 3 of 4 · How fast we answer

✓ Who is complaining | ✓ What happened | 3 How fast we answer | 4 Review & log

The clock this starts

Priority: High

Respond by: 05/09/2026 17:14

The moment you log it plus this utility's hours for that priority.

PRIORITY	RESPOND WITHIN	USED BY
Urgent	4 hours	4 kinds
High	8 hours	3 types · 11 kinds
Normal	72 hours	3 types
Low	168 hours	2 types

These four hours are this utility's own numbers, not a promise this platform makes. They were seeded as a starting point and are changed in one field on *Settings → Reference data → Work priorities*.

Raising or lowering it

Why you changed it: Not changed

A priority moved by hand is recorded against your name.

Nothing recalculates after this. The response time is stamped when the complaint is logged.

Does somebody have to attend?

How it gets done: Nobody — we answer it from here

A billing query needs no van.

Where: The service address

Customer has to be in: No

Putting a billing query in the field-work queue was deliberate. A job may carry no template, no duration and no expectation that anyone is home — so everything a customer is waiting on sits in one place, whether or not it involves a van.

Who picks it up

Assign to: Meter Services

Person: Unassigned

A team now, a person later. Leaving the person blank sends it to the team's queue; the scheduling board gives it a name.

HOW LONG THIS KIND USUALLY TAKES

No duration is held against any kind. The catalogue carries names, a heading and a default response time, and nothing else — so the board cannot plan a day from what is in here.

v2.234.15

← Back | Continue →

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

How fast we answer · `/brazosbend/complaints/new?step=3` · A response time stamped from the tenant's own hours

/brazosbend/complaints/new?step=4

SMARTBillHub | Complaints / Log a complaint | ⚲ Search accounts, premises, meters... | ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets

← Complaints

COMPLAINT

Review — and what it starts

Save & exit

Step 4 of 4 · Review & log

✓ Who is complaining · ✓ What happened · ✓ How fast we answer · 4 Review & log

Who is complaining Step 1

Account	A-11812 · Bramble Bakery
Customer number	C-00271
Category	Commercial · Small commercial
Service address	142 Bakers Row, Silver Creek, TX 78611
Unit	U-000744 · Suite 1
Stood on	The account
Reported by	Priya Okafor
Phone	(512) 555-0188
Email	p.okafor@bramblebakery.example
How they told us	Telephone

What happened Step 2

Kind	Consumer Complaint · Billing Issues
Service	— not about one service
It happened on	05/08/2026
Where	The service address
Attached	photo-of-bill.jpg · 240 KB

In their words

Two months of estimated reads and the March bill is four times December's.

How fast Step 3

Priority	High · 8 hours at this utility
Changed by hand	No — the kind chose it
Logged	05/09/2026 09:14
Respond by	05/09/2026 17:14
Attendance	Nobody — answered from here
Assigned to	Meter Services
Person	— the team's queue

What happens when you log it

WHEN	WHAT
Now	One job, referenced and on the clock from this minute
Now	It appears on the Complaints tab and in the work queue
Now	One audit row naming you
Now	**Nothing goes to the customer**
Next	The team picks it up, or the board gives it a name
Then	Somebody types what they found and closes it

Logging this does not touch the disconnect case. This customer is still due to be cut on 05/14. If the complaint is upheld, stopping the ladder is a separate act on a separate screen, and nothing will remind anybody.

What goes out to the customer

Every row here is unticked, and not one of them is a choice. No template exists for any of it.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☐	That we have it, and its reference	Bramble Bakery	Email · Print	— none exists	On logging
☐	When we said we would answer	Bramble Bakery	Email	— none exists	On logging
☐	That somebody is coming	Bramble Bakery	SMS	— none exists	When a visit is booked
☐	What we found and what we did	Bramble Bakery	Email · Print	— none exists	On resolving

Choosing a template

Search templates

⚲ complaint

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
— nothing matches *complaint*	—	—	—	—	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.


The search finds nothing, and that is the true answer. There is no complaint family in the template catalogue at all — not a draft, not an unpublished one.

← Back · Log the complaint · respond by 05/09 17:14

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Review & log · `/brazosbend/complaints/new?step=4` · Every field from three steps, and four letters that do not exist

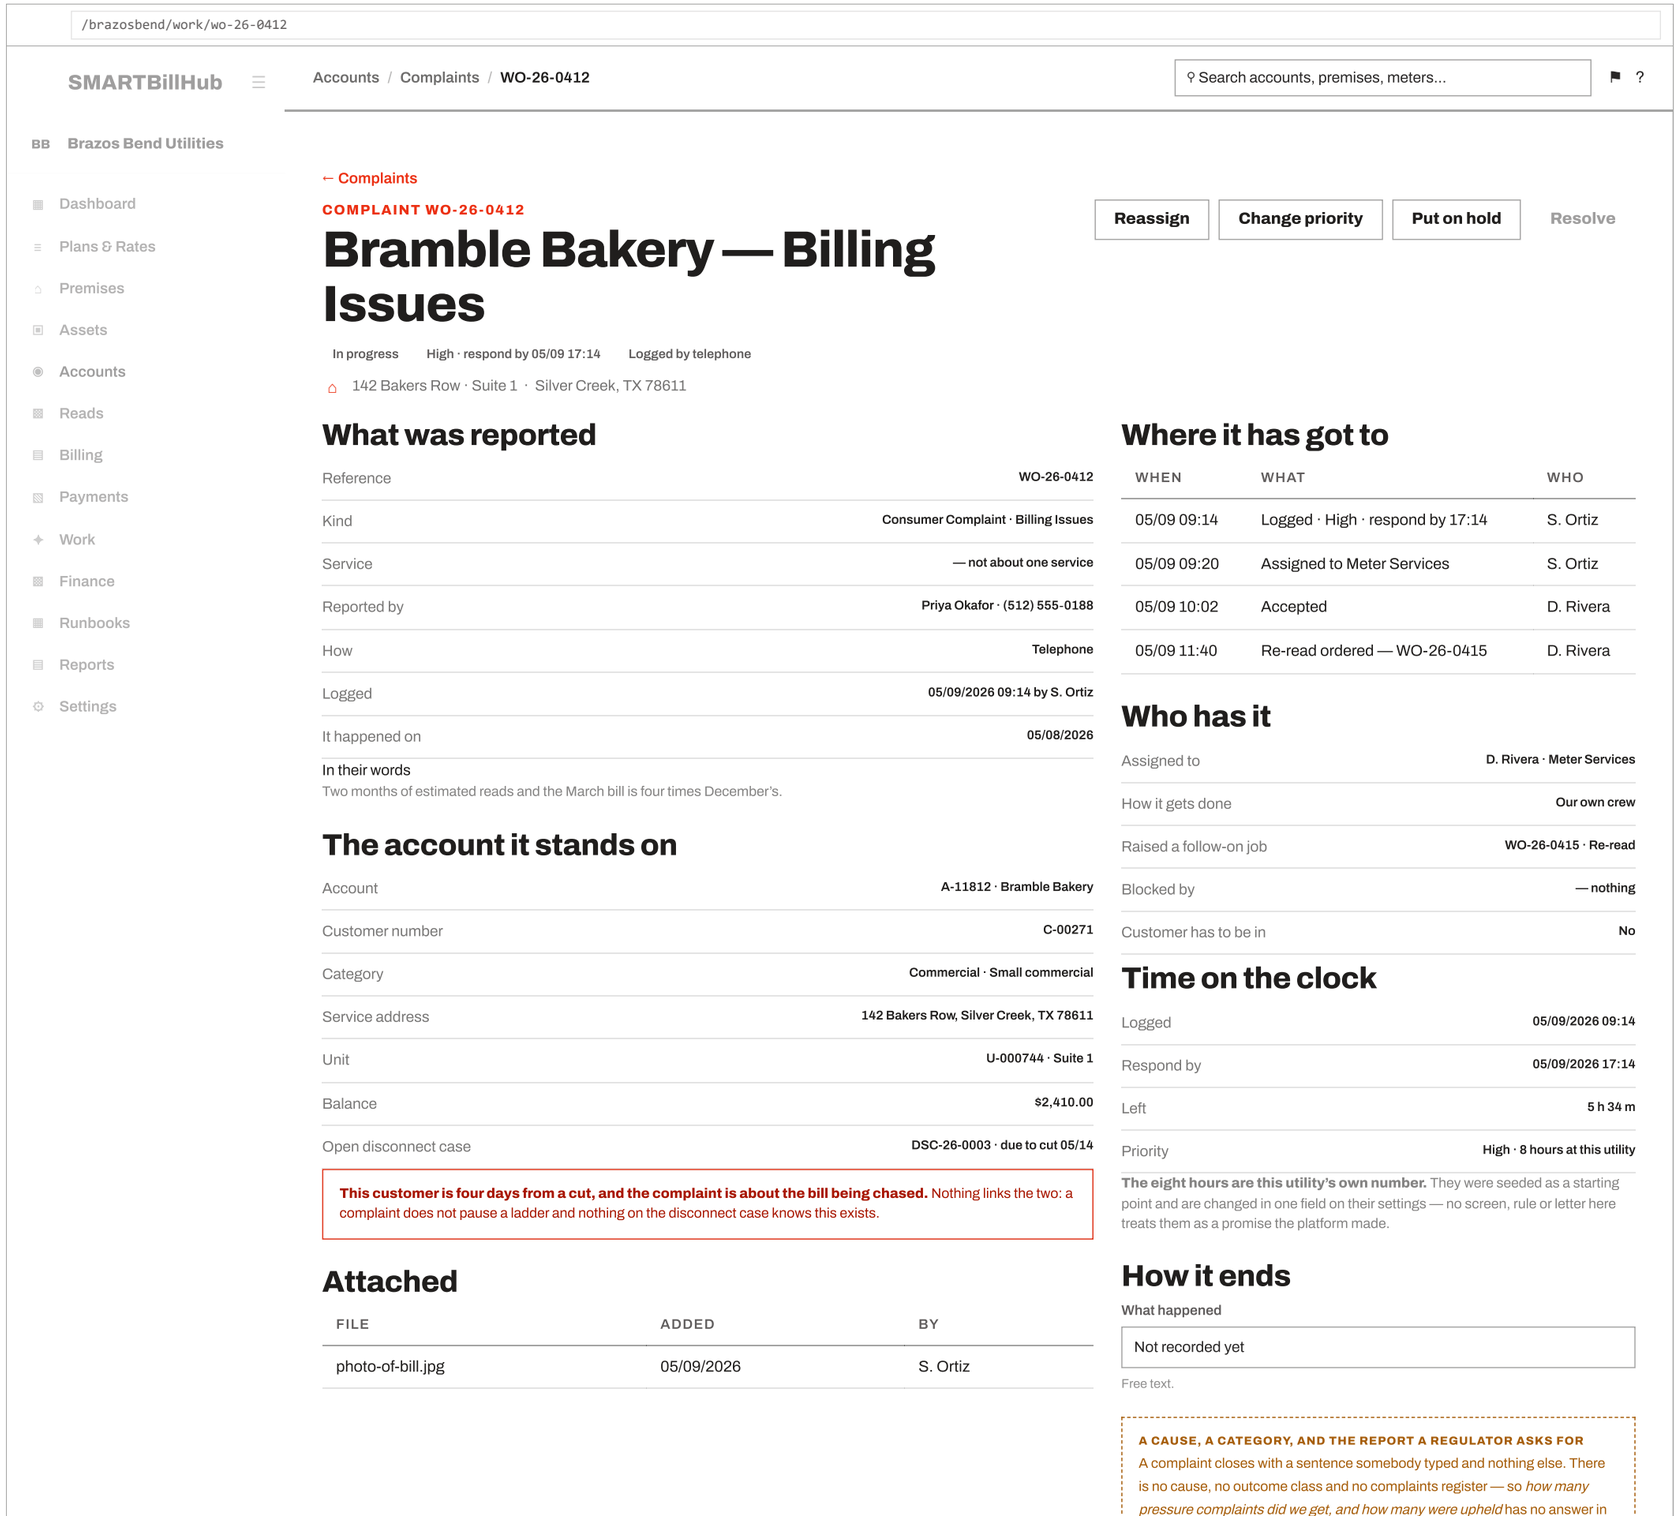

this product, for any period.

NOTHING TELLS THE CUSTOMER IT IS RESOLVED
Closing a job queues no letter, no email and no text. Whoever resolves it rings them, or nobody does.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Complaints · the detail view · `/brazosbend/work/wo-26-0412` · What was said, who has it, and the clock it is answered on

What it is	A filter on one job type. **Not a new table** — `work_orders` already carries the type, the priority, the due time and the account it is for.
How you get here	**Nowhere.** The tab is proposed, so no door exists. Drawn beside the register because that is where it belongs.
Write surfaces	**Add** a four-step wizard on `/complaints/new`, not a dialog over the list. **Update** reassign, change priority, hold, resolve. **No delete** — a complaint is cancelled with a reason.
Walked	**Not walked.** There is nothing to walk.
Commitment	**Undertaken as ACC-S32.** It was drawn before anybody had undertaken it, which is exactly the gap this pass was looking for. The card names what it waits on and what done looks like.
Rules	BR-WRK-006 · 016 · 018 · OQ-WRK-1765

19 Services NEW BUILD

`/:tenant/accounts?tab=services · no screen id · a five-step form, its fees, and the kinds behind both tabs`

Commitments ACC-S32 new build

The question: "*They want a smaller bin. That is not a complaint and it is not a new connection — where does it go?*"

The same model, the other type — and the difference between them is not cosmetic. *Consumer Services* is what a customer ASKED FOR; *Consumer Complaint* is what went wrong. A container swap answered in three days is a good service and a missed collection answered in three days is not, which is why they carry different response times and why they are two tabs rather than one filter. ⚠ **Three sub-types exist across eleven services**, and that is reported rather than filled in: job types are a utility's own list.

All 9 screens of this tab and its settings, drawn at 1280 and buildable as drawn. Real app shell, real table, real field labels. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

`/brazosbend/accounts?tab=services&f.state=open`

SMARTBillHub

Accounts / Services

⚲ Search accounts, premises, meters...

⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

ACCOUNTS

The register

+ Request a service

10 tabs · Services · 3 open

Accounts | Requests | New connects | Move-ins | Move-outs | Transfers | Disconnects | Complaints | Services | Imports

OPEN	DUE THIS WEEK	FEES OUTSTANDING	DONE THIS MONTH
3	2	$35.00	6
asked for, not done	within 7 days	on 1 job	completed since 05/01

Open | Due this week | Fees due | Done | All | Filter ▾ | ⚲ Search by reference, account, customer or address | Columns ▾ | ⇩ Export

REF	ACCOUNT	CUSTOMER	ADDRESS	WHAT THEY ASKED FOR	SERVICE	PRIORITY	ASKED	DUE	STATE	
WO-26-0410	A-11455	Ferraro, L.	1408 Elm · Unit B	Container swap	Trash	Normal · 72 h	05/08	05/11	Booked	↗ Open
WO-26-0405	A-11674	Vasquez, M.	310 Marigold · Unit 1	Water Truck Services	Water	Normal · 72 h	05/08	05/11	Open	↗ Open
WO-26-0399	A-11602	Ncube, T.	1408 Elm · Unit E	Disconnection/Reconnection	—	Normal · 72 h	05/07	05/10	Open	↗ Open

1–3 of 3 · Rows per page 50 | 100 | 200 ‹ ›

Three kinds, across eleven services — and that is the finding, not a gap to quietly fill. *Consumer Services* is one of the nine job types, and the sub-types under it are a container swap, a water truck and a disconnect-or-reconnect.

This is what a customer ASKED FOR, not what went wrong. The difference between this tab and Complaints is the type on the job, and it is the difference between a service and an apology — a container swap answered in three days is fine, and a missed collection answered in three days is not.

And one of these rows is the same act a whole wizard already does. *Disconnection/Reconnection* as a service request is a customer asking to be turned off; the Disconnects tab is the utility cutting somebody off for not paying.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Services · the table · `/brazosbend/accounts?tab=services` · Work orders of type *Consumer Services*, standing on an account

/brazosbend/services/new?step=1

SMARTBillHub

Services / Request a service

⚲ Search accounts, premises, meters...

⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing

← Services

SERVICE

Who is asking

Save & exit

Step 1 of 5 · Who is asking

1 Who is asking | 2 What they want | 3 When and who | 4 Service fees | 5 Review & raise

Search for the account *

⚲ ferraro

Who asked

Who asked *

Account number, customer name, service address or meter number.

	ACCOUNT	CUSTOMER	SERVICE ADDRESS	CATEGORY
◉	A-11455	Ferraro, L.	1408 Elm Street · Unit B	Residential
○	A-11602	Ncube, T.	1408 Elm Street · Unit E	Residential

The account

Account number	**A-11455**
Customer	**Ferraro, L.**
Customer number	**C-00877**
Category	**Residential · Standard**
Status	**Active · billable**
Service address	**1408 Elm Street, Silver Creek, TX 78611**
Unit	**U-000913 · Unit B**
Services	**Electric · Water · Trash**
Balance	**$64.20**
How they came to own it	**Bought it · TRF-26-0021**

A new owner asking for a different bin is the ordinary first request. This account changed hands six days ago and the household is not the one the cart was sized for.

L. Ferraro

Phone

(512) 555-0233

Email

l.ferraro@example.com

How they told us

The portal ▾

Telephone · At the counter · Email · The portal · A letter

What this is about

STAND IT ON	WHAT THAT MEANS	CHOSEN
An account	Somebody we bill	☑
A premises	The property, not the person	☐
An asset	The cart, the meter, the hydrant	☑
A build	A connection under construction	☐

This one names two of the four. The account being served and the cart being swapped — so the job can be found from the customer's record and from the asset's history.

The asset

CART-8841 · 96 gallon · fitted 11/02/2024 ▾

Cancel Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Who is asking · `/brazosbend/services/new?step=1` · An account and an asset — a job may name both

`/brazosbend/services/new?step=2`

SMARTBillHub Services / Request a service ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work

← Services

SERVICE

What they want

Save & exit

Step 2 of 5 · What they want

✓ Who is asking | 2 What they want | 3 When and who | 4 Service fees | 5 Review & raise

What they asked for

Service

Trash ▾

What kind *

Container swap ▾

The kinds this utility offers

KIND	SERVICE	ARRIVES AT
Container swap	Trash	Normal · 72 h

Finance
Runbooks
Reports
Settings

Details *
The 96-gallon cart is too big for the side return. Asking for a 48.

From
96 gallon

To
48 gallon

Where
The service address
Or a unit, or the asset itself.

Does anything get charged?

Yes, and it is step 4. What this kind of job costs comes from this utility's charge codes and is quoted, collected or left outstanding on its own step — so the money is decided in front of the customer rather than remembered afterwards.

And a smaller cart usually costs less to serve. Nothing connects a container size to the plan that bills for it, so after this job is done the customer keeps paying the 96-gallon rate until a human changes the plan on another screen.

Water Truck Services	Water	Normal · 72 h
Disconnection/Reconnection	—	Normal · 72 h

Three kinds, across eleven services. That is what is in the catalogue, and it is reported rather than quietly filled in: a hydrant meter hire, a bulk collection, a temporary supply and a meter test are all consumer services this list does not have.

One of them is the same act a whole wizard already does. *Disconnection/Reconnection* here is a customer asking to be turned off; the Disconnects tab is the utility cutting somebody off for not paying.

Anything attached

FILE	SIZE	ADDED BY

+ Attach a file

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back Continue →

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

What they want · `/brazosbend/services/new?step=2` · Three kinds across eleven services, and what each of them costs

`/brazosbend/services/new?step=3`

SMARTBillHub ☰ Services / **Request a service** ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← Services

SERVICE

When, and who does it

Save & exit

Step 3 of 5 · When and who

✓ Who is asking | ✓ What they want | 3 When and who | 4 Service fees | 5 Review & raise

When we said we would do it

Priority
Normal

Due
05/11/2026 16:40
Asked plus this utility's hours for Normal.

PRIORITY	RESPOND WITHIN	USED BY
Urgent	4 hours	4 kinds
High	8 hours	3 types · 11 kinds
Normal	72 hours	3 types
Low	168 hours	2 types

Normal is seventy-two hours here. It is this utility's figure, editable on their own settings, and no screen or letter in this product treats it as a platform promise.

They asked for

Who does it

How it gets done
Our own crew
Who actually does it.

Assign to
Collections crew 2

Customer has to be in
No

Expected to take
Not held
No duration is recorded against any kind.

Any weekday morning

A preference, not a booking.

Nothing is booked by finishing this. The job goes to the work queue with a due time on it; a crew and a slot are given to it on the scheduling board, which is a different screen in a different module.

HOW LONG A CONTAINER SWAP TAKES

The catalogue holds a name, a heading and a response time, and nothing else — no duration and no presence flag. So the board cannot plan a crew's day from what is in here, and twenty minutes is a dispatcher's knowledge rather than the product's.

Follows anything?

Blocked by

— nothing ▾

Follows on from

— nothing ▾

A job can wait on another job. A reconnect waits on the payment clearing; a swap waits on stock.

v2.234.15

← Back Continue →

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

When and who · `/brazosbend/services/new?step=3` · A due time from the tenant's own hours, and nothing booked

`/brazosbend/services/new?step=4`

SMARTBillHub ☰ Services / Request a service ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Services

SERVICE

What this costs

Save & exit

Step 4 of 5 · Service fees

✓ Who is asking | ✓ What they want | ✓ When and who | 4 Service fees | 5 Review & raise

What this job is quoted at

CHARGE	CODE	BASIS	QTY	EACH	AMOUNT	
Container swap	CC-CARTSWAP	per cart	1	$35.00	$35.00	Waive
Cart delivery	CC-DELIVERY	per visit	1	$15.00	$15.00	Waive

+ Add a line

The quote

Container swap	$35.00
Cart delivery	$15.00
Waived	$0.00
Quoted	**$50.00**

The amounts are this utility's charge codes, not typed. A code carries the price, the basis it multiplies by and the words the customer reads.

Or take it later

- (●) **Take what they are paying now**
  $15.00 at the counter, $35.00 left to collect.
- ( ) **Take nothing now — the whole $50.00 is outstanding**
- ( ) **Nothing to pay — waive the lot**
  Needs a reason, and the lines stay on the quote at $0.00.

Outstanding is a figure, not a state to choose. It is the quote less what was taken, so it falls out of the two panels on the left rather than being set anywhere.

Nothing outstanding stops this job. The swap is raised, booked and done whether or not the $35.00 has been paid.

What this does NOT do

Raise an invoice — No

A line is waived, never removed. Waiving needs a reason and records it against your name, and the line stays on the quote showing $0.00 — so a customer who was not charged and a customer who was never quoted do not look the same six months later.

Taking it now

Amount

$15.00

Any amount.

Method

Cash ▾

Cash · Card · Cheque · Bank transfer

Receipt *

RCP-26-4902

Required.

Sending the same receipt twice takes the money once. A clerk who presses this again after a timeout does not double the customer; the receipt is what makes the second one a no-op.

Where that leaves it

Quoted	$50.00
Collected today	$15.00
Outstanding	**$35.00**

Post a journal line	No
Touch the account balance	No
Appear on the next bill	No

It is accepted and marked as cash, and finance reconciles it. That is a deliberate split: this screen records what was handed over the counter, and the books are somebody else's job.

NONE OF THIS EXISTS ON A JOB YET

A work order carries no price today — no lines, no collected figure, no outstanding. This step is drawn on the fee model the service request already has, which is ruled and built, rather than as a second and different one.

← Back Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Service fees · `/brazosbend/services/new?step=4` · Quoted, collected, outstanding — and outstanding is never clamped to zero

/brazosbend/services/new?step=5

SMARTBillHub Services / Request a service ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Services

SERVICE

Review — and what it starts

Save & exit

Step 5 of 5 · Review & raise

✓ Who is asking | ✓ What they want | ✓ When and who | ✓ Service fees | 5 Review & raise

Who is asking ✎ Step 1

Account	A-11455 · Ferraro, L.
Customer number	C-00877
Category	Residential · Standard
Service address	1408 Elm Street, Silver Creek, TX 78611
Unit	U-000913 · Unit B
Stood on	The account, and the asset

When and who ✎ Step 3

Priority	Normal · 72 hours at this utility
Asked	05/08/2026 16:40
Due	05/11/2026 16:40
They asked for	Any weekday morning
How it gets done	Our own crew
Assigned to	Collections crew 2

Asset	CART-8841 · 96 gallon
Asked by	L. Ferraro
Phone	(512) 555-0233
How they told us	The portal

What they want ✎ Step 2

Kind	Consumer Services · Container swap
Service	Trash
From	96 gallon
To	48 gallon
Where	The service address
Fee quoted	— a job carries no price
Attached	— nothing

In their words

The 96-gallon cart is too big for the side return.

Customer has to be in	No
Expected to take	— not held
Blocked by	— nothing

The fees ✎ Step 4

Container swap · CC-CARTSWAP	$35.00
Cart delivery · CC-DELIVERY	$15.00
Waived	$0.00
Quoted	$50.00
Collected today	$15.00 · cash · RCP-26-4902
Outstanding	$35.00
Raises an invoice	No — accepted as cash

$35.00 is still owed, and this job goes ahead anyway. The outstanding fee follows the record, not the crew: it shows on the Services tab and on this job's own page, where it is taken whenever the customer pays it.

What happens when you raise it

WHEN	WHAT
Now	One job, referenced and due 05/11 16:40
Now	It appears on the Services tab and in the work queue
Now	It appears on CART-8841's own history
Now	One audit row naming you, and one for the $15.00
Now	**$35.00 is left outstanding on this job**
Next	The board gives it a day and a slot
Then	A crew does it and somebody accepts it
After	**The plan still bills for 96 gallons**

A job is done when somebody accepts it, not when a crew says so. The acceptance names a person and a time — the same discipline the meter work uses, and the reason a swap cannot be closed by the van that did it.

The last row of that table is not a step, it is a consequence. Nothing in this flow changes what the customer is billed, so unless somebody opens the plan and changes it, the smaller cart is served at the larger price for as long as it takes anyone to notice.

What goes out to the customer

This one was asked for through the portal, and the portal will not tell them it was booked. Three of the four rows have no template and the fourth is a draft nobody has published — so a customer who asked online watches nothing happen and rings on Wednesday to ask.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☐	That we have it, and when we will do it	Ferraro, L.	Email	— none exists	On raising
☐	The day and the slot we booked	Ferraro, L.	SMS	Visit booked v1 Draft	When a crew is assigned
☐	That it is done	Ferraro, L.	Email	— none exists	On completion
☐	That the bin size changed and the bill has not	Ferraro, L.	Print	— none exists	On completion

Choosing a template

Search templates

⚲ service

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Visit booked	SMS	SMS	Default · English	v1 Draft	○
— nothing else matches *service*	—	—	—	—	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

The one template that exists is a draft, and a draft cannot be picked. It is listed rather than hidden, because hiding it sends a clerk looking for something they can see exists — and offering it would queue a message nobody has approved.

The last row is the one worth arguing about. Telling a customer their bin got smaller and their bill did not is honest and nobody wants to send it.

Print is the floor. Paperless and text reminders are channels on top of the paper, not instead of it, so an account with paperless on gets the email AND the envelope.

v2.234.15

← Back Raise it · due 05/11 16:40

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Review & raise · `/brazosbend/services/new?step=5` · Every field from four steps, and $35.00 that follows the record rather than the crew

/brazosbend/work/wo-26-0410

SMARTBillHub Accounts / Services / WO-26-0410 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Services

SERVICE WO-26-0410

Ferraro, L. — Container swap

Reschedule Reassign Cancel the job Mark done

Booked Normal · due 05/11 16:40 Asked through the portal

⌂ 1408 Elm Street · Unit B · Silver Creek, TX 78611

What was asked for

Reference	WO-26-0410
Kind	Consumer Services · Container swap
Service	Trash
Asked by	L. Ferraro · (512) 555-0233
How	The portal
Asked	05/08/2026 16:40
They asked for	Any weekday morning

In their words
The 96-gallon cart is too big for the side return.

The account it stands on

Account	A-11455 · Ferraro, L.
Customer number	C-00877
Category	Residential · Standard
Service address	1408 Elm Street, Silver Creek, TX 78611
Unit	U-000913 · Unit B

Where it has got to

WHEN	WHAT	WHO
05/08 16:40	Asked through the portal	L. Ferraro
05/08 16:40	Raised · Normal · due 05/11 16:40	The portal
05/09 08:05	Assigned to Collections crew 2	M. Hines
05/09 08:06	Booked for 05/11, morning	M. Hines

Who has it, and when

Assigned to	Collections crew 2
Booked for	05/11/2026 · morning
How it gets done	Our own crew
Customer has to be in	No
Expected to take	20 minutes
Blocked by	— nothing

Time on the clock

Asked	05/08/2026 16:40

Balance	$64.20
How they came to own it	Bought it · TRF-26-0021

The asset it is about

Asset	CART-8841 · 96 gallon
Fitted	11/02/2024
Swapping to	48 gallon · from stock

A job can name the actual thing it is about. The cart is one of four anchors a job may stand on, so this one names both the account being served and the asset being swapped.

The fees on this job

CHARGE	CODE	AMOUNT	STATE
Container swap	CC-CARTSWAP	$35.00	Outstanding
Cart delivery	CC-DELIVERY	$15.00	Collected 05/08

Where the money stands

Quoted	$50.00
Collected	$15.00
Waived	$0.00
Outstanding	**$35.00**

$35.00 is still owed and the job went ahead anyway. The swap was booked, and it will be done, whether or not this is paid — fees and field work are two queues on purpose.

Nothing here is on a bill. These lines raise no invoice and post no journal entry: what was taken is recorded as cash against a receipt, and finance reconciles it.

WHAT THE SMALLER CART COSTS THE CUSTOMER EVERY MONTH

The job's own fees are here; the PLAN is not. Nothing connects a container size to the tariff that bills for it, so a customer moving from 96 to 48 gallons keeps paying the 96-gallon rate until somebody notices and changes the plan by hand, on a different screen.

Due	05/11/2026 16:40
Left	2 days 7 h
Priority	Normal · 72 hours at this utility

How it ends

What was done

Not recorded yet

Free text, and a crew may attach a photo.

Photo from the crew	— not yet
Accepted by	— not yet

A job is done when somebody accepts it, not when a crew says so. The acceptance names a person and a time, which is the same discipline the meter work uses: somebody decided, and the record says who.

NOTHING TELLS THE CUSTOMER IT IS BOOKED OR DONE


This one was asked for through the portal and the portal will not tell them it was booked for Monday morning. Closing it queues nothing either.


v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.

Services · the detail view · `/brazosbend/work/wo-26-0410` · What was asked, what it is about, and who accepted it

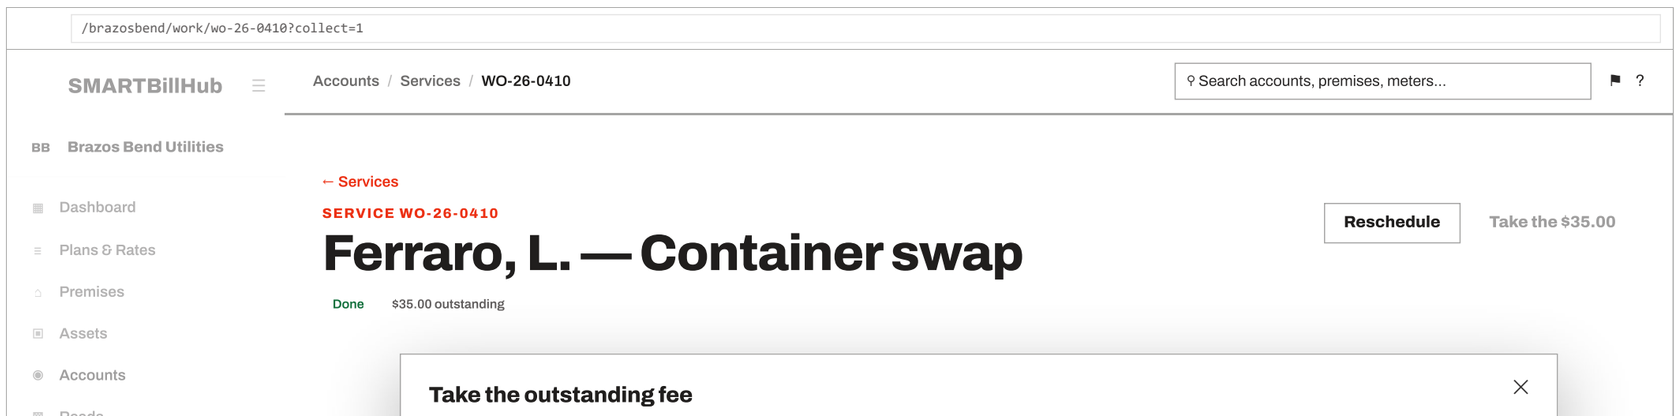

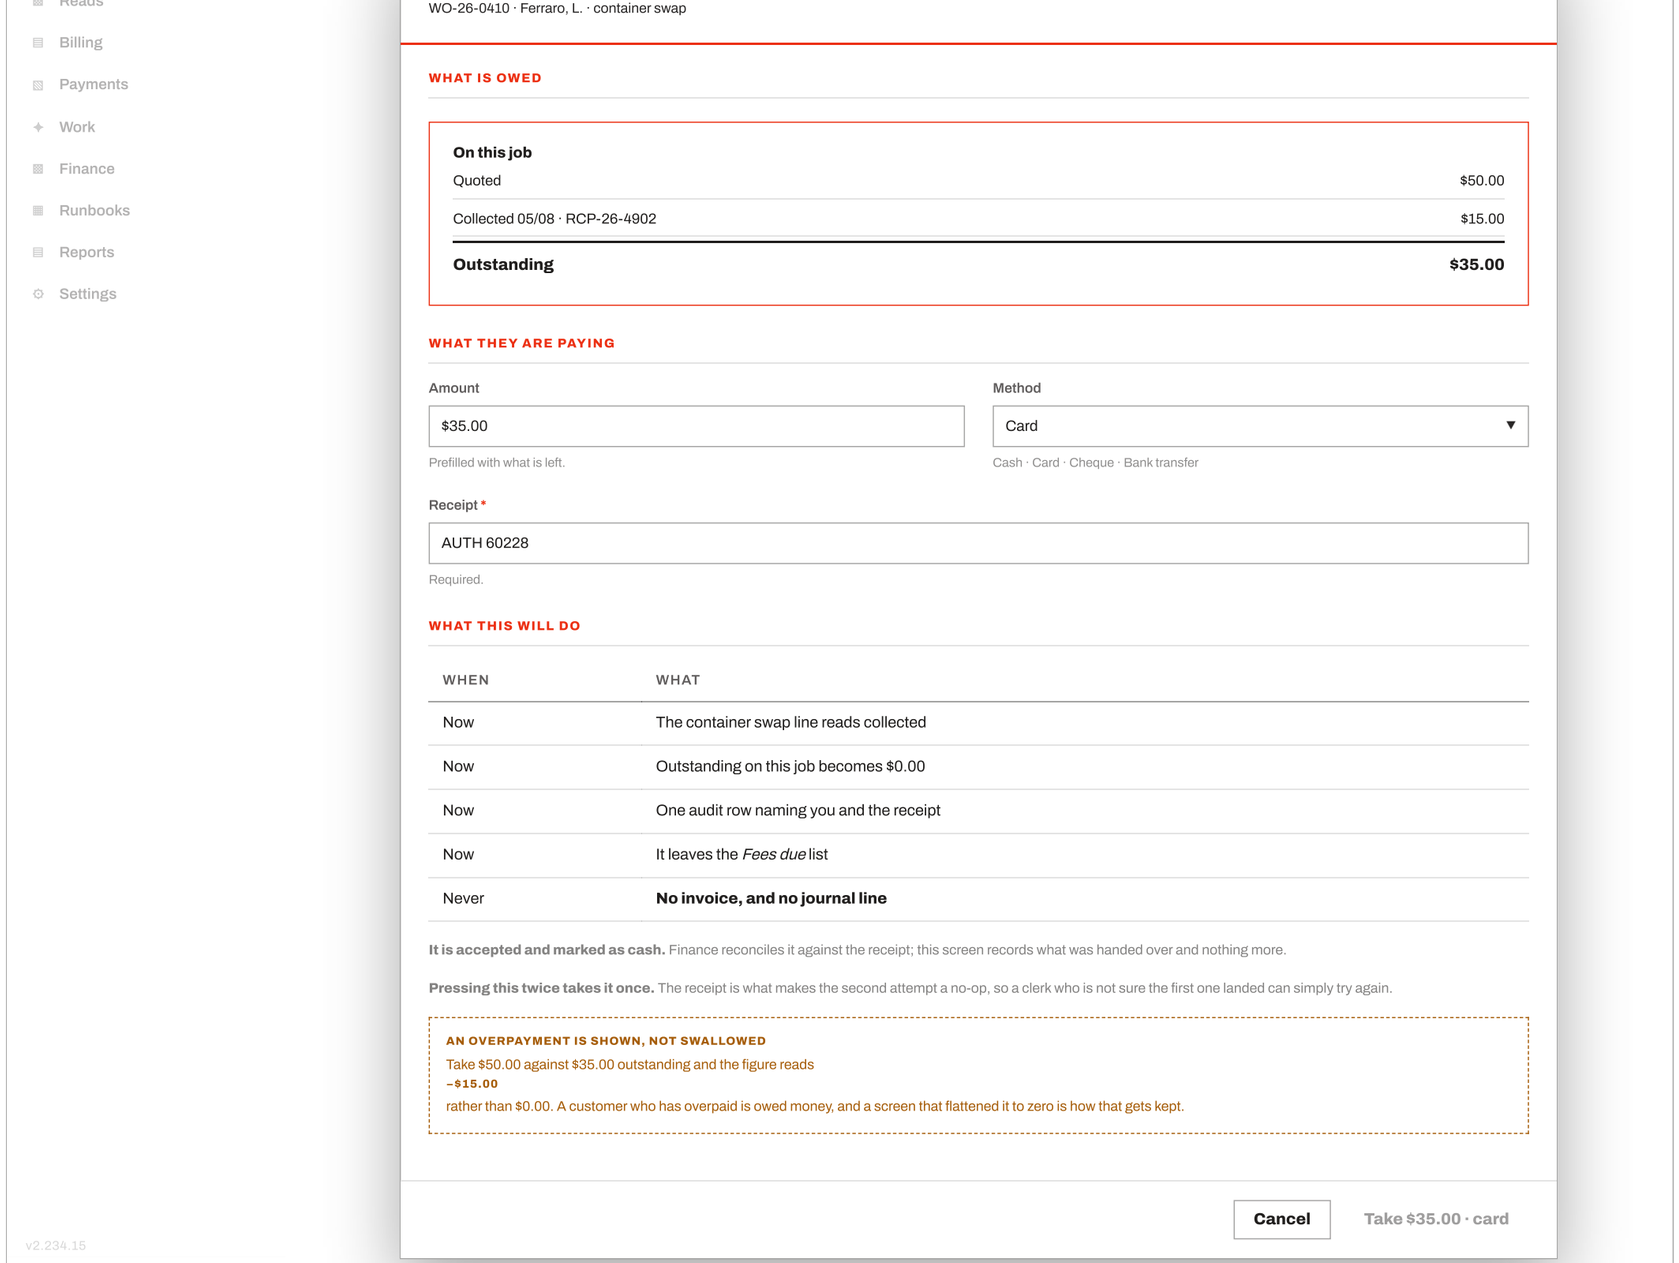



> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** there is no complaints or services tab, no form and no record in the front end; a complaint is a work order of type Consumer Complaint and is reachable only through Work.
>
> **Services · taking the fee later** · `/brazosbend/work/wo-26-0410?collect=1` · What an outstanding fee does when somebody finally pays it

The kinds, maintained in Settings

⚠ **Unlike the two tabs, this screen exists.** *Settings → Configure → Reference data* is shipped, and both lists a clerk picks from on the two forms are rows on it already. **Ruled mid-draft:** *"the reference data for the services and complaints should be very simple. Just the user can add the kinds of services and kinds of*

should be very simple. Just the user can add the kinds of services and kinds of complaints." The first draft of this was the whole work catalogue — nine headings, a tree, typed parent codes, three depth refusals — and a second screen for ranks, colours and hours. All of it true, none of it what a utility opens this screen to do. **What is here is a narrow door onto two headings of that list**: the machinery still exists and is still how it works, and nobody has to meet it to add one more kind of complaint.

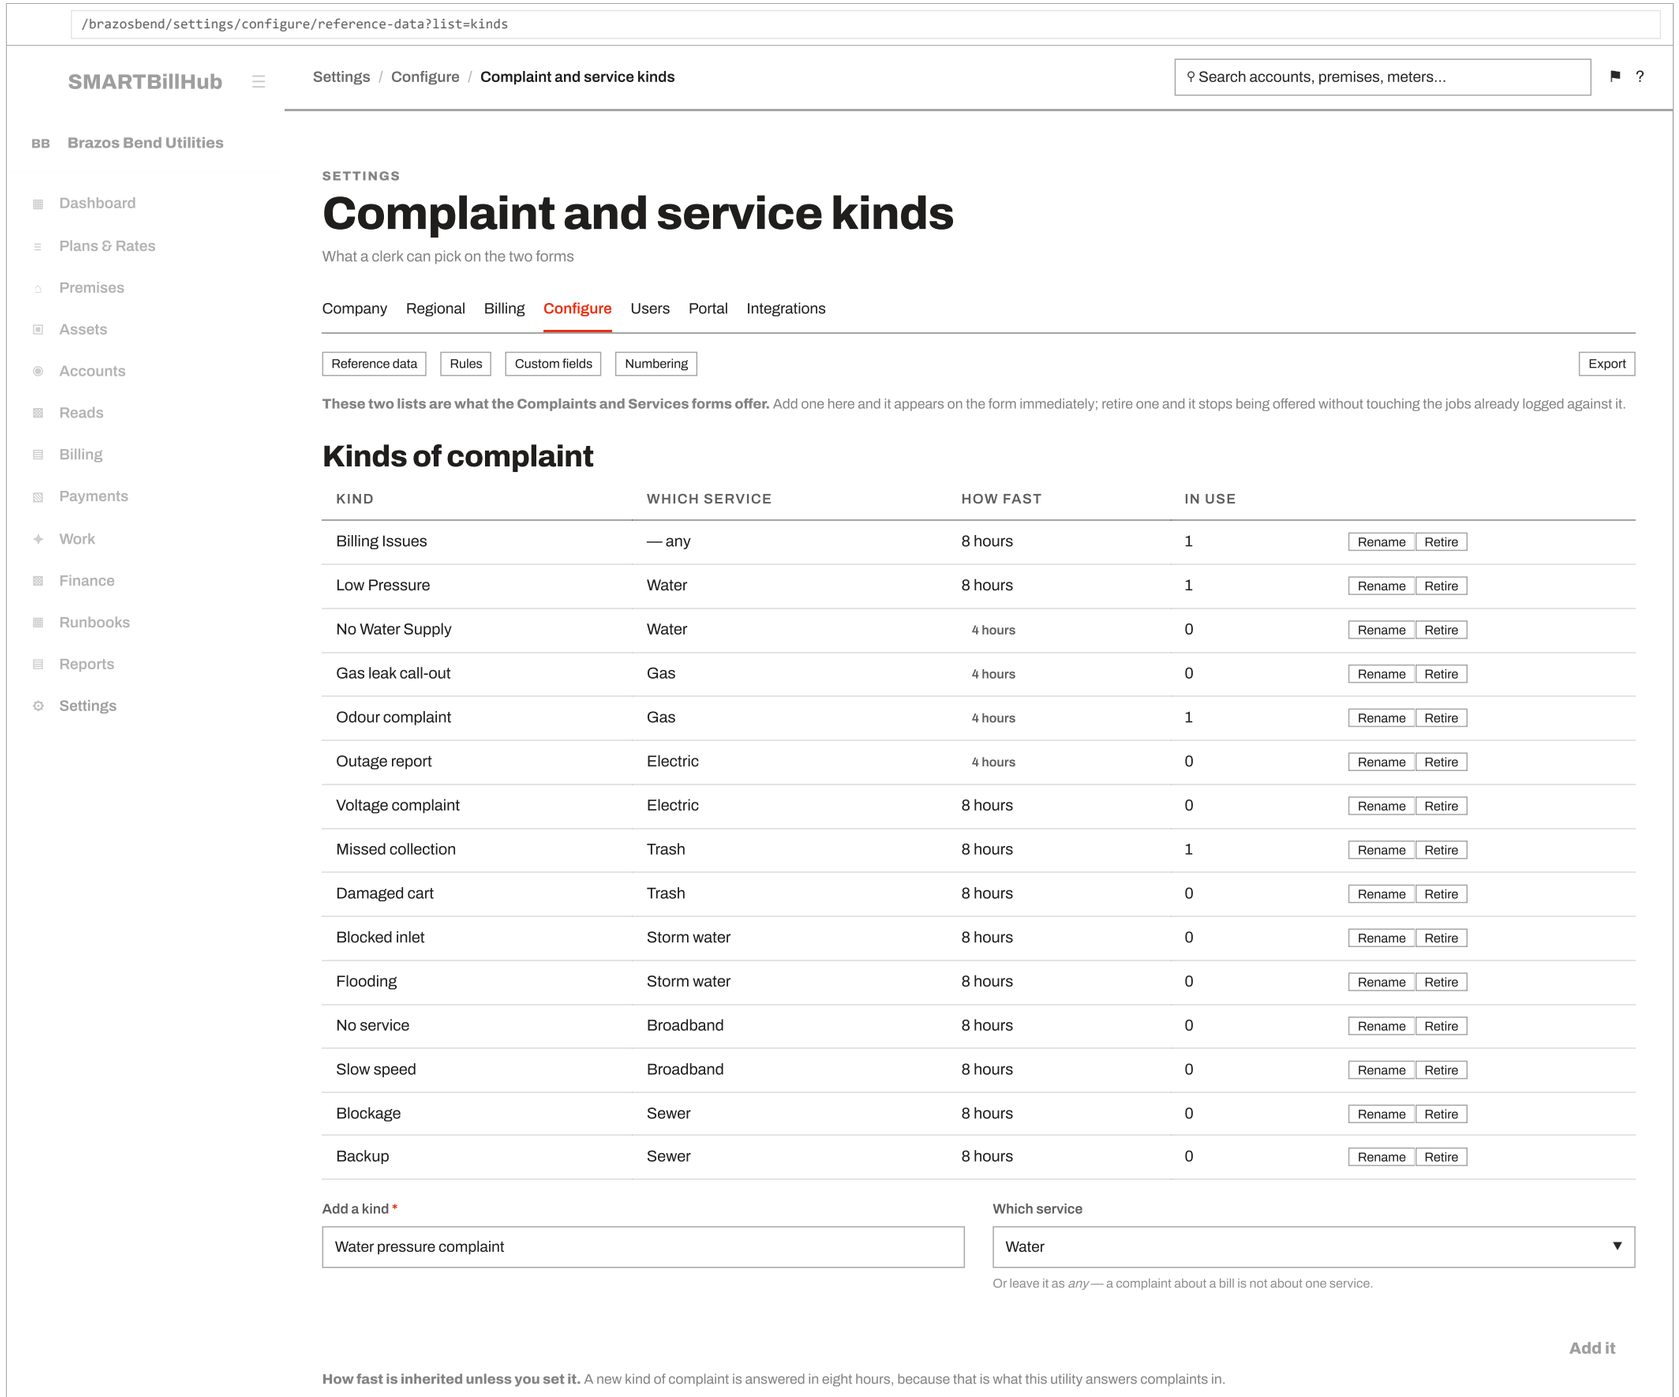

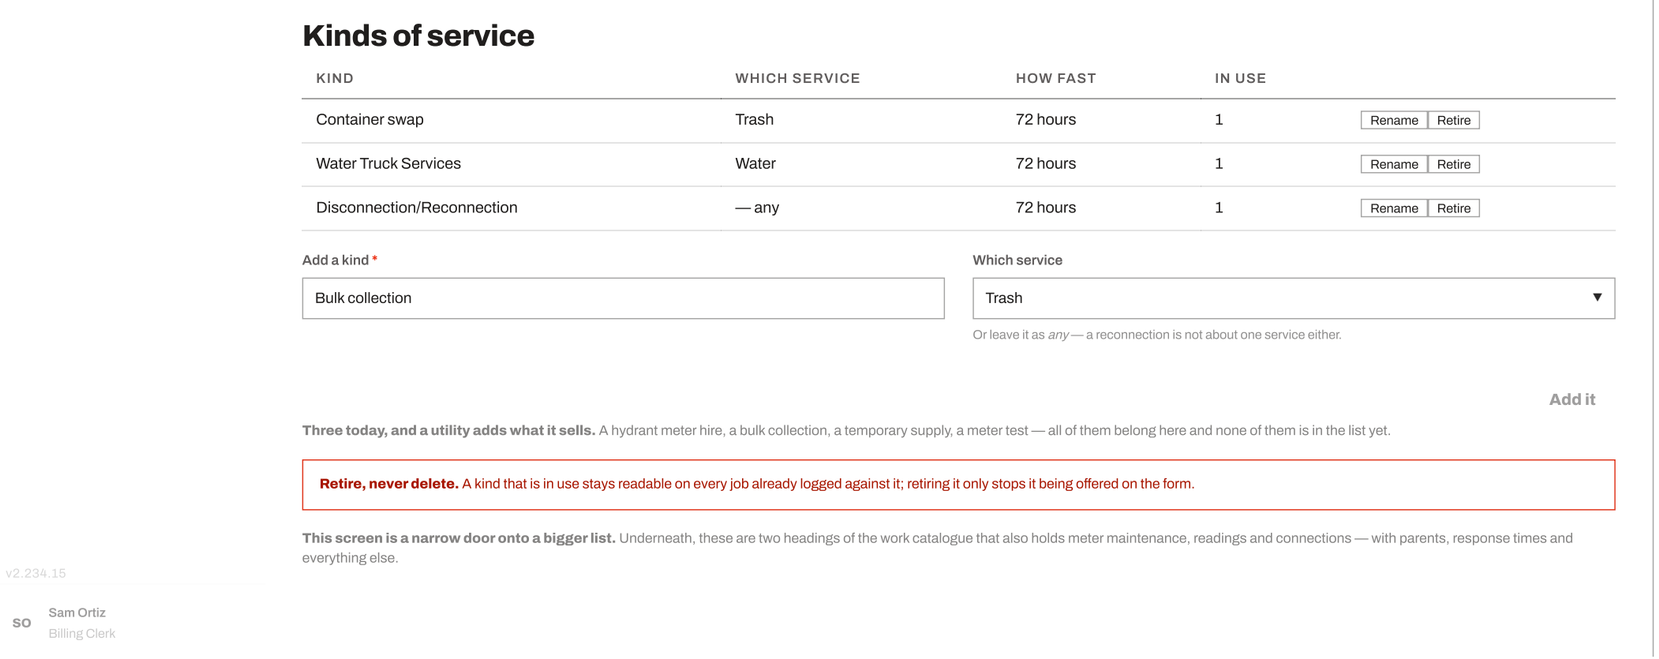

Kinds of service

KIND	WHICH SERVICE	HOW FAST	IN USE	
Container swap	Trash	72 hours	1	Rename Retire
Water Truck Services	Water	72 hours	1	Rename Retire
Disconnection/Reconnection	— any	72 hours	1	Rename Retire

Add a kind *

Bulk collection

Which service

Trash

Or leave it as *any* — a reconnection is not about one service either.

Add it

Three today, and a utility adds what it sells. A hydrant meter hire, a bulk collection, a temporary supply, a meter test — all of them belong here and none of them is in the list yet.

Retire, never delete. A kind that is in use stays readable on every job already logged against it; retiring it only stops it being offered on the form.

This screen is a narrow door onto a bigger list. Underneath, these are two headings of the work catalogue that also holds meter maintenance, readings and connections — with parents, response times and everything else.

v2.234.15

SO Sam Ortiz
Billing Clerk

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: Settings → Configure → Reference data exists and was not walked.

Reference data · complaint and service kinds · `/brazosbend/settings/configure/reference-data?list=kinds` · Two lists, and adding one takes a name

What it is	A filter on the *Consumer Services* job type, standing on an account.
How you get here	**Nowhere.** Proposed, like Complaints.
Write surfaces	**Add** a five-step wizard on `/services/new`, not a dialog over the list. **Collect** an outstanding fee from the record. **Update** reschedule, reassign, cancel, mark done — and **accepted by** names a person, because a crew saying it is done is not the same as somebody accepting it.
Walked	**Not walked.**
Two gaps worth the ink	**A job carries no price**, so a chargeable service is done and then billed by somebody remembering. And **nothing connects a container size to the plan that bills for it**, so a customer swapping 96 gallons for 48 keeps paying the 96-gallon rate until a human changes the plan.
Commitment	**Undertaken as ACC-S32,** with Complaints — one commitment, two tabs, because they are the same build.
Rules	BR-WRK-006 · 016 · 018

ACC-S43 NEW READ

Two fields the account read serves reach a screen, or leave the payload

STATUS Unverified

WAITS ON A decision on `template_override_id` only. `sub_accounts` is what ACC-S17's tab renders, so that one is already undertaken; this commitment is the other half and the rule that keeps the payload honest.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN Every key `account_detail_dict` serves is either on a screen or removed from the response, and a test fails on a key that is served and shown nowhere.

CLOSES §14L · two served fields that reach no screen

ACC-S21 NEW BUILD

Each queued record opens onto its own page, and the request's five outcomes are the link between them

STATUS Unverified

WAITS ON The service request detail exists today; the build, the two moves, the transfer and the disconnect case are proposed and drawn from their own tables. Approving a request raises the job and the job names the request it came from, with anything still owed on it travelling along.

SCREENS 01 · 02

WHAT DONE LOOKS LIKE ON SCREEN A clerk can answer *what happened, what is it waiting on, and what has still not been done* from the record itself — including the cases where *completed* does not mean finished.

CLOSES §02 · a queued record has no page of its own

ACC-S20 EXISTS BEHIND

Every wizard's work has a queue, and the register's ten tabs are where they land

STATUS Unverified

WAITS ON Seven worklists — requests, new connects, move-ins, move-outs, transfers, disconnects, imports — each over a table that already exists, with the columns those screens already declare. What is missing is not data: it is that this document never drew where a clerk goes after pressing Submit.

SCREENS 01

WHAT DONE LOOKS LIKE ON SCREEN A clerk who has just committed a wizard can find the thing they made, and can see at a glance which rows they can actually move — because *waiting on* is a column beside the state and not folded into it.

CLOSES §02 · no screen shows where a committed wizard's work lands

ACC-S32 NEW BUILD

Complaints and Services become tabs on the register

STATUS Unverified

WAITS ON Screens only. A complaint and a service call are already work orders — *Consumer Complaint* and *Consumer Services* are two of the nine job types, both carry kinds, and a job already stands on an account. What is missing is the list, the form and the record.

SCREENS 18 · 19

WHAT DONE LOOKS LIKE ON SCREEN A clerk taking a call on Friday opens Complaints, raises one in four steps, sees it in the tab with the date it was promised back, and a second clerk finds it on the account without knowing it is a work order underneath.

CLOSES §02 · neither tab exists, and everything behind both does

03

Starting service

Four ways a customer comes to exist: somebody walks in and asks (a request), a builder connects an address (a new connect), a clerk types one in (S18), or the

next occupant takes a unit somebody just left (a move-in).

> **How these fifteen entries differ from the two above**
>
> Screens 01 and 02 carry the full treatment — the whole spec table, the data flow and a field table per field. **Screens 03 to 17 are drawn and carry the rows that discriminate** — the audited doors, the primary, the write surfaces, the states and the walked row — but their field tables are rolled up into appendix I rather than repeated per screen. That is a deliberate scoping, stated here rather than left for a reader to notice.
>
> **Every drawing in this document is the desktop screen at 1280.** The phone drawings were cut on the product owner's instruction. Where a decision only becomes visible when space is scarce — the KPI strip stacking, the seven-glyph rail wrapping, an eight-column table at 390 — **this document no longer shows it**, and that is a real gap rather than a tidy-up: most of these screens are used on a desk, but the move-out and disconnect wizards are the two a person runs standing up.
>
> **And every STEP of every flow is drawn as a full screen, not one representative step per wizard.** A wizard is not one screen — the new connect is nine, the move-out and the new account are six each — and an audit that draws step 5 and lists the other eight has audited a ninth of it. **61 production wireframes**: 56 flow screens, the two register screens, and the three remedies.
>
> **These are drawn in the product's own UI, read out of its stylesheets rather than approximated.** The palette, the type and the geometry come from `src/styles/tokens.css`; the shell from `AppShell.css` (a 240px inverted ink sidebar, an accent fill on the active module, a 56px topbar with a 2px rule); the header from `PageHeader.css`; the KPI band from `KPIStrip.css`; the step rail and its square badges from `WizardFrame.tsx`; the buttons from `buttonKit.ts`; the pill from `StateFrame.css`; the field from `FormModal.css`; the table from `DataTable.css`. **Every corner is square** because `tokens.css` sets all three radii to 0 and says so in words.
>
> Required fields carry the asterisk UI-RULES 10 asks for; a dashed block is a stated absence naming the rule it waits on; a disabled control is drawn disabled. The caption under each screen gives its address and, on the last step of a flow, the endpoint the commit reaches.

The rules this screen is drawn to

Written here because a drawing shows one state and a clerk meets six. Every cell below was read off the running product — one account opened per status, on 2026-09-10 — and not inferred from the gate code. Where the tenant has no account in a status, the row says so.

> **Rule 1 · Every action stays on the screen, in every status**
>
> **PO ruling 2026-09-10:** "*keep all buttons on screen*" and "*keep all icon only disable them*". So nothing is hidden by state, and **BR-SHL-025 stands unchanged** — "*a control this role or this deployment cannot honour renders disabled with its reason, never hidden*". No supersession was needed and none is claimed. A control a clerk cannot use still tells them it exists and why, which is what turns a dead button into an explanation.
>
> **The cost is real and is accepted, not hidden:** on four of the five statuses that could be tested, **four of the six actions are disabled at once**, and on `pending_activation` **nine of the thirteen controls** on this screen are disabled together. That is the price of the rule, and the answer to it is the reason text, not removal.

Account status	Seen on	Adjust	Move-out	Activate	Move-in	Close out	Record payment
`active`	`A-11812`	disabled	**live**	disabled	disabled	disabled	**live**
`vacation_hold`	`A-11512`	disabled	**live**	disabled	disabled	disabled	**live**
`marked_disconnect`	`A-11340`	disabled	**live**	disabled	disabled	disabled	**live**
`pending_activation`	`A-12048`	disabled	disabled	**live**	disabled	**live — wrong**	**live**

`closed`	`AC-2026-00042`	disabled	disabled	disabled	**live**	disabled	**live**
`disconnected`	—	not confirmed	not confirmed	not confirmed	not confirmed	not confirmed	not confirmed

Reading it. `Adjust` is disabled in every status and that is not a state gate — "*Adjustments are billing rows, and billing is not built. There is no endpoint to post one to.*" It is a build gap, so BR-SHL-025 applies to it squarely. `Record payment` is live in every status by ruling: **BR-PAY-036** — accepting money never changes an account's status, and gating a closed account out of it would refuse a cheque that settles a final bill.

A defect this table found: `Close out` is live on a draft account

The gate is `!(isOccupyingAccount || isClosedAccount)` (`AccountDetailPage.tsx:524–530`). A `pending_activation` account is **neither** — its behaviour class is `non_billable` and it is not terminal — so it falls through the gate and the control renders **live**. Confirmed on screen on `A-12048`.

BR-CUS-430 says close-out is for an account whose service has been CUT. A draft never took service. The rule the gate is written from names `disconnected`, and **the tenant has no disconnected account**, so the one status this control exists to serve is the one status that could not be tested. Both halves are the finding.

Rule 2 · All seven rail icons render in every status

Six of the seven are genuinely wired and gate on **state**, not on a build gap — `Print bill` and `Issue credit` go live the moment a bill exists, which is why they are live on the closed account below and nowhere else. Only **Send statement** is permanently dead: nothing in this product renders a statement.

Status	Send statement	Print bill	Issue credit	Change plan	Disconnect notice	Payment plan	Add note
`active / vacation_hold / marked_disconnect`	disabled	disabled	disabled	**live**	**live**	**live**	**live**
`pending_activation`	disabled	disabled	disabled	disabled	disabled	disabled	**live**
`closed`	disabled	**live**	**live**	disabled	disabled	disabled	**live**
`disconnected`	not confirmed	not confirmed	not confirmed	not confirmed	not confirmed	not confirmed	not confirmed

Rule 3 · The header carries every fact, and the service chips are what must be managed

PO ruling 2026-09-10: "*i will keep all header info and manage it*". So no fact leaves the header. What needs a rule is the one part of it that grows without a ceiling: **a tenant may enable eleven services** (Electric, Water, Gas, Sewer, Trash, Storm water, Solar, Broadband, Thermal/Heat, Battery, Fire) and each renders a chip.

Measured on the running header by cloning chips into it: 256px at two services, **302px by six**, and it keeps climbing. The chip row is **739px** wide and a real chip (`ELECTRIC · E-5000`) is **~130px**, so eleven need **~1,430px — three rows**. At that point the tabs and the whole money band are pushed toward the fold on the screen a clerk opens twenty times a day. The reporter's own production tenant already wraps to two rows at six services.

The rule, and it is a UI-RULES matter rather than a preference: service chips occupy **one row**. What does not fit collapses into a single + N more chip that expands in place. **The header's height is therefore fixed by its fields and never by its data** — which is the same principle the search bar needed (a control must not change size because of what is written in it), and the reason it is stated as a rule rather than fixed once on this screen.

Rule 4 · Everything the API serves is on the screen

PO ruling 2026-09-10: *"we should have all these details captured on screen"*. The account endpoint serves **69 fields**. Eleven were served and drawn nowhere, each confirmed absent by searching the rendered text for its served value:

`ageing_segment` · `ageing_days_past_due` · `ageing_source` · `last_bill_at` · `autopay` · `status_behavior_class` · `kind` · `master_account` · `balance_basis` · `balance_source` · `unit_plan.code` · `service_agreements[].started_on`.

Ageing is the one that matters and it is proved, not argued. The accounts LIST shows an Ageing column. The DETAIL showed nothing: on `A-11812` the API serves `ageing_segment: "d61_90"`, **61 days past due**, source `opening_buckets`, and the words "past due" appear **nowhere** on that account's screen. A clerk drills into the account and loses the single fact that says how overdue it is. It is now the second tile in the band.

Rule 5 · Every fact sits under a named group

PO ruling 2026-09-10: *"when we do information architecture, we have to logically group the information, give group a heading so that it is easy for user to understand"*. Six groups, and the test is that a new field's group can be named without asking: **Money** · **Service** · **History** · **Customer** · **Billing preferences** · **Account setup** · **Portal access**.

What grouping removed. The name appeared **three times** on the old screen, the account number twice, the deposit twice and "Deposit received" twice. Each appears once now. ⚠ **The address was the opposite problem and is the more dangerous one:** the service address and the mailing address are two DIFFERENT facts that happened to be identical on the sample account, drawn twice with nothing to tell them apart. A clerk learns to skip the second and then misses it on the landlord account where the bill goes somewhere else. They are labelled distinctly now, and the mailing address states its absence rather than repeating the service address.

⚠ **The service address is marked by an icon, and that puts weight on the icon.** It is the same glyph the sidebar uses for Premises, because the service address IS the premises — and it saves the header a whole text label, which is what the header needed. But **an icon with no accessible name is a picture, not a label**, and this one is now the only thing separating the service address from the mailing address. It therefore carries `title` and `aria-label` of "*Service address*", and the mailing address keeps its full text heading rather than a matching glyph — two similar icons would rebuild the confusion this rule exists to remove.

Rule 6 · No rule id and no database column ever reaches a clerk

B14 rule 32 — "*no rule id or internal code in clerk-facing copy*" — with **rule 31** behind it, "*no database id is ever the visible value of a field*". Reported from this document's own drawing: "*You are showing DB column — last_bill_at is null…*".

⚠ **It was the DOCUMENT breaking the rule, not the product.** Five live screens were searched in their rendered text — the accounts list, two account details, the new-account wizard and move-out. **Rule ids on screen: none, on all five.** Yet the drawings carried **nine**, because the blueprint's own vocabulary had been written into a clerk's mouth: "*No column at all — BR-CUS-057*", "*A computed cache with no computer yet — BR-CUS-058*", and seven more. Every one is gone; a re-scan of all 61 drawings now returns **zero**.

The absence sentences say the same thing in a clerk's language. "*No column at all — BR-CUS-057. Never $0.00.*" became "*Deposit interest is not tracked, so this is blank rather than zero.*" The fact did not move; only the audience did. The rule id belongs in this document's annotations, where a reader is looking one up, and never inside the drawn screen.

Two things are kept on purpose. The import mapping step still shows `CUST_NO → customer_no` and `ACCT → account_no` — there the field names ARE the content, because a clerk is mapping their columns onto ours. And the account Sub-type still reads `small_commercial`, for the reason below.

A rule-31 finding in the product itself: the account sub-type is a raw enum

The one internal string that **does** reach a clerk on the live product is the account sub-type. Read off the running screen: `single_family` on `AC-2026-00001` and `small_commercial` on `A-11812` — underscore, lower case, straight out of the column.

Everything around it is labelled properly: Category renders *Commercial*, status renders *Active*, the behaviour class renders *Billable*. Sub-type is the one field that was never given a

display map. **It is drawn as it is**, because a blueprint that quietly prettifies the product stops being evidence — and it is filed here rather than fixed in the picture. Closed by ACC-S23.

---

03 New account wizard

BLOCKED · NEW BUILD · EXISTS BEHIND


`/:tenant/accounts/new` · `?step=1-6` · `S18` · `NewAccountWizard.tsx`

Commitments ACC-S19 exists behind · ACC-S34 new build · ACC-S28 blocked · ACC-S18 blocked · ACC-S4 new build · ACC-S6 new build

> **Five steps, not six — the plan step is gone**
>
> The product draws a whole step for the plan, and its own copy explains why it should not: *"the plan is read from the unit and is not stored on the account"*, *"shown, not stored"*, and then the warning *"pick a unit first if this reads empty"*. A step of a six-step wizard carrying no input, whose only value is derived from the step before it.
>
> PO ruling: *"there should not be any step to select a plan as plan is already attached on the unit itself. So whenever the unit is selected, show all the details."* So the unit step now carries the unit's whole record — its plan, version, lock and base charge among it — and the clerk sees what the account will inherit **before** committing to the unit rather than two clicks later. **Every drawing below is the wizard as it should be, not as it is.**

The question: *"They're standing at the counter and they want service. Get them on the books."*

All 6 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

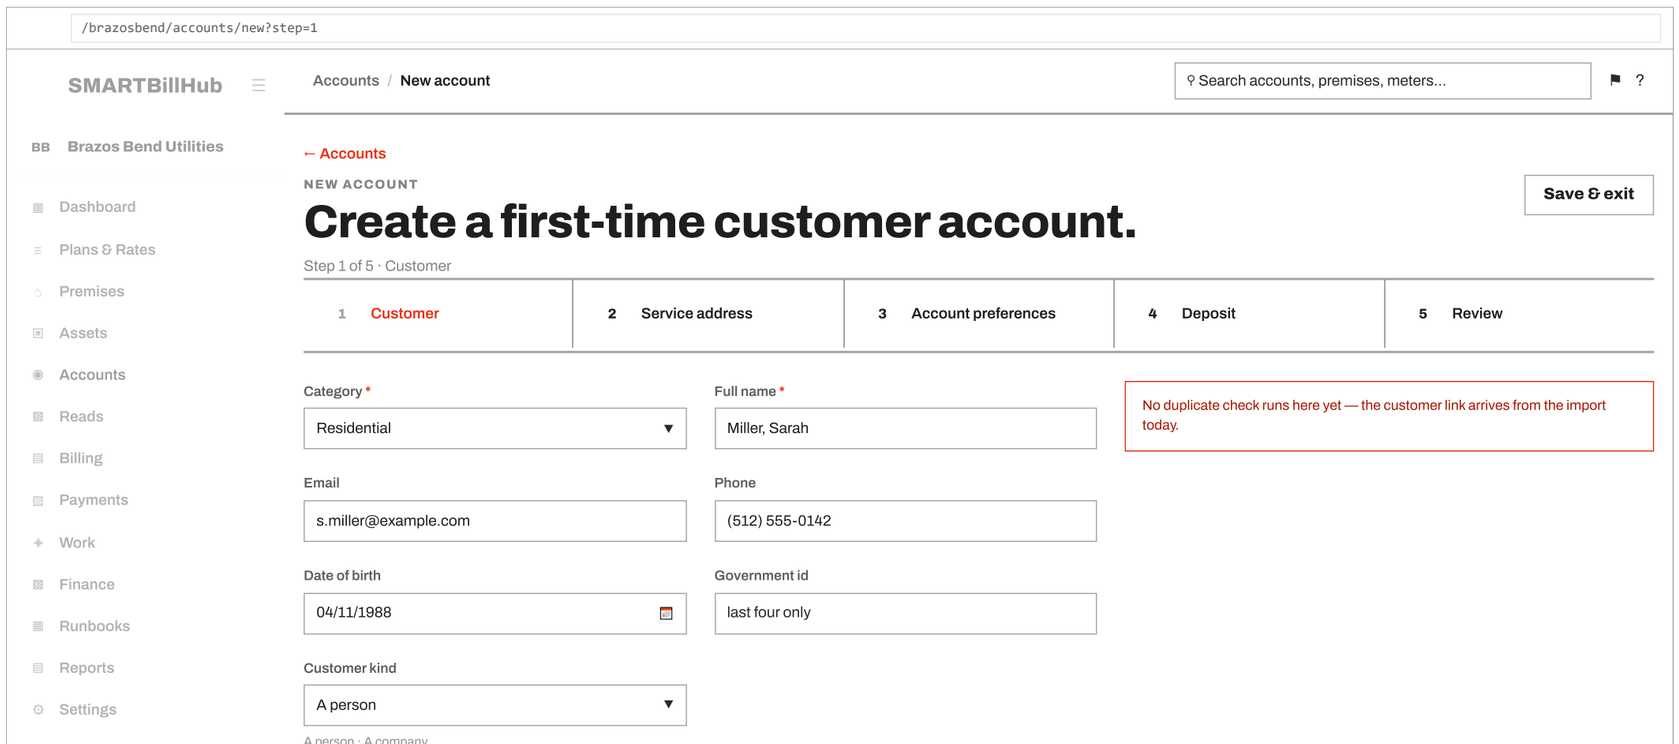

IDENTITY — STORED ENCRYPTED

SSN: •••-••-4417

Driving licence: TX ••••882

MAILING ADDRESS

Address line: 1408 Elm Street

City: Austin

State: TX

Postal code: 78704

v2.234.15

SO Sam Ortiz
Billing Clerk

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-account wizard has SIX steps and still asks for a plan; these five drop that step because the unit already carries the plan.

Customer · `/brazosbend/accounts/new?step=1`

/brazosbend/accounts/new?step=2

SMARTBillHub ☰ Accounts / New account ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

NEW ACCOUNT

Which unit?

Save & exit

Step 2 of 5 · Unit

✓ Customer | 2 Service address | 3 Account preferences | 4 Deposit | 5 Review

Unit * : Pick a vacant or reserved unit ▾

Start date * : 05/02/2026

The picker offers vacant and reserved units only.

Services: Electric · Water

Meters at unit: M-4021 · M-4022

INITIAL READS
Not captured here — reads commit through metering's own batch path.

Unit A, 1408 Elm Street — everything this unit carries

Unit number	U-000912	Parcel	—
Label	Unit A	Plan	SCW-RES · Sample — Residential · v1
Unit type	Duplex — half	Plan in force since	06/01/2026
Floor	Ground	Plan locked	No
Floor area	1,120 sq ft	Base charge	$20.00 a month
Premises	1408 Elm Street · PR-0402	Bill the owner when vacant	No
Service address	1408 Elm Street, Silver Creek, TX 78611	Meters	M-4021 · M-4022
Map point	Reads the building's	Services available	ELECTRIC WATER

the address is the building's; this unit carries no point of its own, and the screen says which of the two it is showing

the plan comes from here, which is why there is no plan step — it is not locked on this unit, so a later change-plan can override it on the account

Nothing on this panel is an input.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-account wizard has SIX steps and still asks for a plan; these five drop that step because the unit already carries the plan.

Unit · `/brazosbend/accounts/new?step=2` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

/brazosbend/accounts/new?step=3

SMARTBillHub

Accounts / New account

⚲ Search accounts, premises, meters...

⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

NEW ACCOUNT

Account preferences

Save & exit

Step 3 of 5 · Account preferences

✓ Customer	✓ Service address	3 Account preferences	4 Deposit	5 Review

How the bill is delivered

A bill is always printed. Paperless and text reminders are extra channels on top of the paper, not instead of it — neither of them switches the printed bill off.

☑ Paperless billing — email a copy of every bill

Goes to the email captured on step 1. With no email on file this is shown and cannot be ticked.

☐ Text reminders — when a bill is issued, and before it falls due

Needs a mobile number.
Both start off.

Paying

☐ Autopay

Capture-only in v1 — the enrolment is stored and shown, and nothing collects on it.

Tax

☑ Tax exempt

Tax-exempt reference

TX-EX-99213

The certificate number.

Expires

12/31/2027

The account starts being taxed again the day after.

Language

Preferred language

English ▼

The accepted codes come from this utility's regional settings.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-account wizard has SIX steps and still asks for a plan; these five drop that step because the unit already carries the plan.

Account preferences · `/brazosbend/accounts/new?step=3`

/brazosbend/accounts/new?step=4

SMARTBillHub

Accounts / New account

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

NEW ACCOUNT

Deposit

Save & exit

Step 4 of 5 · Deposit

✓ Customer	✓ Service address	✓ Account preferences	4 Deposit	5 Review

Does this account need a deposit?

Deposit *

Yes — take one ▼

Yes — take one · No · Waive it (needs a supervisor)

Amount *

150.00

Typed by hand today.

Why this amount

Standard for the category ▼

Standard for the category · No credit history · Previous arrears · Returning customer

Due

05/16/2026

Falls on the first bill's due date, unless it is taken today.

A CREDIT TIER WOULD SIZE THIS, AND NOTHING WORKS ONE OUT

The tier stays blank rather than showing a grade, so the amount above is a judgement with a reason beside it rather than a number the system stands behind.

Is the customer paying it now?

The account does not exist until the last step creates it, and a payment has to post against an account.

Take the deposit now *

Yes — the customer is paying today ▼

Yes — the customer is paying today · No · send it with the first bill

Method *

Card ▼

ACH · Card · Cash · Check · Lockbox · Money order · Wire

Reference or receipt number

AUTH 55192

Whatever the customer can quote back.

Amount taken

150.00

Defaults to the deposit.

Posting date *

05/02/2026

The day this payment counts from.

Clearing date

05/02/2026

The day the money actually arrived.

A deposit only reaches the deposit register when its payment clears. Leave the clearing date blank and the money is recorded and still on its way: the new account will read a deposit of **$0.00** while the cash is in the drawer.

What the customer pays today

Deposit	$150.00
First bill	Not raised yet — it follows the first cycle
Connection fee	None on this category
Taken today	**$150.00**

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-account wizard has SIX steps and still asks for a plan; these five drop that step because the unit

already carries the plan.

Deposit · `/brazosbend/accounts/new?step=4` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

/brazosbend/accounts/new?step=5

SMARTBillHub

Accounts / New account

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

NEW ACCOUNT

Review

Save & exit

Step 5 of 5 · Review

✓ Customer | ✓ Service address | ✓ Account preferences | ✓ Deposit | 5 Review

Check this over before it is created

Everything entered across the four steps, in the order it was asked for.

CUSTOMER · STEP 1 Edit →

Category	Residential
Customer kind	A person
Full name	Miller, Sarah
Email	s.miller@example.com
Phone	+1 (512) 555-0132
Date of birth	04/18/1984
Government ID	Driving licence · seen 05/02/2026
SSN	Not captured
Address line	1408 Elm Street, Unit A
City	Silver Creek
State	TX
Postal code	78611

the mailing address matches the service address, so the bill goes to the property

SERVICE ADDRESS AND UNIT · STEP 2 Edit →

Unit	Unit A · 1408 Elm Street
Unit number	U-000912
Unit type	Duplex — half · 1,120 sq ft
Premises	1408 Elm Street · PR-0402
Service address	1408 Elm Street, Silver Creek, TX 78611
Services	ELECTRIC WATER
Meters	M-4021 · M-4022
Plan, from the unit	SCW-RES · Sample — Residential · v1
Base charge	$20.00 a month
Start date	05/02/2026

the plan is inherited, not chosen — it is the unit's

ACCOUNT PREFERENCES · STEP 3 Edit →

Paperless billing	On · to s.miller@example.com
Text reminders	Off
Printed bill	Always — the elections above are on top of it
Autopay	Off · captured, nothing collects on it
Tax exempt	Yes · TX-EX-99213, expires 12/31/2027
Preferred language	English

DEPOSIT · STEP 4 Edit →

Deposit	Required
Amount	$150.00
Why this amount	Standard for the category
Due	05/16/2026
Credit tier	Not worked out — nothing computes one

DEPOSIT PAYMENT · STEP 4 Edit →

Taken today	Yes
Amount taken	$150.00
Method	Card
Reference	AUTH 55192
Posting date	05/02/2026
Clearing date	05/02/2026

The clearing date is filled in, so the deposit reaches the deposit register and the new account will read **$150.00**.

What will be on the account the moment it is created

Account number	Allocated at save
Customer number	None — this contact is not linked to a customer record
Balance	$0.00 — nothing is billed until the first cycle
Deposit on file	$150.00
Taken from the customer today	**$150.00**

What is still not written: the customer link and the plan snapshot.

What goes out to the customer

Three are ticked and two are not, and none of it is a default nobody chose. The portal invitation is off because this account has no portal sign-in yet, and the first-bill note has no template behind it.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☑	The account is open, and its number	Okonkwo, Adaeze	Email · Print	Welcome — new account v5	On create
☑	A receipt for the $150.00 deposit	Okonkwo, Adaeze	Email	Deposit receipt v3	On create
☑	The service agreement	Okonkwo, Adaeze	Print	Service agreement v2	On create
☐	How to sign in to the portal	Okonkwo, Adaeze	Email	Portal invitation v4	On create
☐	When the first bill is coming	Okonkwo, Adaeze	Email	— none chosen	With the first cycle

Choosing a template

Search templates

⚲ welcome

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Welcome — new account	Email	Email	Residential · English	v5 Published	◉
Welcome — new account	Printable	Print	Residential · English	v5 Published	◉
Welcome — new account	Email	Email	Default · Spanish	v2 Draft	○
Welcome — commercial	Email	Email	Commercial · English	v3 Published	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

Print is the floor. Paperless and text reminders are channels on top of the paper, not instead of it, so an account with paperless on gets the email AND the envelope.

A template resolves on three axes and falls back on two. The class of letter, the customer category and the language — and where no variant exists for a category or a language, the default one is used.

The draft version is listed and cannot be picked. Hiding it sends a clerk looking for something they can see exists; offering it would queue a letter nobody has approved.

And how should it be saved?

Save as *

Activate — it becomes the occupant ▾

Draft occupies nothing: the unit stays vacant, nothing bills, and the account can be activated later. **Activate** takes the unit now — the account becomes its occupant and starts billing on the start date.

This is the last thing asked because it is the thing that decides what the other four steps mean.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Create and activate ✓

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-account wizard has SIX steps and still asks for a plan; these five drop that step because the unit already carries the plan.


Review · `/brazosbend/accounts/new?step=5` · Commits **POST /accounts**, then **POST /accounts/{id}/activate** when Activate is chosen, then **POST /accounts/{id}/payments** for the deposit

Where a new account lands

This is the one flow whose landing was already drawn. What the wizard creates is an **account**, which lands in the register's own first tab and opens on the account page — screens **01** and **02** at the top of this document, with all twelve of its tabs. A draft lands there too — **the wizard's radio says *Draft* and the status the product writes is *Pending activation***, which is the state the two drawings below are of.

There is no separate "new account request" object, and inventing a queue for one would be drawing a table the product does not have. Every other flow in this document does produce its own record, and each is drawn beside the wizard that makes it.

> **AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED.** Why: the register tab and the account page both exist and render any account; neither was opened on a pending one during the walk.
> **Where a new account lands · the register's Accounts tab** · `/brazosbend/accounts?tab=accounts&f.status=pending_activation` · Filtered to what this wizard makes · one row, and the KPI band above it agrees

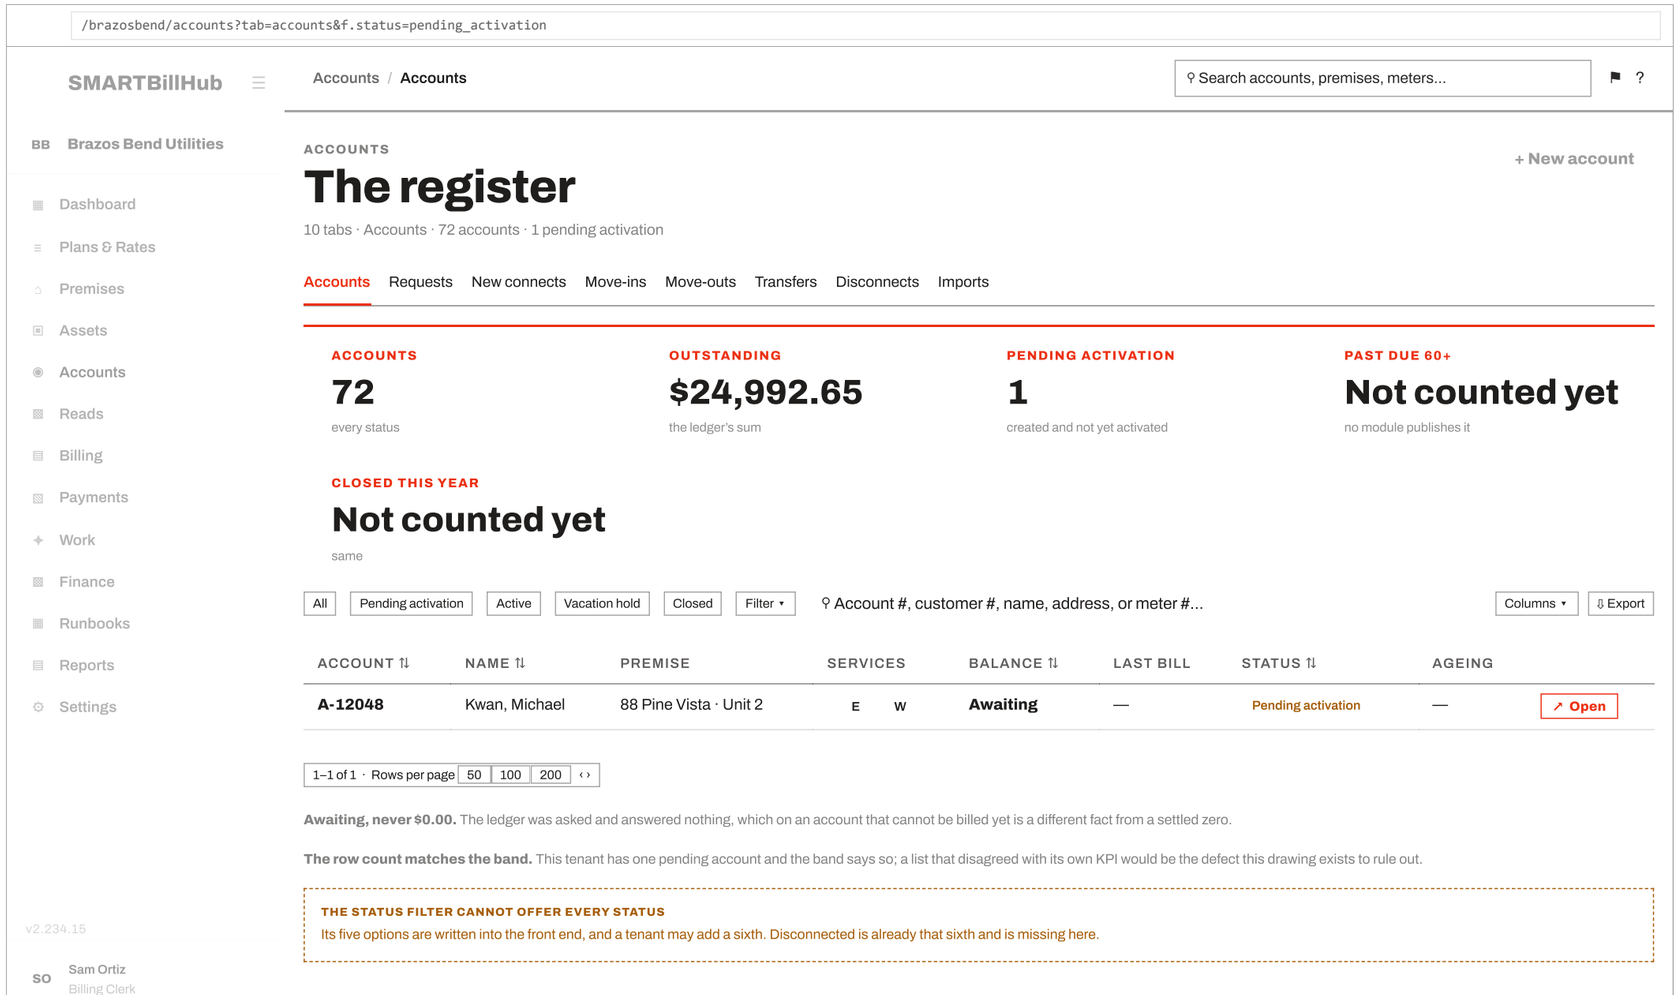


Awaiting, never $0.00. The ledger was asked and answered nothing, which on an account that cannot be billed yet is a different fact from a settled zero.

The row count matches the band. This tenant has one pending account and the band says so; a list that disagreed with its own KPI would be the defect this drawing exists to rule out.

THE STATUS FILTER CANNOT OFFER EVERY STATUS
Its five options are written into the front end, and a tenant may add a sixth. Disconnected is already that sixth and is missing here.

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the register tab and the account page both exist and render any account; neither was opened on a pending one during the walk.

The new account, opened · A-12048 · `/brazosbend/accounts/a-12048?tab=overview` · The one state this wizard produces, on the record page · 1 stated absence

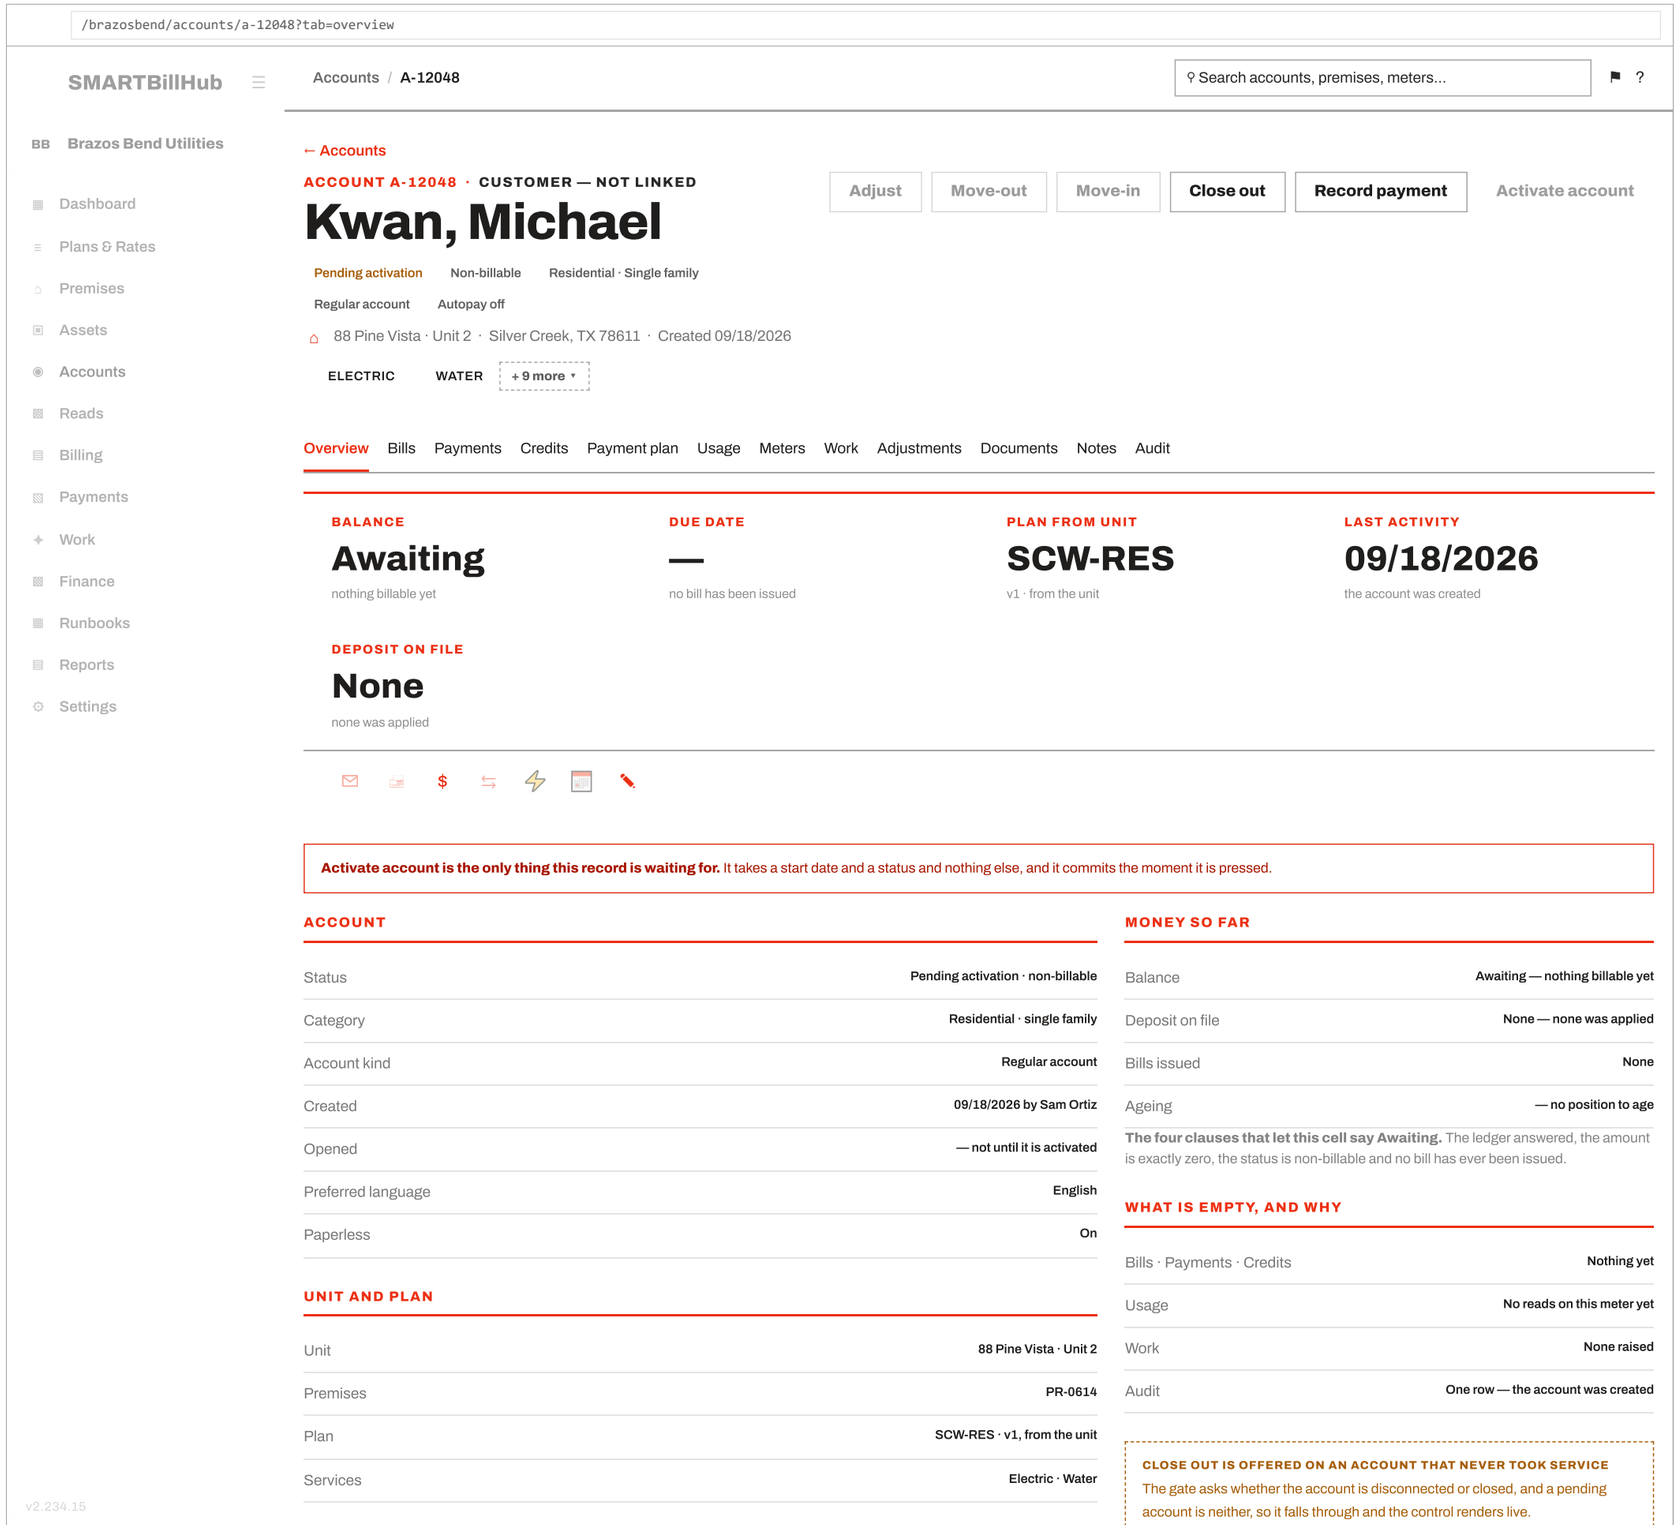

How you get here	Three doors: the Accounts tab primary (`AccountsListPage.tsx:999`), the list's empty-state CTA (`:1522`), and the move-in wizard's step-1 refusal strip, which offers it when the unit picker cannot help (`moveShared.tsx:1653`).
Primary action	**Create account ✓** on step 6, with a radio choosing *Draft* or *Activate*. A draft occupies nothing.
Tabs	None — a six-step stepper with `?step=` in the URL.
Write surfaces	**Add** `POST /accounts`, then optionally `POST /accounts/{id}/activate`. **Edit / Update** n/a.
Walked	**Not walked.**
States	**Loading** unit picker skeleton · **Empty** "no vacant units" with a link out · **Failed** commit failure keeps every entered value · **Draft** the account exists and holds nothing.
Rules	BR-CUS-018 · 019 (advisory) · 020 · 021 · 023 · 029 · 055 · 064 · UI-RULES 3 · 7 (violated) · 11
⚠ Step 8 constraint	**This file is NOT on `route-b-migrated.txt`.** A Tailwind utility written here renders as nothing at all, and every check passes on it. Any remedy for this screen reuses a class `customers.css` already declares.

04 Move-in wizard


BLOCKED · NEW BUILD · EXISTS BEHIND

`/:tenant/accounts/:accountId/move-in` · `S19` · six steps

Commitments ACC-S19 exists behind · ACC-S35 new build · ACC-S27 blocked · ACC-S4 new build · ACC-S6 new build

The question: "*The last tenant's gone. Put the new one on, from the right day, with the right readings.*"

All 5 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

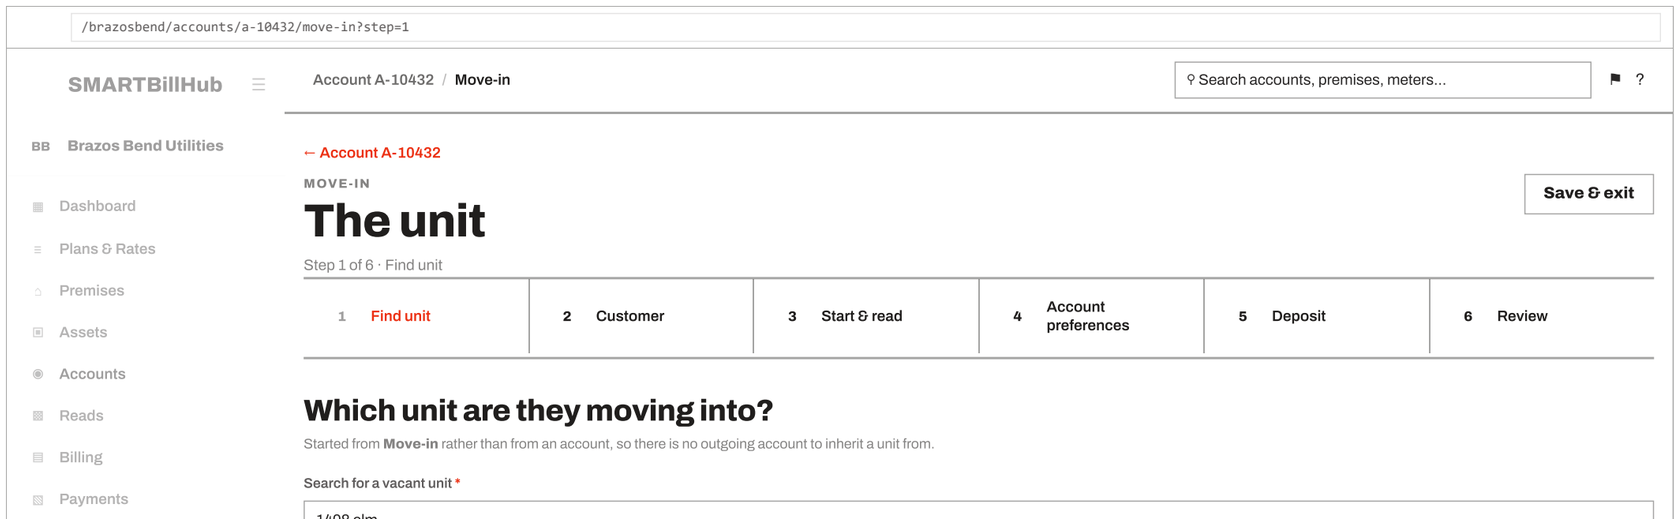

1408 elm

An address, a unit label or a premises name.

	UNIT	ADDRESS	TYPE	SERVICES	VACANT SINCE	PREVIOUS ACCOUNT
◉	Unit A	1408 Elm Street	Duplex — half	ELECTRIC WATER	01/29/2026	A-10432 · Okafor, D.
○	Unit B	1408 Elm Street	Duplex — half	ELECTRIC WATER	Occupied · A-11455	—
○	Unit 2	1412 Elm Street	Apartment	ELECTRIC	11/03/2025	A-09871 · Nadeau, R.

Unit A, 1408 Elm Street — everything this unit carries

The unit

Unit number	U-000912
Label	Unit A
Unit type	Duplex — half
Floor	Ground
Floor area	1,120 sq ft
Premises	1408 Elm Street · PR-0402
Service address	1408 Elm Street, Silver Creek, TX 78611
Map point	Reads the building's
Parcel	—

the address is the building's and this unit carries no point of its own, so the screen says which of the two it is showing

What it is billed on

Plan	SCW-RES · Sample — Residential · v1
In force since	06/01/2026
Plan locked	No
Base charge	$20.00 a month
Bill the owner when vacant	No

the plan belongs to the unit and the new account inherits it — it is not a choice on any later step

Nothing on this panel is an input.

Services and meters

Services available ELECTRIC WATER

METER	SERVICE	TYPE	LAST READ	READ ON
M-4021	Electric	Walk-by	41,607	01/28/2026
M-4022	Water	Walk-by	8,902	01/28/2026

these are the outgoing account's final reads, and they become the new occupant's opening reads on step 3

Who was here before

Previous account	A-10432 · Okafor, D.
Closed	01/28/2026
Vacant since	01/29/2026
Vacant for	94 days

a long vacancy is worth noticing: nothing has been read here since January, so the opening reads above are three months old

A UNIT WITH NO METER CAN STILL BE MOVED INTO

The wizard does not refuse it. Service starts, nothing can be measured, and no metered bill can be raised until one is fitted — which is the state A-11812 has been in since 2024.

SO Sam Ortiz
Billing Clerk

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.

Unit · `/brazosbend/accounts/a-10432/move-in?step=1`

← Account A-10432

MOVE-IN

Who is moving in?

Save & exit

Step 2 of 6 · Customer

Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

✓ Find unit | 2 Customer | 3 Start & read | 4 Account preferences | 5 Deposit | 6 Review

Category *
Residential

Full name *
Miller, Sarah

Email
s.miller@example.com

Phone
(512) 555-0142

Date of birth
04/11/1988

Government id
last four only

Customer kind
A person

A person · A company.

IDENTITY — STORED ENCRYPTED

SSN
•••-•••-4417

Driving licence
TX ••••882

MAILING ADDRESS

Address line
1408 Elm Street

City / State / Postal
Austin · TX · 78704

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.
Customer · `/brazosbend/accounts/a-10432/move-in?step=2`

/brazosbend/accounts/a-10432/move-in?step=3

SMARTBillHub

Account A-10432 / Move-in

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks

← Account A-10432

MOVE-IN

Start date & reads

Save & exit

Step 3 of 6 · Start & read

✓ Find unit | ✓ Customer | 3 Start & read | 4 Account preferences | 5 Deposit | 6 Review

Moved in on *
05/02/2026

Earliest start 01/29/2026

BILL FROM
Needs the cycle the billing module owns.

Opening reads

METER	READING	READ DATE	COULD NOT BE READ
M-4021 · Electric · total	41,680	05/02/2026	☐
M-4022 · Water · total	8,902	04/29/2026	☐
M-4021 · Electric · demand		05/02/2026	☐

Prior final read is prefilled where one exists, with how old it is.

An estimate can refuse, in five named ways — no earlier reading, the consecutive-estimate cap, a demand peak, no reading settings, and no period to work over. A reading that merely looks odd still POSTS, flagged: *vacant unit* is the expected one here.

Reports
Settings

M-4021 · Electric · demand — 05/02/2026

Both registers continue the reads step 1 showed — 41,607 and 8,902, taken on 01/28 as the outgoing account's finals. Ninety-four empty days added 73 units of standby electric and not a drop of water, which is what an empty flat looks like.

Every date opens on the move-in day, so a clerk who changes nothing gets what the screen does today. The water meter was read three days before the tenant moved in, and now it can say so.

The demand register could not be read, and could not be estimated either. A demand peak is never estimated, because the charge it drives would be disputed.

The outgoing account must have been billed through the move day — the server refuses an earlier start.

NOTHING GUARDS THE READ DATE
The locked rules catch a duplicate reading and a negative period. Nothing checks a read date against the previous occupant and no rule refuses one dated after today — while the start date above has both.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.

Start date & reads · `/brazosbend/accounts/a-10432/move-in?step=3` · the read date is new — the reading and the estimate are already built · 2 stated absences on this step, drawn dashed — each names the rule or table it waits on

/brazosbend/accounts/a-10432/move-in?step=4

SMARTBillHub

Account A-10432 / **Move-in**

⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← Account A-10432

MOVE-IN

Account preferences

Save & exit

Step 4 of 6 · Account preferences

✓ Find unit	✓ Customer	✓ Start & read	4 Account preferences	5 Deposit	6 Review

How the bill is delivered

A bill is always printed. Paperless and text reminders are extra channels on top of the paper, not instead of it — neither of them switches the printed bill off.

☑ Paperless billing — email a copy of every bill

Goes to the email captured on step 2. With no email on file this is shown and cannot be ticked.

☐ Text reminders — when a bill is issued, and before it falls due

Needs a mobile number.
Both start off.

Paying

☐ Autopay

Capture-only in v1 — the enrolment is stored and shown, and nothing collects on it.

Tax

☐ Tax exempt

A reference and an expiry are asked for the moment it is ticked.

Language

Preferred language

English ▾

The accepted codes come from this utility's regional settings.

The same elections the new-account wizard takes, and the same columns behind them. A move-in writes every field a create writes bar the unit, which it takes from the account being moved out of — so nothing here is new ground, and a preference set on this step is stored exactly as it would be on a counter sign-up.

ACCOUNT PLAN
Not asked on this step, and not asked on any other: the plan lives on the unit and the account derives it. Step 1 shows the unit's plan; there is nothing to choose here and nothing to store.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.
Account preferences · `/brazosbend/accounts/a-10432/move-in?step=4` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

`/brazosbend/accounts/a-10432/move-in?step=5`

SMARTBillHub ☰ Account A-10432 / **Move-in** ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Account A-10432

MOVE-IN

Deposit

Save & exit

Step 5 of 6 · Deposit

✓ Find unit | ✓ Customer | ✓ Start & read | ✓ Account preferences | 5 Deposit | 6 Review

Does this account need a deposit?

Deposit *
Yes — take one ▼
Yes — take one · No · Waive it (needs a supervisor)

Amount *
150.00
Typed by hand today.

Why this amount
Standard for the category ▼
Standard for the category · No credit history · Previous arrears · Returning customer

Due
05/16/2026
Falls on the first bill's due date, unless it is taken today.

A CREDIT TIER WOULD SIZE THIS, AND NOTHING WORKS ONE OUT
The tier stays blank rather than showing a grade, so the amount above is a judgement with a reason beside it rather than a number the system stands behind.

Has this customer paid us a deposit before?

DEPOSIT CARRY-FORWARD
The one question this step has that the new-account wizard does not: a mover may have held an account with this utility before, and their own deposit could follow them. Carry-forward rides the customer linkage, so there is nothing to read a prior position from - the server warns on every move-in that it could not be checked, and this step says the same before the commit rather than after.

It is the CUSTOMER's own prior account, not the one being moved out of. A-10432 belongs to the outgoing tenant; their deposit settles on their own close-out and has nothing to do with the person moving in.

Is the customer paying it now?

The account does not exist until the last step creates it, and a payment has to post against an account.

Take the deposit now *
Yes — the customer is paying today ▼
Yes — the customer is paying today · No · send it with the first bill

Method *
Card ▼
ACH · Card · Cash · Check · Lockbox · Money order · Wire

Reference or receipt number
AUTH 55192
Whatever the customer can quote back.

Amount taken
150.00
Defaults to the deposit.

Posting date *
05/02/2026
The day this payment counts from.

Clearing date
05/02/2026
The day the money actually arrived.

A deposit only reaches the deposit register when its payment clears. Leave the clearing date blank and the money is recorded and still on its way: the new account will read a deposit of **$0.00** while the cash is

in the drawer.

What the customer pays today

Deposit	$150.00
First bill	Not raised yet — it follows the first cycle
Connection fee	None on this category
Taken today	**$150.00**

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.

Deposit · `/brazosbend/accounts/a-10432/move-in?step=5` · copied from the new-account wizard, with the one question a move-in adds · 2 stated absences on this step, drawn dashed — each names the rule or table it waits on

`/brazosbend/accounts/a-10432/move-in?step=6`

SMARTBillHub ☰ Account A-10432 / Move-in ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Account A-10432

MOVE-IN

Review

Step 6 of 6 · Review

Save & exit

✓ Find unit	✓ Customer	✓ Start & read	✓ Account preferences	✓ Deposit	6 Review

The unit they are moving into ✎ Step 1

Unit number	U-000912
Label	Unit A
Unit type	Duplex — half
Floor	Ground
Floor area	1,120 sq ft
Premises	1408 Elm Street · PR-0402
Service address	1408 Elm Street, Silver Creek, TX 78611
Map point	Reads the building's — this unit carries none of its own
Parcel	—
Services available	Electric · Water

What it is billed on

Plan	SCW-RES · Sample — Residential · v1
In force since	06/01/2026
Plan locked	No
Base charge	$20.00 a month
Bill the owner when vacant	No

The plan is the unit's and the account inherits it.

Start date and opening reads ✎ Step 3

Moved in on	05/02/2026
Earliest start	01/29/2026 · the day after A-10188 closed

REGISTER	READING	READ DATE	HOW
M-4021 · Electric · total	41,680	05/02/2026	Read
M-4022 · Water · total	8,902	04/29/2026	Read
M-4021 · Electric · demand	—	05/02/2026	Not estimated

One register opens unread and unestimated. A demand peak is never estimated, so this account starts with no demand figure and somebody has to attend.

BILL FROM

Needs the cycle the billing module owns.

Account preferences ✎ Step 4

Paperless billing	On — and a printed bill is raised as well
Text reminders	Off
Autopay	Off

Who was here before

Previous account	A-10432 · Okafor, D.
Closed	01/28/2026
Vacant since	01/29/2026
Vacant for	94 days

The customer

Step 2

Category	Residential
Full name	Miller, Sarah
Email	s.miller@example.com
Phone	(512) 555-0142
Date of birth	04/11/1988
Customer kind	Person

Identity — stored encrypted

SSN	•••-••-4417
Driving licence	TX ••••882
Government id	— not captured

Mailing address

Address line	1408 Elm Street
City	Austin
State	TX
Postal code	78704

The customer was resolved at save, and nobody was shown it. This move-in required an identifier and matched or created a customer on it — the server knew which, recorded it, and dropped the answer before this screen.

Tax exempt	No
Preferred language	English

Print is the floor.

Deposit

Step 5

Deposit	Yes — take one
Amount	$150.00
Why this amount	Standard for the category
Due	05/16/2026

Paid today

Take the deposit now	Yes — the customer is paying today
Method	Card
Reference	AUTH 55192
Amount taken	$150.00
Posting date	05/02/2026
Clearing date	05/02/2026
Still to collect	$0.00

DEPOSIT CARRY-FORWARD

Could not be checked. A prior deposit of this customer's would ride the customer linkage, and there is none - so this $150.00 is taken as if they were new to the utility.

What the commit writes

Step 6

Account number	allocated at save
Status	Active from 05/02/2026
Order	the account, then the reads, then the payment

One transaction.

What goes out to the customer

The last row is the one this move-in actually needs. One register opened unread and could not be estimated, so this account starts with no demand figure — and the customer has not been told.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☑	The move-in is done, and the new account number	Miller, Sarah	Email · Print	Welcome — move-in v5	On commit
☑	A receipt for the $150.00 deposit	Miller, Sarah	Email	Deposit receipt v3	On commit
☑	The service agreement	Miller, Sarah	Print	Service agreement v2	On commit
☐	The readings this account opened on	Miller, Sarah	Email	Opening reads v2	On commit
☐	That a meter still has to be read	Miller, Sarah	Email	— none chosen	When a visit is raised

Choosing a template

Search templates

⚲ move-in

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Welcome — move-in	Email	Email	Residential · English	v5 Published	◉
Welcome — move-in	Printable	Print	Residential · English	v5 Published	◉
Opening reads	Email	Email	Default · English	v2 Published	○

Welcome — move-in	Email	Email	Default · Spanish	v1 Draft	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

Print is the floor. Paperless and text reminders are channels on top of the paper, not instead of it, so an account with paperless on gets the email AND the envelope.

A template resolves on three axes and falls back on two. The class of letter, the customer category and the language — and where no variant exists for a category or a language, the default one is used.

The draft version is listed and cannot be picked. Hiding it sends a clerk looking for something they can see exists; offering it would queue a letter nobody has approved.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Complete move-in ✓

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the product's move-in wizard has FIVE steps and takes no deposit; these six add the deposit step and a read date.
> **Review** · `/brazosbend/accounts/a-10432/move-in?step=6` · Commits to **POST /accounts/{fromId}/move-in** · every field from all six steps, and 5 stated absences among them

Where a move-in lands, and what it becomes

The wizard ends at a commit, and this is the question it leaves: where did it go? **Into the accounts register, which has ten tabs and uses seven of them as worklists** — Requests, New connects, Move-ins, Move-outs, Transfers, Disconnects and Imports. Not eight destinations to learn: one screen a clerk already lives on, with a queue per flow. Every one has a real table behind it and the columns drawn are the ones those screens already declare.

The Reads column is what a clerk works this list from. One move-in opened with no reading at all and another with one estimated register — both bill, and both need somebody to go back.

And the record is deliberately short, which the drawing says on its face. A move-in is the record of an ACT; the thing it produced is an ACCOUNT, and every later question — the balance, the bills, the meters — is answered there. What this page is for is the day itself, and the fact that **completed does not mean finished**: one register on MVI-26-0114 opened with no figure at all, so the first bill on that account prices two of three.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the Move-ins tab exists and was walked; it carries no *waiting on* column, which is what this drawing adds.
> **Where a move-in lands · the Move-ins tab** · `/brazosbend/accounts?tab=move-ins` · The six-step move-in's own worklist · a move record, and the account it opened

/brazosbend/accounts?tab=move-ins

SMARTBillHub ☰ Accounts / Move-ins ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads

ACCOUNTS


The register

+ New move-in

10 tabs · Move-ins · 1 still open


Accounts Requests New connects Move-ins Move-outs Transfers Disconnects Complaints Services Imports

OPEN	STARTING THIS WEEK	WAITING ON A READING
1	2	2

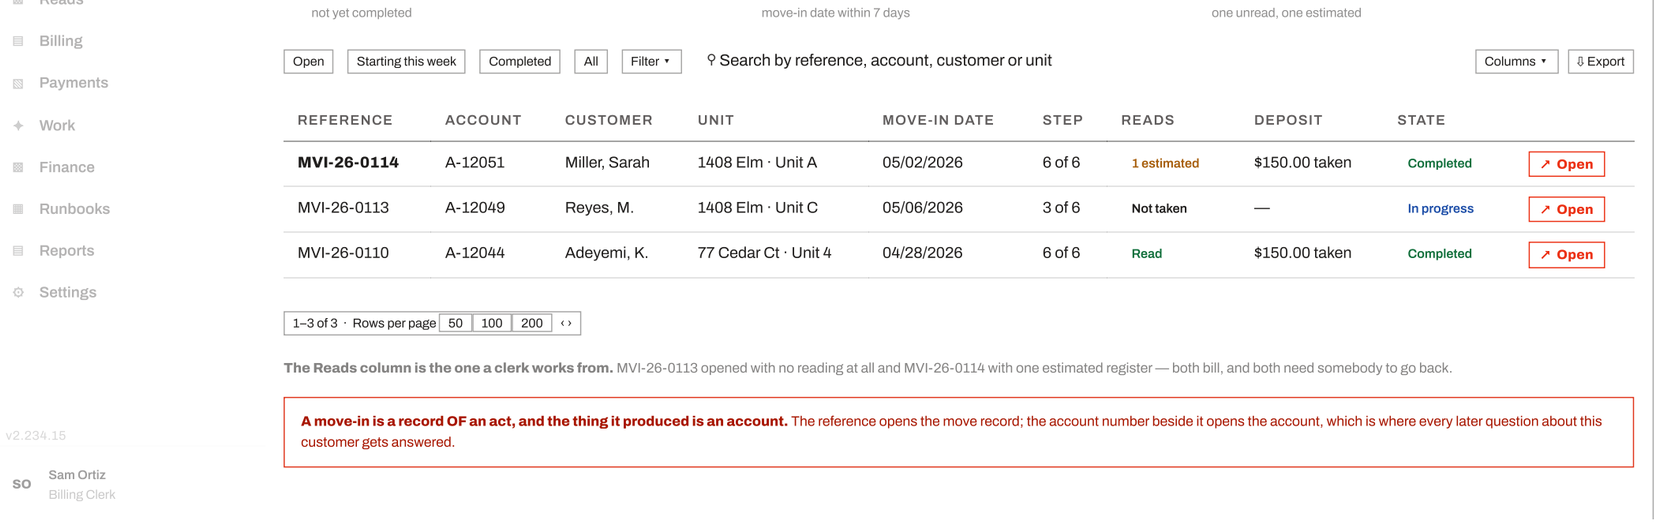

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no move record page exists; a move-in today is visible only as the account it opened.

The move-in, opened · MVI-26-0114 · `/brazosbend/moves/mvi-26-0114` · Proposed · the record of the act, and a door to the account it opened

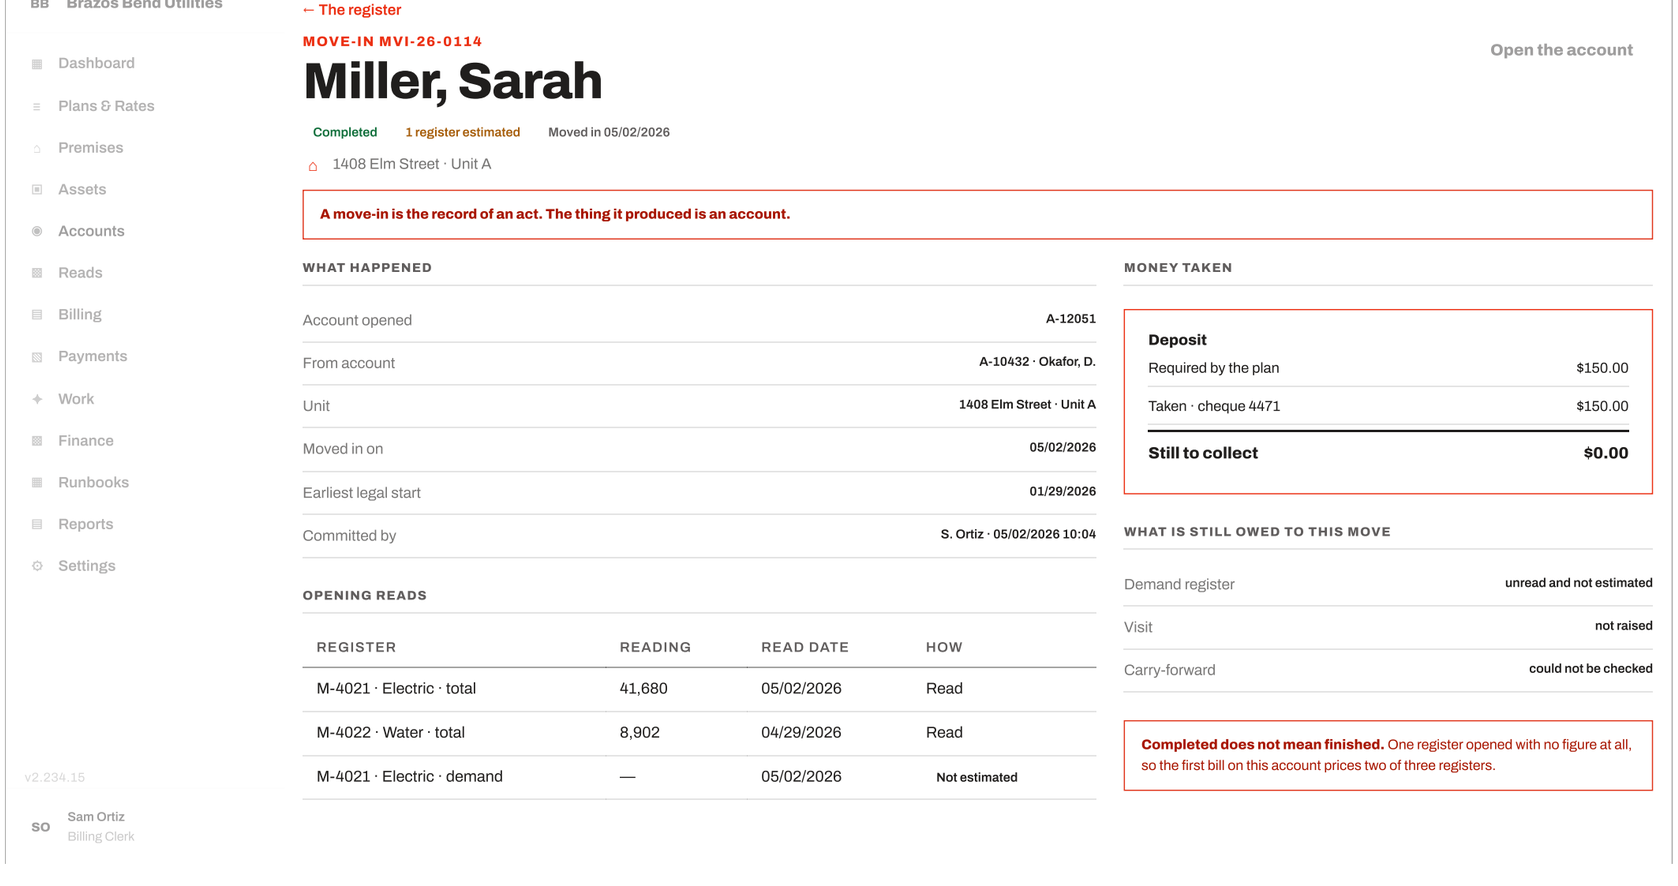

This record has no actions, and that is the answer rather than a gap. A move-in and a sale are records of acts that have already happened — there is nothing left to decide on them, so the only controls are doors to the account and the customer. **The two things this record says are still wrong are deliberately not buttons here**: the property's owner record and the account's contact details are both fixed on their own screens, by somebody who can see what else is on them.

How you get here	Account-scoped: the S21 **Move-in** button (`AccountDetailPage.tsx:728`) and the move-out wizard's done screen, which chains straight into it (`MoveOutWizard.tsx:1441`).
Primary action	**Complete move-in ✓**
Write surfaces	**Add** `POST /accounts/{fromId}/move-in`. **Park** `?park=1`, resumable from the Move-ins tab.
Walked	**Not walked.**
Rules	BR-CUS-017 · 020 · 021 · 022 · 024 · 056 · BR-SHL-046

05 Move-in wizard · standalone NO COMMITMENT

`/:tenant/move-ins/new` — the same `MoveInWizard` as screen 04, entered with no account chosen

No commitment names this address — it is the same `MoveInWizard` as screen 04 at a second URL, so the 5 commitments on 04 reach it without naming it.

What it is	**A second address, not a second screen.** Same component; step 1 asks for the unit and derives the outgoing account from it, so nothing is guessed.
How you get here	Four doors: the S17 header **Move-in** (`AccountsListPage.tsx:1217`), the Move-ins tab primary (`:984`), the tab's empty-state CTA (`MoveInsTab.tsx:1188`), and **Resume** on a parked draft (`parkedDrafts.tsx:416`).
Walked	**Not walked.**

06 Service request capture EXISTS BEHIND

`/:tenant/requests/new` · S85 · six steps

Commitments ACC-S19 exists behind

The question: "*Somebody's asking us for something. Write it down and give them a number they can quote.*"

All 6 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

/brazosbend/requests/new?step=1

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

← Requests

NEW REQUEST

Who is this request for?

Save & exit

Step 1 of 6 · Customer

1 Customer | 2 Connection | 3 Addresses & property | 4 Documents | 5 Fees | 6 Check & submit

Channel *: Counter

Full name *: Miller, Sarah

Optional on a staff-raised request.

Stored encrypted at the application layer, shown as the last four.

Email: s.miller@example.com

Phone: (512) 555-0142

Date of birth: if known

Driver's licence: TX ••••882

SSN: •••-••-4417

☐ Add a co-applicant

Continue →

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Customer · `/brazosbend/requests/new?step=1`

/brazosbend/requests/new?step=2

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks

← Requests

NEW REQUEST

What are they asking for?

Save & exit

Step 2 of 6 · Connection

✓ Customer | 2 Connection | 3 Addresses & property | 4 Documents | 5 Fees | 6 Check & submit

Category *: New connection

Sub-category: Residential dwelling

Which services does this property need? *: 3 of 11 selected

Electric ✕ Water ✕ Sewer ✕

Pick from the eleven this utility runs.

Services are asked here because this is where the request stops being a name and becomes a job. The address comes next; what they want comes first, because it is what decides which questions the rest of the wizard has to ask.

A multiselect, not eleven rows. A clerk at a counter picks two or three of eleven, so the list is somewhere to look rather than something to read: the picked ones sit under the box and the other eight stay out of the way.

WHETHER A SERVICE CAN ACTUALLY REACH THIS ADDRESS

Each service on a request carries a flag for that, and it is NULL until somebody surveys - a real third state that is neither yes nor no. Nothing on this wizard sets it, so every service picked here is a request and never a promise.

Reports
Settings

When each one is wanted

SERVICE	REQUESTED START
Electric	05/12/2026
Water	05/12/2026
Sewer	05/12/2026

Each service carries its own start. A block that needs electric on the 12th and sewer a fortnight later is one request and not two, so the date sits per service rather than once on the form.

Connection date

if known

The whole job, where the applicant has a date in mind.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Connection · `/brazosbend/requests/new?step=2` · services picked from a multiselect, each with its own start · 1 stated absence on this step

/brazosbend/requests/new?step=3

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← Requests

NEW REQUEST

Addresses

Save & exit

Step 3 of 6 · Addresses

✓ Customer	✓ Connection	3 Addresses & property	4 Documents	5 Fees	6 Check & submit

Service address

Street address or premise *

212 Balcones Drive

Unit, flat or suite

Unit 3

City *

Austin

State *

TX

ZIP code *

78704

The property

How many units are on this property? *

6

What the applicant says is there.

Billing address

☑ Billing address same as service

Billing address

—

Filled in only when the box above is cleared.

What the register matched

LOOKED FOR MATCHED CONFIDENCE

The address is the APPLICANT'S, not a record. It is matched against the premises register below it and the match is shown beside it — never written over it.

THE ADDRESS IS ONE FIELD TODAY, NOT FIVE

The request keeps the address exactly as the applicant gave it, in a single line, and never overwrites it with whatever the resolver matches. Five boxes is five columns - and the reason there is one is that an applicant's address is not a premises yet.

NOTHING HOLDS A UNIT COUNT

No column on the request records how many units a property has. Today the number lives only in whatever the clerk typed into the notes, which no screen and no rule can read.

The plot has gone from this step. It was the one field here asking a clerk for a land-registry reference they would have to go and look up, on a form filled in while somebody waits.

THE PLOT COLUMN STAYS, AND STOPS BEING WRITTEN

Removing a control is not dropping a column. The request still has somewhere to keep a plot or parcel reference, and nothing on this wizard writes it any more - so a request captured here carries none, and the surveyor's own record is where it belongs.

The match is evidence, never a decision. What the resolver found sits beside what the applicant said.

212 Balcones Drive · Unit 3	PR-0731 · 212 Balcones Drive	Exact
Unit 3	U-001884 · Unit 3	Exact
Units on the property · 6	6 units on PR-0731	Agrees

An address that matches nothing is not refused. It is flagged as having no premises on record, and the request carries on - because a new connection at a field with no address yet is exactly the job this wizard exists for.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Addresses · `/brazosbend/requests/new?step=3` · the service address, the unit count and the billing address — the plot is gone · 3 stated absences on this step

/brazosbend/requests/new?step=4

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Requests

NEW REQUEST

Documents

Save & exit

Step 4 of 6 · Documents

✓ Customer	✓ Connection	✓ Addresses & property	4 Documents	5 Fees	6 Check & submit

DOCUMENT	REQUIRED	FILE	UPLOADED BY	STATE
Proof of identity	Yes	driving-licence.pdf · 1.2 MB	S. Ortiz · 05/04/2026	Verified
Proof of address or occupancy	Yes	lease-212-balcones.pdf · 840 KB	S. Ortiz · 05/04/2026	Not checked
Tenancy agreement or deed	No	—	—	Nothing attached
Site plan or unit schedule	Yes	block-plan.pdf · 3.1 MB	S. Ortiz · 05/04/2026	Rejected · unreadable
Anything else	—	—	—	Nothing attached

All | Required | Missing | Rejected

Attach a file | Add another document

Attaching one

Document type *

Proof of identity ▼

Eight designed types, plus *Anything else* for whatever the applicant brought that helps.

File *

driving-licence.pdf · 1.2 MB

Name and size are recorded, with who attached it and when.

What it proves

Identity and current address

☐ Required on this request

Attaching a file is not the same as verifying it. Every attachment lands *Not checked* and stays there until somebody looks at it.

A missing document never blocks the request being created. It is chased afterwards, and the request shows as waiting on documents until somebody clears it.

THERE IS NO FILE STORE

The path to attach one is built: the type, the name, the size, who uploaded it and when are all recorded. What is recorded is a REFERENCE to a file this product does not hold, so nothing here can open, re-read or re-send the document later.

Two different facts decide whether a document is required and both feed the same approval gate: the utility's own checklist for this request type, and a clerk ticking *required on this request* because of something about this applicant.

Approval is blocked until every required document is checked — not until one is attached.

v2.234.15

SO Sam Ortiz

← Back

Continue →

/brazosbend/requests/new?step=5

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

← Requests

NEW REQUEST

Fees

Save & exit

Step 5 of 6 · Fees

✓ Customer	✓ Connection	✓ Addresses & property	✓ Documents	5 Fees	6 Check & submit

What this request is quoted

CHARGE	DESCRIPTION	BASIS	QTY	UNIT	AMOUNT
CC-REQFEE	Application fee	per request	1	$25.00	$25.00
CC-EXPED	Expedited processing	per request	1	$60.00	$60.00
CC-METERT	Meter test on connection	per meter	3	$15.00	$45.00
	Quoted				**$130.00**

Add a fee | Waive a line

This takes money and posts nothing. No journal line, no invoice, no account — there is no account yet.

The quote is snapshotted the moment money is taken. Adding a line afterwards must not retro-change what the clerk handed over a receipt for, so $130.00 is frozen onto the request beside the $25.00.

Outstanding is signed and is never clamped at zero. If a counter took more than the quote, the screen says so.

Collecting twice is refused by name. The same receipt number again answers with what is already recorded; a DIFFERENT one on a request that has already been collected is refused and names the receipt it already holds.

A waived line leaves the quote and stays on the request with its reason, so a fee nobody paid and a fee somebody excused never look the same afterwards.

Taking the money

Fee timing *
Collect now ▼
Collect now · Collect later

Method *
Cash ▼
Cash · Card · Cheque

Amount taken *
25.00
A part payment is accepted.

Receipt number *
RCP-26-4471
The number on the receipt the clerk has just written.

Payment summary

Quoted	$130.00
Settled by an invoice	$0.00
Collected at the counter · cash · RCP-26-4471	$25.00
Outstanding	**$105.00**

← Back

Continue →

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Documents · `/brazosbend/requests/new?step=4` · the attach path is built and the file store is not · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Fees · `/brazosbend/requests/new?step=5` · the fee is taken here and posts nothing — finance reconciles

/brazosbend/requests/new?step=6

SMARTBillHub

Requests / New request

⚲ Search accounts, premises, meters...

← Requests

NEW REQUEST

Check and submit

Save & exit

Step 6 of 6 · Check

✓ Customer | ✓ Connection | ✓ Addresses & property | ✓ Documents | ✓ Fees | 6 Check & submit

The applicant Step 1

Channel	At the counter
Full name	Miller, Sarah
Email	s.miller@example.com
Phone	(512) 555-0142
Date of birth	04/11/1988
Driver's licence	TX ••••882
SSN	•••-••-4417

What they are asking for Step 2

Category	New connection
Sub-category	Residential dwelling
Services	Electric · Water · Sewer
Requested start	05/12/2026, all three
Connection date	— not given

Addresses and property Step 3

Service address

Street address or premise	212 Balcones Drive
Unit, flat or suite	Unit 3
City	Austin
State	TX
ZIP code	78704
Units on the property	6
Billing address	Same as service
Matched premises	PR-0731 · exact
Matched unit	U-001884 · exact
Plot or parcel	— not asked on this wizard

Documents Step 4

DOCUMENT	FILE	STATE
Proof of identity	driving-licence.pdf	Verified
Proof of address	lease-212-balcones.pdf	Not checked
Site plan	block-plan.pdf	Rejected
Tenancy agreement	—	Nothing attached

Two required documents are not yet cleared.

Fees Step 5

Quoted	$130.00 · three lines
Fee timing	Collect now
Taken	$25.00 · cash · RCP-26-4471
Settled by an invoice	$0.00
Outstanding	$105.00

$105.00 is still owed and this request can still be submitted. The money is not what gates it; the unchecked documents are.

On submit Step 6

Request number	SR-26-0001 · already allocated
State	Draft → Submitted
Waiting on	Documents

The number exists before the submit. A draft carries its own number, so a clerk can quote it to somebody standing at the counter who has not finished answering.

What goes out to the applicant

The second row is what makes this submission useful. Two required documents are not cleared, and telling them so as they leave the counter is the difference between a request that moves next week and one that sits.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☑	The request is in, and its number	Miller, Sarah	Email	Request acknowledged v6	On submit
☑	What we still need from them	Miller, Sarah	Email	Documents outstanding v2	On submit
☑	A receipt for the $25.00 taken	Miller, Sarah	Print	Counter receipt v1	Already handed over

☐	That $105.00 is still owed	Miller, Sarah	Email	— none chosen	On submit
☐	The decision, when it is made	Miller, Sarah	Email · SMS	Request decided v4	On approve or refuse

Choosing a template

Search templates

⚲ request

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Request acknowledged	Email	Email	Default · English	v6 Published	◉
Documents outstanding	Email	Email	Default · English	v2 Published	◉
Request decided	Email	Email	Default · English	v4 Published	○
Request acknowledged	SMS	SMS	Default · English	v2 Draft	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

A text never replaces a posted notice. Where a decision has to be put in writing, the SMS on the last row is a courtesy alongside it and never instead of it.

The receipt is already in their hand. It was written at the counter when the $25.00 was taken, so this row records what was given rather than queueing a second copy.

A template resolves on three axes and falls back on two. The class of letter, the customer category and the language — and where no variant exists for a category or a language, the default one is used.

The draft version is listed and cannot be picked. Hiding it sends a clerk looking for something they can see exists; offering it would queue a letter nobody has approved.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back Save as draft Submit request ✓

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: six steps drawn against a wizard the walk confirmed has six.

Check · `/brazosbend/requests/new?step=6` · Commits to **creates a NUMBERED request — a draft carries its number** · every field from all six steps, and 1 stated absence among them

Where a captured request lands, and what it becomes

Onto the register's Requests tab, already numbered — a draft carries its number from the moment it is started, so a clerk can quote it to somebody still standing at the counter.


> **⚠ Requests is the front door, and the other five queues are what a request BECOMES**
>
> A service request carries an **outcome**, and the five job outcomes are exactly the other five flows in this document: `new_connection`, `move_in`, `move_out`, `transfer`, `disconnect`. Approve `SR-26-0001` and a build appears on the New connects tab; the build names the request it came from, and the **$105.00 still outstanding on it travels along** rather than being lost at approval. A build raised directly has no request and its column says so — both are ordinary, and nobody goes looking for a request that never existed.
>
> **This is the spine of the whole document**, and until now no drawing in it had shown the link.

"Waiting on" is not the state, and that is the column's whole point. One request is *Approved* and waiting on a scheduled date; another is *Under review* and waiting on a supervisor. A list showing only the state puts those two in the same bucket and tells a clerk nothing about which one they can move.

The record is the one detail view that exists in the product today — three tabs, Applicant, Documents and History — and the drawing follows it rather than proposing a new shape. On it, **the money does not gate approval and the**


documents do: $105.00 outstanding is finance's to reconcile; an unchecked identity document is this clerk's.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the Requests tab exists and was walked; the *waiting on* column is the addition.
> **Where a captured request lands · the register's Requests tab** · `/brazosbend/accounts?tab=requests&f.state=open` · The front door · and the tab the six-step capture commits into

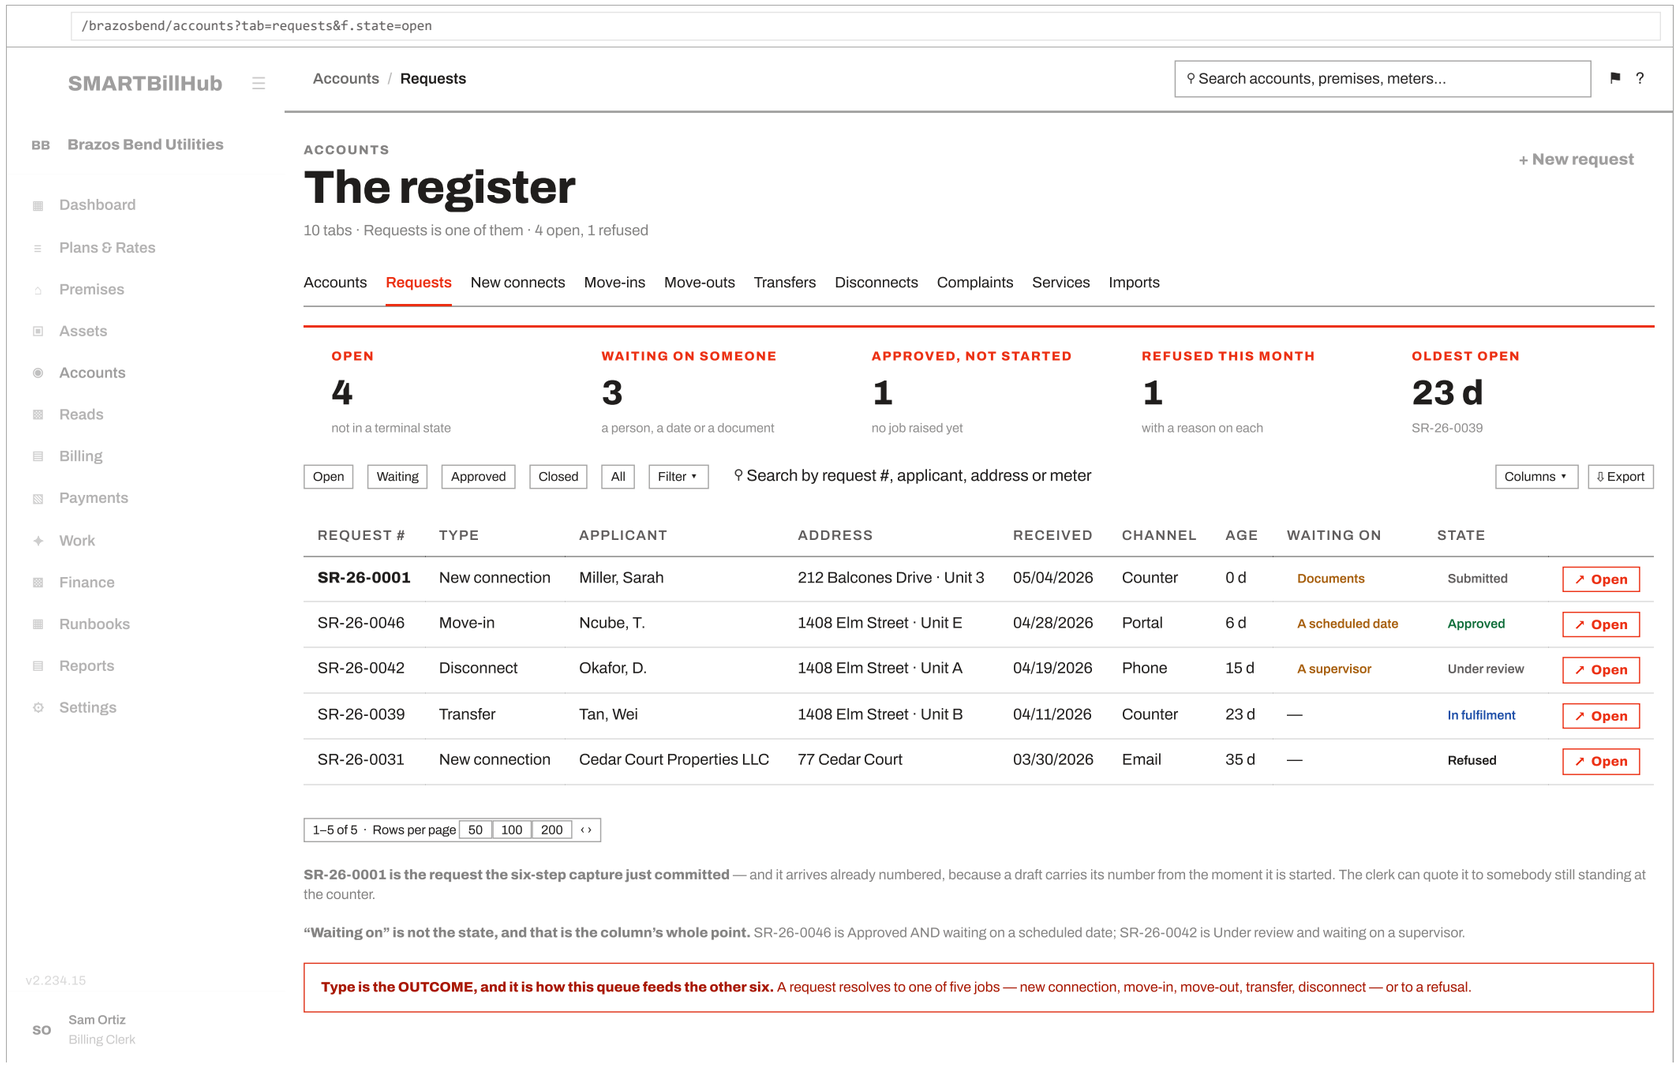

> **AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED.** Why: the one record that exists today, and its three real actions.
> **The request, opened · SR-26-0001** · `/brazosbend/requests/sr-26-0001` · The one detail view that exists in the product today · three tabs



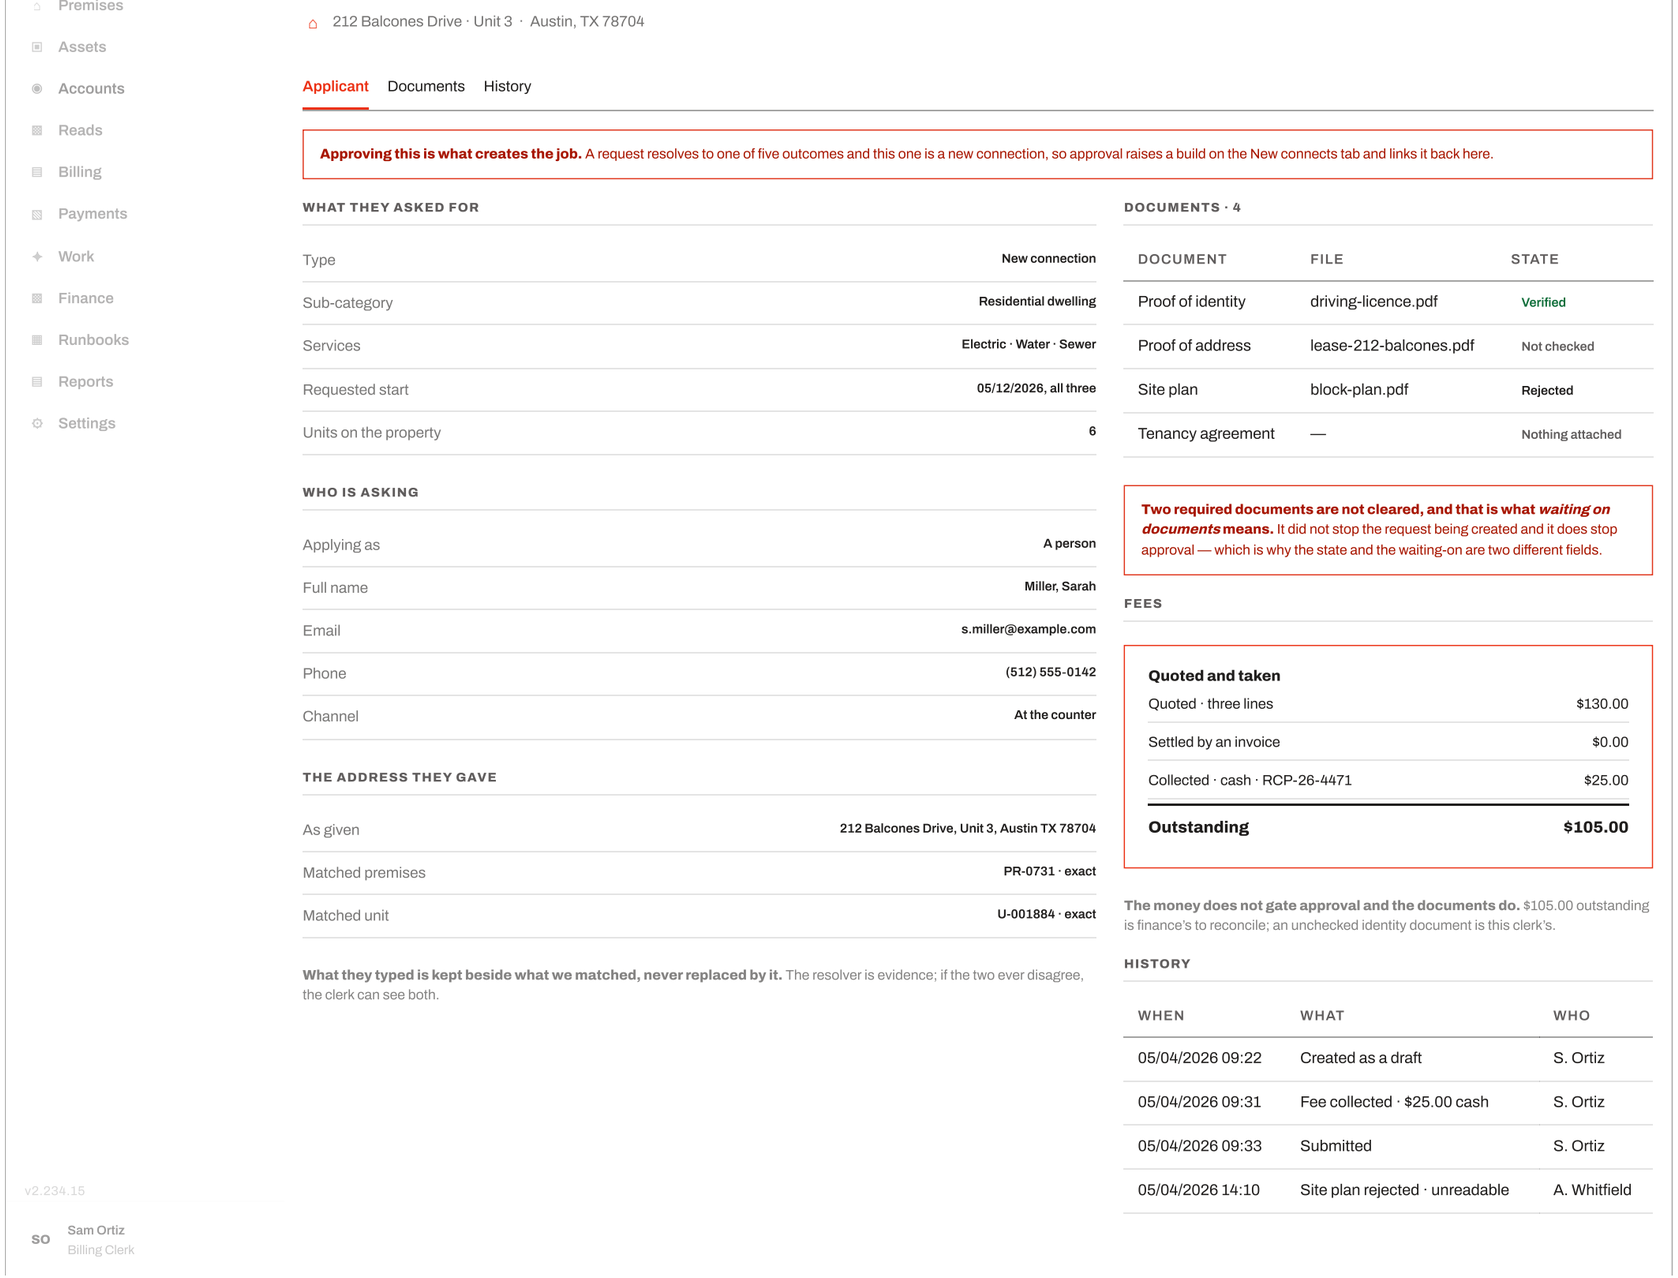

Three actions, and what each one does. The decision panel is the point of this record — everything above it is evidence for it. **Approve** resolves the request to one of five outcomes and raises that job; **Refuse** is terminal and reopenable with a reason; **Ask for more** keeps it open and moves *waiting on* to the applicant, which is why that is a column and not a state.

> **AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED.** Why: the one record that exists today, and its three real actions.
> **Approve the request — and what it creates** · `/brazosbend/requests/sr-26-0001` · Action 1 of 3 on the request · the one that makes a job

```
/brazosbend/requests/sr-26-0001
```

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← The register

REQUEST SR-26-0001 · NEW CONNECTION

Miller, Sarah

Submitted Waiting on documents

Refuse Ask for more Approve

Approve SR-26-0001

This creates real service and real charges

WHAT IS THIS REQUEST?

- (•) **A new connection** — Raises a build on the New connects tab, linked back to this request.
- ( ) **A move-in** — Opens an account on a unit that already has service.
- ( ) **A move-out** — Closes an account and frees its unit.
- ( ) **A transfer** — One customer, a different address of ours.
- ( ) **A disconnect** — Raises a case and starts the notice ladder.

Nothing is preselected, deliberately. The resolver matched this address to PR-0731 exactly, and that is EVIDENCE — not the decision.

WHAT APPROVING WILL DO

THEN	WHAT
Now	This request becomes **Approved** and the outcome is recorded against your name
Now	A build is raised on the New connects tab, naming this request
Now	The $105.00 still outstanding here travels with it
Next	The build's own wizard asks for units, services, plans and charges
Not now	No account opens, no meter is fitted, nothing is energised

Two required documents are still unchecked — an identity proof and a rejected site plan. That is what makes this request *waiting on documents*, and approval is exactly the thing it blocks.

Cancel Approve and raise the build

v2.234.15

SO Sam Ortiz
Billing Clerk

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the one record that exists today, and its three real actions.

Refuse the request — terminal, and reopenable · `/brazosbend/requests/sr-26-0001` · Action 2 of 3 on the request · a reason is required

/brazosbend/requests/sr-26-0001

SMARTBillHub
Accounts / Miller, Sarah
Search accounts, premises, meters...

SMARTBillHub

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

Accounts / Miller, Sarah

Search accounts, premises, meters...

← The register

REQUEST SR-26-0001 · NEW CONNECTION

Miller, Sarah

Submitted Waiting on documents

Refuse Ask for more Approve

Refuse SR-26-0001

The applicant is told; the request stays on record

WHY

Reason *

Not our service area

Not our service area · Documents not provided · Applicant withdrew · Duplicate of another request · Other

What to tell them

212 Balcones Drive falls outside the Brazos Bend boundary. The city utility covers this street.

Goes into the refusal letter.

WHAT REFUSING WILL DO

THEN	WHAT
Now	The request becomes **Refused**, which is terminal
Now	A refusal letter is queued to the applicant
Now	The $25.00 already collected stays collected — refunding it is finance's act, not this one
Later	It can be **reopened**, with a reason, from refused or withdrawn and from nowhere else

Refusing does not undo the money. $25.00 was taken at the counter against a $130.00 quote. The request closes owing $105.00 that will never be collected and holding $25.00 that may have to be given back — both visible, because a refusal that silently wrote off a receipt is how a cash drawer stops reconciling.

Cancel Refuse the request

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: the one record that exists today, and its three real actions.

Ask for more — the state that is not a refusal · `/brazosbend/requests/sr-26-0001` · Action 3 of 3 on the request · and the one clerks reach for most

/brazosbend/requests/sr-26-0001

SMARTBillHub

Accounts / Miller, Sarah

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts

← The register


REQUEST SR-26-0001 · NEW CONNECTION

Miller, Sarah

Submitted Waiting on documents

Refuse Ask for more Approve

Ask SR-26-0001 for more

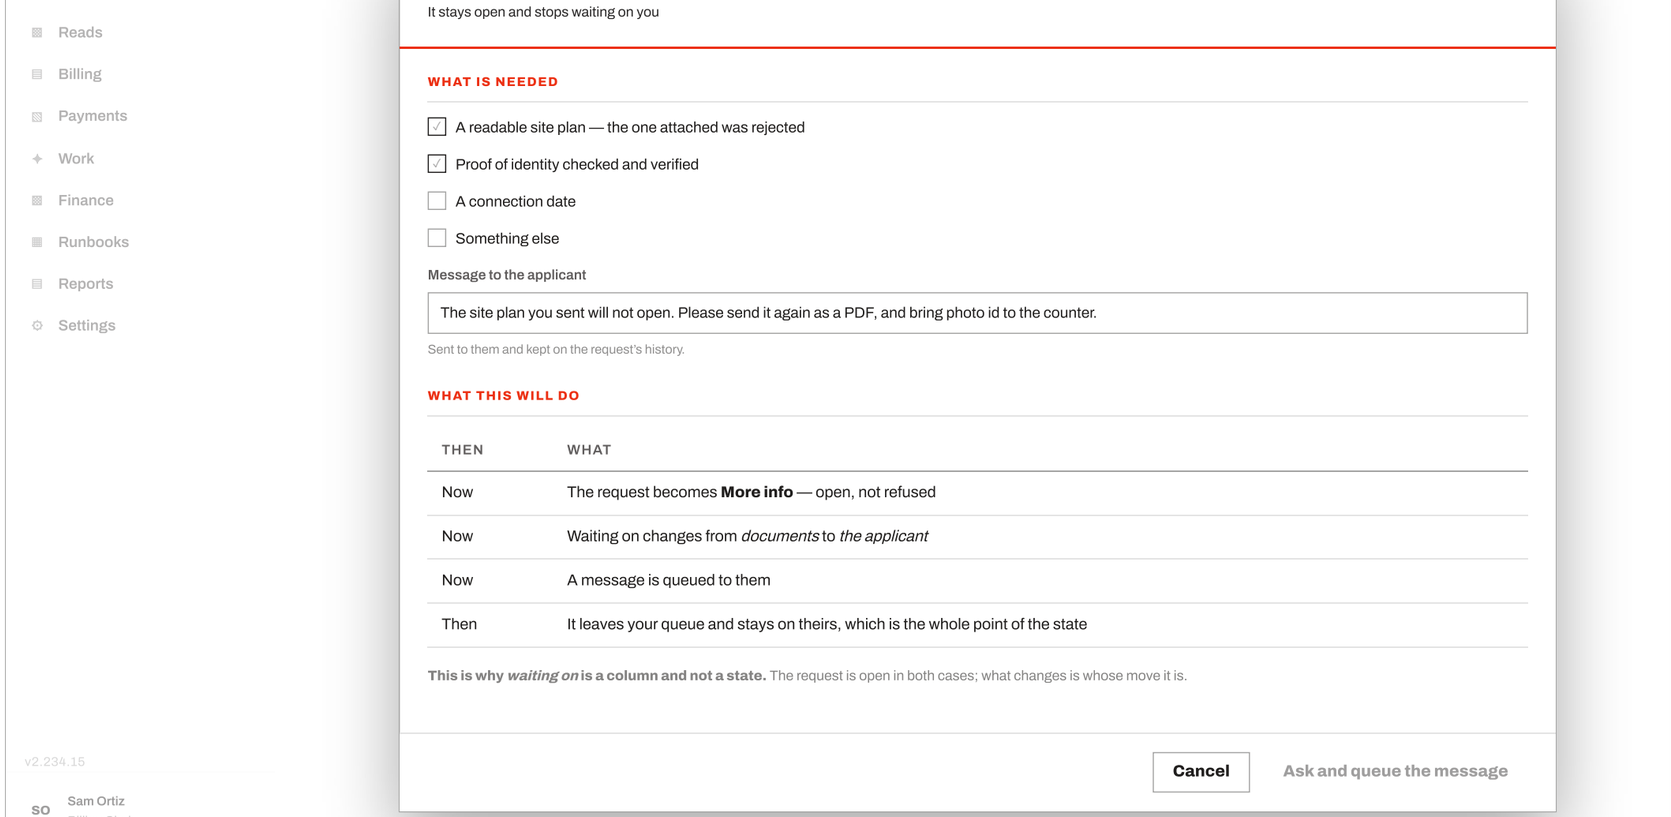

How you get here	Five doors: the Requests tab primary (`AccountsListPage.tsx:914`), the standalone list's header (`ServiceRequestsListPage.tsx:548`, gated to the standalone route), the list's empty CTA (`:593`), an inline link in the Transfers tab's wrong-door explainer (`TransfersTab.tsx:603`), and "Capture another" on the confirmation (`ServiceRequestCapturePage.tsx:1551`).
Primary action	**Submit request** ✓ — and submitting sends the customer an acknowledgement. A request is numbered the moment it is created; a draft carries its number and abandoning one does not reuse it.
Write surfaces	**Add** the request. **Edit** each review block links back to the step that captured it.
Walked	**Not walked.**
Small finding	`ServiceRequestCapturePage.tsx:1551` navigates to a hardcoded `"/requests/new"` although the same file imports `SERVICE_REQUEST_NEW_ROUTE`. Same shape at `features/metering/OwnerAccount.tsx:434`, which builds `` `/accounts/${id}` `` rather than calling `accountDetailPath`. Neither is broken today; both are a route that will not move when the constant does.
Rules	BR-CUS-079 · 089 · 092 · 093 · 095 · 1020 · 1021 · 1032 · 1044


07 New connect wizard BLOCKED NEW BUILD

`/:tenant/connections/new` · S87 · eight steps — the longest flow in the product

Commitments ACC-S44 blocked · ACC-S36 new build

The question: "*A developer's built six flats. Connect the building, meter every unit, and bill the developer for the work.*"

All 8 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

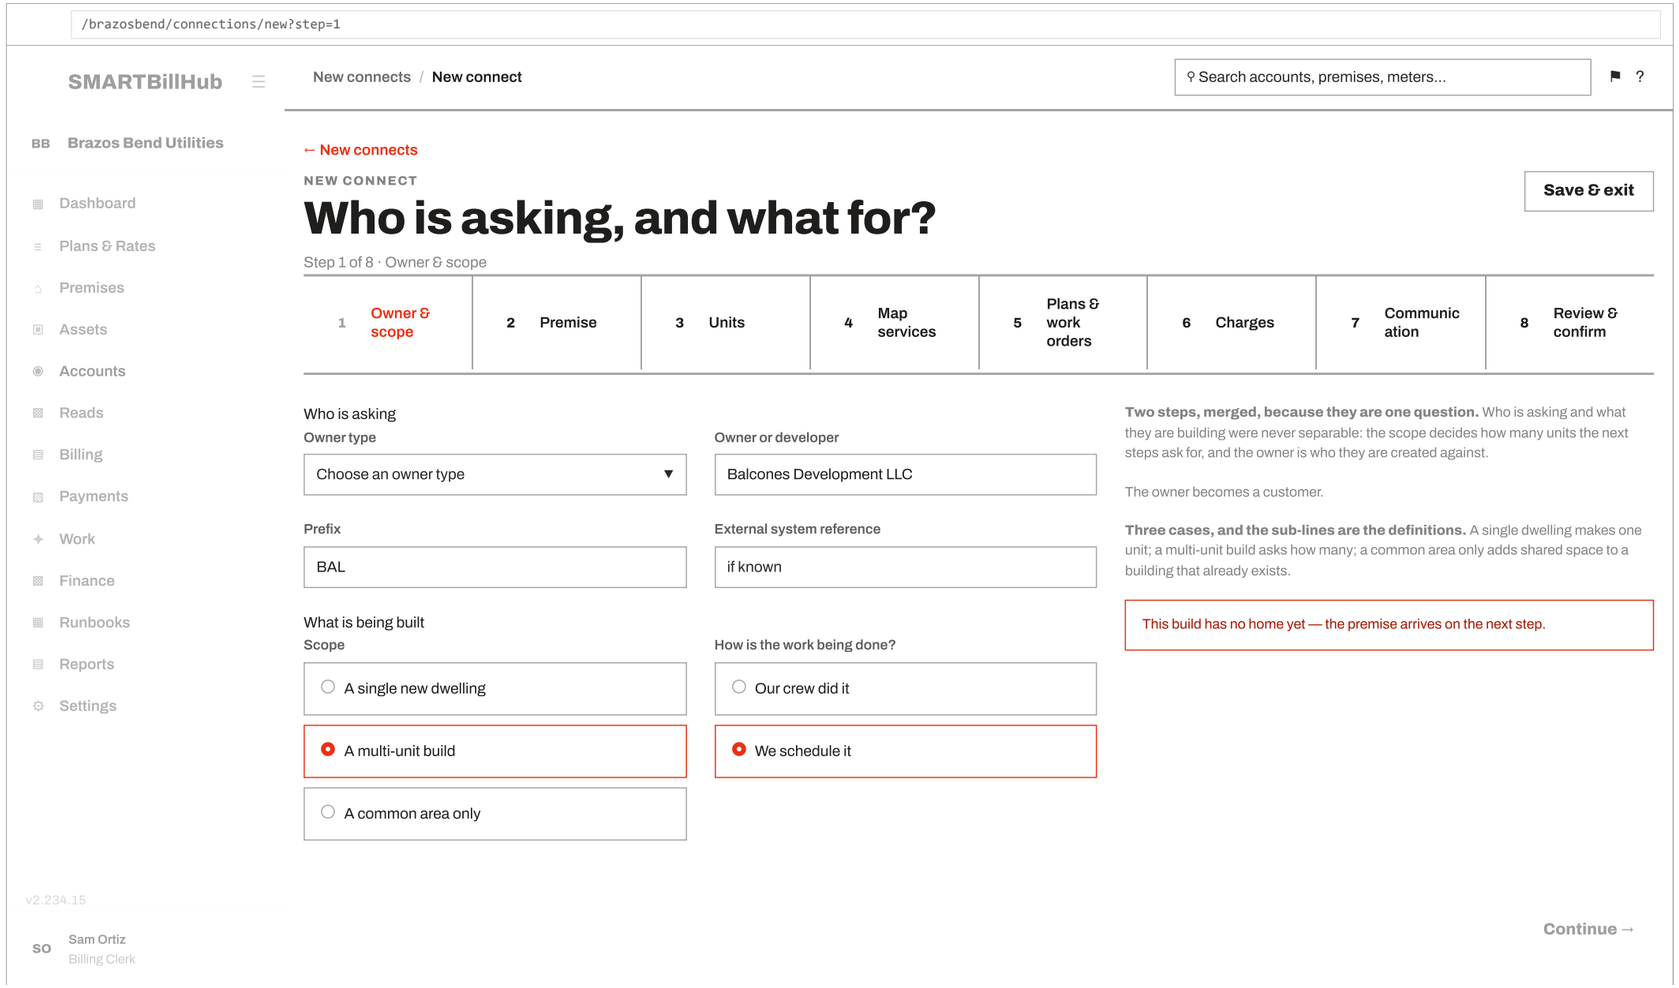

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Owner & scope · `/brazosbend/connections/new?step=1` · two steps merged — who is asking and what they are building are one question



Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

Step 2 of 8 · Premise

✓ Owner & scope	2 Premise	3 Units	4 Map services	5 Plans & work orders	6 Charges	7 Communic ation	8 Review & confirm

Premise type

Choose a premise type

Service address

Street address or premise *

212 Balcones Drive

Unit, flat or suite

Named on the next step

Greyed rather than removed, so the address set reads the same everywhere it is asked for.

City *

Austin

State *

TX

ZIP code *

78704

The record

Parcel or GIS reference

R-0044-1189

Read route

Route 4 · North

This is where an address comes from. An address is kept on the premise and nowhere else; every meter, account, route, cycle, bill and work order at this build reaches it by walking back to this record.

The same five boxes the request wizard asks for, so a clerk who captures an application and a clerk who builds a site are typing into the same shape. What differs is what happens to it: a request keeps what the APPLICANT said, verbatim and never overwritten, because it is not a premise yet.

It becomes the service address of every unit below it.

The parcel and the read route are the building's own, not part of the address. A unit may carry its own map point where its GIS differs; the address it never carries.

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Premise · `/brazosbend/connections/new?step=2` · the service address is created here, in the same five boxes the request wizard asks for

/brazosbend/connections/new?step=3

SMARTBillHub

New connects / New connect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← New connects

NEW CONNECT

The units

Save & exit

Step 3 of 8 · Units

✓ Owner & scope	✓ Premise	3 Units	4 Map services	5 Plans & work orders	6 Charges	7 Communic ation	8 Review & confirm

How many units

6

Showing 3 of 6 units · common area included.

☑ Include a common-area unit

UNIT	KIND	OCCUPANCY
1	Dwelling	Vacant
2	Dwelling	Vacant
CA	Common area	—

/brazosbend/connections/new?step=4

SMARTBillHub

New connects / New connect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← New connects

NEW CONNECT

Which services per unit

Save & exit

Step 4 of 8 · Map services

✓ Owner & scope	✓ Premise	✓ Units	4 Map services	5 Plans & work orders	6 Charges	7 Communic ation	8 Review & confirm

How are services chosen?

○ **Apply to all units**
One tick per service, written to every unit.

◉ **Choose per unit**
A row per unit.

Services at each unit

UNIT	KIND	ELECTRIC	WATER	SEWER
Unit 1	Dwelling	☑	☑	☑
Unit 2	Dwelling	☑	☑	☑
Unit 3	Dwelling	☑	☑	☑
Unit 4	Dwelling	☑	☑	☑
Unit 5	Dwelling	☑	☑	☑
Unit 6	Dwelling	☑	☑	☑
Common area	Common area	☑	☑	☐

Tick a column · Clear a column · Copy unit 1 to all

The common area is why this grid exists. It takes electric and water and no sewer — there is nothing to drain from a hallway and a car park.

Per unit is not an alternative shape — it is the shape. One row per unit per service is what the product stores, each with its own state and its own activation date, so a build energises one service at one unit at a time.

What this grid adds up to

Service points	20
— dwellings	6 units × 3 services = 18
— common area	electric and water = 2
Meters to fit	20 · one per service point
Work orders	9

Every figure on the review step is this grid counted. Change a tick here and the meters, the plan assignments and the one-time charges all move, which is why it is worth getting right before the money step rather than after it.

SUB-METER LINKS
Set after the meters exist. Nothing on this build declares a sub-meter, so the review will show none rather than a zero that reads like an answer.

← Back


Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk


REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Map services · `/brazosbend/connections/new?step=4` · per unit, because the common area takes no sewer · 1 stated absence on this step

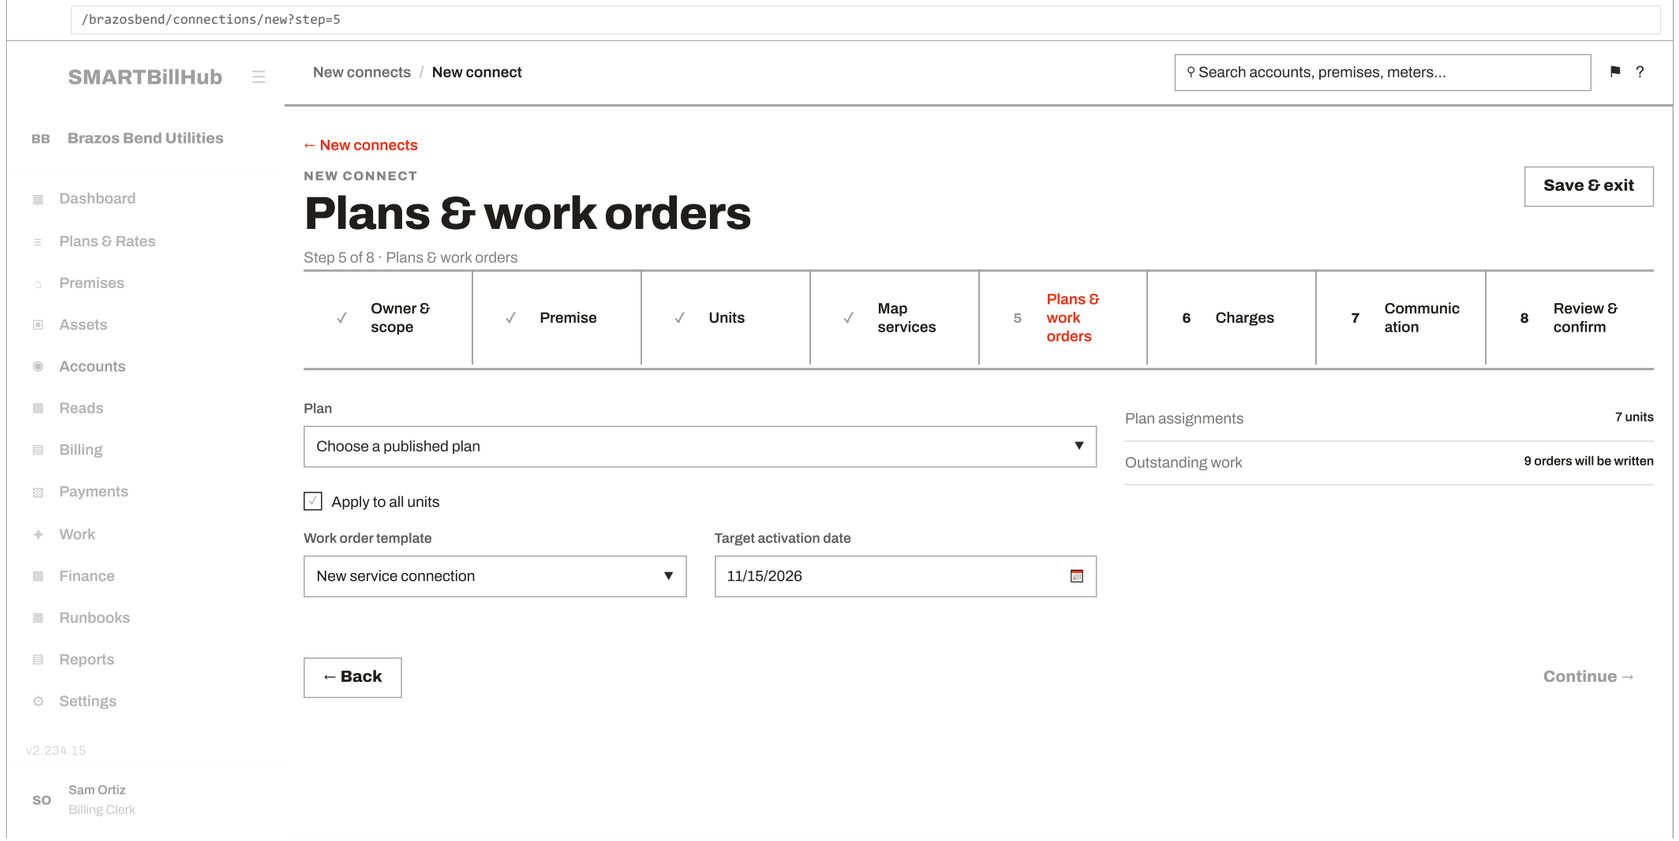

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Plans & work orders · `/brazosbend/connections/new?step=5`

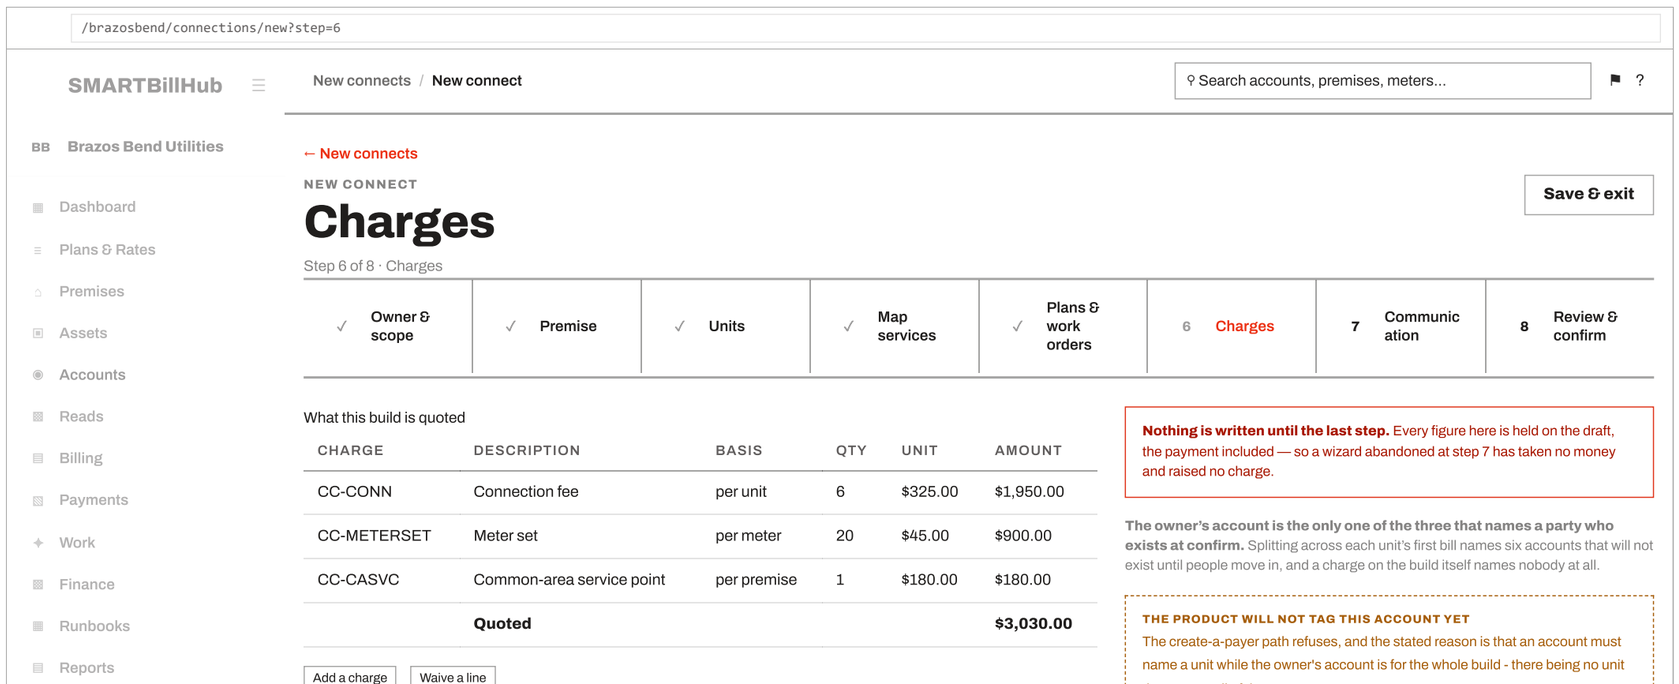

Settings

Every quantity is counted from the services grid, not typed. Six units, twenty service points, one premise — change a tick on step 4 and these move with it.

Who is billed

- (•) **The owner's account for this address**
  A-10088 · Balcones Development LLC.
- ( ) **Each unit's first bill**
  Split across six accounts that do not exist yet, and the developer never sees an invoice.
- ( ) **The connection itself**
  Refused: a charge on a build is a debt owed by nobody, and nothing in the product can settle it.

There is ONE money path, and this is the choice that keeps it that way. Charges are tagged to an account number — the ledger posts against accounts, the frozen money rules are account-shaped, and every rule that says *the account* would have grown a silent exception for a payable that is not an invoice, settled by a payment referencing no account.

Taking the money now

Take payment *
Yes — a deposit against the quote ▾
Yes · No, invoice it on activation · No, the developer pays per unit

Method *
Cheque ▾
ACH · Card · Cash · Cheque · Wire

Reference *
CHQ 118420
The cheque or confirmation number.

Amount taken *
1,500.00
A part payment is accepted and the rest stays outstanding.

Posting date *
05/04/2026
The day this payment counts from.

Clearing date
if known
Leave blank on a cheque that has not cleared.

Payment summary

Quoted · three lines	$3,030.00
Taken now · cheque CHQ 118420	$1,500.00
Outstanding at activation	**$1,530.00**

⚠ That reason expired on 2026-09-01 and the refusal did not. An account no longer has to name a unit: a Master Account hangs off the ADDRESS with no unit at all, which is exactly *the owner's account for the whole build.*

A deposit against a quote is not a deposit against an account. This money settles one-time charges on a build; it is not the security deposit a tenant pays when they move in, and the two never meet.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Charges · `/brazosbend/connections/new?step=6` · the quote, the payer and the money · 1 stated absence on this step

`/brazosbend/connections/new?step=7`

SMARTBillHub

New connects / New connect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts

← New connects

NEW CONNECT

Telling the customer

Save & exit

Step 7 of 8 · Communication

✓ Owner & scope	✓ Premise	✓ Units	✓ Map services	✓ Plans & work orders	✓ Charges	7 Communication	8 Review & confirm

Who we are telling

Contact	Balcones Development LLC · ops
Email	ops@balconesdev.example
Phone	(512) 555-0199
Preferred language	English

What goes out

COMMUNICATION	TO	CHANNEL	TEMPLATE	WHEN	
Build confirmed	Owner · Balcones Development LLC	Email	New connect — confirmed	On commit	☑
Quote and what is owed	Owner · Balcones Development LLC	Email · Print	Connection quote	On commit	☑
Schedule of works	Owner · Balcones Development LLC	Email	Work schedule	On commit	☑
Unit energised	Owner, per unit	Email	Service live — per unit	As each unit activates	☑
Inspection booked	Owner · Balcones Development LLC	SMS	— none chosen	When the order is scheduled	☐
Welcome pack	Each occupant	Print	— none chosen	When an account opens	☐

Two are unticked and neither is an oversight. An SMS about a booking nobody has made yet has nothing to say, and the welcome pack belongs to whoever moves in rather than to the developer.

Choosing a template

Search templates

⚲ connection

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Connection quote	Printable	Print	Commercial · English	v4 Published	◉
Connection quote	Email	Email	Default · English	v2 Published	○
Connection quote — Spanish	Email	Email	Default · Spanish	v1 Draft	○
New connect — confirmed	Email	Email	Default · English	v7 Published	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

A template is chosen along three axes and falls back on two of them. The class of letter, the customer category, and the language — and where no variant exists for a category or a language, the default one is used.

The Spanish variant is a draft, and drafts are listed but cannot be picked. Hiding it would send a clerk looking for something they can see exists; showing it as choosable would queue a letter nobody has approved.

Print is the floor here too. The quote goes by email AND on paper: an owner who never opens the address on file still gets the figure they owe.

A PREVIEW OF THE RENDERED LETTER

The template picker names the version that would be used and does not render it. Nothing on this screen proves the merge fields resolve against a build that does not exist yet.

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.

Communication · `/brazosbend/connections/new?step=7` · what goes out, and which template it uses · 1 stated absence on this step

/brazosbend/connections/new?step=8

SMARTBillHub

New connects / New connect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

Dashboard
Plans & Rates

← New connects

NEW CONNECT

What will be created

Save & exit

Step 8 of 8 · Review & confirm

What will be created

WHAT	COUNT
Customer	1 · Balcones Development LLC
Premises	1 · 212 Balcones Drive
Units	7 · six dwellings and one common area
Meters	20
Sub-meter links	0 · none declared on this build
Plan assignments	7
One-time charges	$3,030.00

These seven counts are a contract, not a summary. The commit must produce exactly them.

From each step

Owner and scope

Owner or developer	Balcones Development LLC
Prefix	BAL
Scope	A multi-unit build
How the work is done	We schedule it

The premise

Service address	212 Balcones Drive, Austin, TX 78704
Parcel	R-0044-1189
Read route	Route 4 · North
From request	SR-26-0001 · approved 05/04/2026

Units and services

Dwellings	6 · electric, water, sewer
Common area	1 · electric and water, no sewer
Service points	20

Plans and work orders

Plan	Commercial Standard — from the unit
Assignments	7
Work orders	9
Gate	inspection — no unit energises until it passes

Charges and money

Quoted	$3,030.00 · three lines
Billed to	A-10088 · the owner's account
Taken now	$1,500.00 · cheque CHQ 118420
Clearing date	not given — the cheque has not cleared
Outstanding at activation	$1,530.00

Communication

What happens next

WHEN	WHAT	WHERE IT SHOWS
On confirm	The build is created across five modules — the customer, the premises and units, the meters, the plans and the charges	New connects tab
On confirm	Three messages are queued to the owner	Nothing sends them yet
On confirm	Nine work orders are raised, one of them the gate	The build's own record
Next	An inspection is booked and passed	Waiting on clears
Then	Units energise one at a time as their meters are fitted	Partly activated
When a tenant arrives	An account opens on that unit	Accounts tab
First bill	The one-time charges appear on the owner's account, not the tenant's	A-10088


Nothing before this button has written anything. Every step has been held on a draft, the payment included.

Activation is not part of this commit. The build is created waiting on an inspection; no unit is live and no account exists yet.

THE OWNER'S ACCOUNT CANNOT BE TAGGED YET

The charges are quoted and the payer is chosen, and the path that attaches them refuses on a reason that expired on 2026-09-01. Until that is corrected the quote stands on the build and the money has nowhere to post.

What this build will NOT do: it opens no accounts, sends nothing, and energises nothing. Those are three later acts by three different people, and the review says so rather than letting *Confirm* imply otherwise.

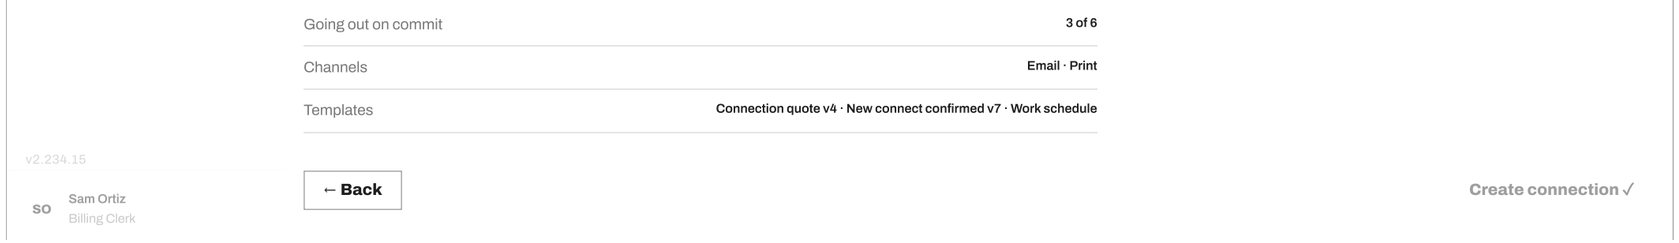

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the product's new-connect wizard has NINE steps; these eight merge owner and scope and create the service address on the premise step.
>
> **Review & confirm** · `/brazosbend/connections/new?step=8` · every field from every step, the seven-count contract, and what happens next · Commits to **creates premises, units, meters, plan assignments, work orders and charges in one commit**


Where an approved build lands, and what it becomes

Onto the New connects tab, either raised directly or created by approving a request — and the list says which.

"Partly activated" is a state, not a warning. A nine-unit build has some units live and some not; a list answering only *activated: yes or no* would call that whole building finished or unfinished, and both would be wrong. A build completes one unit at a time, and each unit's account opens on the day its unit does.

The record carries the work orders and what the build is waiting on. On `CX-26-0007` that is one inspection — nothing else is blocked and three units cannot activate until it passes, which is why it is on the header rather than buried in a list of nine orders.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the New connects tab exists and was walked; the *waiting on* column is the addition.
>
> **Where an approved connect lands · the New connects tab** · `/brazosbend/accounts?tab=new-connects` · What the eight-step connect wizard creates, and what a request becomes

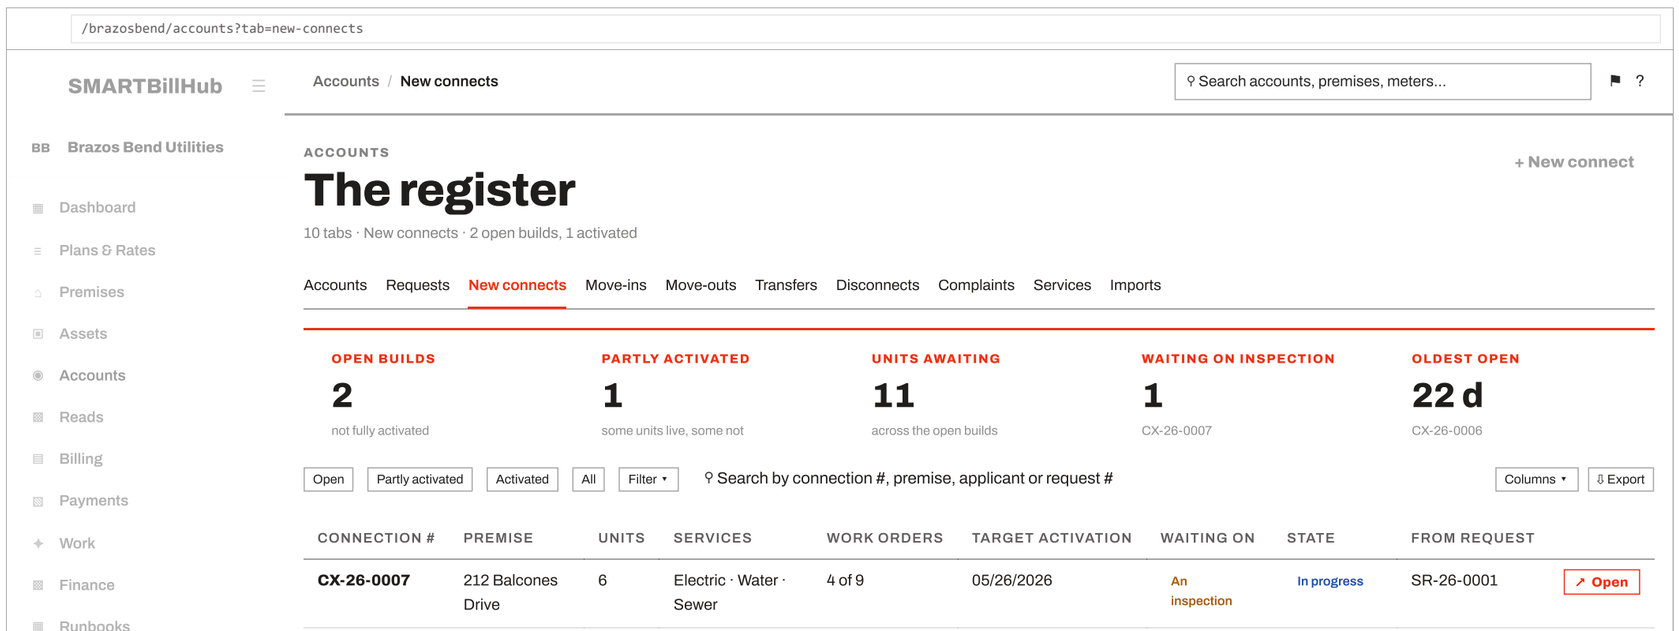

CX-26-0006	77 Cedar Court	9	Electric · Water	9 of 9	05/12/2026	—	Partly activated	SR-26-0031	↗ Open
CX-26-0004	310 Marigold Way	2	Electric	2 of 2	04/30/2026	—	Activated	—	↗ Open

1–3 of 3 · Rows per page 50 100 200 ‹ ›

A build is not activated all at once, which is why *Partly activated* is a state and not a warning. CX-26-0006 has nine units and some are live while others are not; a list that answered only *activated: yes or no* would call that whole building unfinished or finished, and both would be wrong.

The *From request* column is the spine. CX-26-0007 exists because SR-26-0001 was approved, and CX-26-0004 has none because somebody raised it directly.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build, opened · CX-26-0007 · Overview · `/brazosbend/connections/cx-26-0007?tab=overview` · The standard detail layout · every action top right, then tabs

/brazosbend/connections/cx-26-0007?tab=overview

SMARTBillHub

Accounts / New connects / CX-26-0007

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

⌂ 212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Overview | Units & services | Plan & charges | Work orders | Communication | Audit

UNITS	ACTIVATED	WORK ORDERS	QUOTED	OUTSTANDING
7	3 of 7	9	$3,030.00	$1,530.00
6 dwellings and the common area	8 of 20 service points live	4 done · the inspection is outstanding	billed to A-10088	$1,500.00 taken, not cleared

The inspection is what the whole build is waiting on. Nothing else is blocked, and four units cannot energise until it passes — **WO-26-0309** on the Work orders tab.

LIVE STATE

State	In progress
Waiting on	an inspection
Units activated	3 of 7
Service points live	8 of 20
Target activation	05/26/2026
Activated at	— not yet

OWNER AND SCOPE · STEP 1

Owner type	Developer
Owner or developer	Balcones Development LLC
Prefix	BAL

THE PREMISE · STEP 2

Premise type	Apartment block
Street address or premise	212 Balcones Drive
Unit, flat or suite	— units are named on the next tab
City	Austin
State	TX
ZIP code	78704
Parcel or GIS reference	R-0044-1189
Read route	Route 4 · North
Premises number	PR-0731

This is where the address came from. Every meter, account, route, bill and work order on this build reaches it by walking back to this record.

WHERE IT CAME FROM

External system reference	— not given
Scope	A multi-unit build
How the work is done	We schedule it

Request	SR-26-0001 · approved 05/04/2026
Approved by	A. Whitfield
Created	05/04/2026 14:22
Fee outstanding on the request	$105.00

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build · Units and services · `/brazosbend/connections/cx-26-0007?tab=units` · Steps 3 and 4, on the tab a clerk looks for a unit in

`/brazosbend/connections/cx-26-0007?tab=units`

SMARTBillHub ☰ Accounts / New connects / CX-26-0007 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

⌂ 212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Overview | Units & services | Plan & charges | Work orders | Communication | Audit

UNITS AND SERVICES · STEPS 3 AND 4

⚲ Search units and meters ▾ Filter ☰ Columns ↓ Download

UNIT	ELECTRIC	WATER	SEWER	METER	STATE
Unit 1	☑	☑	☑	M-5101	Activated
Unit 2	☑	☑	☑	M-5102	Activated
Unit 3	☑	☑	☑	M-5103	Meter fitted
Unit 4	☑	☑	☑	—	Awaiting meter
Unit 5	☑	☑	☑	—	Awaiting meter
Unit 6	☑	☑	☑	—	Awaiting meter
Common area	☑	☑	☐	M-5120	Activated

How many units	6 dwellings
Common-area unit	included
Services chosen	Per unit — not *apply to all*

The common area takes no sewer, and that is why the grid was filled in per unit. *Apply to all units* would have raised a sewer service point, a meter and a work order for a drain a car park will never need.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build · Plan and charges · `/brazosbend/connections/cx-26-0007?tab=plan` · Steps 5 and 6 · 1 stated absence on this tab

/brazosbend/connections/cx-26-0007?tab=plan

SMARTBillHub

Accounts / New connects / CX-26-0007

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Overview | Units & services | Plan & charges | Work orders | Communication | Audit

PLAN · STEP 5

Plan	Commercial Standard · v3 — from the unit
Plan assignments	7 · one per unit
Work order template	New service connection
Target activation	05/26/2026
Gate	Inspection — no unit energises until it passes

MONEY

Billed to	A-10088 · the owner's account
Taken	$1,500.00 · cheque CHQ 118420 · 05/04/2026
Clearing date	not given — the cheque has not cleared
Outstanding	$1,530.00

THE PAYER IS CHOSEN AND NOT YET TAGGED

The path that attaches an account refuses on a reason that expired on 2026-09-01 — that an account must name a unit. Until it is corrected the quote stands on the build and the money has nowhere to post.

CHARGES · STEP 6

CHARGE	BASIS	QTY	UNIT	AMOUNT
Connection fee	per unit	6	$325.00	$1,950.00
Meter set	per meter	20	$45.00	$900.00
Common-area service point	per premise	1	$180.00	$180.00
			Quoted	**$3,030.00**

Every quantity is counted from the services grid, not typed. Change a tick on the Units tab and these move with it.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build · Work orders · `/brazosbend/connections/cx-26-0007?tab=work` · All nine, the gate marked, and + Add a work order on the list itself

/brazosbend/connections/cx-26-0007?tab=work

SMARTBillHub

Accounts / New connects / CX-26-0007

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

Overview | Units & services | Plan & charges | **Work orders** | Communication | Audit

WORK ORDERS ON THIS BUILD

Search work orders — Filter — Columns — Download — + Add a work order

ORDER	TYPE	WHERE	DUE	STATE	NOTE
WO-26-0301	Survey for New Connection	212 Balcones Drive	05/06	Done	
WO-26-0302	Commercial Connection	Unit 1	05/18	Done	
WO-26-0303	Commercial Connection	Unit 2	05/18	Done	
WO-26-0304	Commercial Connection	Common area	05/19	Done	
WO-26-0305	Commercial Connection	Unit 3	05/22	In progress	
WO-26-0306	Commercial Connection	Unit 4	05/25	Scheduled	
WO-26-0307	Commercial Connection	Unit 5	05/25	Scheduled	
WO-26-0308	Commercial Connection	Unit 6	05/26	Scheduled	
WO-26-0309	Routine Inspection	212 Balcones Drive	05/24	Scheduled	**the gate**

Raised by the build — 9 · from template *New service connection*

Done — 4

Outstanding — 5, one of them the gate

The gate is one of these orders, not a separate thing. WO-26-0309 is the inspection: while it is open no unit energises, and **Activate units** refuses and says so.

Add a work order is the same act in both places. It raises an ad-hoc order with no template behind it, and it is **not** a gate unless somebody says so — the dialog is drawn below.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build · Communication · `/brazosbend/connections/cx-26-0007?tab=communication` · Step 7 · four rows, and none of them has been sent

`/brazosbend/connections/cx-26-0007?tab=communication`

SMARTBillHub

Accounts / New connects / CX-26-0007

Search accounts, premises, meters…

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details — Add a work order — Activate units

In progress — Waiting on an inspection — Apartment block — Target 05/26/2026

212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Overview | Units & services | Plan & charges | Work orders | **Communication** | Audit

WHAT THIS BUILD QUEUED · STEP 7

WHAT WENT OUT	CHANNEL	TEMPLATE	STATE
Build confirmed	Email	New connect confirmed v7	Queued

Quote and what is owed	Email · Print	Connection quote v4	Queued
Schedule of works	Email	Work schedule v2	Queued
Unit energised	Email	Service live · per unit	Per unit, as it happens

Queued is not sent. A row exists for each and no sender picks it up.

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists at all — a connect today leaves premises, units, meters, plan assignments, work orders and charges, and no page that gathers them.

The build · Audit · `/brazosbend/connections/cx-26-0007?tab=audit` · Every act this build wrote, and the one it could not · the rows are the acts the build really records — created, committed, waiting-on set, one per unit and service energised, work orders raised, accepted and reported, and letters queued · 1 stated absence on this tab

`/brazosbend/connections/cx-26-0007?tab=audit`

SMARTBillHub

Accounts / New connects / CX-26-0007

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC WATER SEWER

Overview | Units & services | Plan & charges | Work orders | Communication | Audit

EVERYTHING THAT HAPPENED TO THIS BUILD

⚲ Search the log

▾ Filter | ☰ Columns | ↓ Download

WHEN ▼	WHO	WHAT HAPPENED
05/04/2026 14:22	A. Whitfield	Build created · from request SR-26-0001
05/04/2026 14:22	A. Whitfield	Build committed · 1 premises, 7 units, 20 service points, 7 plans
05/04/2026 14:22	A. Whitfield	Work orders raised · 9, from *New service connection*
05/04/2026 14:23	A. Whitfield	Letters queued · 3
05/06/2026 10:14	R. Alvarez	Field result recorded · WO-26-0301, survey passed
05/18/2026 11:05	S. Ortiz	Unit energised · Unit 1 · electric, water, sewer
05/18/2026 11:06	S. Ortiz	Unit energised · Unit 2 · electric, water, sewer
05/19/2026 08:12	S. Ortiz	Unit energised · Common area · electric, water
05/20/2026 09:31	S. Ortiz	Waiting-on set · an inspection
05/22/2026 13:40	R. Alvarez	Work order accepted · WO-26-0305

ONE ACT IS MISSING, AND ITS ABSENCE IS THE FINDING


Nothing here says the payer was attached, because that path refuses. The money on the Plan and charges tab has nowhere to post, and this log is where that shows.

v2.234.15

SO Sam Ortiz
Billing Clerk

Two actions on a build. Activate units is the one that ends the build, and it is terminal per service — there is no transition back out of activated. **Add a work order** raises an ad-hoc job with no template behind it, which gates nothing unless somebody says so.


> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no build record page exists; a connect today leaves premises, units, meters and charges and no page that gathers them.
> **Activate units — and the gate that stops it** · `/brazosbend/connections/cx-26-0007` · Action 1 of 2 on the build · activation is terminal

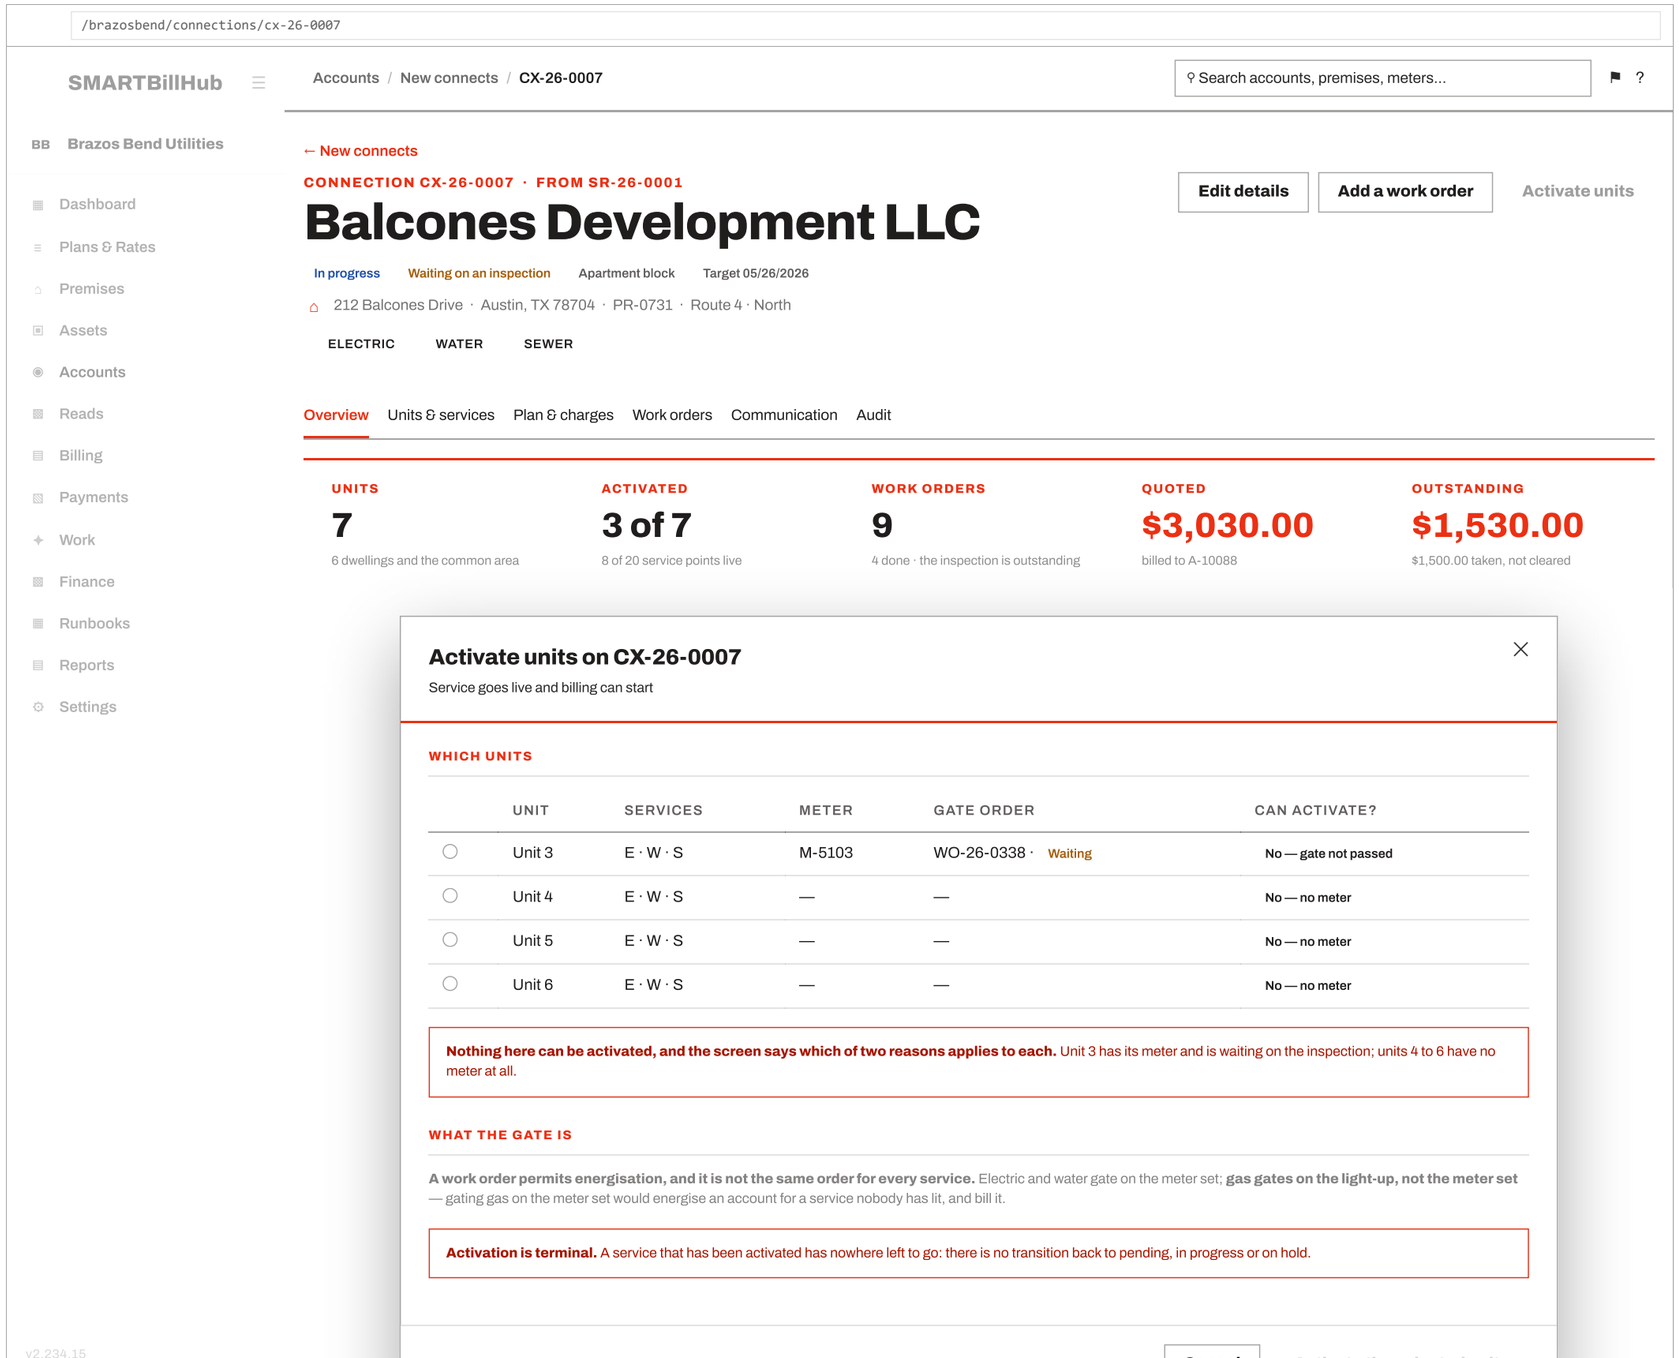

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no build record page exists; a connect today leaves premises, units, meters and charges and no page that gathers them.

Add a work order — ad-hoc, and not a gate · `/brazosbend/connections/cx-26-0007` · Action 2 of 2 on the build · an order with no template behind it

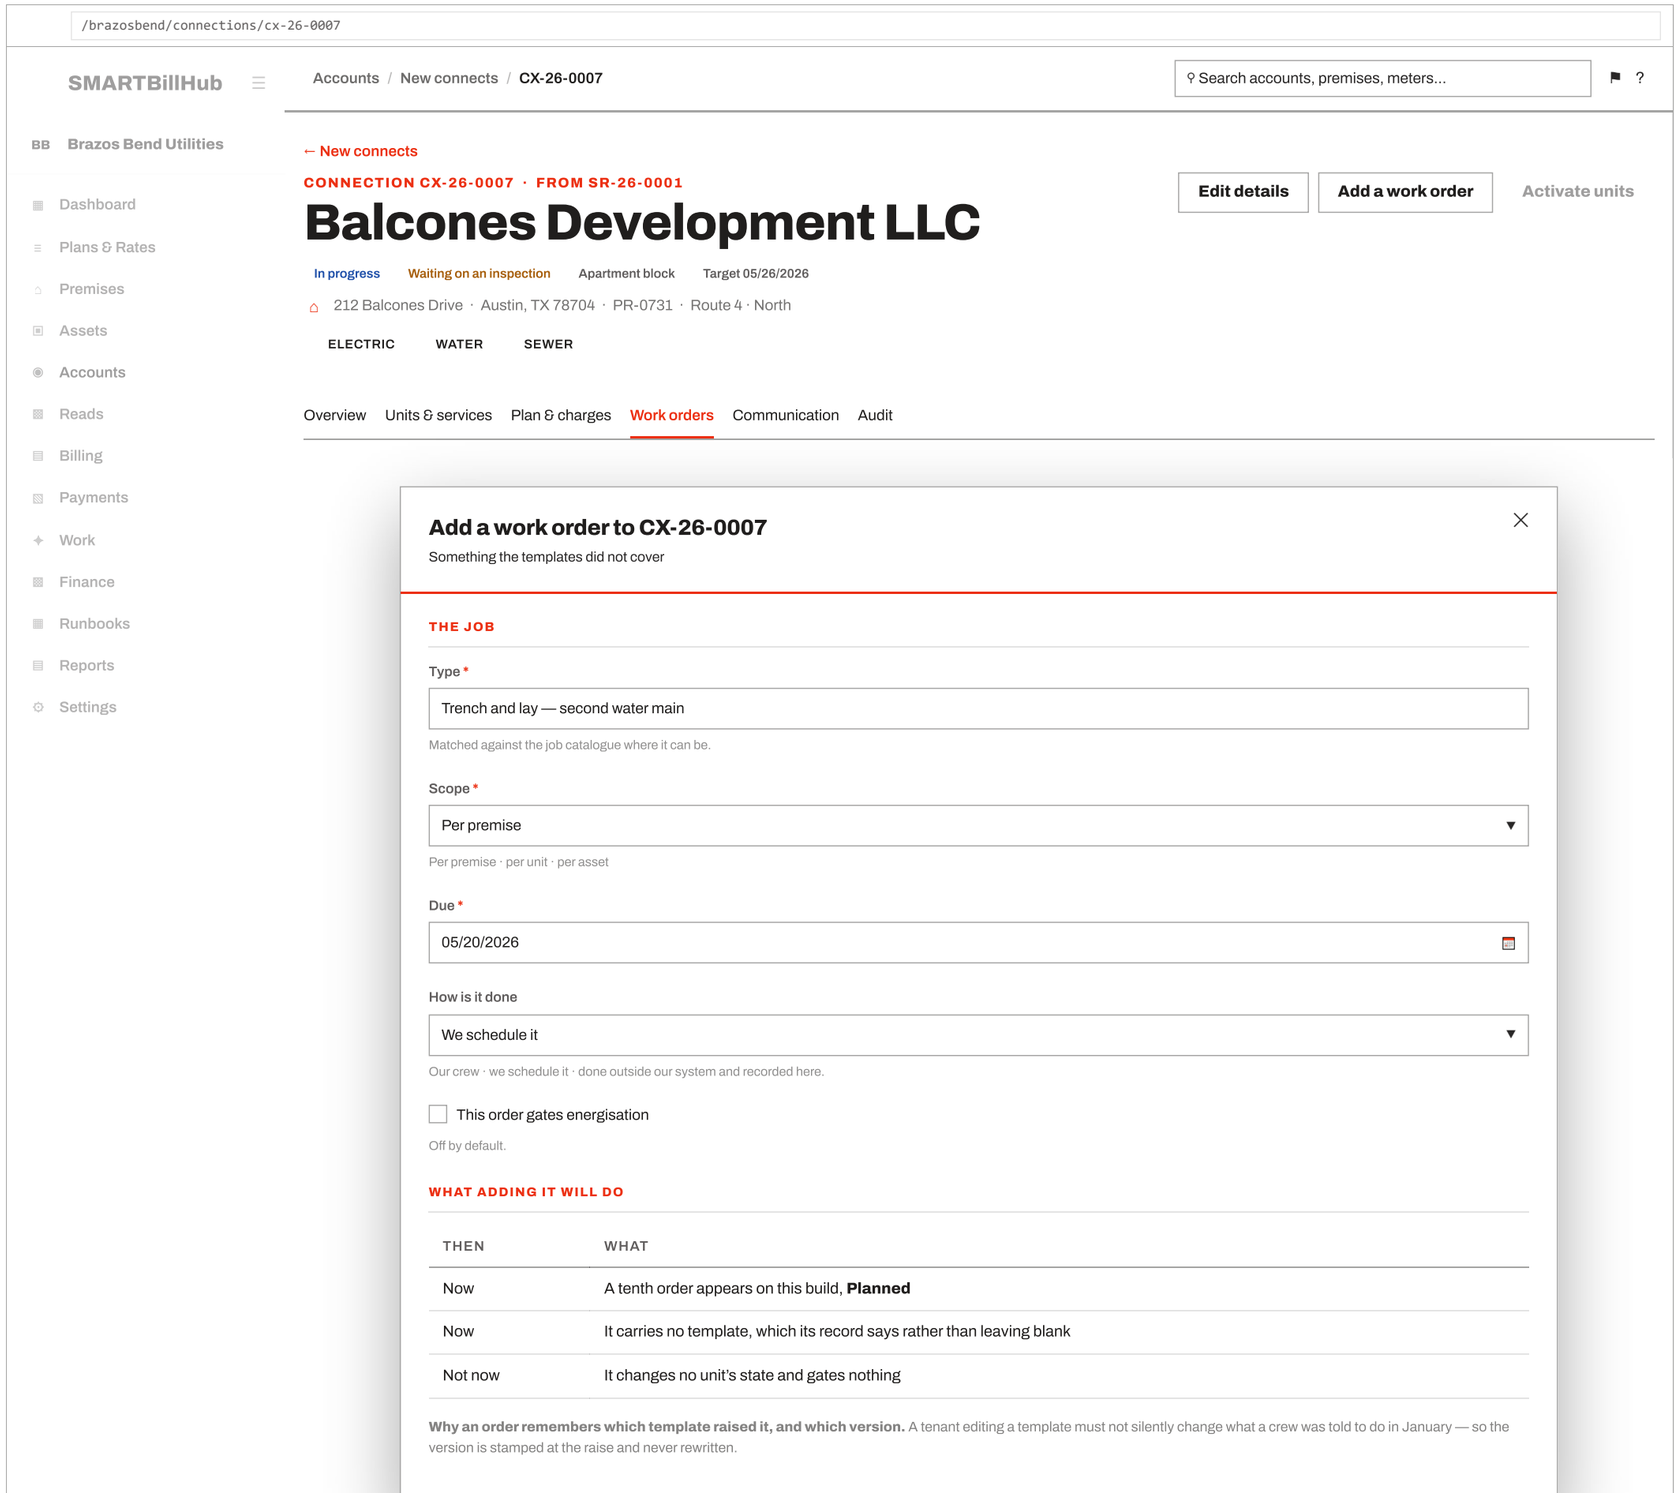

v2.234.15

SO Sam Ortiz
Billing Clerk

Cancel | Add the work order

REDESIGN — PUBLISHED 2026-09-17, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: nothing edits a committed build — there is no update path on a connection anywhere in the product, so a clerk who mistypes a target date raises a new build or lives with it.

Edit this build · CX-26-0007 · `/brazosbend/connections/cx-26-0007?tab=overview&edit=1` · The third action · four fields drawn disabled with their reason (BR-SHL-025), and two of those are an open question rather than a build · 4 stated absences on this dialog

`/brazosbend/connections/cx-26-0007?tab=overview&edit=1`

SMARTBillHub

Accounts / New connects / CX-26-0007

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← New connects

CONNECTION CX-26-0007 · FROM SR-26-0001

Balcones Development LLC

Edit details | Add a work order | Activate units

In progress · Waiting on an inspection · Apartment block · Target 05/26/2026

212 Balcones Drive · Austin, TX 78704 · PR-0731 · Route 4 · North

ELECTRIC · WATER · SEWER

Overview | Units & services | Plan & charges | Work orders | Communication | Audit

UNITS	ACTIVATED	WORK ORDERS	QUOTED	OUTSTANDING
7	3 of 7	9	$3,030.00	$1,530.00
6 dwellings and the common area	8 of 20 service points live	4 done · the inspection is outstanding	billed to A-10088	$1,500.00 taken, not cleared

Edit this build

What a committed build lets you change

WHAT YOU CAN CHANGE NOW

Waiting on

an inspection

The one field a committed build lets you set. Clearing it means nothing is blocking.

Target activation locked

05/26/2026

Nothing writes this once a build is committed.

How the work is done locked

We schedule it

Recorded when the build was raised, and not changed after.

Scope locked

A multi-unit build

Same.

Owner type locked

Developer

Same.

CHANGED ON THE SCREEN THAT OWNS IT

DETAIL	WHERE IT IS EDITED	WHY NOT HERE
The address, route and parcel	Premises · PR-0731	An address is kept in one place, and this build points at it
Units and their labels	Units under PR-0731	Seven rows of their own, shared with meters and accounts
Meters	Assets	A meter outlives this build

Owner or developer	Account A-10088	The name belongs to the account that pays

CANNOT BE CHANGED

DETAIL	WHY
Money taken, cheque number, clearing date	A correction is a new row, never an edit of the old one
Billed to	Tagged once. Moving a stated quote to another account changes who owes it with nothing recording that it moved
Charge lines	The wizard can add and waive one; a committed build cannot
Connection number, the request it came from	Identity

One field will change. Everything else on this dialog says where it is changed, or why it is not.

Cancel Save changes

v2.234.15

SO Sam Ortiz
Billing Clerk

What a committed build lets you change, and what it does not

There is no update path on a connection anywhere in the product — not in `06-backend/apps/metering/` and not in `07-frontend/src/api/endpoints.ts`. Every change below goes through its own named act, and the fields with no act have no way to move at all.

Detail	Step	After the build is committed	What decides it
Waiting on	–	**Yes, from here**	Its own act, and it is refused while the build is held
Outstanding work · add an item	–	**Yes, from here**	Its own act
Outstanding work · close an item	–	**Yes, from here**	Its own act
A service on a unit · add one	4	**Yes, from here**	The same refusal the unit wizard gives
A service's state — awaiting meter, fitted, energised	4	**Yes, from here**	One move at a time, and **energised is terminal**: taking a live service off is a disconnect, not an edit
Unit service characteristics — the pricing inputs	4	**Yes, from here**	Its own act, per unit and per key
Work orders · add one, record a field result	5	**Yes, from here**	Already on the Work orders tab
Hold · release · cancel	–	**Yes, each its own act**	Each takes a reason, and **cancelled is terminal**
Billed to — the payer	6	**Once only**	It **refuses to re-tag**: a stated quote that moved debtor is a debt that changed hands with nothing recording it. And it refuses today anyway, on a reason that expired on 2026-09-01
The owner's account	1 · 6	**Create once**	Its own act

The premise — type, address, city, state, ZIP, parcel, route	2	**Yes, but on Premises**	An address is stored on the premises and nowhere else, so the build points at it and keeps no copy
Units and their labels	3	**Yes, but on Units**	Rows of their own, shared with meters and accounts
Meters	4	**Yes, but on Assets**	A meter outlives the build
Owner or developer name	1	**Yes, but on the account**	The name belongs to the account that pays
Target activation date	5	**No path at all**	A real column on the build that nothing writes after a commit. ACC-S44
How the work is done	1	**No path at all**	Same — a real column, no setter. ACC-S44
Owner type · prefix · external reference · scope	1	**No path at all**	Captured on the request; the build row has no such columns
Plan · plan assignments · work order template	5	**No path at all**	The account derives its plan from the unit, and assignments are written once at commit
Charge lines — add or waive	6	**No path at all**	The wizard draws both buttons and a committed build has neither. ACC-S44
Quoted total	6	**Derived**	Counted from the lines
Money taken, cheque number, clearing date	6	**Never**	Financial immutability — a correction is a new row
Queued letters	7	**No path at all**	The queue is append-only output
Connection number, the request it came from	–	**Identity**	Never moves

Two of these are an open question and not a build decision. The target activation date and the charge lines are the two a clerk will reach for first, and both have a column or a wizard control and no path behind them. The dialog draws them **disabled with their reason** rather than live, because making them writable is a specification somebody has to rule on — that is ACC-S44, and it is left open rather than answered here.

How you get here	Three doors: the New connects tab primary (`AccountsListPage.tsx:923`), the tab's empty CTA (`NewConnectsTab.tsx:783`), and **Resume** on a parked draft (`parkedDrafts.tsx:416`).
Primary action	**Create connection ✓**, whose answer offers *Open the connection →* — which lands on the account's Work tab, not a screen of its own.
Write surfaces	**Add** premises, units, meters, plan assignments, work orders and charges, in one commit. Charges bill to a **master account**, per BR-CUS-083.
Walked	**Not walked.**
Rules	BR-CUS-083 · 1010 · 1011 · BR-MET-1161

Commitments in this section

Three commitments, one per wizard redesign this section draws. **All three were orphans until this pass** — nineteen REDESIGN figures between them, drawn to rulings and undertaken by nobody.

ACC-S34 NEW BUILD

The new-account wizard loses its plan step

STATUS Unverified

WAITS ON Nothing on the server — the unit already carries the plan and the wizard already reads the unit. **THE RULING THAT ASKED FOR THIS EXISTS IN NO REPOSITORY FILE**, which is ACC-S41.

SCREENS 03

WHAT DONE LOOKS LIKE ON SCREEN Opening `/accounts/new` draws five steps, not six; step 2 shows the unit's plan as a fact rather than a question, and the review recaps all five.

CLOSES §03 · five REDESIGN figures nobody had undertaken

WITHOUT IT TODAY A clerk opening an account picks a plan that the unit then overrides.

ACC-S35 NEW BUILD

The move-in wizard takes a read, a read date and a deposit

STATUS Unverified

WAITS ON A deposit step copied from the new-account wizard, and a read date beside the reading. The product's move-in has five steps and takes no deposit.

SCREENS 04

WHAT DONE LOOKS LIKE ON SCREEN A move-in collects the opening read with its date or an estimate, takes the deposit in the same flow, and the review recaps all six steps.

CLOSES §03 · six REDESIGN figures nobody had undertaken

ACC-S44 BLOCKED

A committed build can be corrected, or says which corrections are refused

STATUS Unverified

WAITS ON A RULING, AND IT IS THE REASON THIS ONE IS BLOCKED RATHER THAN NEW BUILD. There is no update path on a connection anywhere in the product. Two of the missing ones are a decision rather than a build: **THE TARGET ACTIVATION DATE** and **HOW THE WORK IS DONE** are real columns that nothing writes after a commit, and **CHARGE LINES** can be added and waived in the wizard and not afterwards. Whether a committed quote is fixed, and whether a slipped inspection may move the target date, are the Product Owner's to answer.

SCREENS 07

WHAT DONE LOOKS LIKE ON SCREEN EDIT DETAILS opens over the record and every field on it is either live or disabled with the reason it cannot be honoured — none is hidden. A clerk whose inspection slips a fortnight either moves the date or reads, on the control itself, why they cannot.

CLOSES §03 · four fields on the Edit dialog with no path behind them

WITHOUT IT TODAY A clerk who mistypes the target activation date cannot correct it. Nothing in the product edits a committed build, so the choice today is to raise a second build or to live with the wrong date on the one that exists.

ACC-S36 NEW BUILD

The new-connect wizard is eight steps, and the premise step makes the address

STATUS Unverified

WAITS ON Nothing ruled beyond the merge itself. This is the largest orphan this audit found — eighteen figures: a whole wizard redesign, the build record on six tabs and its three actions, on the one screen that carried *No commitment*.

SCREENS 07

WHAT DONE LOOKS LIKE ON SCREEN `/connections/new` draws eight steps; the service address is created on the premise step in the same five boxes the request wizard uses; and an approved build opens onto a record laid out like every other detail view — a header with its actions top right, then Overview, Units and services, Plan and charges, Work orders, Communication and Audit.

CLOSES §03 · EIGHTEEN REDESIGN figures on a screen carrying No commitment

WITHOUT IT TODAY A developer's six-flat building is connected through nine steps that ask for the address twice, and afterwards there is no one page that says what was built.

04

Ending service

Four terminal paths, and the product is careful that they are visibly different: a tenancy ends (move-out), a customer moves to another of your addresses (transfer), service is cut for non-payment (disconnect), and a cut customer is finally finished (close-out).

08 Move-out wizard NEW BUILD

`/:tenant/accounts/:accountId/move-out · S20 · six steps`

Commitments ACC-S12 new build · ACC-S37 new build · ACC-S29 new build · ACC-S26 new build · ACC-S4 new build · ACC-S6 new build

The question: "*They're leaving on the 28th. Close it properly — and tell me what happens to the deposit before I promise them anything.*"

All 6 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).



Search for the account *

⚲ okafor

Account number, customer number, name, service address or meter number.

	ACCOUNT	CUSTOMER	SERVICE ADDRESS	STATUS	BALANCE
◉	A-10432	Okafor, D.	1408 Elm Street · Unit A	Active	$247.30
○	A-10188	Okafor, D.	88 Quarry Lane	Closed	$0.00

Two accounts, one name. A customer who has lived at two of our addresses has two accounts, and the closed one cannot be moved out again — it is listed so the clerk can see they picked the right one, not hidden so they wonder.

The account

Account number	A-10432
Customer number	C-00318
Name	Okafor, D.
Category	Residential · Standard
Status	Active
Opened	02/14/2024
Balance	$247.30
Deposit on file	$150.00
Autopay	Off
Paperless billing	On
Preferred language	English
Mailing address	Same as service

The unit they are leaving

Unit	U-000912 · Unit A
Unit type	Duplex — half
Floor	Ground
Floor area	1,120 sq ft
Premises	1408 Elm Street · PR-0402
Service address	1408 Elm Street, Silver Creek, TX 78611
Plan	SCW-RES · Residential · v1
Base charge	$20.00 a month
Bill the owner when vacant	No

Entered from the account's own page, this step confirms rather than searches — the account arrives in the address bar and a second picker could choose one the page cannot act on. Entered from the Move-outs tab, there is nothing in the URL and the search above is the only way in.

Meters on this unit

METER	SERVICE	TYPE	LAST READ	READ ON
M-4021	Electric	Walk-by	51,776	12/28/2025
M-4022	Water	Walk-by	1,388	12/28/2025

Both were last read a month ago, so neither figure is what the register stands at today. Step 2 is where that gets fixed.

What is open on this account

Unpaid bills	2 · $247.30
Payment plan	None
Disputes	None
Open service requests	None
Sub-accounts	0 — this is not a master account

Whether an issued bill blocks this move-out cannot be checked here. Billing has no invoices table, so the screen genuinely does not know — the server answers it at the commit, and every move-out warns that the check could not run.

THE MOVE-OUT REASON

Five options are named on screen and none of them is stored. There is no column for it, so the wizard asks and forgets - which is worse than not asking, and is drawn rather than quietly dropped.

v2.234.15

SO Sam Ortiz
Billing Clerk

Continue →

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

The account · `/brazosbend/accounts/a-10432/move-out?step=1`

`/brazosbend/accounts/a-10432/move-out?step=2`

SMARTBillHub

Account A-10432 / **Move-out**

Search accounts, premises, meters…

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Account A-10432

MOVE-OUT

Date & final reads

Save & exit

Step 2 of 6 · Date & final reads

✓ Find account	2 Date & final reads	3 Final bill & deposit	4 The shortfall	5 What happens next	6 Review & close

Moved out on *

01/28/2026

The last day this customer is responsible for the supply.

Final reads

Key the register as it stands, and the day it was read.

METER	FINAL READ	READ DATE	COULD NOT BE READ
M-4021 · Electric · total Last read 51,776 · read 31 days ago	52,410	01/28/2026	☐
M-4022 · Water · total Last read 1,388 · read 31 days ago	—	01/28/2026	☑

Every date opens on the move-out day. A meter read on the Saturday before a Tuesday move-out can say so, and a clerk who changes nothing gets the move-out date on both.

What the estimate answered

REGISTER	OUTCOME	WHAT WAS RECORDED
M-4022 · Water	Estimated	1,402 — worked from this register's own history over 31 days, method disclosed on the read.

An estimated final read is lawful and it is also the one a customer disputes. It prices the last month of a bill they are about to be asked to settle, so the account closes on a figure nobody stood in front of.

The three answers a final read can have

STATE	WHAT IT MEANS
Taken	Somebody read the register at or after the move-out date.
Estimated	Worked out from that register's own history, with the method disclosed.
Due	No reading at all, and the date has passed.

Two would not have been enough. A settlement reached on an estimate and one reached on a real reading are not the same claim, and the state is stored on the account so the difference survives the wizard closing.

An estimate can refuse, in five named ways — no earlier reading, the consecutive-estimate cap, a demand peak, no reading settings, or no period to work over. A refusal comes back as data beside the row: never a zero, never an invented figure.

What this step does NOT do

NO USAGE IS WORKED OUT HERE

The difference between the last reading and this one is not computed on this screen. Reads commit through metering's own door and the consumption follows from them; a delta drawn here would be a second arithmetic to disagree with the first.

The reads are committed with the close, not before it. The whole move-out is one transaction, so a refused reading rolls the close back with it and everything stays on screen.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

Date & final reads · `/brazosbend/accounts/a-10432/move-out?step=2` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

`/brazosbend/accounts/a-10432/move-out?step=3`

SMARTBillHub

Account A-10432 / **Move-out**

Search accounts, premises, meters…

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates

← Account A-10432

MOVE-OUT

Final bill & deposit

Save & exit

Step 3 of 6 · Final bill & deposit

Step 3 of 6 · Final bill & deposit

The final bill

LINE	PERIOD	AMOUNT
Electric · 634 kWh	12/28/2025 — 01/28/2026	$71.40
Water · 14 kgal · estimated	12/28/2025 — 01/28/2026	$17.70
Unbanked export credit	—	$0.00
	Final bill, net	**$89.10**

What to do with the deposit

◉ **Apply it to the final bill**
The only one that reduces what this customer owes, and the only one available while the account lands short.

Amount to apply *
150.00
The whole deposit by default.

Applied on *
01/28/2026
The move-out day.

○ **Refund it** Account is short
Needs the subtraction to land below zero, and this one lands $186.40 above it.

○ **Hold it** No dispute
Needs an open dispute.

○ **Transfer it to another account** Different flow
That is the transfer flow, not a move-out — there the deposit never leaves and the history is kept.

Three are greyed and each says why. Which of the four is available is decided by the subtraction below, not by the clerk — and hiding the other three would leave a clerk wondering whether this product can refund a deposit at all.

Everything outstanding

The subtraction

Prior balance	$247.30
Final bill, net	$89.10
OUTSTANDING	**$336.40**
Deposit applied	– $150.00
Deposit interest	not recorded
Unapplied credit	– $0.00
Short by	**$186.40**

The next step is what happens to that $186.40. It is its own step because it is a decision about somebody else's money, not an arithmetic.

How the money lands is not a choice. It is one subtraction, and the answer decides which case this account is in: above zero is short, zero is settled, and below zero is a refund — unless a dispute holds it, or a sibling account owes us money, in which case it goes there.

The five landings, one arithmetic

LANDING	WHEN	THIS ACCOUNT
Settled	nothing left either way	
Refund due	below zero, nothing in the way	
Short	above zero	this one
Held	below zero, a dispute is open	
To a sibling	below zero, another account owes us	

What the other three would ask for

ACTION	ITS FIELDS
Refund it	Method — ACH, a mailed cheque, or carried to a new account · the amount · where to send it
Hold it	Which dispute · a review date · who authorised the hold
Transfer it	The receiving account, resolved by the server · the amount · a reason

Named rather than hidden, so a reader can see what each one needs without having to find an account in the right state to make it appear.

⚠ The signed arithmetic includes deposit interest and this product does not track it. The frozen figure applies **$153.50** — a $150.00 deposit held fourteen months at the tenant's 2% simple rate earns $3.50. Here *applied* counts the deposit alone, and **the consequence runs against the customer**: a smaller amount applied makes the shortfall bigger, so this account is asked for more than the signed rule says it owes.

NO BILL IS ISSUED BY THIS SCREEN
Billing raises the final bill; this wizard prices what it will contain and posts nothing. The figures above are a settlement position, not an invoice, and the account closes owing what the invoice will say.

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

Final bill & deposit · `/brazosbend/accounts/a-10432/move-out?step=3` · 3 stated absences on this step, drawn dashed — each names the rule or table it waits on

/brazosbend/accounts/a-10432/move-out?step=4

SMARTBillHub ☰ | Account A-10432 / Move-out | ⚲ Search accounts, premises, meters... | ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Account A-10432

MOVE-OUT

The shortfall

Save & exit

Step 4 of 6 · The shortfall

✓ Find account	✓ Date & final reads	✓ Final bill & deposit	4 The shortfall	5 What happens next	6 Review & close

What happens to $186.40

Outstanding	$336.40
Deposit applied	– $150.00
Short by	$186.40
Owed by	Okafor, D. · A-10432, closing today

◉ **Collect it**
It stays owed by Okafor, D. and collections chase them at their next address.

Forwarding address

88 Quarry Lane, Silver Creek, TX 78611

Where the reminders go.

○ **A payment plan**
Agreed before the account closes, and the plan survives the closure.

○ **Transfer it to the master account**
A-10001 · Elm Street Holdings LLC, the declared owner of 1408 Elm Street.

○ **Write it off**
The debt stops existing rather than moving.

What each one would ask for

PATH	ITS FIELDS	WHO CAN
Collect it	A forwarding address	Any clerk
A payment plan	Instalments · first payment date · amount each · the customer's agreement	Any clerk
Transfer it	The target — the master account or the premises owner — and a reason	Any clerk
Write it off	A reason · a supervisor's approval	A supervisor

Transferring points the reminder ladder at somebody who never agreed to this debt. A departing tenant's residue moving to their landlord is lawful and it is also a letter arriving at a company that has never heard of Okafor.

What the chosen path will do

THEN	WHAT
Now	$186.40 stays on A-10432 as a closing balance
Now	The account closes SHORT, which keeps its reminder ladder running
Next	Collections chase Okafor, D. at 88 Quarry Lane
Not now	Nothing moves to the landlord and nothing is forgiven

Closing does not stop the reminders. Only a settled or refunded close does that.

If the transfer were chosen instead: the master account's own ladder restarts, this account closes settled, and the sub-account is closed by the transfer rather than by the move-out. That is one ruling, not two screens agreeing by accident.

WHICH CASE THE ACCOUNT IS IN COMES FROM A READ THIS DEPLOYMENT ANSWERS ONLY IN PART
The landing and the figures are served. The rest of the close picture - premises occupancy afterwards, the vacant-charge position, payment-plan progress - arrives empty, so no path is offered on a guess and nothing is assumed in its place.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

The shortfall · `/brazosbend/accounts/a-10432/move-out?step=4` · 3 stated absences on this step, drawn dashed — each names the rule or table it waits on

/brazosbend/accounts/a-10432/move-out?step=5

← Account A-10432

MOVE-OUT

What happens next

Save & exit

Step 5 of 6 · What happens next

✓ Find account | ✓ Date & final reads | ✓ Final bill & deposit | ✓ The shortfall | 5 What happens next | 6 Review & close

The account

Status becomes	Closed · 01/28/2026
Balance at close	$186.40 still owed
Service agreements	both ended 01/28/2026
Autopay	stops
Paperless	kept — the final bill still goes out

Closing does not stop the reminders. An account that closes SHORT keeps its ladder running against the person who left.

The unit

Falls to	Vacant · from 01/29/2026
Vacant standby	Off — nobody is billed for it
Plan	stays on the unit
Next occupant can start	01/29/2026 at the earliest

A vacant unit bills the owner only where its own standby flag is set. This one is off, so the unit costs nobody anything until somebody moves in.

The meters

On the unit	2 · M-4021, M-4022
They stay fitted	yes — a move-out removes nothing
Final reads	one taken, one estimated

The money

Deposit	$150.00 applied to the final bill
Deposit interest	not recorded
Shortfall	$186.40 · to be collected
Final bill	raised by billing, not by this wizard
Refund	none — the account is short

What we will send

MESSAGE	WHEN	STATE
Final bill	when billing raises it	Not queued here
Closing statement	on close	Queued
Deposit applied	on close	Queued
Amount still owed	on close	Queued

Queued is not sent. Rows are written and no sender picks them up.

What this close does NOT do


NOT THIS	WHY
Issue the final bill	Billing raises it on its own cycle.
Refund anything	The account is short; there is nothing to return.
Remove the meters	They belong to the unit, not the customer.
Free the unit for today	The outgoing account is billed through its move-out day, so the next tenant starts the day after.
Close a sub-account	There are none — this is not a master account.


SIX CONSEQUENCES THE PRODUCT CANNOT YET STATE

Premises occupancy afterwards, the owner on record, the vacant-charge position, payment-plan progress, what happens to the assets, and any master-account effect all arrive empty from the close-impact read. Each is named rather than defaulted, because a blank consequence and a harmless one look identical once a screen guesses.

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

What happens next · `/brazosbend/accounts/a-10432/move-out?step=5`

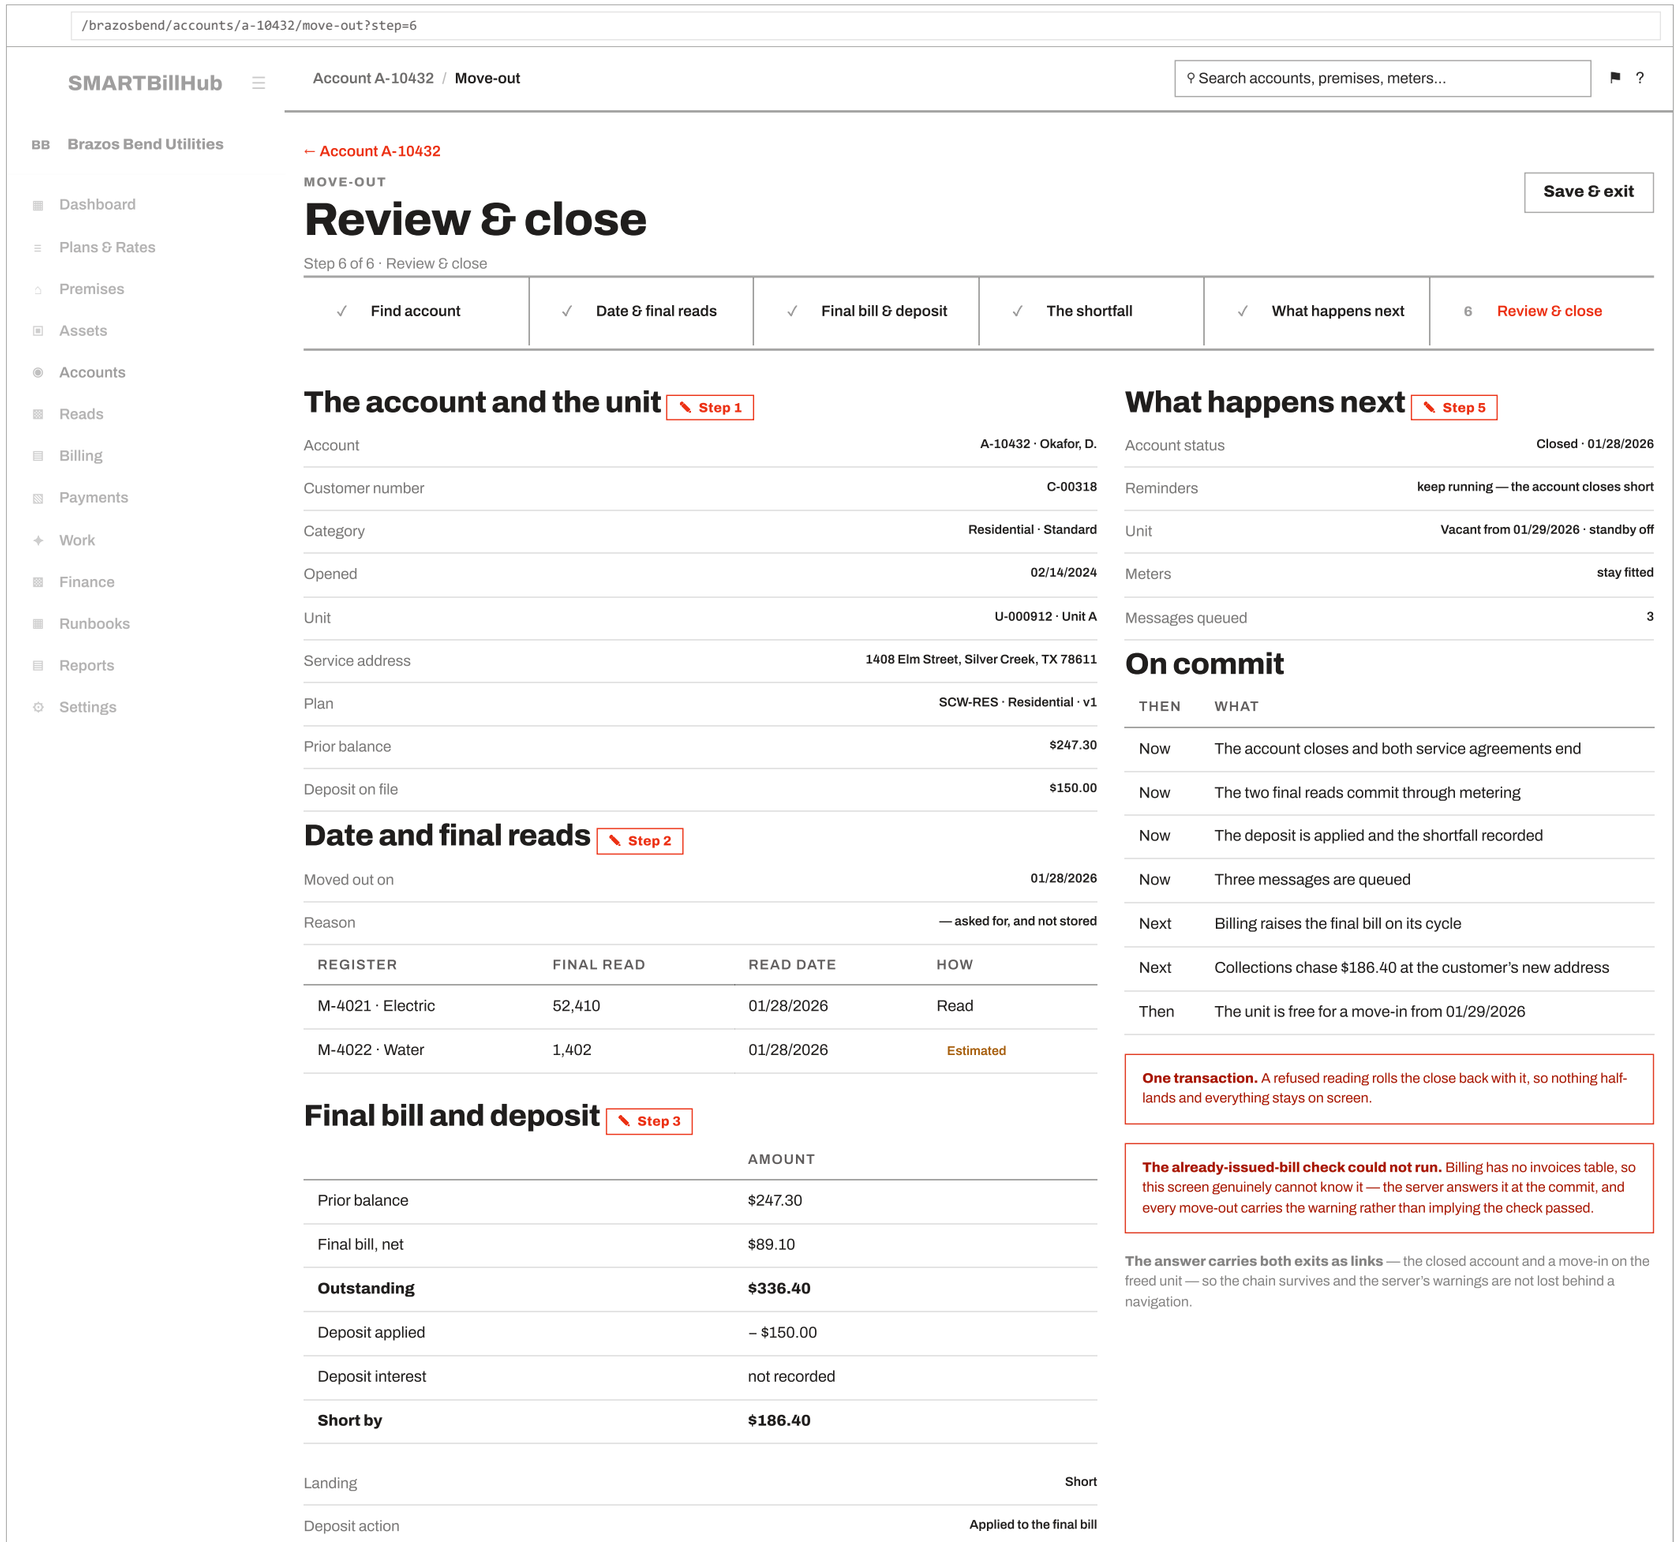

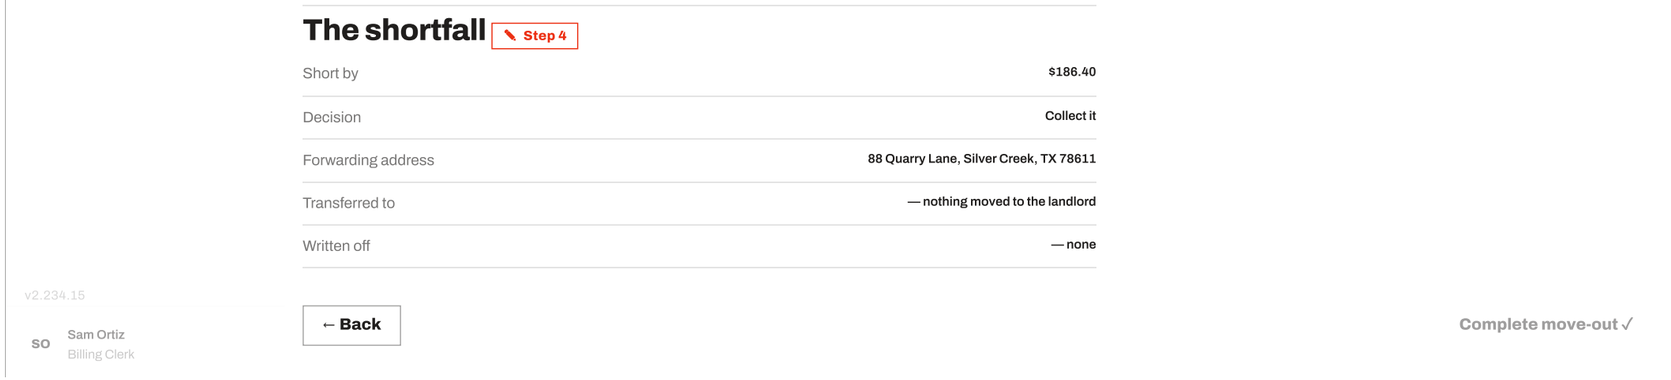

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's move-out has six steps, and its deposit panel carries no actions and its shortfall no step; both were put back here.

Review & close · `/brazosbend/accounts/a-10432/move-out?step=6` · Commits to **POST /accounts/{id}/move-out · reads GET /accounts/{id}/close-impact at step 5**

Where a move-out lands, and what it becomes


Onto the register's Move-outs tab, beside the six other worklists the register carries.

Settlement is a direction, not a status. One of these owes the utility $186.40 and one is owed $42.15 back, and they are the same kind of row. A column reading only *settled* would hide which way the money goes, which is the only thing a clerk ringing about it needs. **Final read has three answers and not two** — taken, estimated, or still due — and the middle one is why it is a column: a move-out settled on an estimate is lawful, and it is also the one a customer disputes.

> **A closed move-out can still be waiting on a decision**
>
> `MVO-26-0088` is short by **$186.40 owed by somebody who has left**, and nothing has decided where it goes. It can follow the customer, or be tied back to the master account for that address — and tying it back **points the reminder ladder at a landlord**, so it is a clerk's deliberate act and never a consequence of closing.
>
> **Nothing is preselected on that record.** A default there would be the product deciding whose debt this is.

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the Move-outs tab exists and was walked; the *waiting on* column is the addition.

Where a move-out lands · the Move-outs tab · `/brazosbend/accounts?tab=move-outs` · The six-step move-out's worklist · final reads and where the money landed

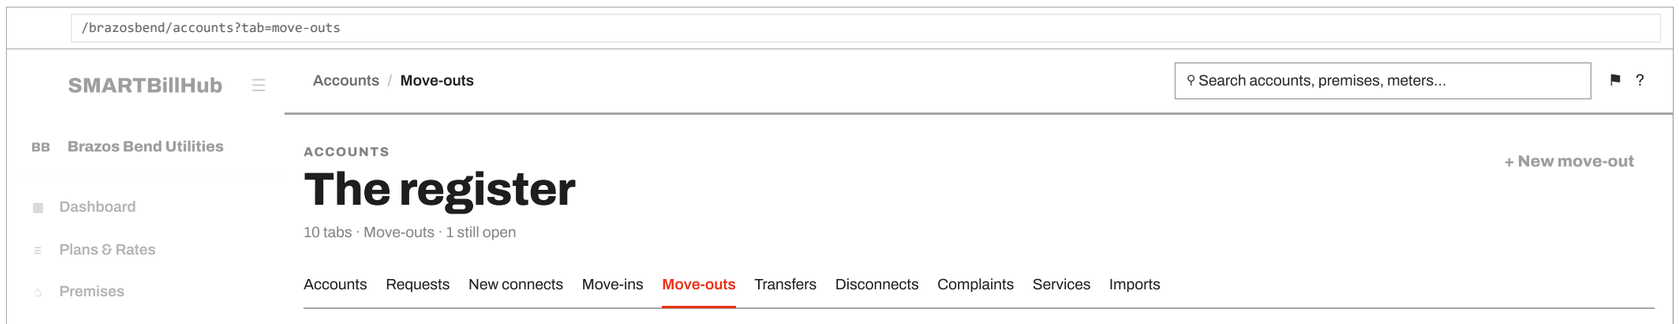

Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

OPEN
1
not yet closed

LEAVING THIS WEEK
1
move-out date within 7 days

FINAL READS DUE
1
no reading and the date has passed

Open | Leaving this week | Closed | All | Filter ▾ | ⚲ Search by reference, account, customer or unit | Columns ▾ | ⇩ Export

REFERENCE	ACCOUNT	CUSTOMER	UNIT	MOVE-OUT DATE	STEP	FINAL READ	SETTLEMENT	STATE	
MVO-26-0088	A-10432	Okafor, D.	1408 Elm · Unit A	01/28/2026	6 of 6	Taken	Short by $186.40	Completed	↗ Open
MVO-26-0087	A-11602	Ncube, T.	1408 Elm · Unit E	05/09/2026	2 of 6	Due	—	In progress	↗ Open
MVO-26-0084	A-11890	Fairbanks, J.	1408 Elm · Unit D	04/14/2026	6 of 6	Estimated	Refund $42.15	Completed	↗ Open

1–3 of 3 · Rows per page 50 100 200 ‹ ›

Settlement is a direction, not a status. One of these owes the utility $186.40 and one is owed $42.15 back, and they are the same kind of row.

Final read has three answers and not two. Taken, estimated, or still due — and the middle one is why it is a column: a move-out settled on an estimate is lawful, and it is also the one a customer disputes.

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no move-out record page exists, and nothing in the product ties a shortfall back to a landlord.

The move-out, opened · MVO-26-0088 · `/brazosbend/moves/mvo-26-0088` · Proposed · and the one decision a closed move-out can still be waiting on

`/brazosbend/moves/mvo-26-0088`

SMARTBillHub ☰ Accounts / Move-outs / **MVO-26-0088** ⚲ Search accounts, premises, meters… ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

← The register

MOVE-OUT MVO-26-0088

Okafor, D.

Completed · Short by $186.40 · Moved out 01/28/2026

⌂ 1408 Elm Street · Unit A

Open the account | Tie the shortfall back

WHAT HAPPENED

Account closed	A-10432
Unit	1408 Elm Street · Unit A
Moved out on	01/28/2026
Final read	Taken · 01/28/2026
Unit now	Vacant · standby off
Committed by	S. Ortiz · 01/28/2026 15:12

HOW THE MONEY LANDED

Settlement

Closing balance	$336.40
Deposit applied	$150.00
Short by	**$186.40**

$186.40 is owed by somebody who has left, and nothing has decided where it goes. It can follow the customer, or be tied back to the master account for this address — and tying it back points the reminder ladder at the landlord, so it is a clerk's deliberate act and never a consequence of closing.


WHERE IT COULD GO

OPTION	WHAT IT MEANS
Follow the customer	The debt stays theirs and collections chase them at their new address.
Tie back to the master	A-10001 · Elm Street Holdings LLC. Their ladder restarts, and this account closes.
Write it off	Needs a supervisor and a reason.

Nothing is preselected. A default here would be the product deciding whose debt this is.

One action, and it is a consent rather than a consequence. Written as an automatic rule, tying a shortfall back would move a departing tenant's debt onto a landlord who never agreed to it, silently, on every move-out in the product.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no move-out record page exists, and nothing in the product ties a shortfall back to a landlord.
> **Tie the shortfall back — and what it does to the landlord** · `/brazosbend/moves/mvo-26-0088` · The only action on a completed move-out · and it is a consent, not a consequence

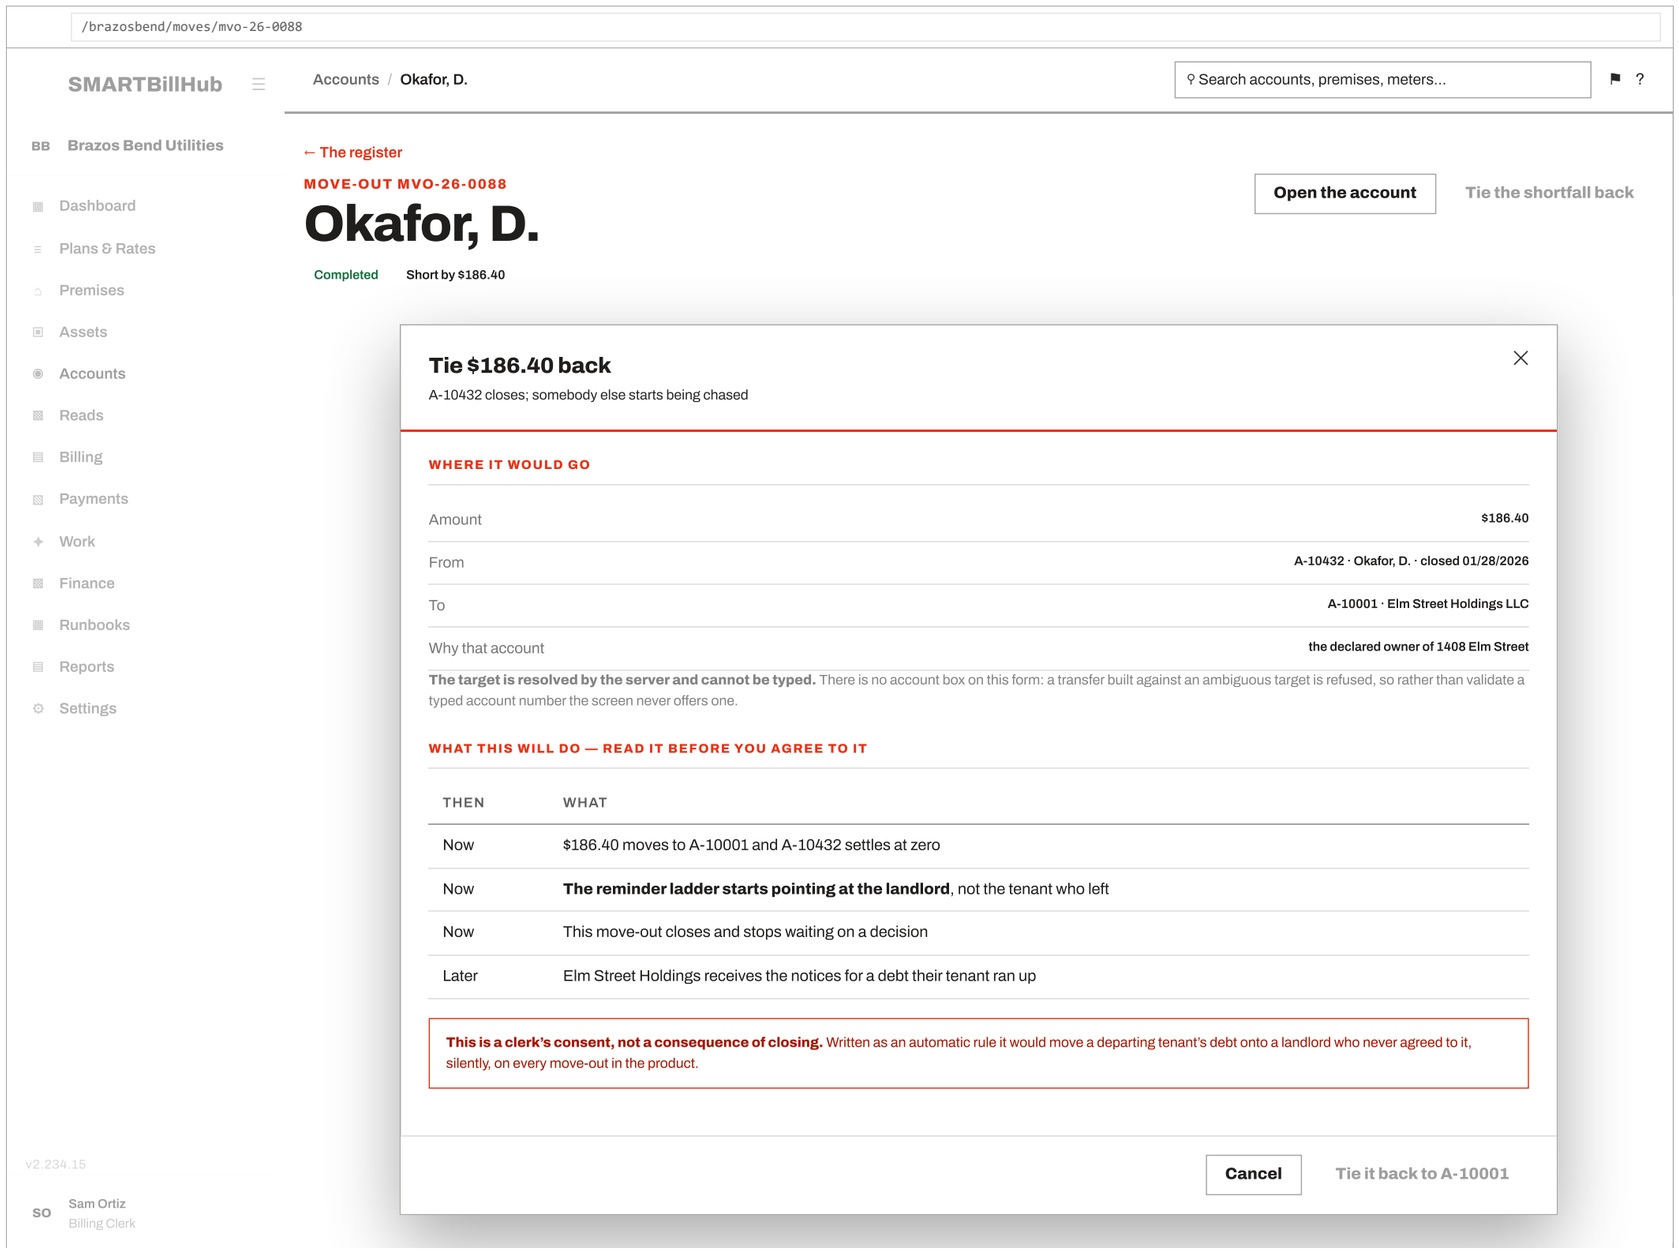

How you get here	The S21 **Move-out** button (`AccountDetailPage.tsx:713`), guarded so only an account that currently holds its unit can use it.
Primary action	**Complete move-out ✓** — one commit, not the design's two buttons, whose answer carries both exits as links so the chain survives.
Write surfaces	**Update** `POST /accounts/{id}/move-out`, plus `/settle-shortfall`, `/refund` and `/hold-excess`. Reads `GET /accounts/{id}/close-impact` for step 5.

Walked	**Not walked.**
Notable	Step 5 draws **nine** consequence panels — premises, unit, assets, deposit, open bills, sub-accounts, payments, plan, collections — and each says whether it is derived, explicitly served, or not served at all. This is UI-RULES 11 honoured about as thoroughly as it gets in this product.
Rules	BR-CUS-025 · 030 · 031 · 056 · 081 · 082 · 096 · 1040 · BR-SHL-046

09 Move-out wizard · standalone NO COMMITMENT

`/:tenant/move-outs/new  — the same MoveOutWizard as screen 08, entered with no account chosen`

No commitment names this address — it is the same `MoveOutWizard` as screen 08 at a second URL, so the 6 commitments on 08 reach it without naming it.

What it is	A second address. Step 1 becomes a real **Find account** search rather than a confirmation.
How you get here	Four doors, mirroring move-in: header (`AccountsListPage.tsx:1212`), tab primary (`:984`), empty CTA (`MoveOutsTab.tsx:769`), parked **Resume**.
Walked	**Not walked.**

10 Close-out NEW BUILD EXISTS BEHIND

`/:tenant/accounts/:accountId/close-out  ·  no screen id  ·  the act, what it does, and the account after it`

Commitments ACC-S12 new build · ACC-S38 new build · ACC-S4 new build · ACC-S7 exists behind

The question: "*We cut this one in August and they never came back. Finish it — and don't let me pretend the debt went away.*"

The act that ends an account whose supply was cut — and the one date in this product that no correction can un-say. Ruled 2026-08-27, verbatim and in full: "*A disconnected customer can never be closed - Add a separate close-out act — Cleaner in the record*". **The reasoning is part of the ruling:** relaxing the move-out door to admit a cut customer would file a disconnection AS a move-out in a permanent record, and to a regulator those are not the same event. So the two doors refuse each other in both directions, and this one writes the **cut date** rather than the day the clerk pressed it — which on this account is the difference between a unit being re-lettable on 08/19 and being refused for **43 days**.

All 3 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

/brazosbend/accounts/a-11488/close-out

← Account A-11488

CLOSE OUT ACCOUNT

Close out this account

Save & exit

A-11488 · Okafor, D. · cut on 08/18/2026

The account you are closing

Account number	A-11488
Customer	Okafor, D.
Customer number	C-00318
Category	Residential · Standard
Status now	Disconnected · non-billable
Service address	77 Rio Grande, Silver Creek, TX 78611
Unit	U-001207 · Unit 2
Services	Electric · Water
Opened	06/03/2021

Disconnected is not closed, and that is why this screen exists. A cut leaves the account OPEN: it still owes money, the customer can still pay it, and the supply can still be restored.

What was cut, and when

Disconnect case	DSC-26-0114
Reason	Non-payment
Services cut	Electric · Water
Cut on	08/18/2026
Final metered bill	$23.23 · 18 days of 31
Base charges since	None — they stop at the cut
Balance	$612.75 · unchanged since the cut

The final bill was raised at the cut, not today. Eighteen days of a $40.00 month is $23.23, and after the cut the balance does not move except when they pay, when a correction is posted, or if service comes back.

What you are recording

Closing this account out on *

09/30/2026

Today, or the day the decision was actually made.

Why *

Cut 08/18, no contact in six weeks, tenancy ended and the landlord has re-let.

A sentence, in your own words.

Status it takes

Closed

A terminal status.

A LIST OF REASONS TO PICK FROM

There is none, and the sentence above is what gets recorded. Nothing in this product counts closures by reason, so *how many did we close as written off last year* has no answer.

What pressing this writes

WHAT	VALUE	WHY THAT
The date the account closed	**08/18/2026**	The CUT date — not today
The account's status	Closed	Terminal at last
Every open service agreement	Ends 08/18/2026	The same day service actually stopped
The disconnect case	Closed out	With today's date and your name on it
The record of the act	One row	*Closed out*, never *closed*

The date on the record is the CUT date, and getting that wrong costs six weeks of an empty unit. Service ended on 08/18. If today's date went on the record instead, the next customer could not legally start before 10/01 — so every one of the **43 days** from 08/19 to 09/30 would be refused on a property this utility was entitled to re-let the whole time.

Both dates are kept, on purpose. The record reads: service ended on the cut date, and the account was closed out on this later day, by this person.

What it will not do

Take a final read	No — the meter was read, or not, at the cut
Settle the deposit	No — that is the payments side
Decide where the debt goes	No — see the next screen
Write a move-out record	No — this was not a move
Clear the balance	No — $612.75 survives it

Nothing here is filed as a move-out, and that is the point of the whole act. A customer whose supply was cut did not move out, and a permanent record saying they did is not something a correction can un-say.

NOTHING HAS BEEN CHECKED FOR YOU

This act does not look up an active payment plan, an open dispute or an unbilled cycle, and

IT IS NOT TELLING YOU THEY ARE CLEAR

. Whether any of the three should stop a terminal act or merely warn has never been decided, and refusing on a blocker nobody agreed to would leave a dead end with no way past it.

When it refuses

IF	WHAT YOU ARE TOLD
The account is already closed	This account is already closed. Correcting a close-out means a new record.
They still live there	This customer still occupies the unit, so use Move-out instead.
The supply was	Only an account whose service was cut can be

The supply was never cut	Only an account whose service was cut can be closed out.
Your date is before the cut	The close-out date cannot be earlier than the cut date.
You left the date empty	Enter the date you are closing this account out.
You left the reason empty	Say why this account is being closed out.

The second one is the door working, not failing. Somebody who still lives there is a move-out; sending them through here would file a departure as a disconnection, which is the same falsification as the other way round.

← Back to the account | Record the close-out

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's close-out is one screen that states the act; it does not show what closing does, and it draws no after state.

Close out this account · `/brazosbend/accounts/a-11488/close-out` · The act, what it writes, and the six ways it refuses

/brazosbend/accounts/a-11488/close-out?confirm=1

SMARTBillHub ☰ Account A-11488 / Close out account ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Account A-11488

CLOSE OUT ACCOUNT

What closing this account does

Save & exit

Read this before you press it · nothing has happened yet

The moment you press it

WHEN	WHAT
Now	The account becomes **Closed** and stops being billable
Now	Its closing date is written as **08/18/2026**, the cut day
Now	Every service agreement on it ends on that same day
Now	The disconnect case is marked closed out, with your name
Now	The unit is free for somebody else from **08/19/2026**
Now	One record of the act — *closed out*, not *closed*
Now	**A fresh collections case opens at tier 1**

The account, afterwards

Status	Closed · terminal
Closed on	08/18/2026 · the cut date
Closed out on	09/30/2026 by S. Ortiz
Billed again	Never
Balance	$612.75 · unchanged
Can they still pay it	Yes
Can it be reopened	No — a correction is a new record

The money, and who chases it now

What is left

Balance at the cut	$612.75
Paid since	$0.00
Written off by this act	$0.00
Still owed after closing	**$612.75**

A new case opens	Tier 1 · the first reminder
Against	This account itself
Kind of ladder	Collections — letters only
Can it reach a cut	No
Deposit applied	— not by this act

A closed account cannot be escalated to a disconnection, because there is nothing left to disconnect. So the ladder that restarts is a collections one: reminders, and then whatever this utility does about a debt it cannot cut for.

Closing an account is not writing off what it owes. The balance survives the closure untouched, and somebody is still asking for it the following week.

And who it is NOT chased from

Closing is the one act no correction can un-say. Everything else in this product is fixed by writing a new row.

The unit

Released	**At the cut, 08/18/2026**
Vacant since	**08/19/2026**
Earliest a move-in may start	**08/19/2026**
Days it has stood empty	**43, to 09/30/2026**
Owner billed while vacant	**Per the premises' own setting**

Those 43 days are why the cut date goes on the record. The utility could have re-let this property from the 19th of August.

Tied back to a master account	**No**
The landlord	**Not written to, not asked**
Where that is decided	**The move-out wizard, by a clerk**

A residue nobody tied back does not become the landlord's problem, and therefore does not become the landlord's letters. Moving a departing tenant's debt onto the owner of the building is a deliberate act with a name recorded against it, and this screen does not collect that consent — so it must not have that effect.

What the customer receives

MESSAGE	WHEN	EXISTS?
That the account is closed	On closing	No template
A final statement of what is owed	On closing	No template
The tier-1 reminder	With the new ladder	Yes

So the first thing they hear about their account being closed is a demand for $612.75. Nothing announces the closure itself — there is no template for it and none for a closing statement. The only letter this produces is the one asking for money.

WHAT A REGULATOR WOULD ASK FOR

Closures cannot be counted by reason, because the reason is a sentence somebody typed. *How many accounts did we close with a balance, and how much did we write off* is not a question this product can answer for any period.


← Back **Yes — close it out**

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's close-out is one screen that states the act; it does not show what closing does, and it draws no after state.

What closing it does · `/brazosbend/accounts/a-11488/close-out?confirm=1` · The account, the unit, the 43 days and the debt that outlives all three

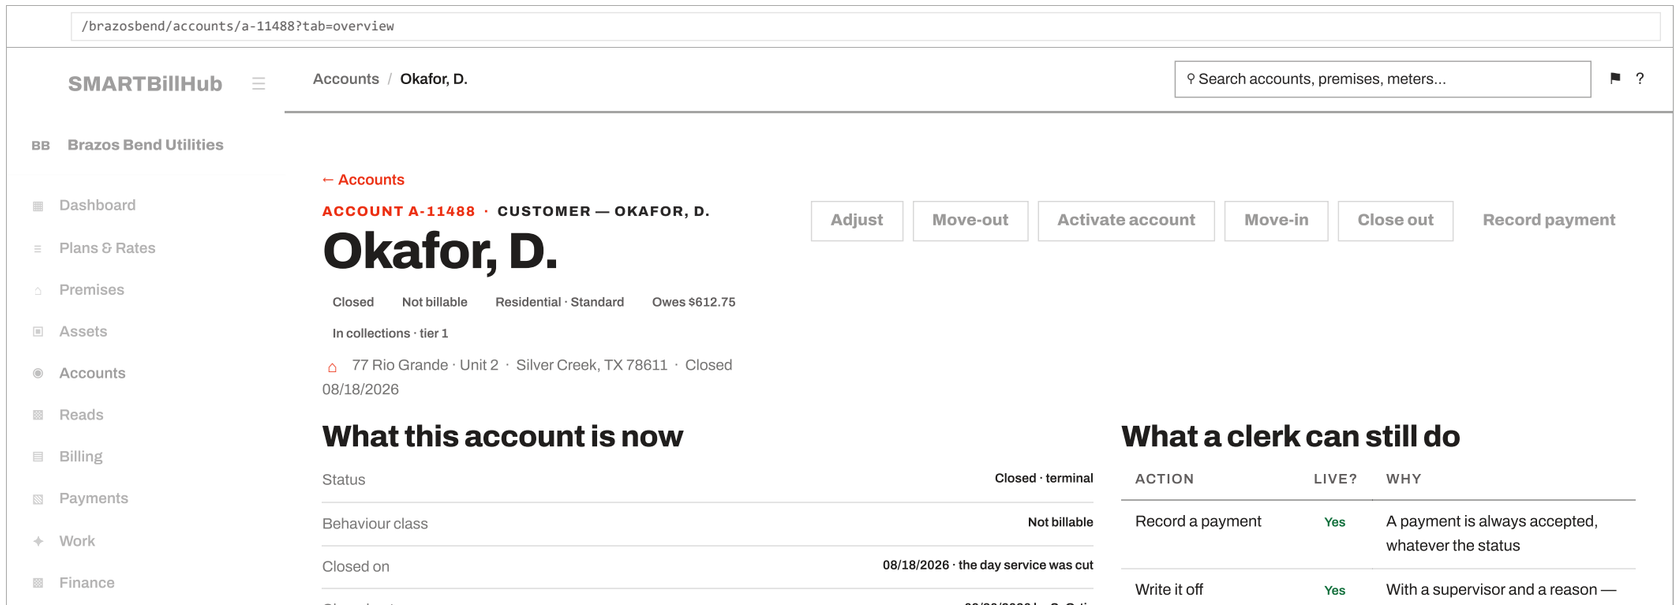

Closed out on	09/30/2026 by S. Ortiz
Why	Cut 08/18, no contact in six weeks, tenancy ended and the landlord has re-let.
Disconnect case	DSC-26-0114 · closed out
Service agreements	Both ended 08/18/2026
Last bill	$23.23 · 08/18/2026
Next bill	None — ever

Two dates, and they answer different questions. *Closed on* is when the customer stopped having service.

The money

Still owed	
Balance	$612.75
Deposit on file	$0.00
Written off	$0.00
Being chased	**$612.75**

Collections case	COL-26-0141 · opened 09/30/2026
Tier	1 of 3 · first reminder
Sequence	Collections — letters only
Escalates to a cut	No
Tied back to a master	No

Closed, and still being chased. The two are not in conflict: closing ends the SERVICE relationship and settles nothing.

		a separate act
Read the bills, reads and notes	Yes	The whole history stays readable for ever
Adjust the balance	No	Nothing left to adjust
Move them out	No	Already closed
Reopen it	No	A correction is a new record, never an edit
Reconnect the supply	No	That was possible while it was only disconnected

Every control that is off says why, on hover, instead of vanishing. A button that disappears teaches a clerk nothing; one that is greyed out with a sentence on it answers the question they were about to ring somebody about.

The last row is the one that changed at closing. While the account was merely disconnected, paying the arrears and the reconnection fee would have brought the supply back.

The unit they left

Unit	U-001207 · Unit 2
Premises	77 Rio Grande · PR-0611
Occupied by	Nobody
Vacant since	08/19/2026
A move-in may start	On or after 08/19/2026
This account's claim on it	Ended at the cut

The unit was free from the day after the cut, not from the day the paperwork was done. That is the whole reason the closing date is the cut date, and it is visible here as the one place a clerk would notice if it were wrong.

What is still open elsewhere

WHAT	REFERENCE	STATE
Collections	COL-26-0141	Tier 1
Disconnect case	DSC-26-0114	Closed out
Complaints	— none	—
Service requests	— none	—

A DEPOSIT TO RETURN, OR TO APPLY
This account holds none. Where one is held, closing does not touch it — the refund leg belongs to payments and is a different act on a different screen, so a closed account with a deposit still on it is a thing somebody has to go and finish.

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's close-out is one screen that states the act; it does not show what closing does, and it draws no after state.

The account afterwards · `/brazosbend/accounts/a-11488?tab=overview` · Closed, still owed, and every control that is off saying why

How you get here	One door: the S21 **Close out** secondary (`AccountDetailPage.tsx:738`), live only on a cut, non-occupying, non-closed account.
Primary action	**Record the close-out**, on the **danger tier** — B14 rule 6 honoured, colour and not only shape.

Write surfaces	**Update** `POST /accounts/{id}/close-out`, and it accepts **three fields only** — the date you did it, the reason, and the terminal status. The closing date, a final read, a deposit disposition and a shortfall path are all **refused by omission**: the date is derived and the rest belong to acts that collect a consent this one does not.
What it does NOT write	**No move record** — a close-out is not a move, and filing one would be the exact falsification the separate act exists to prevent. **No final-read state** — the meter was read, or was not, at the cut months earlier, and writing a value would claim a reading this act never took.
⚠ One sentence corrected	The drawing said "*The final bill — Billing issues none yet*". That was reversed on 2026-08-30: **the cut raises the final bill** — $23.23 of a $40.00 base on this account, 18 days of 31 — so by the time anyone reaches this screen the bill exists and the balance has been static ever since.
Walked	**Not walked.**
Commitment	**No epic owns this screen.** Its own trace block says so: the PO ruled the act on 2026-08-27 and no epic covers it, so a story is owed. That absence is the finding, and this document does not invent a commitment to fill it. Closed by ACC-S7.
Rules	BR-CUS-082 · 430 · 431 · BR-CUS-110 · B14 rule 6

11 Transfer wizard NEW BUILD

`/:tenant/transfers/new · S89 · five steps`

Commitments ACC-S39 new build · ACC-S4 new build

The question: "*I sold the house. Hand the whole account to whoever bought it — the number, the meter and what it owes.*"

⛔ **This flow was redrawn to the job the product actually does, and the old drawing is not a variant of it.** Until 2026-09-01 a transfer moved a customer to another of our addresses: it closed one account, opened a second at a new unit, took a final read and an opening read, and carried the deposit across. **The Product Owner ruled that a transfer is a SALE** — "*dont create new account - we reassing that account - bascailly I have sold my property - so account get transfer to new person or business; if I move to new location then it is new Service request*". The account, its number, its unit, its meters, its plan and its whole ledger stay where they are; **the customer changes**. So there is no leaving step, no arriving step and no final read, and a customer MOVING is a new service request instead. The five steps below are the five the code names.

All 5 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).



TRANSFER

Find the account, and who is selling

Save & exit

Step 1 of 5 · Find the account

1 Find the account | 2 The buyer | 3 Date of sale | 4 What they take on | 5 Review & confirm

Search for the account *

marigold

Account number, customer name, service address or meter number.

	ACCOUNT	CUSTOMER	SERVICE ADDRESS	STATUS	BALANCE
◉	A-11674	Delgado, R.	310 Marigold Lane · Unit 1	Active	$318.40
○	A-11602	Ncube, T.	1408 Elm Street · Unit E	Already being sold	$84.15

One sale at a time. An account already part-way through a sale cannot start another — the second row is listed rather than hidden, so a clerk can see it exists and why it is not offered.

The account — and all of it changes hands

Account number	A-11674
Customer number	C-00461
Seller	Delgado, R.
Customer kind	Person
Category	Residential · Standard
Status	Active
Opened	03/08/2022
Current balance	$318.40
Deposit on file	$150.00
Deposit interest	— not recorded
Autopay	On · bank transfer
Paperless billing	On
Bill email	r.delgado@example.com
Phone	(512) 555-0311
Preferred language	English
Mailing address	Same as service

What is changing hands with it

Unit	U-001355 · Unit 1
Unit type	Duplex — half
Floor	Ground
Floor area	1,040 sq ft
Premises	310 Marigold Lane · PR-0518
Service address	310 Marigold Lane, Silver Creek, TX 78611
Services	Electric · Water
Meters	M-5180 Electric · M-5181 Water

Stays with you. The account number, the unit, the meters, the plan, the billing cycle and the whole ledger stay exactly where they are.

Selling the property, or moving house? If this customer is moving to another of our addresses, this is not a transfer.

Said here on purpose
The two used to be one door, and the door that existed did the second job.

The same customer elsewhere

Other accounts	1 · A-11721 · 88 Quarry Lane
Affected by this sale	No — that one is theirs still

The seller keeps every other account they hold.

What this sale will not touch

Issued bills	Stay in the seller's name, for ever
Payments taken	Stay as taken
Journal entries	Stay as posted
The account number	Unchanged
The unit and meters	Unchanged
Service agreements	Unchanged

A bill is a record of what was sent, not a claim about who owes it today. A bill posted to this seller still says their name a year from now, and nothing here reissues or re-addresses one.

THE PROPERTY OWNER RECORD

A sale does not rewrite the premises' owner. That is a separate, typed record on the property itself and it still wants matching by hand — the commit says so out loud rather than leaving a clerk to assume it followed.

Plan	SCW-RES · Residential · v1
Base charge	$20.00 a month
Billing cycle	Cycle 2 · the 9th
Ledger	51 months, unbroken

v2.234.15

SO Sam Ortiz
Billing Clerk

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's transfer wizard still creates a second account, takes a final read and asks for two dates; BR-CUS-1030 made a transfer a REASSIGNMENT and these five are drawn to that ruling.

Find the account, and who is selling · `/brazosbend/transfers/new?step=1`

`/brazosbend/transfers/new?step=2`

SMARTBillHub

Transfers / Transfer

⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Transfers

TRANSFER

Who is buying it

Save & exit

Step 2 of 5 · The buyer

✓ Find the account	2 The buyer	3 Date of sale	4 What they take on	5 Review & confirm

Who is buying it

Matched first, created only on no match. The buyer is looked up against the customers already on file before anybody new is written.

Person or company

Customer kind: A person ▼
A person · A company.

Full name *: Vasquez, M.
As it should appear on the bill.

One identifier — and one is enough

Social Security number: Not given

Driving licence: Not given

Phone: (512) 555-0197
A phone identifies a person here.

How to reach them

Email: m.vasquez@example.com

Mailing address: Same as the service address ▼

Matched an existing customer. C-00902 · Vasquez, M., on the phone number.

Needs one identifier to continue. This is what the step refuses with when a name is typed and nothing else is.

Field visit — the changeover read

This is where the reading is arranged, and it is not typed here. A sale closes no account and opens none, so there is no final read and no opening read: the meter keeps running on one unbroken account.

RAISE	REFERENCE	WHAT IT IS	SERVICE	HOW LONG
☑	WT-0114	Changeover read	Electric	20 min
☑	WT-0115	Changeover read	Water	20 min
☐	WT-0132	Meter condition check	—	30 min

☐ No visit needed

A recorded answer, not an unticked box.

What happens when you save

WHEN	WHAT
Now	Two jobs are raised on this account and go to the work queue
Now	The sale records which jobs it raised
Next	Scheduling gives them a crew and a slot
Then	The readings land through the ordinary reads door

The sale does not wait for the visit, and the visit does not close the account. Either can finish first.

The list is the utility's own. These are the published job templates this tenant wrote.

A FINAL READ, TYPED HERE

There is none, and it is not missing. Nothing on a sale records a meter reading;

the account is not closing, so there is no closing figure to capture.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's transfer wizard still creates a second account, takes a final read and asks for two dates; BR-CUS-1030 made a transfer a REASSIGNMENT and these five are drawn to that ruling.

Who is buying it · `/brazosbend/transfers/new?step=2`

/brazosbend/transfers/new?step=3

SMARTBillHub

Transfers / Transfer

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Transfers

TRANSFER

The date of sale

Save & exit

Step 3 of 5 · Date of sale

✓ Find the account | ✓ The buyer | 3 Date of sale | 4 What they take on | 5 Review & confirm

The date of sale

Date of sale *

05/09/2026

The day the account changes hands.

One date, not two. The old step asked for a leaving date and an arriving date because the job closed one account and opened another.

Nothing is prorated at a sale. One unbroken account, one service agreement, one billing period.

What changes hands on that day

Unit	U-001355 · Unit 1
Unit type	Duplex — half · ground · 1,040 sq ft
Premises	310 Marigold Lane · PR-0518
Service address	310 Marigold Lane, Silver Creek, TX 78611
Services	Electric · Water
Electric meter	M-5180 · walk-by · read 04/09/2026
Water meter	M-5181 · walk-by · read 04/09/2026
Plan	SCW-RES · Residential · v1
Base charge	$20.00 a month
Billing cycle	Cycle 2 · the 9th
Current period	04/09/2026 – 05/08/2026
Next bill	05/09/2026

Read-only, and that is the point. None of this is chosen on a sale.

What the date does

Who owns the account from	05/09/2026
Who the next bill goes to	The buyer
Recorded as	One day, on the sale

What the date does not do

Split the bill	No
Close a period	No
Start a new ledger	No
Trigger a final statement	No
Move the deposit	No — there is nowhere to move it to

The period covering this date is not divided. 04/09 to 05/08 is one bill and it is issued on 05/09 to the buyer, who by then owns the account. Whatever the two parties settle between themselves about the days before the sale is their arrangement, not ours.

The buyer pays for days the seller used. That follows from the ruling that the debt goes with the property, and it is the one thing on this wizard a clerk should say out loud to a buyer on the phone.

A CLOSING STATEMENT FOR THE SELLER

Nothing produces one. A sale closes no account, so there is no final bill and no settlement run.

v2.234.15

Sam Ortiz
Billing Clerk

← Back

Continue →

SO Billing Clerk

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's transfer wizard still creates a second account, takes a final read and asks for two dates; BR-CUS-1030 made a transfer a REASSIGNMENT and these five are drawn to that ruling.

The date of sale · `/brazosbend/transfers/new?step=3`

`/brazosbend/transfers/new?step=4`

SMARTBillHub

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

v2.234.15

SO Sam Ortiz
Billing Clerk

Transfers / Transfer

⚲ Search accounts, premises, meters... ⚑ ?

← Transfers

TRANSFER

What the buyer takes on

Save & exit

Step 4 of 5 · What they take on

✓ Find the account | ✓ The buyer | ✓ Date of sale | 4 What they take on | 5 Review & confirm

What the buyer takes on

As it stands on 05/09/2026

Account balance	$318.40
Deposit on file	$150.00
Deposit interest earned	— not recorded
Taken on by the buyer	**$318.40**

The debt goes with the property. The buyer takes the address and what it owes.

And it costs one line of code, because nothing moves. The account carries its own ledger and the account is not going anywhere — so the balance never moves, because the thing it sits on never moves.

Fees to collect on this sale

THERE ARE NONE, AND THIS STEP TAKES NO PAYMENT

A reassignment quotes nothing and collects nothing. There is no change-of-ownership fee in this product: no rule sets one, no table holds one, and no door would take the money.

What a fee would need, if one is wanted. A named charge with an amount and a tax treatment, a place on the bill or a receipt of its own, and a decision about whether an unpaid one blocks the sale.

Before you continue

☐ I have shown this to the buyer

Recorded with the sale: a clerk confirms the figure was put in front of the buyer, not that they agree with it.

Why there is nothing to decide here

This step used to have two switches — should the deposit carry, should the arrears follow — because four rules disagreed and nobody had ruled. Both were answered the same day: the debt follows the property.

Two figures this screen cannot fully stand behind

DEPOSIT INTEREST

Interest on a held deposit is agreed and is not built. This account shows $150.00 and the agreed arithmetic for a deposit held this long says $153.50. It renders as not recorded rather than as $0.00, because zero would be a claim.

THE BALANCE IS A RUNNING TOTAL, NOT A RE-DERIVED ONE

$318.40 is the figure the account carries, not a sum recomputed from the bills and payments underneath it. It is what every other screen shows and it is what the buyer takes on — but it is a cache, and this screen says so instead of implying an audit.

Who gets told this figure

The clerk	Here, on this step
The record	Written with the sale, at the moment of sale
The buyer	Not decided

Whether the buyer must be shown what they are taking on, and where, has never been ruled. It is not answered by inference here: the figure rides the record so it exists, and no letter claims to have told them.

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's transfer wizard still creates a second account, takes a final read and asks for two dates; BR-CUS-1030 made a transfer a REASSIGNMENT and these five are drawn to that ruling.

What the buyer takes on · `/brazosbend/transfers/new?step=4` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

`/brazosbend/transfers/new?step=5`

← Transfers

TRANSFER

Review — one account, one new owner

Save & exit

Step 5 of 5 · Review & confirm

✓ Find the account | ✓ The buyer | ✓ Date of sale | ✓ What they take on | 5 Review & confirm

The account being sold ✎ Step 1

Account number	A-11674
Seller	Delgado, R.
Customer number	C-00461
Category	Residential · Standard
Status	Active — and it stays active
Opened	03/08/2022
Unit	U-001355 · Unit 1
Premises	310 Marigold Lane · PR-0518
Service address	310 Marigold Lane, Silver Creek, TX 78611
Services	Electric · Water
Meters	M-5180 Electric · M-5181 Water
Plan	SCW-RES · Residential · v1
Base charge	$20.00 a month
Billing cycle	Cycle 2 · the 9th

The buyer ✎ Step 2

Name	Vasquez, M.
Customer kind	Person
Identifier given	Phone
Social Security number	— not given
Driving licence	— not given
Phone	(512) 555-0197
Email	m.vasquez@example.com
Mailing address	Same as the service address
Matched to	C-00902 · already on file
New customer created	No

The changeover read ✎ Step 2

Jobs raised	2
Electric	WT-0114 · Changeover read · 20 min
Water	WT-0115 · Changeover read · 20 min
Meter condition check	— not raised

The date ✎ Step 3

Date of sale	05/09/2026
Recorded as	One day
Current period	04/09/2026 – 05/08/2026
Next bill	05/09/2026 · to the buyer
Prorated	No

The money ✎ Step 4


Account balance	$318.40
Deposit on file	$150.00
Deposit interest	— not recorded
Taken on by the buyer	$318.40
Refunded to the seller	$0.00
Re-collected from the buyer	$0.00
Fees collected	— there are none
Shown to the buyer	Yes

What will happen when you confirm

WHEN	WHAT
Now	The buyer becomes the customer on A-11674
Now	The seller's link to this account is removed
Now	The balance and deposit are recorded as they stand today
Now	Two changeover-read jobs go to the work queue
Now	One audit row: from whom, to whom, and the figures
Next	The bill on 05/09 is issued to the buyer
Then	The property's owner record still wants updating by hand

One transaction. All five writes land together or none of them does.

The account keeps the seller's contact details and settings. Paperless is still on, the bill email is still the seller's, and autopay is still running on the seller's bank instruction.

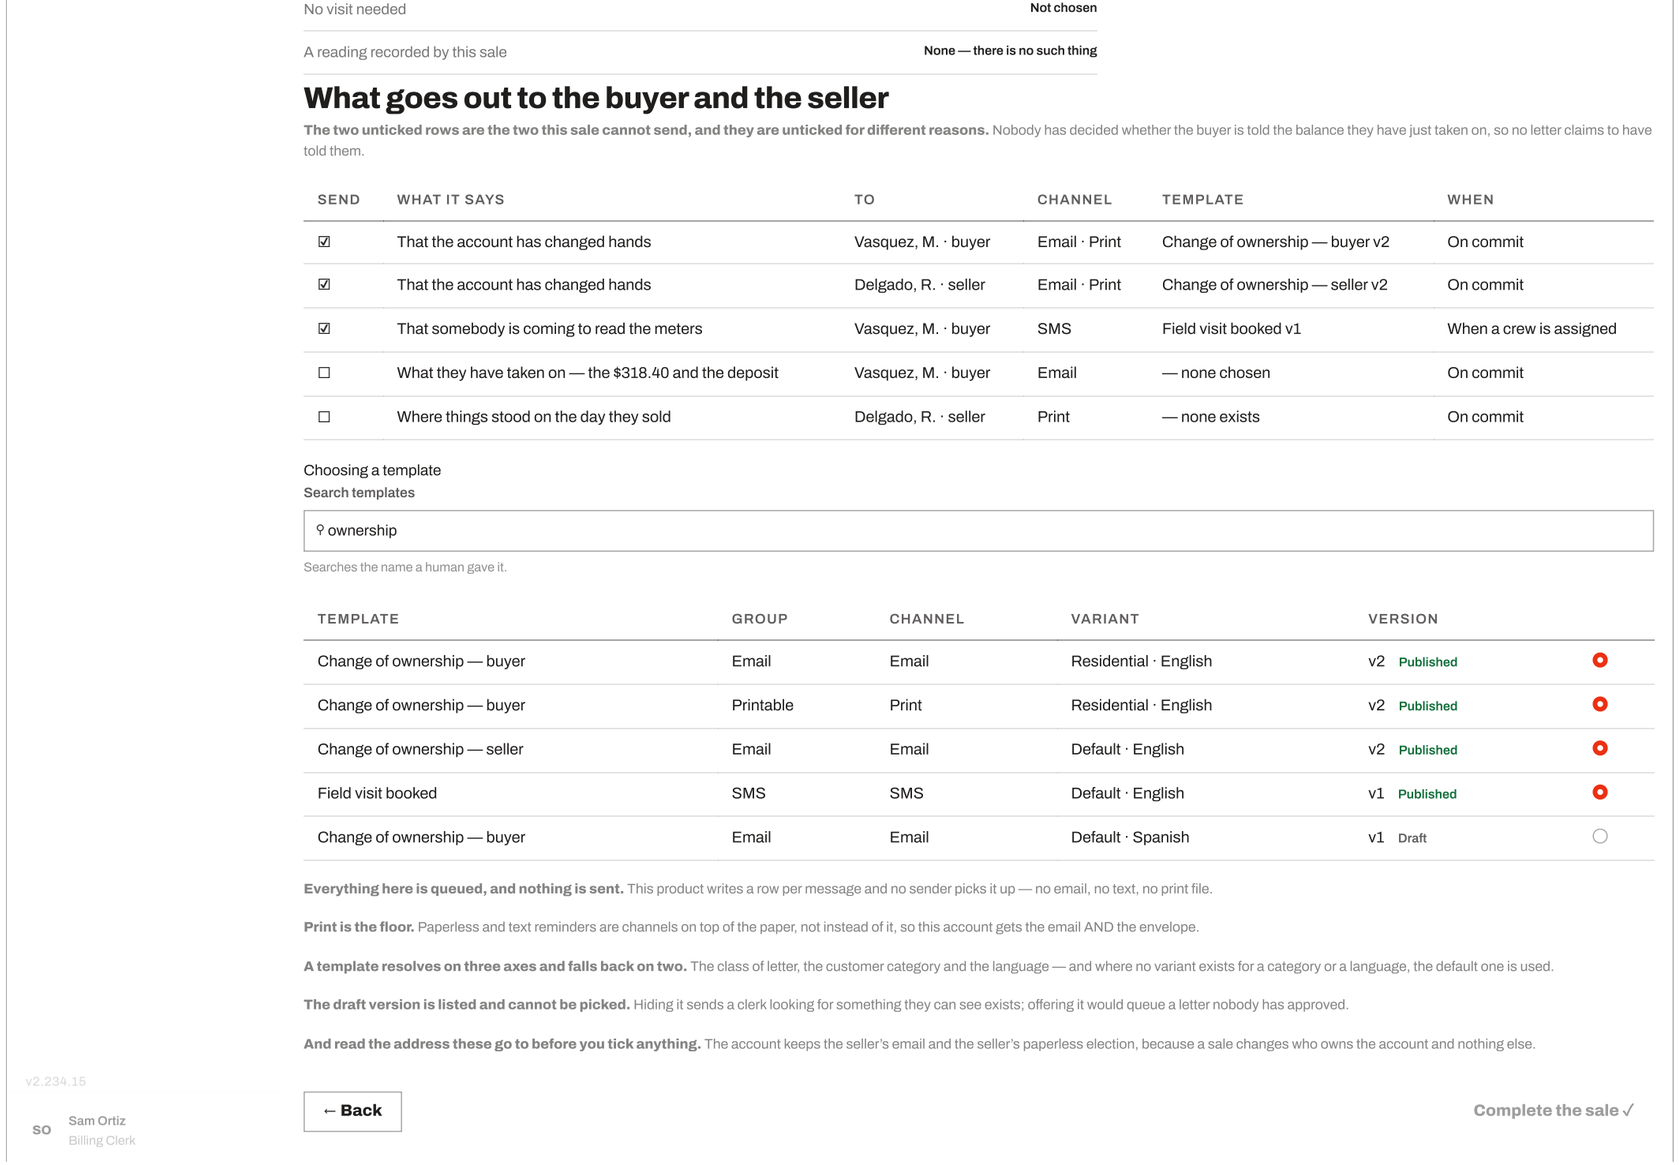

No visit needed — Not chosen

A reading recorded by this sale — None — there is no such thing

What goes out to the buyer and the seller

The two unticked rows are the two this sale cannot send, and they are unticked for different reasons. Nobody has decided whether the buyer is told the balance they have just taken on, so no letter claims to have told them.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☑	That the account has changed hands	Vasquez, M. · buyer	Email · Print	Change of ownership — buyer v2	On commit
☑	That the account has changed hands	Delgado, R. · seller	Email · Print	Change of ownership — seller v2	On commit
☑	That somebody is coming to read the meters	Vasquez, M. · buyer	SMS	Field visit booked v1	When a crew is assigned
☐	What they have taken on — the $318.40 and the deposit	Vasquez, M. · buyer	Email	— none chosen	On commit
☐	Where things stood on the day they sold	Delgado, R. · seller	Print	— none exists	On commit

Choosing a template

Search templates

⚲ ownership

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Change of ownership — buyer	Email	Email	Residential · English	v2 Published	◉
Change of ownership — buyer	Printable	Print	Residential · English	v2 Published	◉
Change of ownership — seller	Email	Email	Default · English	v2 Published	◉
Field visit booked	SMS	SMS	Default · English	v1 Published	◉
Change of ownership — buyer	Email	Email	Default · Spanish	v1 Draft	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

Print is the floor. Paperless and text reminders are channels on top of the paper, not instead of it, so this account gets the email AND the envelope.

A template resolves on three axes and falls back on two. The class of letter, the customer category and the language — and where no variant exists for a category or a language, the default one is used.

The draft version is listed and cannot be picked. Hiding it sends a clerk looking for something they can see exists; offering it would queue a letter nobody has approved.

And read the address these go to before you tick anything. The account keeps the seller's email and the seller's paperless election, because a sale changes who owns the account and nothing else.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Complete the sale ✓

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the product's transfer wizard still creates a second account, takes a final read and asks for two dates; BR-CUS-1030 made a transfer a REASSIGNMENT and these five are drawn to that ruling.
>
> **Review — one account, one new owner** · `/brazosbend/transfers/new?step=5` · Commits to **one door running all five staged writes in a single transaction**


Where a transfer lands, and what it becomes

Onto the Transfers tab, with two dates rather than one. A transfer has an out date and an in date and they are rarely the same day; a single date column would have to pick one and would be wrong about the other.


The record is where the flow justifies existing at all. A transfer is the one case where the deposit is supposed NOT to move: a move-out followed by a move-in would refund $150.00 and take it again, and would start the customer's history over. The closing balance travels with it, because a transfer that left a $64.20


stub on a closed account is how somebody ends up in collections for a house they no longer live in.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the Transfers tab exists and was walked; the *waiting on* column is the addition.
> **Where a transfer lands · the Transfers tab** · `/brazosbend/accounts?tab=transfers` · One customer, two addresses — and the deposit that follows them

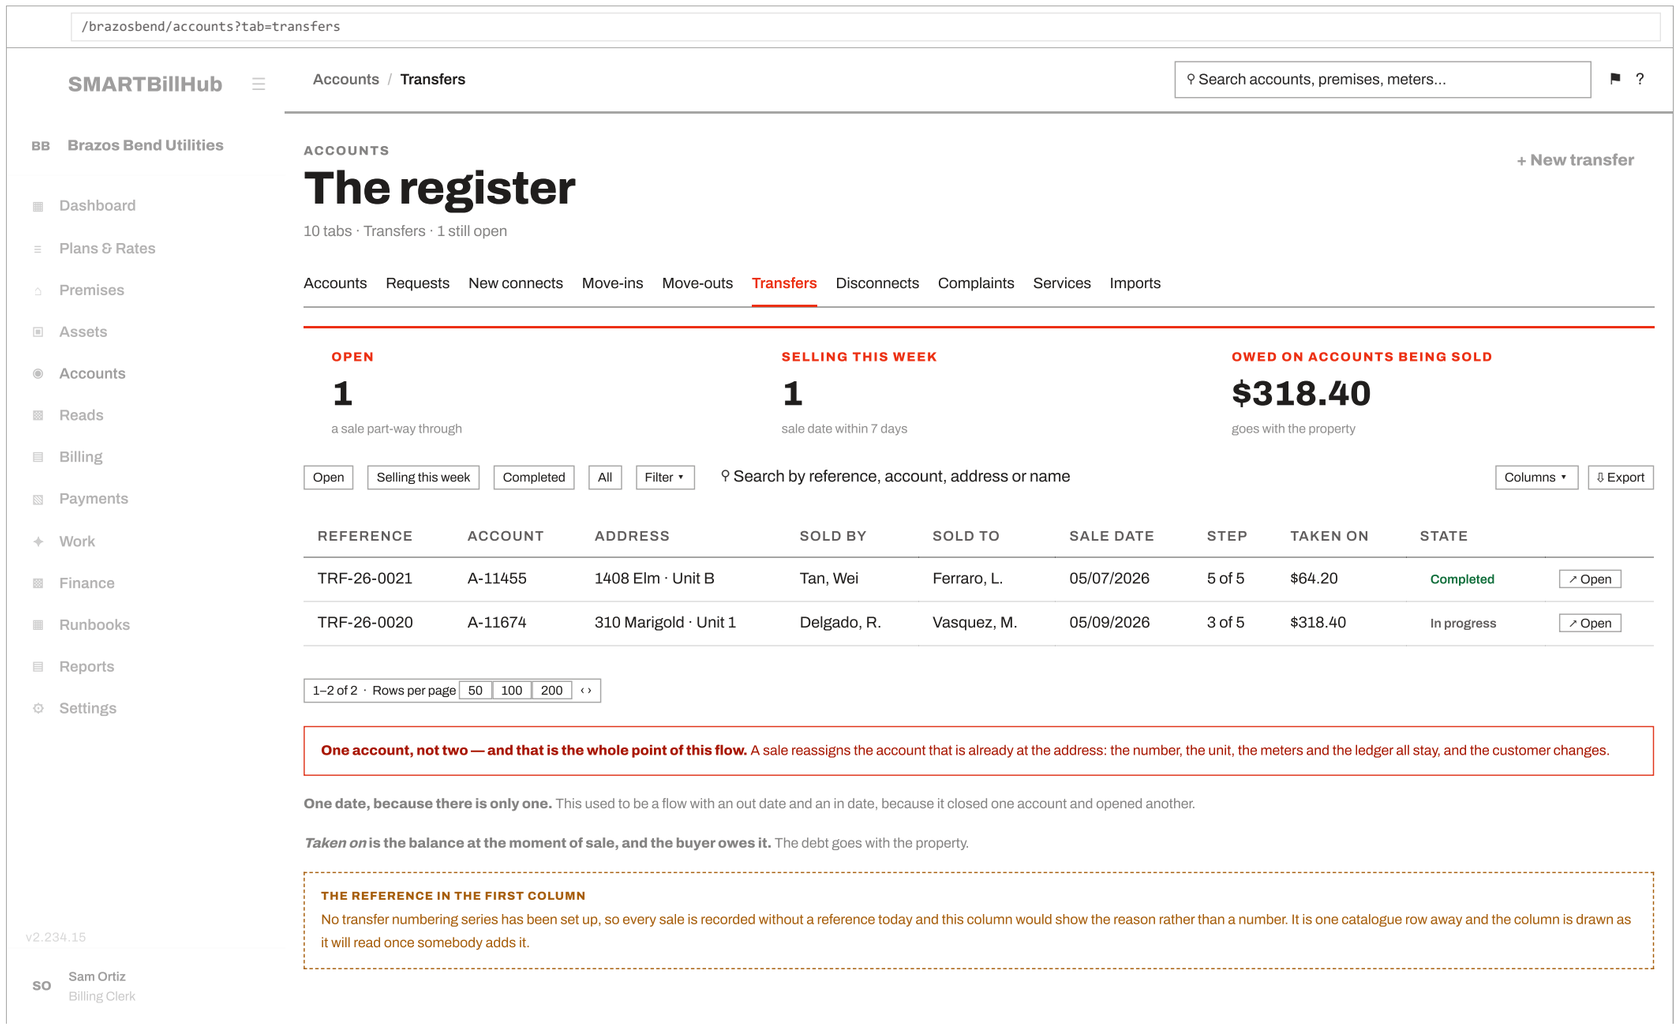

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no transfer record page exists.
> **The transfer, opened · TRF-26-0021** · `/brazosbend/transfers/trf-26-0021` · Proposed · the deposit and the balance that followed the customer

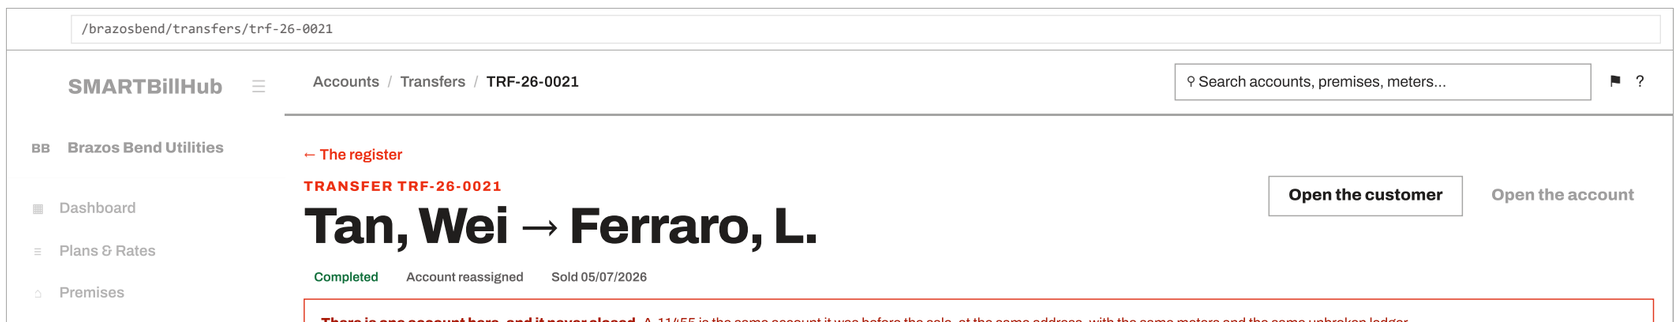

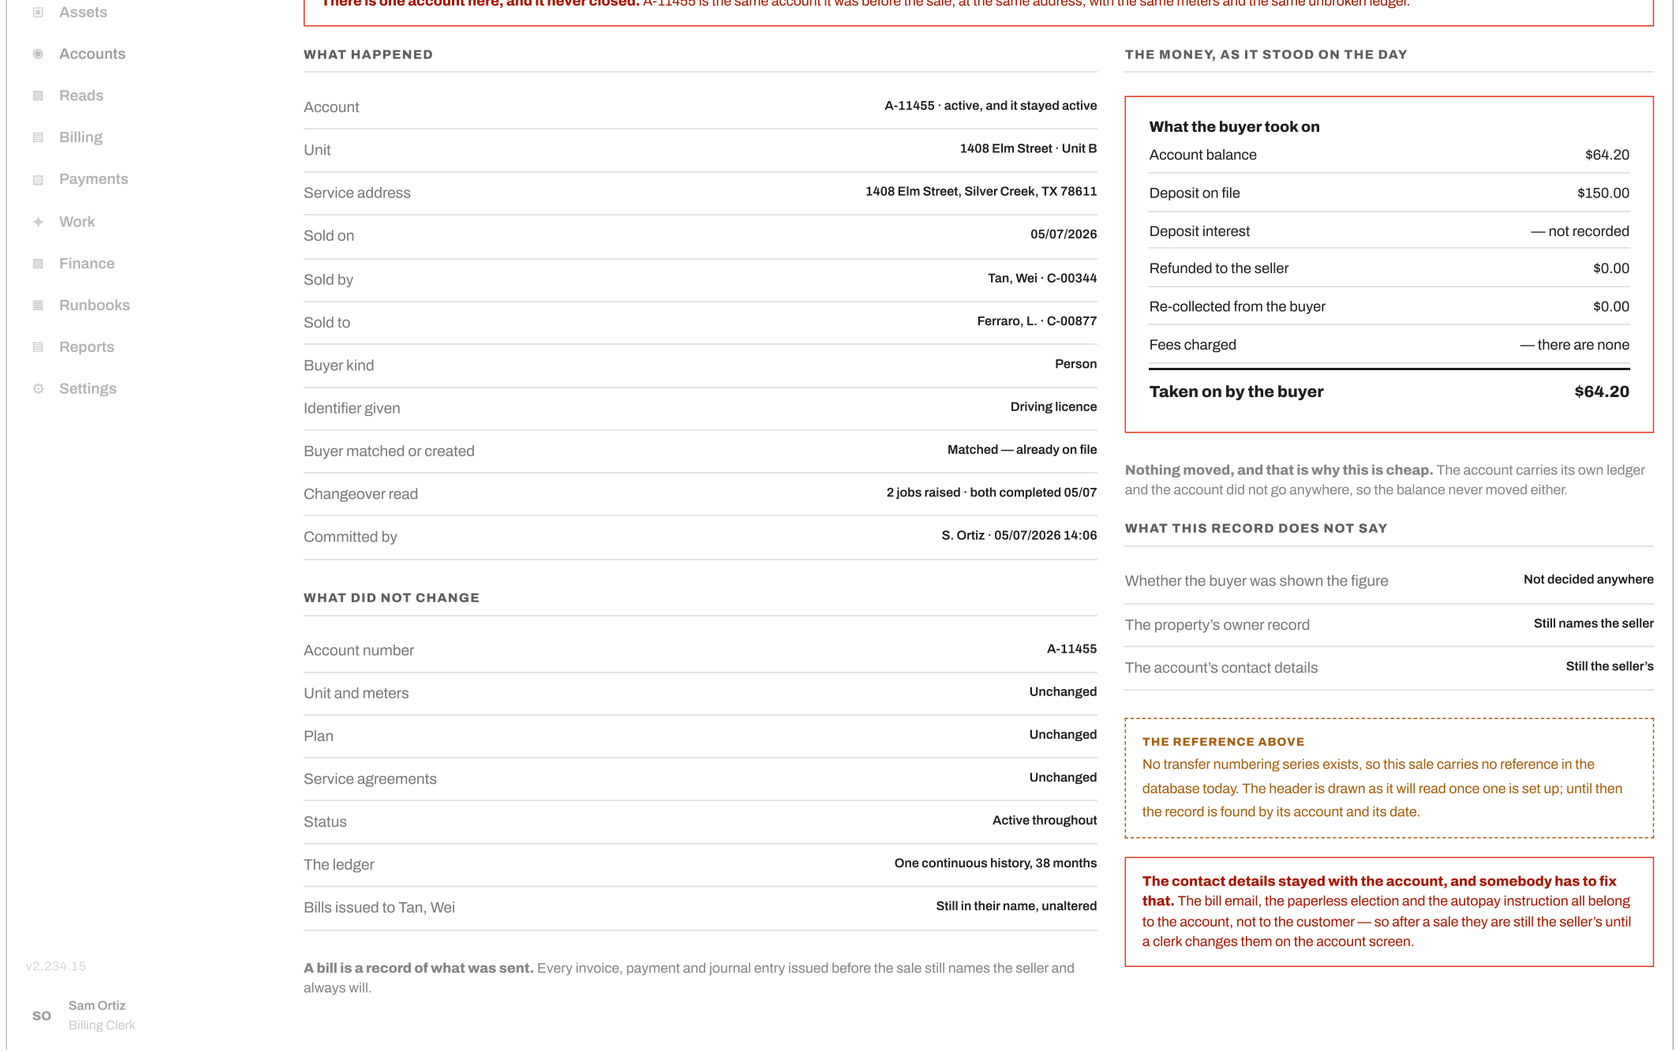

This record has no actions, and that is the answer rather than a gap. A move-in and a transfer are records of acts that have already happened — there is nothing left to decide on them, so the only controls are doors to the accounts they produced. Drawing a button here would invent a decision the product does not offer.

How you get here	Three doors: Transfers tab primary (`AccountsListPage.tsx:930`), empty CTA (`TransfersTab.tsx:709`), parked **Resume**.
Primary action	**Complete the sale ✓** — one door running all five staged writes inside one transaction: start, name the buyer, set the date, show the money, reassign. All of it lands or none of it does.
⚠ Blocked in the shipped screen	**The buyer is never asked for.** The five steps on the running product are still the old job — *Leaving · Final reads · Arriving · Money · Review* — so the wizard posts a destination unit, two dates and two elections that the commit does not read, and never sends the buyer, which the commit requires. Every attempt refuses at the second of five writes, naming a field that appears on none of the screens.
Walked	**Not walked.**
Rules	BR-CUS-086 · 590 · 1030 · 1031

12 Disconnect wizard BLOCKED NEW BUILD

`/:tenant/disconnects/new · S90 · five steps`

Commitments ACC-S10 new build · ACC-S40 new build · ACC-S25 blocked · ACC-S27 blocked · ACC-S4 new build · ACC-S6 new build

The question: "*They haven't paid in three months. Cut them — lawfully, and tell me what I'm not allowed to assume.*"

The five steps are the five the code names, and every figure below is the module's own. Ten protection questions of which three can be answered; three protections, each with a different life; the send and the proof kept as two separate records; three fee codes of which one is ever charged; and a cut that nothing performs on the day it is scheduled for. **This wizard schedules — it never cuts.**

All 5 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

/brazosbend/disconnects/new?step=1

SMARTBillHub

Disconnects / Disconnect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Disconnects

DISCONNECT

Whose service, and why

Save & exit

Step 1 of 5 · Account & reason

1 Account & reason | 2 Protections | 3 Notice & date | 4 Fees & consequences | 5 Review

Search for the account *

⚲ bramble

Account number, customer name, service address or meter number.

	ACCOUNT	CUSTOMER	SERVICE ADDRESS	OWED	TIER
◉	A-11812	Bramble Bakery	142 Bakers Row · Suite 1	$2,410.00	Final notice
○	A-11602	Ncube, T.	1408 Elm Street · Unit E	$512.80	Case already open

One open case at a time. The second row has a case running already and cannot start another.

The customer

Account number	A-11812
Customer	Bramble Bakery
Customer number	C-00271

Why is service being cut?

Reason

Non-payment ▾

Non-payment · Unsafe installation · Tampering or theft · Premises abandoned · Customer asked

Only non-payment has a lawful path to a cut today. A cut is scheduled after the final certified notice, and the ladder that produces one runs on debt.

And the reason drives nothing else. It is recorded on the case and no rule branches on it — no fee, no notice period and no protection changes because of what is chosen here.

Which services

CUT	SERVICE	METER	WHAT HAPPENS TO IT
☑	Electric	M-3391	Full disconnection

Customer kind	Company
Category	Commercial · Small commercial
Account status	Active · billable
Opened	09/10/2024
Premises	142 Bakers Row · PR-0288
Unit	U-000744 · Suite 1
Service address	142 Bakers Row, Silver Creek, TX 78611
Contact	p.okafor@bramblebakery.example
Phone	(512) 555-0188
Preferred language	English
Paperless billing	Off
Autopay	Off

The money — why the ladder is running

Where this account stands

Balance	$2,410.00
Oldest item	62 days past due
Deposit on file	$450.00
Last payment	$180.00 · 03/02/2026
Payment plan	None
Ladder floor	$25.00 — this is well above it

The bills behind that figure

BILL	ISSUED	DUE	AMOUNT	STATE
INV-26-0411	03/08/2026	03/22/2026	$840.00	Overdue
INV-26-0538	04/08/2026	04/22/2026	$795.00	Overdue
INV-26-0662	05/08/2026	05/22/2026	$775.00	Issued

Three unpaid bills reconcile to the balance exactly. $840.00 plus $795.00 plus $775.00 is $2,410.00, and the newest is not yet overdue — the ladder is running on the two above it.

☑	Water	M-3392	Full disconnection
☐	Trash	—	Left on

A cut need not take everything, and each service says what happens to it rather than leaving the treatment implied.

A RESTRICTOR INSTEAD OF A CUT

A flow restrictor — leaving a trickle rather than nothing — is refused by name. Nothing in this product can express a partial supply, and a screen that offered it would be promising a state no meter, bill or read could represent.

Where the ladder has got to

Tier	3 of 3 · final notice
Friendly reminder	04/14/2026
10-day notice	04/24/2026
Final notice	05/09/2026
Case raised by	S. Ortiz · 04/14/2026
Case reference	DSC-26-0003

v2.234.15

SO Sam Ortiz
Billing Clerk

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's disconnect wizard has five steps and neither prices the protections nor collects a fee; these five do both.

Whose service, and why · `/brazosbend/disconnects/new?step=1`

`/brazosbend/disconnects/new?step=2`

SMARTBillHub

Disconnects / Disconnect

⚲ Search accounts, premises, meters...

⚑ ?

BB Brazos Bend Utilities

Dashboard

Plans & Rates

← Disconnects

DISCONNECT

Protections — anything that stops this

Save & exit

Step 2 of 5 · Protections

✓ Account & reason · 2 Protections · 3 Notice & date · 4 Fees & consequences · 5 Review

Ten questions, and only three have an answer

This step exists because cutting service to a protected household is the most serious thing this product does. It never says *all clear.* it lists what was asked, what answered, and what nothing in this product can check.

QUESTION	ANSWER	ANSWERED ON	WHO ANSWERS IT
Medical equipment on site?	No	05/09/2026	The product
Weather moratorium in force?	No	05/09/2026	The product
An active payment plan?	No	05/09/2026	The product
An open dispute?	— not checked	—	Nobody — no table holds one
Life-support registration?	— not checked	—	Nobody — not modelled
Age or disability protection?	— not checked	—	Nobody — not modelled
An assistance application pending?	— not checked	—	Nobody — not modelled
A recent partial payment?	— not checked	—	Payments knows — not read here
Has the notice period been served?	— not checked	—	Step 3 knows — not read here
Is this a landlord-billed premises?	— not checked	—	Nobody — not modelled

Seven of the ten cannot be answered by anything. They are drawn as questions rather than hidden, because a screen that showed only the three it can answer would read as a clean check on a household nobody has actually checked.

An answer from three weeks ago is not the same claim as an answer from this morning, which is why the date sits beside each one.

What you can do here

Record a protection

Protection

Medical certificate ▾

Medical certificate · Payment plan · Weather moratorium.

PROTECTION	HOW LONG IT LASTS	ENDS WHEN
Medical certificate	Until a date	The certificate expires
Payment plan	No date of its own	The plan ends or is missed
Weather moratorium	A date window	The regulator's window closes

Certificate expires

Not given

A medical certificate is the only one that carries its own date.

Reference

Not given

Recording one stops this immediately. A protected account is refused a cut date before any date is written, and the case moves to held rather than cancelled — the money is still owed.

Or stop the ladder without a protection

- ○ **Clerk error** — It should never have been started.
- ◉ **Disputed** — The customer is contesting the bill.
- ○ **The regulator told us to** — An instruction from outside.

What happened

Customer disputes INV-26-0411 on a meter reading

Recorded with the act and with who did it.

Three reasons, and the list is closed. A fourth reason is a fourth way to stop chasing a real debt, and that needs a decision rather than a new word in a dropdown.

NONE OF THIS IS OPERABLE ON THE SHIPPED SCREEN

The protections step as built takes no input at all — it receives nothing to write to and offers no control. Everything on this side of the step is drawn from what the module can already do: it records protections, lifts them, and stops a ladder for one of three reasons.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's disconnect wizard has five steps and neither prices the protections nor collects a fee; these five do both.

Protections — anything that stops this · `/brazosbend/disconnects/new?step=2`

/brazosbend/disconnects/new?step=3

SMARTBillHub

Disconnects / Disconnect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Disconnects

DISCONNECT

The notice, and the date

Save & exit

Step 3 of 5 · Notice & date

✓ Account & reason | ✓ Protections | 3 Notice & date | 4 Fees & consequences | 5 Review

What has gone out already

NOTICE	SENT	CHANNEL	DELIVERED?
Friendly reminder	04/14/2026	Email	— not known
10-day notice	04/24/2026	Print · SMS	— not known
Final notice	05/09/2026	Print · certified	— not known

Nothing in this product delivers a notice, and this column will not pretend otherwise. A row is written and a sender that does not exist yet would pick it up.

How the next one goes out

☑ Certified mail

Required on the final notice, and it cannot be unticked here.

☑ Posted

☑ Email

☐ Text message

A text may go alongside, but it never stands alone at this tier.

☐ Door hanger

☑ In the portal

The only channel that actually delivers anything today.
Six ways out, and they are not equivalent. The final notice is the one a cut is counted from, so the law cares how it went.

A MEDICAL-HOLD ACCOUNT NEVER REACHES THIS STEP
Accounts on a medical hold are excluded from the notice ladder entirely. This is drawn on an account with no hold; the exclusion happens before a clerk ever gets here.

Proof that it was served

Sending and proving are two different records, and only one of them is ours.
The send is what this product writes.

Served by: Certified mail ▾

Certified mail · Posted · Email · Text message · Door hanger

Reference: RA 4821 9930 US

The tracking or receipt number on the proof itself.

Signed for on: 05/11/2026

Recorded by: S. Ortiz

Somebody decided, and the record names them.

No proof, no cut. A cut at the final tier cannot be scheduled on a notice nobody can show was served.

The date

Earliest lawful cut	05/14/2026
Counted from	The final notice, 05/09/2026
Locked	Yes — computed, not typed

Scheduled cut date *: 05/14/2026

On or after the earliest lawful date.

The earliest date is computed and cannot be moved. A clerk may schedule later — a Friday cut before a bank holiday is a real reason to wait — but never earlier.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Continue →

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's disconnect wizard has five steps and neither prices the protections nor collects a fee; these five do both.

The notice, and the date · `/brazosbend/disconnects/new?step=3`

DISCONNECT

Fees, and what a cut does

Save & exit

Step 4 of 5 · Fees & consequences

The fees on this cut

CHARGE	CODE	AMOUNT	WHEN	CHARGED?
Reconnection fee	CC-RECON	$75.00	At the cut	Yes
Disconnection fee	CC-DISC	$45.00	At the cut	No — nothing raises it
Field visit	CC-FIELD	$35.00	Only if a crew attends	No — nothing raises it

Three fees are designed and one is charged. The cut raises the reconnection fee and nothing else: the other two codes exist as names with no path to a bill.

From the tenant's own charge codes, never typed. The amounts above are this utility's rows.

What must be cleared before service comes back

The reconnection figure	
Arrears at the cut	$2,410.00
Reconnection fee	$75.00
To clear before reconnection	**$2,485.00**

The fee lands at the cut, not at restoration — and that is the whole difference. Charged at restoration, a customer pays the arrears, the balance reads zero, and the gate lets them back with the fee never collected.

Take a payment now

Amount

$2,485.00

Prefilled with the full figure.

Method

Card

Reference

AUTH 60114

IF THEY PAY	WHAT IT DOES TO THIS CASE
$2,485.00 or more	Clears it. The cut has nothing left to chase
At or above the tenant's threshold	Pauses the ladder until the next instalment is missed
Below it	Recorded, and the cut still stands

A payment is always accepted, and accepting it changes no status by itself. Taking money here records a payment; it does not lift this case.

What the deposit does

- (•) **Hold it**
  It stays as it is.
- ( ) **Apply it against the arrear**
  $450.00 comes off the $2,410.00, leaving $1,960.00 owed and nothing held if they ever come back.

A deposit is money held on the customer's behalf. Applying it reduces what they owe and does not make it income — and it leaves nothing in hand if service is later restored.

THE ELECTION IS RECORDED; THE MONEY DOES NOT MOVE HERE
Choosing to apply it writes down that somebody decided, and no journal line follows. Moving money between a deposit and a debt is a balance-sheet posting and only the ledger may write one.

What the cut will do

	WHAT
1	Cut electric and water on 05/14/2026, leaving the account open
2	**Stop the base and standing charges at the cut**
3	Add the $75.00 reconnection fee to the balance
4	**Leave the balance unchanged from that day on**
5	Block new service elsewhere until it is settled

Two of those five reverse what this screen used to say. It said a disconnected account keeps accruing base charges and that a cut does not stop the balance growing.

What it will not do

Close the account	**Closing is a separate act**
Forgive the debt	**It stays exactly where it is**
Cut anything today	**Nothing happens until the date**
Remove the deposit	**Unless it is applied above**

AND THE CUT WILL REFUSE ON THIS TENANT TODAY
The three charge codes above are in no catalogue on this system, and the reconnection one does not exist under any spelling. The cut looks its code up and refuses when it finds nothing — so every cut refuses everywhere until somebody adds the row.

Billing Clerk

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's disconnect wizard has five steps and neither prices the protections nor collects a fee; these five do both.

Fees, and what a cut does · `/brazosbend/disconnects/new?step=4`

`/brazosbend/disconnects/new?step=5`

SMARTBillHub

Disconnects / Disconnect

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Disconnects

DISCONNECT

Review — nothing is cut today

Save & exit

Step 5 of 5 · Review

✓ Account & reason | ✓ Protections | ✓ Notice & date | ✓ Fees & consequences | 5 Review

The account ✎ Step 1

Account number	A-11812
Customer	Bramble Bakery
Customer number	C-00271
Category	Commercial · Small commercial
Service address	142 Bakers Row, Silver Creek, TX 78611
Unit	U-000744 · Suite 1
Balance	$2,410.00
Oldest item	62 days past due
Deposit on file	$450.00
Last payment	$180.00 · 03/02/2026
Reason	Non-payment
Services cut	Electric · Water
Trash	Left on
Treatment	Full disconnection on both

Protections ✎ Step 2

Medical certificate	No · checked 05/09/2026
Weather moratorium	No · checked 05/09/2026
Active payment plan	No · checked 05/09/2026
Questions nothing can answer	7 of 10
Protection recorded here	None
Ladder stopped by hand	No

Seven of the ten protection questions were never answered. Nothing in this product can check a life-support registration, an age or disability protection, an open dispute, an assistance application or a landlord-billed premises.

The notice ✎ Step 3

Tier	3 of 3 · final notice

The date ✎ Step 3

Earliest lawful cut	05/14/2026 · locked
Scheduled for	05/14/2026
Counted from	The final notice, 05/09/2026

The money ✎ Step 4

What this cut does to the balance

Arrears today	$2,410.00
Reconnection fee at the cut	$75.00
Disconnection fee	— not charged
Field visit fee	— not charged
Deposit	$450.00 · held, not applied
Payment taken now	$0.00
To clear before reconnection	**$2,485.00**

What happens when you confirm

WHEN	WHAT
Now	The case records the date, the reason and the deposit choice
Now	One audit row naming who scheduled it
Now	Nothing is cut, and no fee is raised yet
05/14	The cut runs: services off, fee raised, base charges stop
05/14	The balance goes static at $2,485.00
After	Reconnection needs the whole $2,485.00, not the arrears

Nothing performs that cut on the day. No runner, job, queue or timer in this product reads a date and acts on it.

Final notice written	**05/09/2026**
Going out by	**Certified mail · post · email · portal**
Delivery confirmed	**— nothing here delivers**
Served by	**Certified mail**
Proof reference	**RA 4821 9930 US**
Signed for on	**05/11/2026**
Proof recorded by	**S. Ortiz**

What goes out to the customer

The last row is the one this cut most needs and cannot send. A household or a business being cut off should be told who to ring if somebody there depends on the supply — and no template exists for it.

SEND	WHAT IT SAYS	TO	CHANNEL	TEMPLATE	WHEN
☑	That the cut is scheduled, and for when	Bramble Bakery	Email · Print	Cut scheduled — commercial v3	On scheduling
☑	What must be paid to stop it — $2,485.00	Bramble Bakery	Email · Print	Amount to clear v2	On scheduling
☑	That a payment now would still stop this	Bramble Bakery	SMS	Pay to avoid disconnection v4	On scheduling
☐	That the supply has been cut	Bramble Bakery	Email · Print	Service disconnected v2	On the cut date
☐	Who to ring about a medical or safety need	Bramble Bakery	Print	— none exists	On scheduling

Choosing a template

Search templates

⚲ disconnect

Searches the name a human gave it.

TEMPLATE	GROUP	CHANNEL	VARIANT	VERSION	
Cut scheduled	Email	Email	Commercial · English	v3 **Published**	◉
Cut scheduled	Printable	Print	Commercial · English	v3 **Published**	◉
Amount to clear	Email	Email	Default · English	v2 **Published**	◉
Pay to avoid disconnection	SMS	SMS	Default · English	v4 **Published**	◉
Cut scheduled	Printable	Print	Residential · Spanish	v1 Draft	○

Everything here is queued, and nothing is sent. This product writes a row per message and no sender picks it up — no email, no text, no print file.

Print is the floor. Paperless and text reminders are channels on top of the paper, not instead of it.

A template resolves on three axes and falls back on two. The class of letter, the customer category and the language — and where no variant exists for a category or a language, the default one is used.

The draft version is listed and cannot be picked. Hiding it sends a clerk looking for something they can see exists; offering it would queue a letter nobody has approved.

And none of these is proof of anything. Queueing a letter is not serving a notice.

v2.234.15

SO Sam Ortiz
Billing Clerk

← Back

Schedule the disconnection ✓

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the product's disconnect wizard has five steps and neither prices the protections nor collects a fee; these five do both.
Review — nothing is cut today · `/brazosbend/disconnects/new?step=5` · Commits to **the disconnect ladder — each of its eleven acts has its own route**

Where a disconnect lands, and what it becomes

Onto the Disconnects tab as a numbered case, with the notices sent under it.


"On hold" is a protection, not a delay. A case held on a medical certificate still

owes the money and is still open, and nothing about that row may be read as a job somebody forgot — so it sits in its own segment and is never worked by accident. **Tier and Last notice answer different questions**: the tier is where the ladder has got to, the last notice is what was actually sent and when.

Two things the record says that the list cannot. *Queued* is not *sent* — nothing in this product delivers a notice, so a cut date counted from a notice nobody posted is exactly what that column exists to make visible. And **a disconnect is not a close-out**: the account stays open, the ladder stops, and the debt stays where it is.

`DSC-26-0003` is the case this document's own account carries — $2,410.00 outstanding, 62 days past due, two notices sent and a cut date on the calendar.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the Disconnects tab exists and was walked; the *waiting on* column is the addition.
> **Where a disconnect lands · the Disconnects tab** · `/brazosbend/accounts?tab=disconnects` · The five-step notice flow's worklist · a case, and the notices under it

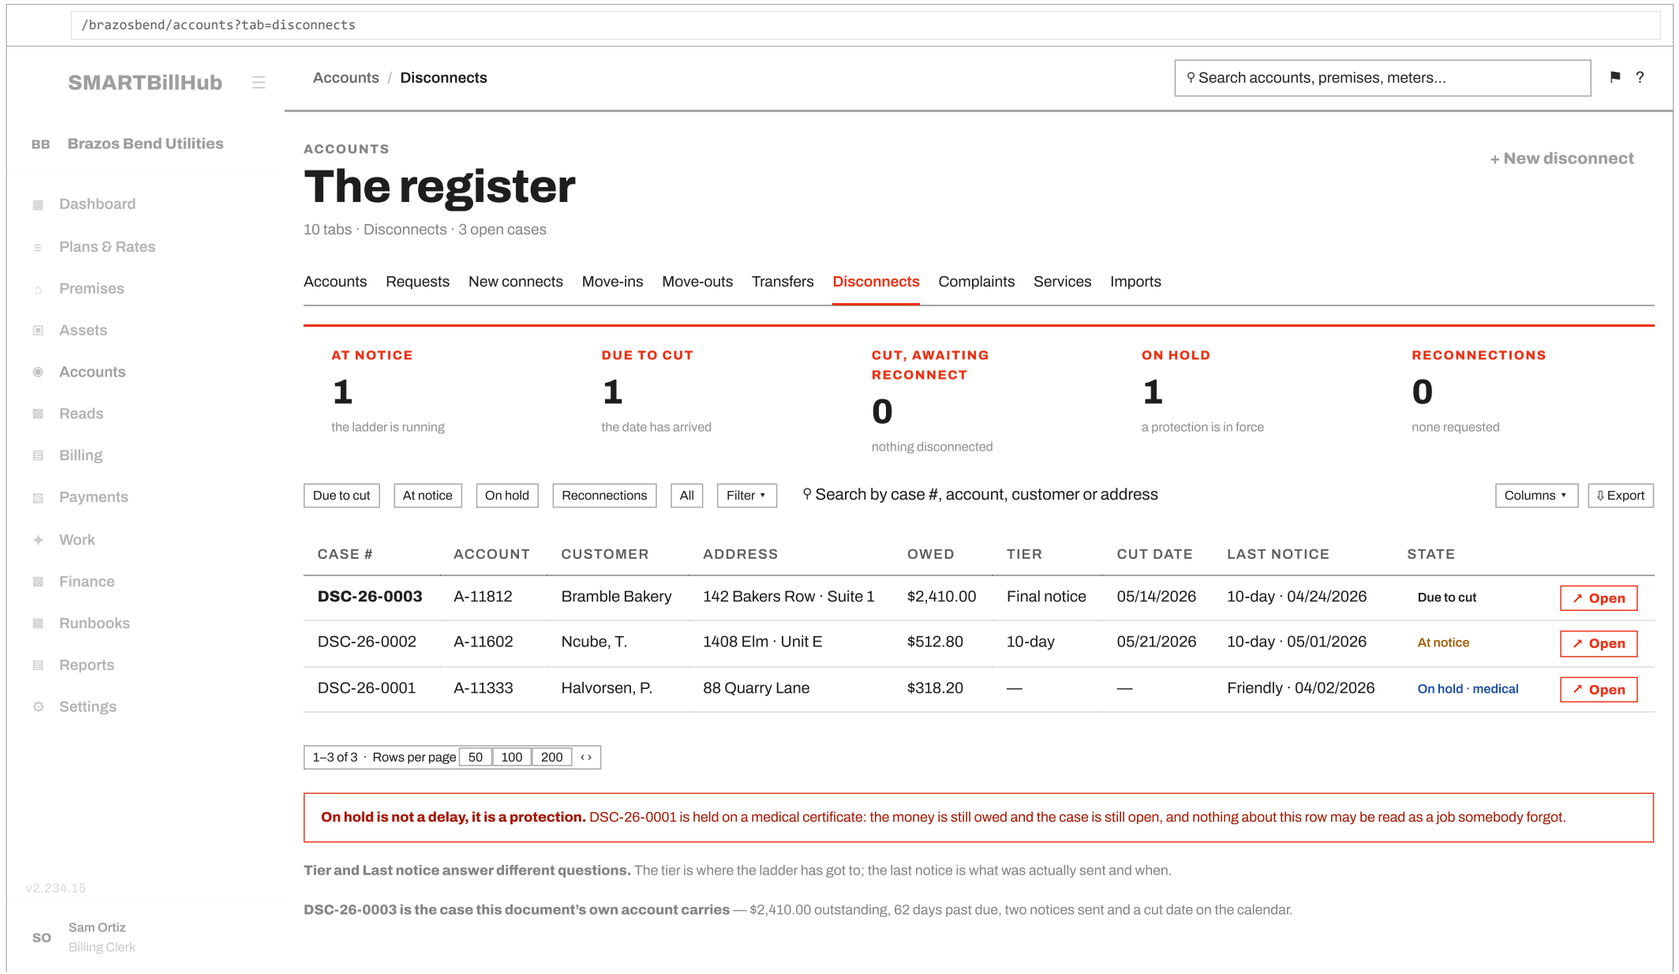

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no disconnect case page exists.
> **The disconnect case, opened · DSC-26-0003** · `/brazosbend/disconnects/dsc-26-0003` · Proposed · the case, its notices, and the four protections that can stop it

/brazosbend/disconnects/dsc-26-0003

SMARTBillHub

Accounts / Disconnects / DSC-26-0003

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← The register

CASE DSC-26-0003

Bramble Bakery

Hold the case | Open the account | Mark as cut

Due to cut · Final notice sent · Cut date 05/14/2026 · Commercial

142 Bakers Row · Suite 1 · Silver Creek, TX 78611

THE CASE

Account	A-11812
Owed	$2,410.00
Oldest debt	62 days past due
Tier	Final notice
Cut date	05/14/2026
Raised by	S. Ortiz · 04/14/2026

NOTICES SENT

NOTICE	SENT	CHANNEL	STATE
Final · 5-day	05/09/2026	Print	Queued
10-day	04/24/2026	Print · SMS	Sent
Friendly reminder	04/14/2026	Email	Sent

Queued is not sent. Nothing in this product delivers a notice: a row is written and a sender that does not exist yet would pick it up.

PROTECTIONS CHECKED

QUESTION	ANSWER	CHECKED
Medical certificate on file?	No	05/09/2026
Weather hold in force?	No	05/09/2026
A payment plan running?	No	05/09/2026
Disputed bill open?	No	05/09/2026

Four questions, each able to stop this on its own, and each answered on a date. An answer from three weeks ago is not the same claim as an answer from this morning, which is why the date is beside it.

WHAT A CUT WOULD DO

Services affected			Electric · Water
Reconnection fee			$75.00 · raised at the cut
Account status becomes	Disconnected	To clear before reconnection	$2,485.00
Base charges			stop at the cut — the balance goes static

A disconnect is not a close-out. The account stays open, the ladder stops, and the debt stays exactly where it is.

v2.234.15

SO Sam Ortiz
Billing Clerk

Two figures on this record were wrong until this draft. The reconnection fee read **$85.00** against a signed **$75.00**, and the consequence panel said billing "*keeps running — a cut is not a close*", which is the exact sentence the base-charge ruling reversed. A cut is now the thing that stops the balance growing, and the fee lands the day the supply goes off rather than the day it comes back — so **$2,485.00** is what reopens this supply, not $2,410.00.

Two actions on a case, and both are narrower than they sound. Hold stops the ladder and forgives nothing. **Mark as cut** stops the supply and closes nothing — the account stays open, the debt stays where it is, and billing keeps running.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no disconnect case page exists.
> **Hold the case — the ladder stops, the debt does not** · `/brazosbend/disconnects/dsc-26-0003` · Action 1 of 2 on the case · a protection, not a delay

/brazosbend/disconnects/dsc-26-0003

SMARTBillHub

Accounts / Bramble Bakery

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← The register

CASE DSC-26-0003

Bramble Bakery

Due to cut · Final notice sent

Hold the case | Open the account | Mark as cut

Hold DSC-26-0003

Nothing is cut while a hold is in force

WHY

- (•) **Medical certificate** — On file and dated.
- ( ) **Weather** — A published temperature rule, not a judgment call.
- ( ) **A payment plan has been agreed** — The plan itself stops the ladder; this records that it did.
- ( ) **A bill is disputed** — The disputed amount is not collectable while it is open.

Review on

06/14/2026

A hold with no review date is a case nobody comes back to.

WHAT HOLDING WILL DO

THEN	WHAT
Now	The cut date of 05/14/2026 is cleared
Now	The notice ladder stops where it is — it does not reverse
Now	The case moves to the **On hold** segment, so it is never worked by accident
Not now	The $2,410.00 is still owed and still ages

A hold is not forgiveness and the screen says so twice. The money stays owed, the debt keeps ageing, and the tier stays where the ladder had got to — so lifting the hold resumes rather than restarts.

Cancel | Hold the case

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no disconnect case page exists.

Mark as cut — and what it is not · `/brazosbend/disconnects/dsc-26-0003` · Action 2 of 2 on the case · the account stays open

/brazosbend/disconnects/dsc-26-0003

SMARTBillHub

Accounts / Bramble Bakery

Search accounts, premises, meters...

← The register

CASE DSC-26-0003

Bramble Bakery

Due to cut · Final notice sent

Hold the case | Open the account | Mark as cut

Mark DSC-26-0003 as cut

Service stops at an address where somebody works

WHAT WAS CUT

Account	A-11812 · Bramble Bakery
Address	142 Bakers Row · Suite 1
Services	Electric · Water

Cut on *

05/14/2026

Who did it

Field crew · WO-26-0402

Meter reading at the cut

18,204

What the register stood at when service stopped.

THE FOUR PROTECTIONS, RE-CHECKED AT THE CUT

QUESTION	ANSWER	CHECKED
Medical certificate on file?	No	05/14/2026
Weather hold in force?	No	05/14/2026
A payment plan running?	No	05/14/2026
Disputed bill open?	No	05/14/2026

They are asked again on the day. An answer from when the notice went out is five days old, and a medical certificate that arrived yesterday is exactly the thing that must stop this.

WHAT MARKING IT CUT WILL DO

THEN	WHAT
Now	The account's status becomes **Disconnected**
Now	The notice ladder stops
Now	A reconnection fee of $75.00 is raised — payable now, not at restoration
Not now	**The account does not close** and the $2,410.00 stays exactly where it is
Not now	Billing keeps running — a standing charge on a cut supply is still a charge

A disconnect is not a close-out. Closing the account is a different act, on a different screen, by somebody deciding the customer has gone.

Cancel | Mark as cut

SO Sam Ortiz
Billing Clerk

How you get here	Four doors: Disconnects tab primary (`AccountsListPage.tsx:937`), empty CTA (`DisconnectsTab.tsx:915`), parked **Resume**, and — newly — the S21 icon rail's ⚡ **Disconnect notice**, which navigates to `/disconnects/new?account=<id>` (`accountRailReadiness.ts:291`).
⚠ Four findings drawn	**Two of the three fee codes are read by nothing** — only the reconnection charge is ever raised, so a designed $155.00 bills as $75.00. **None of the three is in any catalogue on this system**, and the cut refuses when it cannot resolve one — so every cut refuses, everywhere, today. **The protections step takes no input at all**: it is handed nothing to write to and offers no control. And **nothing performs a scheduled cut** — no runner, job, queue or timer in this product reads a date and acts on it.
Primary action	**Schedule the disconnection** ✓ on the danger tier. Nothing is cut by this screen; the cut happens on the date it schedules.
Walked	**Not walked.**
Why Blocked	This is the only screen in the surface carrying **Blocked**. It states more open questions than any other: seven of its refusals name a decision nobody has made — what a restricted service is charged, who a block on new service applies to, what the earliest lawful cut date is, what happens when a crew attends and does not cut. Those are rulings, not code.
Rules	BR-CUS-039 · 091 · 591 · A19 §2

Commitments in this section

Four commitments, one per redesign this section draws. Twenty-one REDESIGN figures between them, and ACC-S39 is the one whose ruling the repository already carries and the product already contradicts.

ACC-S39 NEW BUILD

A transfer reassigns the account instead of creating a second one

STATUS Unverified

WAITS ON Nothing ruled — **BR-CUS-1030 IS ONE OF THE ELEVEN RULINGS THIS DOCUMENT QUOTES THAT IS IN THE REPOSITORY**. The product still runs the superseded flow: a new account, a final read and two dates.

SCREENS 11

WHAT DONE LOOKS LIKE ON SCREEN `/transfers/new` asks for the account and who is selling, who is buying, the date of sale and what the buyer takes on — and commits one reassignment. The account number, the unit, the meters, the plan and the ledger do not move.

CLOSES §04 · seven REDESIGN figures nobody had undertaken

WITHOUT IT TODAY Every property sale makes a second account, so one property accumulates a new account per owner and the ledger splits with it. **THIS IS THE ONLY ORPHAN HERE WHOSE RULING IS SIGNED AND WHOSE PRODUCT CONTRADICTS IT.**

ACC-S38 NEW BUILD

The close-out says what closing does, and what the account looks like after

STATUS Unverified

WAITS ON Nothing on the server. `closed_at` takes the CUT date, the six refusals are already written, and the after state is the account read back.

SCREENS 10

WHAT DONE LOOKS LIKE ON SCREEN Confirming a close-out shows the account, the unit, the 43 days between cut and close and the debt that outlives all three — and the account afterwards reads *Closed*, still owed, with the ladder restarted at tier 1 collections.

CLOSES §04 · three REDESIGN figures nobody had undertaken

WITHOUT IT TODAY A clerk closes an account without being shown that the debt survives it.

ACC-S40 NEW BUILD

The disconnect prices its protections and collects its fees

STATUS Unverified

WAITS ON The three fee codes. `CC-RECON` is the only one ever read and none is seeded, so every cut refuses today on the charge-code lookup.

SCREENS 12

WHAT DONE LOOKS LIKE ON SCREEN Step 2 shows each protection with the decision it forces, step 3 records how the notice was served, and step 4 prices and collects the disconnection fees on the screen that raises them.

CLOSES §04 · five REDESIGN figures nobody had undertaken

WITHOUT IT TODAY A clerk runs the ladder to the cut and the cut refuses on a charge code, with nothing on the screen having said so.

ACC-S37 NEW BUILD

The move-out's deposit can be acted on, and the shortfall gets its step back

STATUS Unverified

WAITS ON Four shortfall paths that are already mounted — `POST /accounts/{id}/settle-shortfall` answers — and a deposit panel that currently states a figure and offers nothing.

SCREENS 08

WHAT DONE LOOKS LIKE ON SCREEN Move-out step 3 offers refund, hold or transfer on the deposit with the three that cannot be taken disabled and each saying why, and step 4 puts the shortfall back where the money is.

CLOSES §04 · six REDESIGN figures nobody had undertaken

WITHOUT IT TODAY A clerk closing a tenancy can see $186.40 is owed and cannot do anything about it on the screen that shows it.

05

Money on an account

Three ways money moves on an account that is not a bill: a payment gets recorded, the plan changes, or the arrears get spread.

---

13 Change plan wizard NEW BUILD


`/:tenant/accounts/:accountId/change-plan · S23 · three steps`

Commitments ACC-S4 new build


The question: "*They want the bigger tariff. What does it cost them, and from when?*"


All 3 screens of this flow, drawn at 1280 and buildable as drawn. Real app

shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

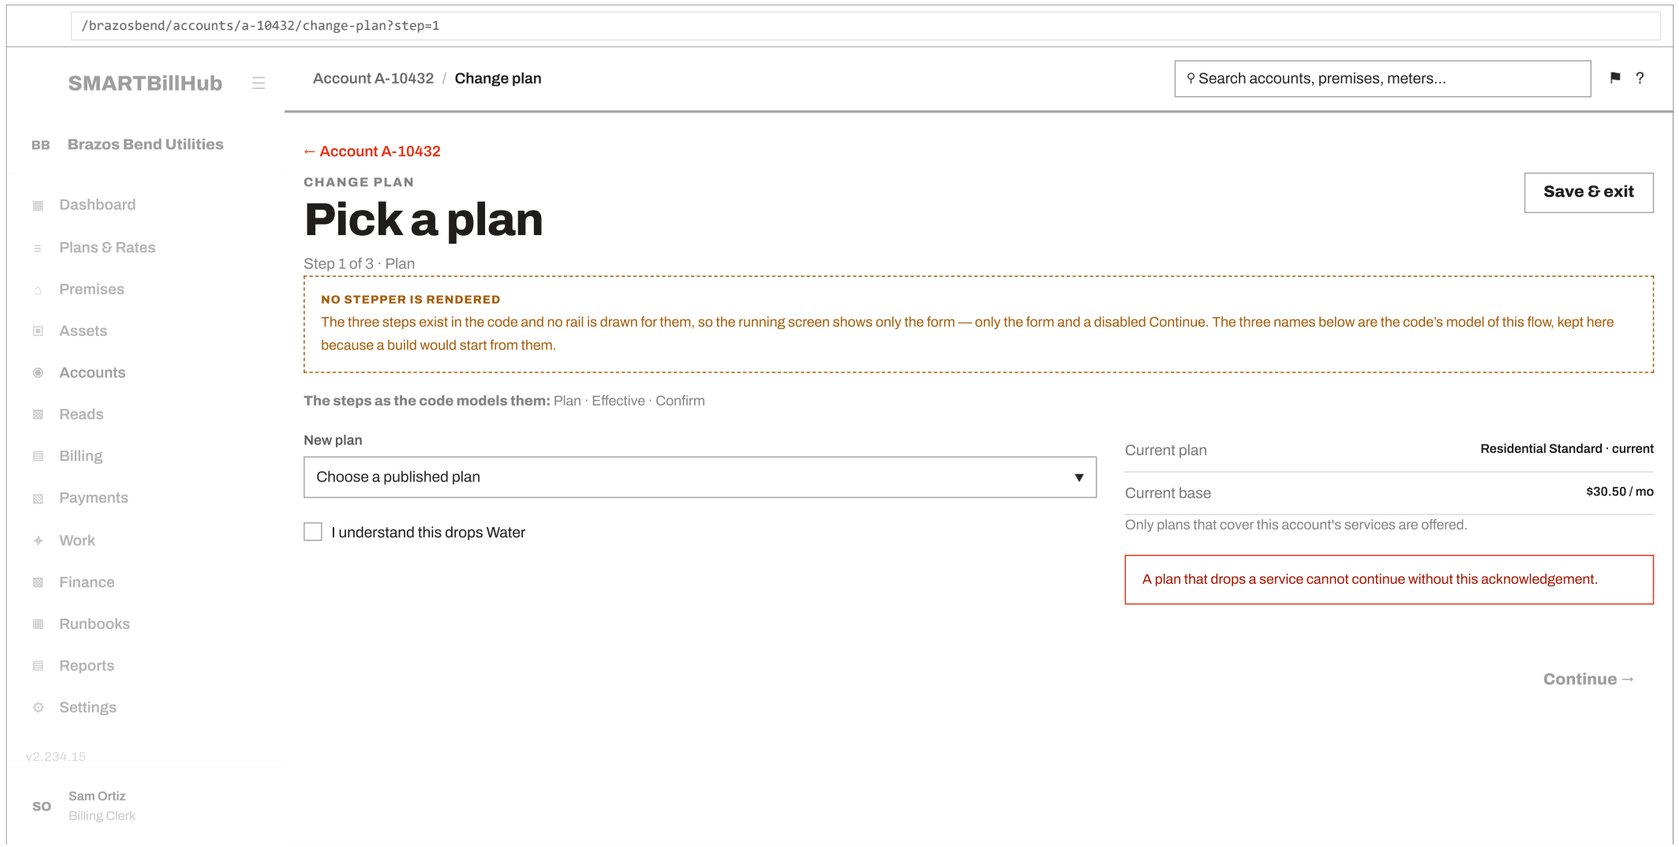


> **AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED.** Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.
>
> **Plan** · `/brazosbend/accounts/a-10432/change-plan?step=1`

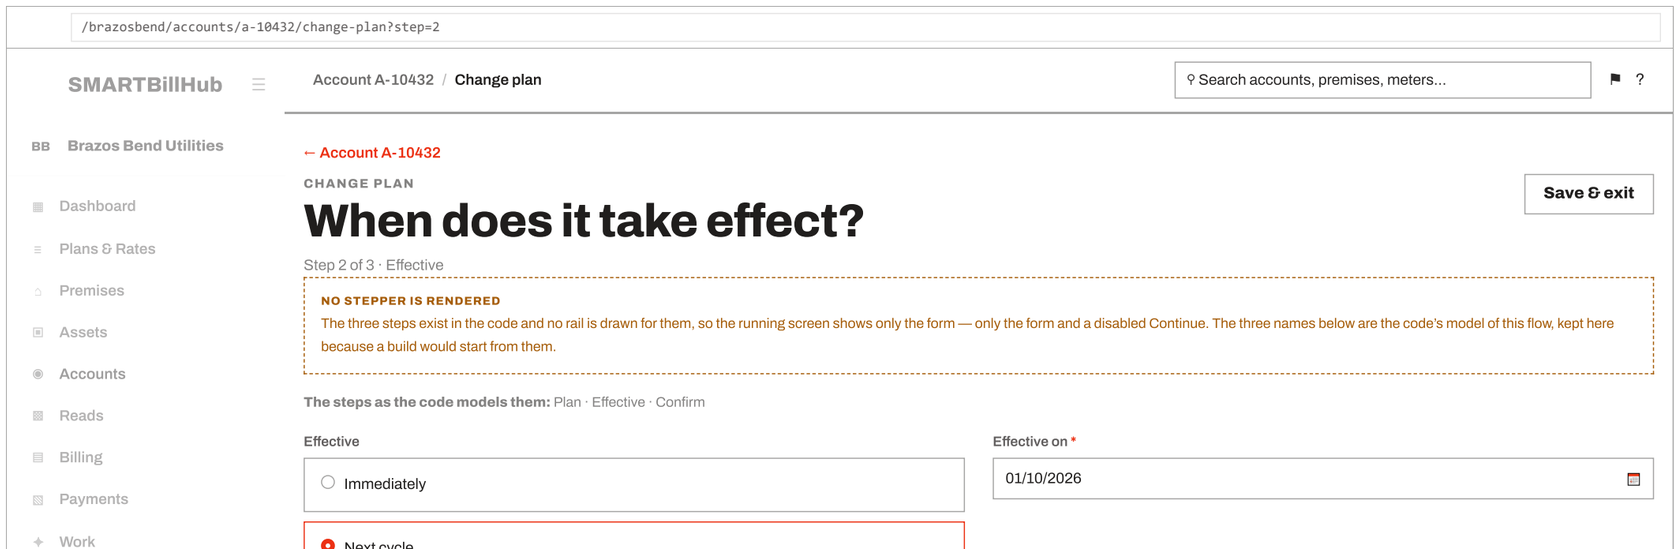

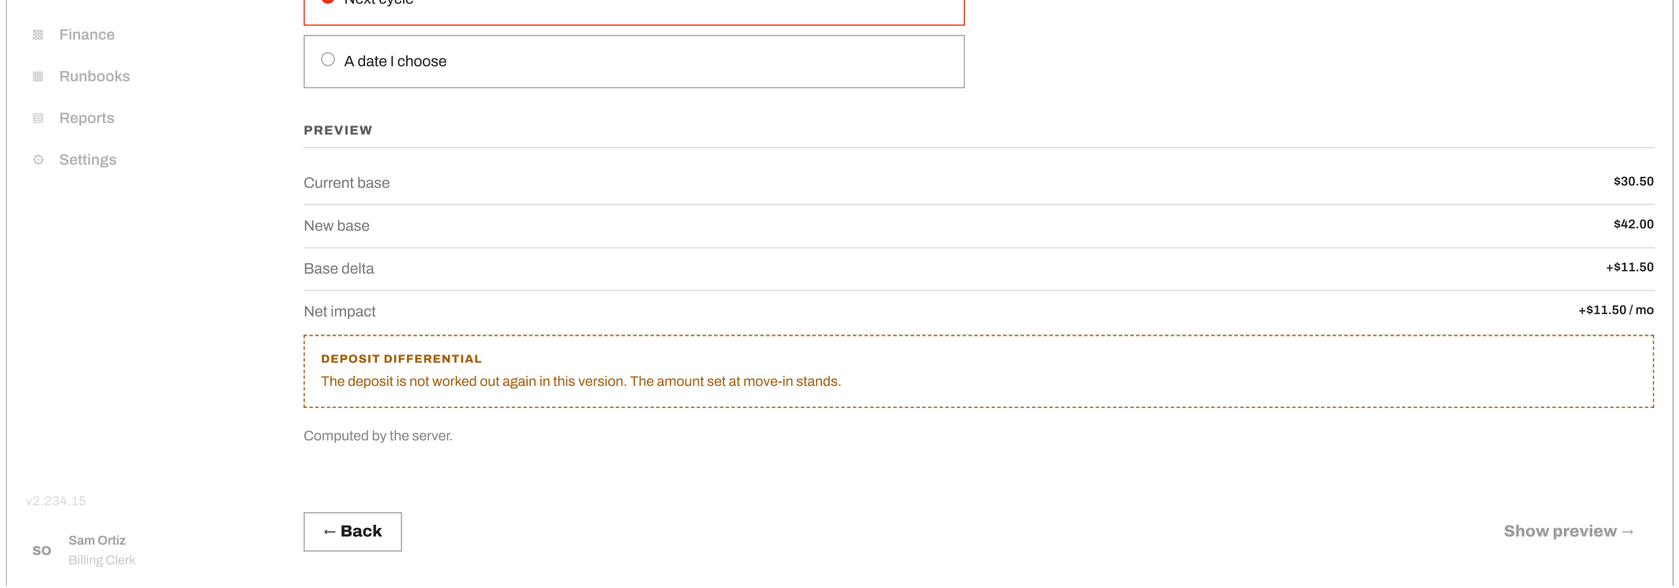

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.

Effective · `/brazosbend/accounts/a-10432/change-plan?step=2`

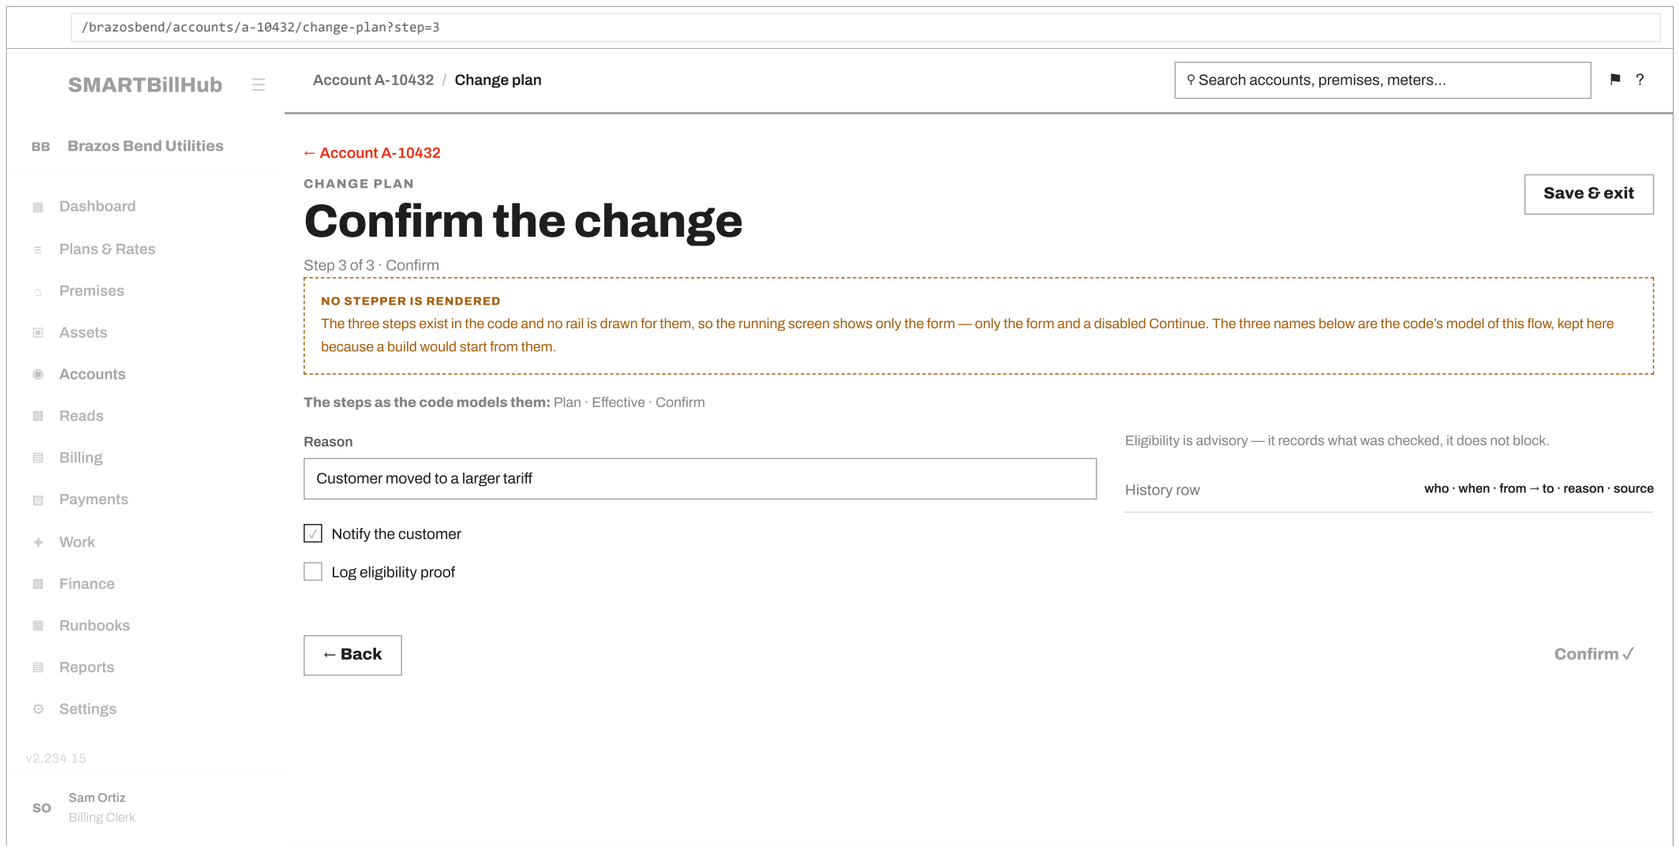

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.

Confirm · `/brazosbend/accounts/a-10432/change-plan?step=3` · Commits to **POST /accounts/{id}/plan-changes · preview at /plan-changes/preview**

Confirm · `/brazosbend/accounts/a-10432/change-plan?step=3` · Commits to **POST /accounts/{id}/plan-changes · preview at /plan-changes/preview**

How you get here	One door: the S21 icon rail's ⇄ **Change plan** (`AccountDetailPage.tsx:581`), live only on an account that currently holds its unit.
Primary action	**Confirm ✓**
Walked	**Not walked.**
⚠ Step 8 constraint	Not on `route-b-migrated.txt` — legacy CSS.
Rules	BR-CUS-041 · 042 (superseded) · 062 · BR-RAT-030

14 Payment plan wizard


BLOCKED NEW BUILD


`/:tenant/accounts/:accountId/payment-plan` · `S24` · `three steps`

Commitments ACC-S27 blocked · ACC-S4 new build · ACC-S6 new build

The question: *"They can't pay $612 today but they can pay $100 a month. Write it down so nobody cuts them off."*


All 3 screens of this flow, drawn at 1280 and buildable as drawn. Real app shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

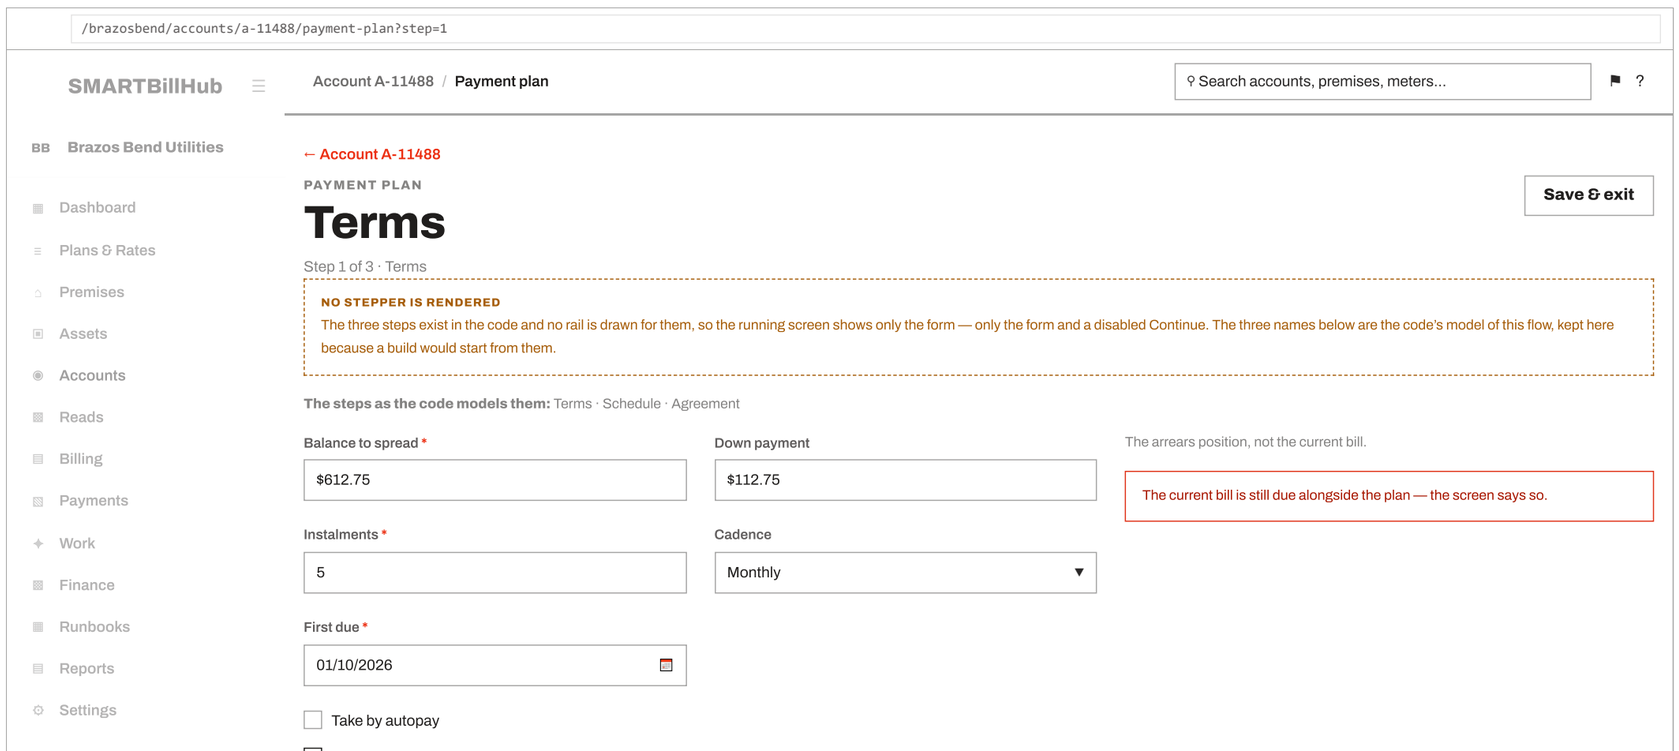

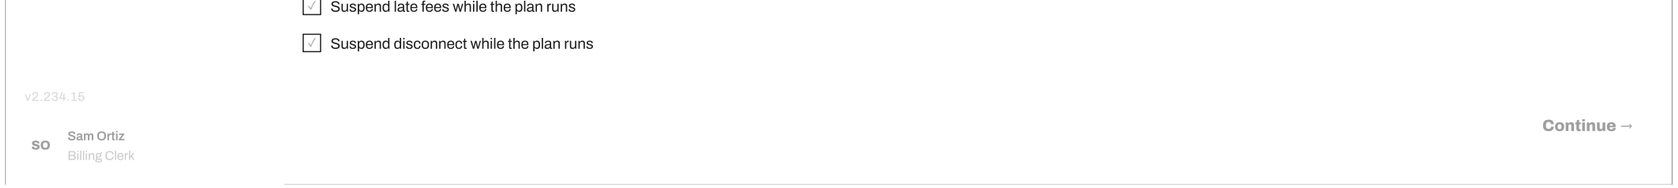


AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.

Terms · `/brazosbend/accounts/a-11488/payment-plan?step=1`

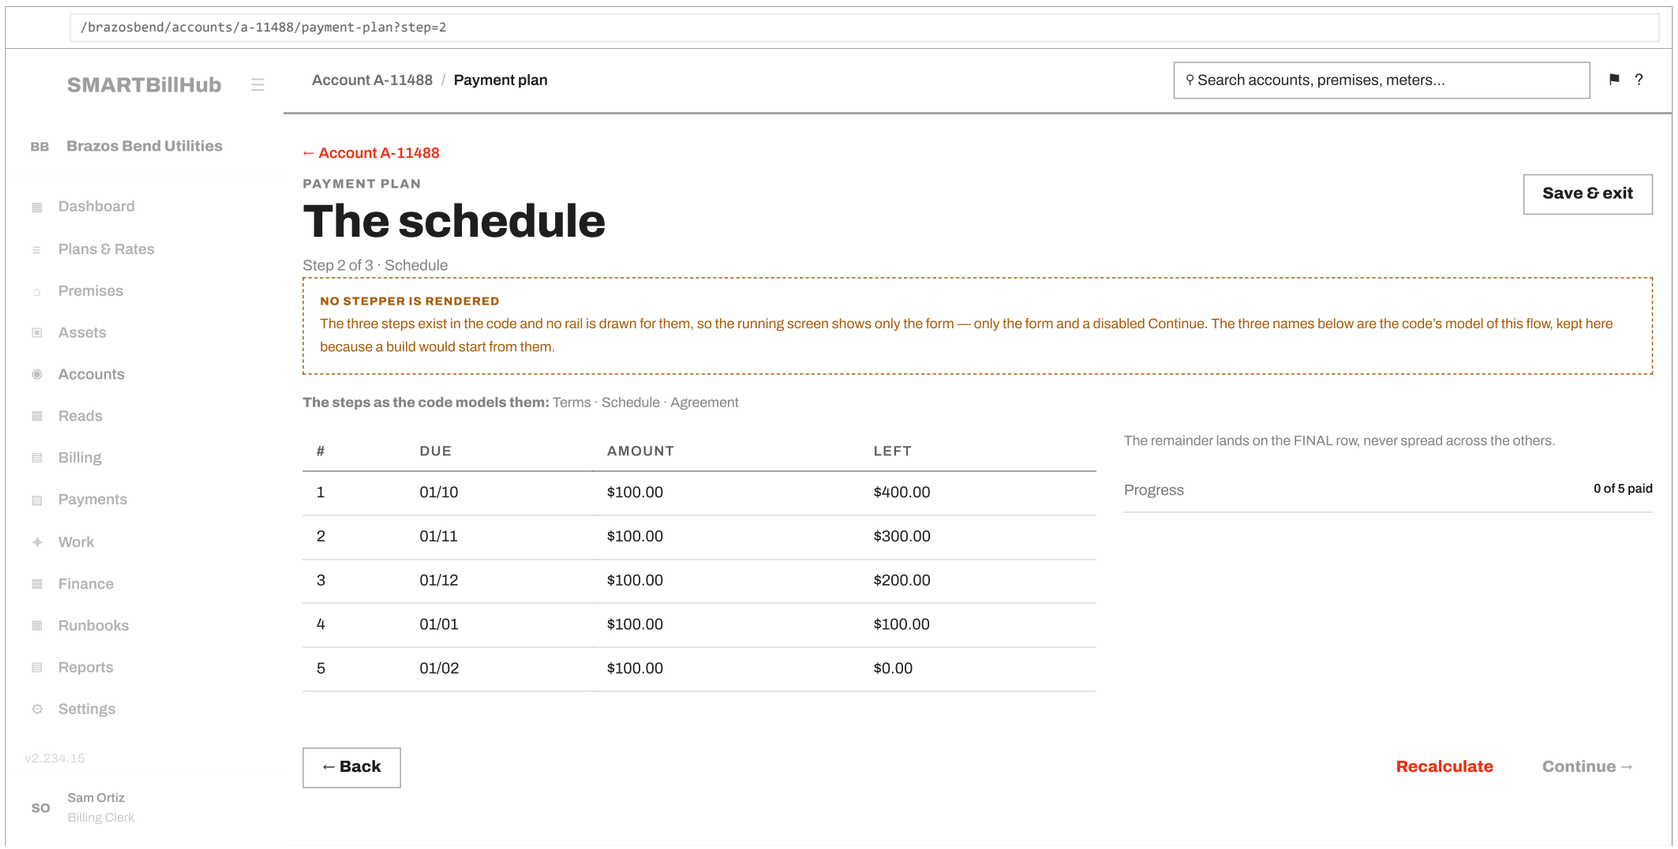

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.

Schedule · `/brazosbend/accounts/a-11488/payment-plan?step=2`

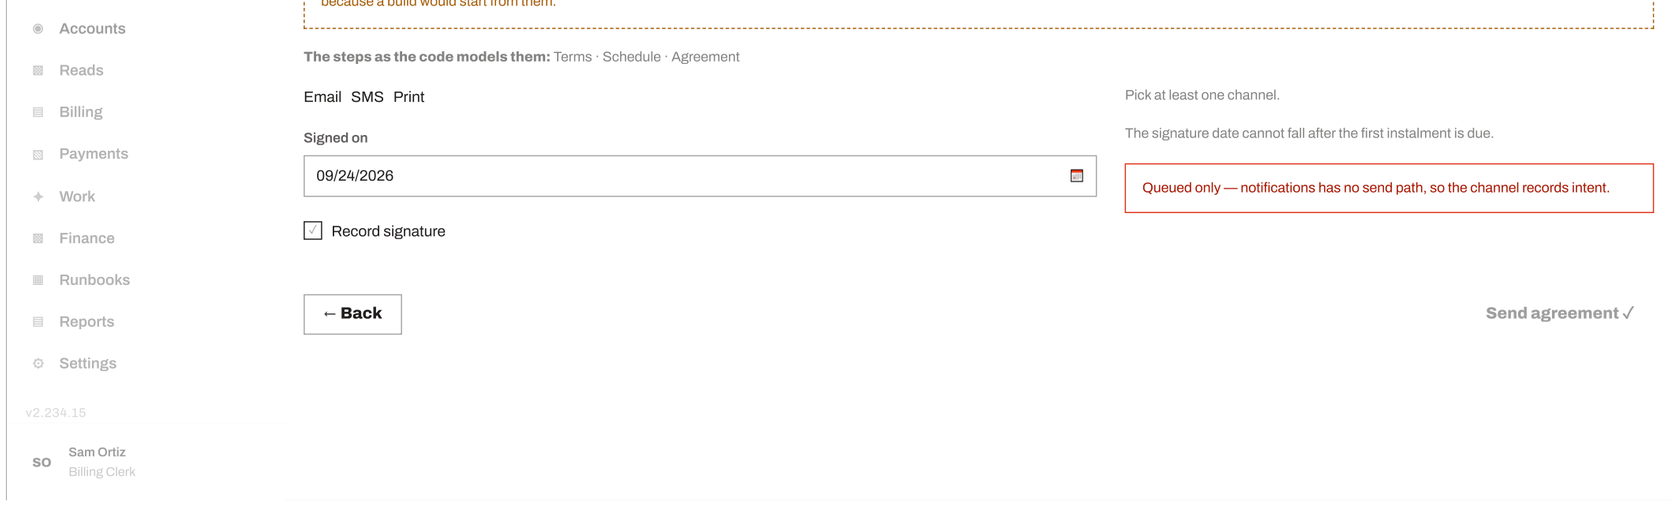

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: neither stepper could be confirmed at all — the running product shows no rail on either entry screen, so even the step count is the code's account of itself.

Agreement · `/brazosbend/accounts/a-11488/payment-plan?step=3` · Commits to **POST /accounts/{id}/payment-plans · preview at /payment-plans/preview**

How you get here	One door: the S21 icon rail's 🛈 **Payment plan** (`AccountDetailPage.tsx:591`), occupying accounts only.
Primary action	**Send agreement ✓** — which queues only. Nothing leaves the building in this release and no e-signature provider is connected.
Walked	**Not walked.**
⚠ Step 8 constraint	Not on `route-b-migrated.txt` — legacy CSS.
Rules	BR-CUS-043 · 044 · B4.4 (2dp half-up, remainder on the final)

06

Loading a utility, and the request queue

The three remaining routes: the bulk import that makes a brownfield utility exist at all, and the two service-request screens the Accounts tab embeds.

---

15 Account import NEW BUILD


`/:tenant/accounts/import · S68 · five stages · returns to ?tab=imports`

Commitments ACC-S9 new build


The question: "*We're going live on Monday with two thousand accounts in a spreadsheet. Get them in, and tell me exactly what didn't.*"

All 5 screens of this flow, drawn at 1280 and buildable as drawn. Real app

shell, real stepper, real field labels in the order the component renders them. A dashed block is a stated absence; a required field carries its asterisk (UI-RULES 10).

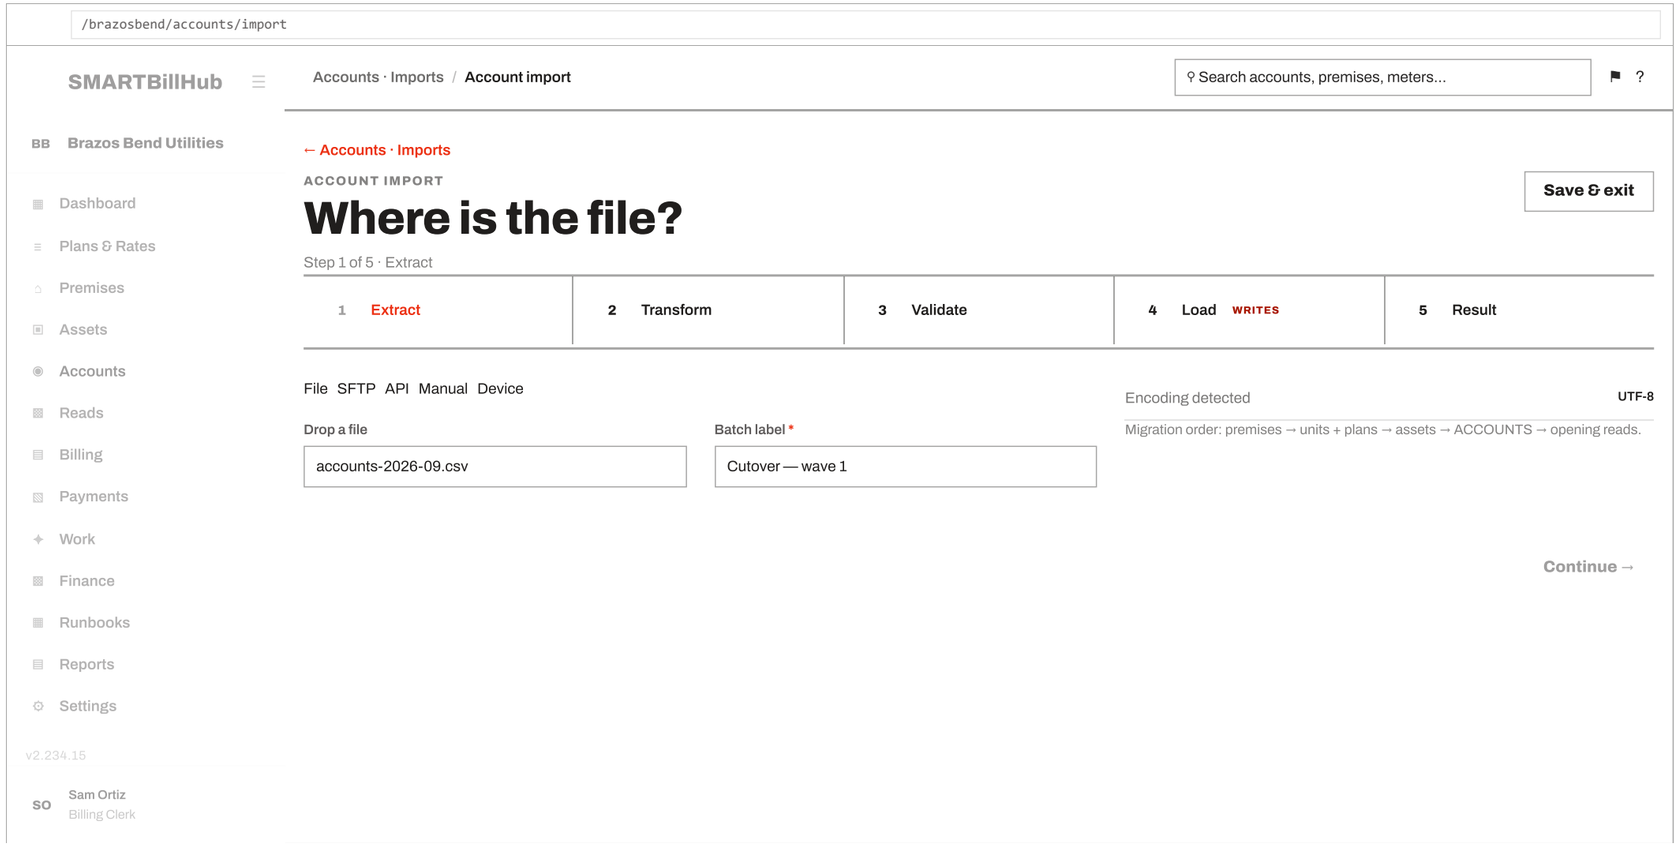

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: five phases drawn against an import the walk confirmed has five.
Extract · `/brazosbend/accounts/import`

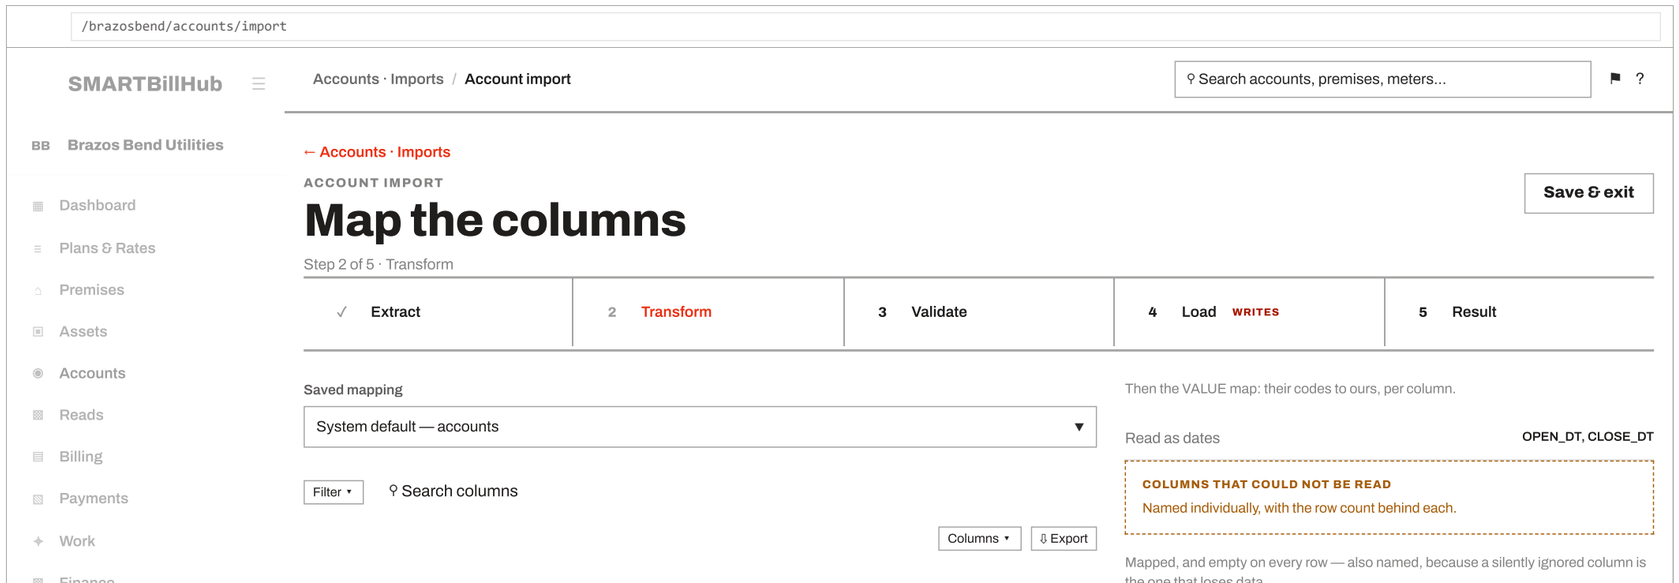


THEIR COLUMN	OUR FIELD
CUST_NO	customer_no
ACCT	account_no
PREMISE	unit
BAL_30	opening 31–60

← Back

Continue →


AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: five phases drawn against an import the walk confirmed has five.


Transform · `/brazosbend/accounts/import` · 1 stated absence on this step, drawn dashed — each names the rule or table it waits on

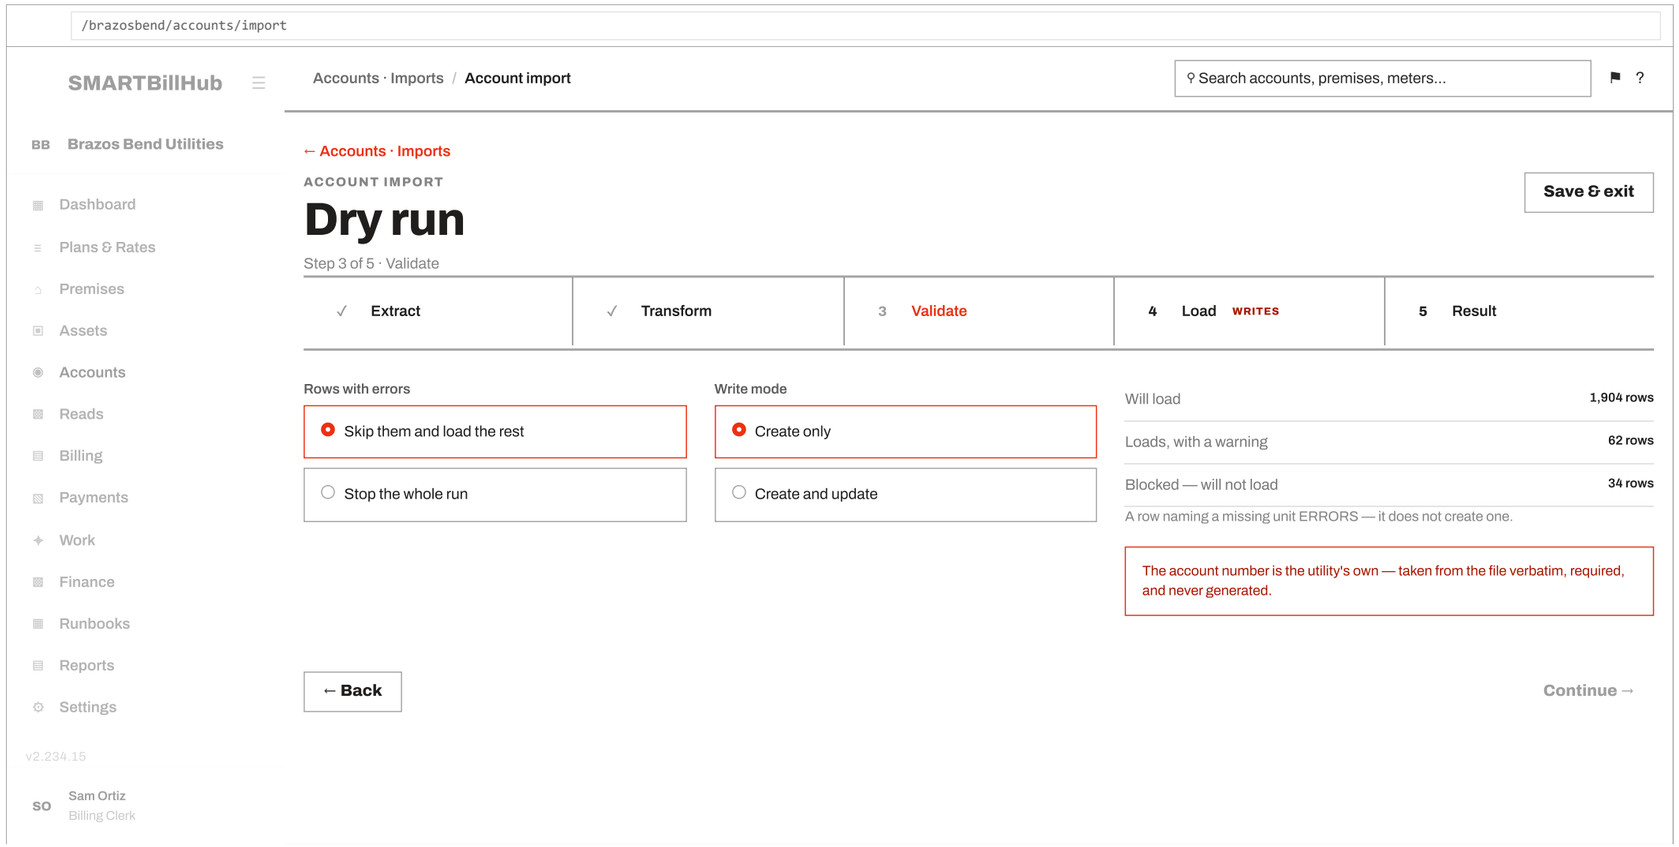

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: five phases drawn against an import the walk confirmed has five.


Validate · `/brazosbend/accounts/import`

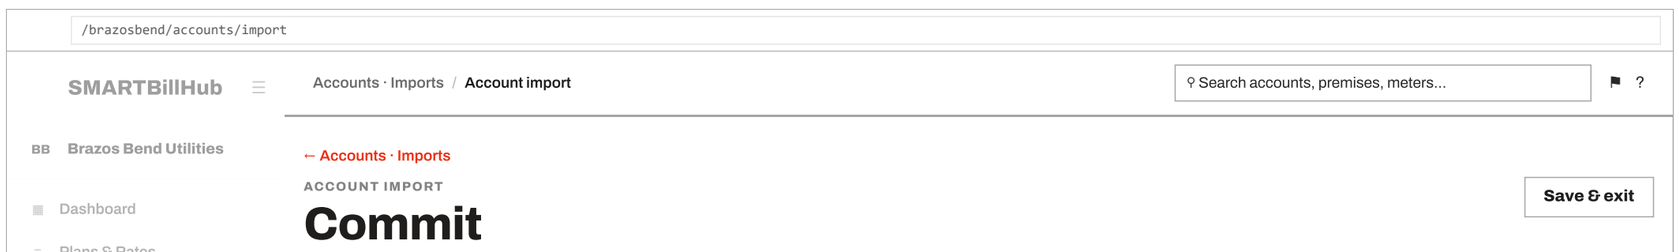

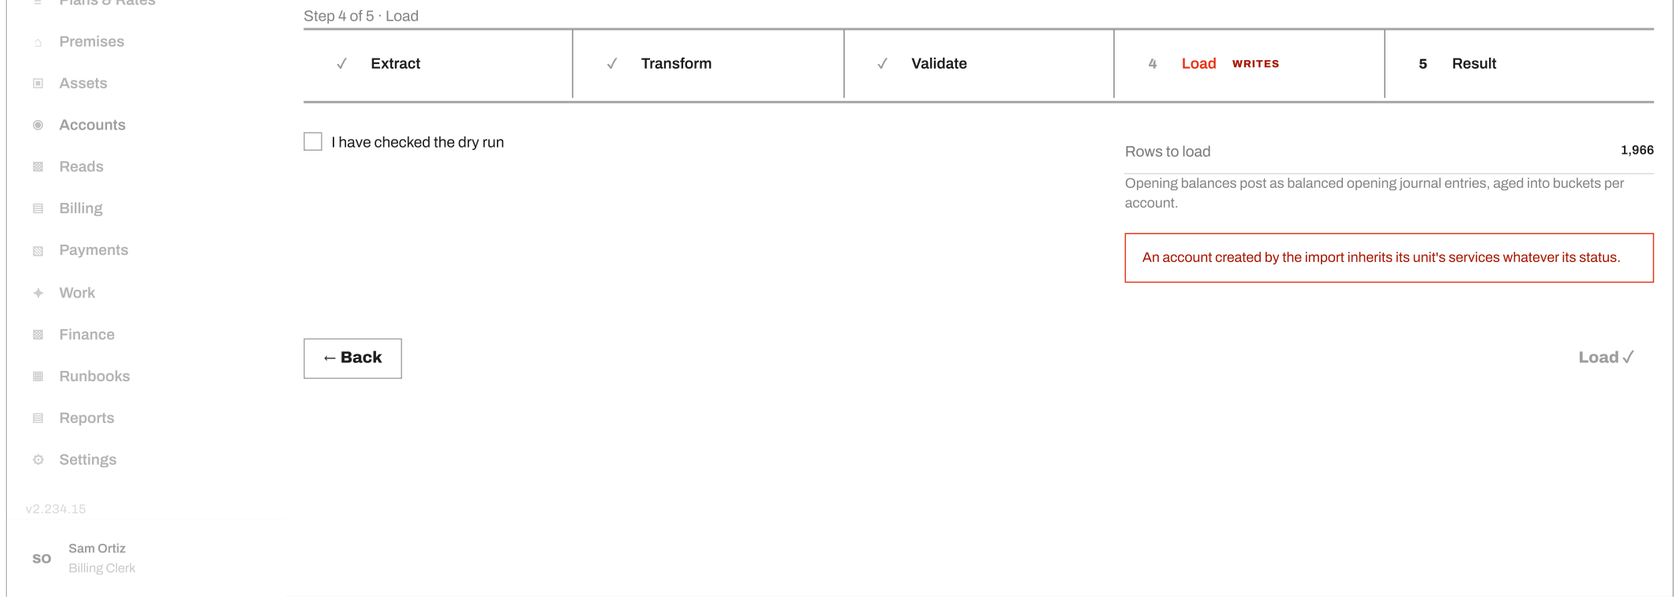

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: five phases drawn against an import the walk confirmed has five.

Load · `/brazosbend/accounts/import`

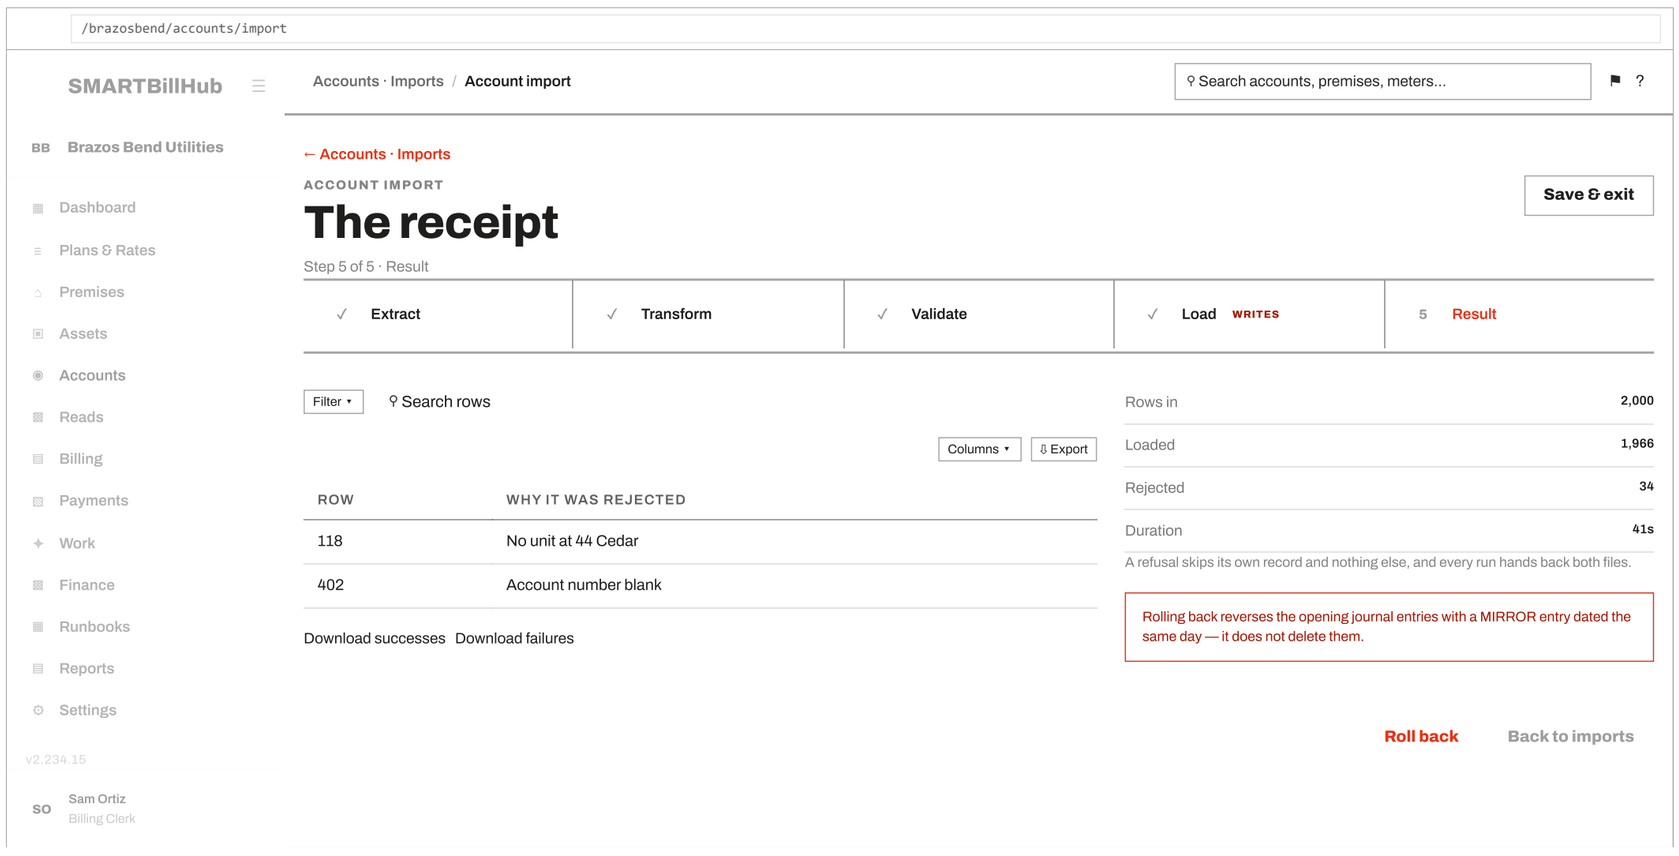

AS-BUILT, FROM CODE — COMPOSED FROM SOURCE, NEVER RENDERED. Why: five phases drawn against an import the walk confirmed has five.

Result · `/brazosbend/accounts/import` · Commits to **the ONE shared ETL runner, accounts target**


Where a load lands

Onto the register's Imports tab, which keeps every run. A rejected run is kept rather than deleted, and it is the most useful row on the list: `IMP-26-0011` loaded nothing and is what the operator corrected to produce `IMP-26-0012`. The pair is the record of what was wrong with the file.

Rows in, loaded and rejected are three figures and never two — 1,213 in, 1,201 loaded, 12 rejected. A run showing only a success count would let twelve accounts go missing without anybody subtracting.

The run's own record is not redrawn, because it already exists: opening one of these is the *Result* screen above — the same five phases with their counts and the rejected rows listed. Drawing it again would be the same screen twice.

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the Imports tab exists and was walked; the *waiting on* column is the addition.
> **Where a load lands · the Imports tab** · `/brazosbend/accounts?tab=imports` · The five-phase import's own history — every run, kept

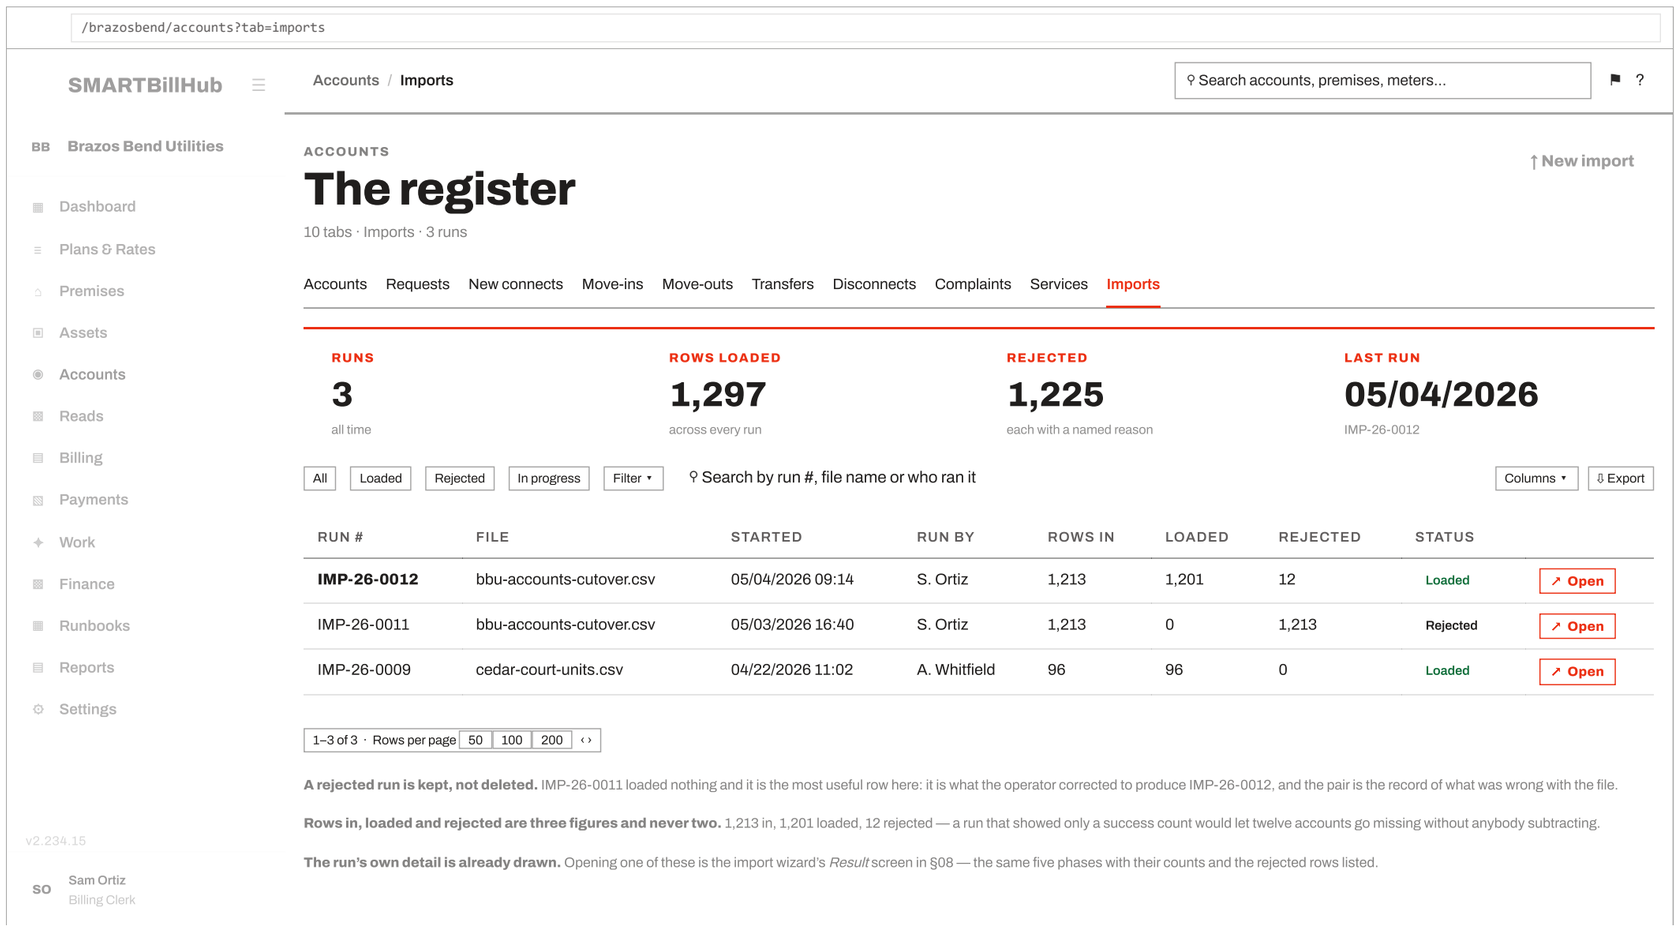

How you get here Two doors: the Imports tab primary (`AccountsListPage.tsx:990`) and the run-history empty CTA (`AccountImportsTab.tsx:426`).

Primary action	**Load** ✓, behind a "I have checked the dry run" gate.
Write surfaces	**Add** in bulk, through the ONE shared ETL runner — this is its sixth target, not a pipeline of its own. **Roll back** reverses the opening journal entries with a mirror entry dated the same day; it does not delete them.
Walked	**Not walked.**
History worth knowing	A1 has specified five steps since 2026-08-08 and the product shipped **three** for sixteen days — no column mapping and no value mapping — so a utility whose CSV did not already use our header names could not import accounts at all. Every gate was green over it, because no gate compares a shipped wizard's step count to the step list its spec writes for it.
Rules	BR-CUS-046 · 047 · 048 · 049 · 050 · 051 · 052 · 075 · 076 · 172 · 672 · 673 · 1041 · 1042 · 1043 · BR-MET-096

16 Service requests list NEW READ

`/:tenant/requests · S83 · also embedded at /accounts?tab=requests with urlState={false}`

Commitments ACC-S33 new read

Drawn with the flow that fills it. The list is beside the six-step capture wizard in *Starting service*, so the steps, the queue they land in and the record they become are read together — jump to it.

How you get here	Four doors: the request detail's back crumb and its "Save & exit" (`ServiceRequestDetailPage.tsx:1240, :1271`), the capture wizard's back crumb (`ServiceRequestCapturePage.tsx:1336`), and global search's "View all in Requests" (`GlobalSearchResults.tsx:220`). **Plus the Accounts screen's Requests tab, which embeds it.**
Tabs	None of its own. When embedded, `ownsUrl=false` suppresses *only* its page header and its URL-backed table state — it touches no row cell.
Write surfaces	**Detail** the row's 👁 **Open** action links to the request (`ServiceRequestsListPage.tsx:415`) — **in both the standalone and the embedded copy**. Note that the request *number* is plain text, not a link, so drill-in is via the eye icon only.
Walked	**Not walked.**

17 Service request detail NO COMMITMENT

`/:tenant/requests/:requestId · S84`

No commitment names this screen — Nothing here is described as owed. The one gap in this pair is on the list beside it, and ACC-S33 closes it.

Drawn with the flow that fills it. The record is beside the six-step capture wizard in *Starting service*, so the steps, the queue they land in and the record they become are read together — jump to it.

How you get here	Three doors: the list's 👁 row action, "Open the request" on the capture confirmation (`ServiceRequestCapturePage.tsx:1557`), and a global-search result row (`GlobalSearchResults.tsx:100`).

Write surfaces	**Update** document verification, fee waivers, the decision. **A fee line cannot be deleted** — it is waived with a reason, the line stays visible and the waiver is recorded against a name.
Walked	**Not walked.**

Commitments in sections 03–06

ACC-S4 NEW BUILD

Every date field behaves the same way across the flow

STATUS Unverified

WAITS ON A shared `.date-input` component, which does not exist anywhere in `07-frontend` today — so no screen in the product can satisfy UI-RULES 7, and this is not an Accounts problem.

SCREENS 03 · 04 · 08 · 10 · 11 · 12 · 13 · 14

WHAT DONE LOOKS LIKE ON SCREEN On the move-out wizard's step 2, the *Moved out on* field shows `08/31/2026` in the tenant's own format, accepts `08312026` typed straight in, and offers a **TODAY** shortcut beside the calendar. It does that identically on all eight screens.

CLOSES §09 · UI-RULES 7, no `.date-input` exists

ACC-S5 EXISTS BEHIND

The catalogue stops carrying sentences no screen shows

STATUS Unverified

WAITS ON Nothing — the conditions these sentences described were all resolved. `AccountsListPage.tsx:179` already records that `ArrivesWith` is no longer imported and that every tab renders a body; the six tab sentences stayed in the catalogue anyway.

SCREENS 01 (six tab strings) and the account detail (four more)

WHAT DONE LOOKS LIKE ON SCREEN Nothing changes on screen — that is the point. `customers.accounts.arrives.moveIns` and its nine siblings are gone from all eleven catalogues, and a grep for `accounts.arrives` returns nothing outside the git history.

CLOSES §08 · 14 catalogue sentences no screen shows

ACC-S6 NEW BUILD

A hold that has expired goes red instead of going stale

STATUS Unverified

WAITS ON A convention, not a table: when a refusal is written with a clock in it — "*in this version*", "*in this release*", "*arrives with X*" — the same commit adds a test that fails when X lands.

SCREENS 01 · 02 · 03 · 04 · 08 · 12 · 14

WHAT DONE LOOKS LIKE ON SCREEN Seventeen strings in this flow carry such a clock. When the customer portal shipped, the suite went red naming `customers.account.note.customerVisibleInert` — rather than that sentence surviving on the Notes tab for a reader to find, which is what happened.

CLOSES §08 · 17 refusals with a clock and nothing reading it

ACC-S7 EXISTS BEHIND

A close-out has a story that owns it

STATUS Unverified

WAITS ON An epic. The act was ruled by the PO on 2026-08-27 and the screen was built the same day; no epic covers it, and the screen's own trace block says a story is owed.

SCREENS 10

WHAT DONE LOOKS LIKE ON SCREEN Nothing on screen — this one is a record gap, and it is in a commitment card because the alternative is that it stays a comment nobody actions. A US-CUS story names the close-out, its states and its test cases, and `CloseOutPage.tsx`'s Story line stops reading *"NO STORY OWNS THIS SCREEN."*

CLOSES §06 · `CloseOutPage.tsx` says no story owns it

ACC-S33 NEW READ

The request number is the link, in both copies of the list

STATUS Unverified

WAITS ON Nothing — the row already links from its eye action, so the address is built and served. The number beside it is plain text, in the standalone list and in the copy the Accounts tab embeds.

SCREENS 16

WHAT DONE LOOKS LIKE ON SCREEN Clicking **SR-2026-00418** opens that request from either copy of the list, and the eye icon stops being the only way in.

CLOSES §06 · the request number is text, so drill-in is the eye icon only

What broke when the product was driven

One row per failure seen in the running app — not per journey and not per screen.

Correction, applied in place · the app WAS driven, and the reason given for not driving it was mostly wrong

~~WAS: 0 of 14 journeys walked. No docker socket, no systemd, PostgreSQL not listening, `node_modules` empty, Django not importable — so nothing could be run.~~
NOW: **the stack was booted and driven.** Four of those five reasons did not survive one command each. PostgreSQL 16 was fully installed at `/usr/lib/postgresql/16/bin`; `pip` was present; `node_modules` is gitignored at `.gitignore:8`, so `npm ci` touches nothing tracked; and Docker was never needed — `make up` is *a* way to run this product, not the only one. Only "nothing is listening on 5432" was true, and that is a thing you start, not a blocker.

What was run. PostgreSQL 16.13 on port 5433 · the backend in a virtualenv *outside* the repository · **334 migrations** · `seed_demo` then `load_sample_data --tenant brazosbend`, which wrote **1,647 rows** — 72 accounts, 91 bills across two cycles, 40 payments, a live payment plan, a completed move-out, a parked move-in · the front end built and served by its own `server.mjs` with `/api/*` passed through to Django, which is the same-origin shape the product ships. `git status --porcelain` is empty: nothing in the repository was written.

What that changes about the rest of this document. The four classes of defect only a driven walk can find were out of reach and are not any more — and one of them was there. Every drawing in §06 has also been re-measured against the running shell, which is where the *Reports* nav item, the 240px sidebar, the 40px page title and four wrong wizard steppers came from.

What broke

Journey	Step	Screen	Did	Expected	Got	Severity

Close-out	Open the close-out screen	22 · `/accounts/{id}/close-out`	Opened the close-out act on an active account from the account detail	The eligibility preview — the cut date, the blocker, the dunning consequence	**404.** The client requests `/api/brazosbend`**`accounts`**`/{id}/close-out` — the tenant segment and the path are concatenated with no separator. `closeOutEndpoints.ts:131` builds `` `accounts/${id}/close-out` `` with **no leading slash**, and `apiPath()` returns `` `${API_PREFIX}/${tenant}${path}` `` (`client.ts:360`). Both the GET preview and the POST commit use that one builder.	**BLOCKS THE JOURNEY** Closed by ACC-S12
Move-out	Step 3 — the settlement read	08 · `/accounts/{id}/move-out`	Reached the step that reads what the account owes or is owed	The close-impact answer, and the landing it implies	**404**, the same fault in a second place: `MoveOutWizard.tsx:1166` requests `` `accounts/${accountId}/close-impact` ``, also with no leading slash.	**BLOCKS THE JOURNEY** Closed by ACC-S12
Record payment	The modal's balance line and amount field	02 · `/accounts/{id}` → Record payment	Opened the modal on an account whose balance is $158.10	Two decimals — `$158.10`, as the list and the header show it	**158.100000 USD**, and the amount field pre-filled with `158.100000`. `AccountActions.tsx:321` interpolates `` `${balance} ${currency}` `` raw; `:234` seeds the input from the same string. Hard rule 2 says money DISPLAYS 2.	**BREAKS A HARD RULE** Closed by ACC-S13
Accounts list	Default ordering	01 · `/accounts`	Opened the list with nothing chosen	The work a clerk has just created, at the top	Sorted **alphabetically by name, ascending** — `?sort=name&dir=asc` is sent before the clerk touches anything. A newly created account lands wherever its customer's surname falls, which on this tenant is page 2 of 2.	**WRONG BY DESIGN** Closed by ACC-S11
Accounts list	The two uncounted tiles	01 · `/accounts`	Read the KPI band against a tenant that has 61–90 and 90+ rows in the table below it	A count, or an honest absence	**PAST-DUE 60+** and **CLOSED THIS YEAR** both read *"Not counted yet"* while the table on the same screen shows two accounts past 60 days and the estate contains a closed account. Deliberate and documented (`AccountsListPage.tsx:673–686`) — but the reason is a gap, not a ruling, so it is a specification and not out of scope.	**HONEST, STILL OWED** Closed by ACC-S22

The two 404s are one defect, and it is the kind nothing in this repository could have caught

Every other API path in `07-frontend/src` begins with a slash — `"/ledger/accounts"`, `"/jobs"`, `"/finance/cost-of-service"`. Exactly **two** do not, and both are in this module: the close-out pair and the move-out settlement read. Concatenated with the tenant segment they produce `/api/brazosbend`**`accounts`**`/…`, which is a real URL shape, so nothing throws — the server simply answers 404 and the screen shows its could-not-load state.

Proved against the running server rather than argued, both paths side by side on the same session cookie:

Requested	Status	Body
`/api/brazosbend`**`accounts`**`/{id}/close-out` — as built	**404**	Django's "Page not found" HTML
`/api/brazosbend/accounts/{id}/close-out` — one character	**200**	`{"account_no":"AC-2026-00001","eligible":false,"blocked_by":{…`
`/api/brazosbend`**`accounts`**`/{id}/close-impact` — as built	**404**	Django's "Page not found" HTML
`/api/brazosbend/accounts/{id}/close-impact`	**200**	`{"currency":"USD","landings":["settled","refund_due","short",…`

Why no check saw it. A unit test mocks the client, so the path never reaches `apiPath()`. `tsc` sees a well-typed string. The backend's own tests call the view directly. And hard-won law 7's shape applies: the front-end test asserts the wrapper was *called*, which is true. **Only a request made by a browser against a real server can see this**, and that is the one thing the previous version of this document had not done.

What worked, said plainly — an empty failure list is worth nothing without it

Walked	Did	Saw
Sign-in → Accounts	Signed in as the seeded owner and landed on the list	72 accounts, $24,992.65 outstanding, 1 pending activation. No console error, no failed request.
The eight list tabs	Clicked every tab	All eight render, each reflects in the URL as `?tab=…`, each swaps the primary action to its own (*+ New request*, *+ New connect*, *Start a disconnect*, *↑ New import*). Rows: 72 · 6 · 8 · 1 · 1 · 0 · 6 · 3.
Search	Typed a name, then an address, then nonsense	Server-side every time — `?q=Bramble` returns the one bakery, `?q=44+Larkspur` matches on address, nonsense returns zero rows rather than an unfiltered page. This corrects an earlier probe of mine that filled the topbar's global search by mistake and reported search dead.
Sort and paging	Sorted on balance, then paged	Both are server parameters — `?sort=balance&dir=asc` and `?page=2&per=50`, which returned the remaining 22 rows. Four headers sort (Account, Name, Balance, Status); the per-page control offers 50/100/200/500/1000.
Account detail, all 12 tabs	Opened a row and clicked every tab	Overview · Bills · Payments · Credits · Payment plan · Usage · Meters · Work · Adjustments · Documents · Notes · Audit. All twelve render, all twelve reflect in the URL, none is blank, none raised an error. The header composes *101 Silver Creek Rd · Unit 1 · Silver Creek, TX 78611* — the walk to `premises` works.
Record payment, end to end	Opened the modal, entered $25.00, submitted	The one write journey walked to a commit. `POST /api/brazosbend/accounts/{id}/payments`, modal closed, and the row is in the database — `25.000000` against that account. The path is correct here, which is what makes the two 404s above a local fault rather than a systemic one.
Six wizards opened	Opened New account, Import, Service request, New connect, Transfer, Disconnect	All six boot and draw their rail. Step counts confirmed: 6 · 5 · 6 · 9 · 5 · 5.

What is still NOT walked, and it is named rather than left to look complete

Six of the fourteen in-scope journeys were opened but not completed to a commit. Every wizard above was driven to its first step and its rail read; none was driven through to the write, because each needs data the walk would have had to author — a vacant unit for a move-in, an unbilled cycle for a move-out. Those steps are drawn in §06 from the code, and they are *read*, not *seen*. The distinction is the whole point of this section, so it is kept even where it is unflattering.

And two steppers could not be confirmed at all. Change plan and Payment plan draw three steps each in §06; the running product shows **no rail** on either entry screen, only a disabled *Continue*. Either the rail appears once the first choice is made, or the drawn stepper is wrong. This document does not know which, and says so rather than guessing — it is the one place in §06 where a drawing is unverified against the screen.

Commitments in this section

Four commitments, one per issue the walk found. A failure with nothing

undertaking to fix it is a story, not a finding.

ACC-S13 NEW BUILD

Money on the screen that takes money displays two decimals

STATUS Unverified

WAITS ON Nothing ruled — hard rule 2 already says money stores 4 and displays 2. The modal renders the raw string and seeds its own input from it, so both the balance line and the prefilled amount are wrong from one source.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN The Record payment modal on a $158.10 account reads **$158.10** and prefills **158.10**, and a golden test fails if either grows a decimal.

CLOSES §07 · six decimals of money on the Record payment modal

WITHOUT IT TODAY A clerk taking a payment reads **158.100000 USD** where the balance is **$158.10**, and the amount box is pre-filled with the same six decimals.

ACC-S12 NEW BUILD

The close-out and the move-out stop asking for a path that 404s

STATUS Unverified

WAITS ON Nothing. One character in each of two files, and the test that proves it — an assertion on the built URL, not on the call, because the call is what looked right all along.

SCREENS 08 · 10

WHAT DONE LOOKS LIKE ON SCREEN Opening the close-out on an active account shows the eligibility preview and its blocker instead of Django's Page not found, and move-out step 3 shows the settlement figure instead of an empty panel.

CLOSES §07 · two 404s from one missing slash

WITHOUT IT TODAY A clerk cannot open the close-out at all, and cannot see what a leaver owes: both screens request a path that 404s and show their could-not-load state.

ACC-S11 NEW BUILD

The list opens on the clerk's own work, not on the alphabet

STATUS Unverified

WAITS ON Nothing on the server — `?sort=created&dir=desc` is already a parameter the list handler reads. What is missing is the default, and the ruling behind it is quoted in §10 and is in no repository file yet.

SCREENS 01

WHAT DONE LOOKS LIKE ON SCREEN Opening `/accounts` with nothing chosen puts the account created five minutes ago in row 1, and the header reads *Newest first* rather than sorting silently by surname.

CLOSES §07 · the list opens on the alphabet

WITHOUT IT TODAY The account a clerk created five minutes ago is on page 2 of 2, because the list sorts by surname before the clerk touches anything.

ACC-S22 BLOCKED

The two uncounted tiles get a number or stop being tiles

STATUS Unverified

WAITS ON A decision nobody has made: PAST-DUE 60+ and CLOSED THIS YEAR both need an ageing position per account that no module publishes, and the same read is what **ACC-S2** waits on. Either one query serves both, or these two tiles come off.

SCREENS 01

WHAT DONE LOOKS LIKE ON SCREEN The band reads **PAST-DUE 60+ · 2** against a tenant whose table shows two such accounts — or the band shows six tiles and the document says which two were withdrawn and why.

CLOSES §07 · two KPI tiles that read “Not counted yet”

08

Every stated absence, and its one decision

Built from the product's own user-facing copy — the sentences a person reads when something cannot be done — not from an auditor's impressions and not from the design, which is a proposal and therefore the wrong place to look for what the server can serve.

The contrast, stated as counts

The wireframes in the design state **zero** absences. The product's own copy for this flow states **131**, of which **57 hold a control the user can see and cannot use**. A further **14 are dead copy** — present in all eleven catalogues, rendered by no source file at all — and **17 are rotting holds**, refusals written with a clock in them that nothing re-checks.

The judgement rule, applied without exception: a recorded ruling that a thing waits makes it **out of scope**, with the ruling quoted. No ruling makes it a **specification** naming what it waits on.

The borderline case, and how the rule decided it. The accounts search placeholder reads *"Account #, customer #, name, address, or meter #…"* where UI-RULES 19 says prompts read *"Search {entities}…"*. That looks like a violation. It is not: B14's own amendment records this exact case — five prompts read a bare field list because those sentences are served verbatim by the server as `search.hint`, and rewriting them by lane fiat would put the drawn prompt and the served hint into disagreement. It is `OQ-600`, **open**, put to the PO as a copy call. So: **out of scope, with the ruling quoted** — not a defect, and not this document's to decide.

The absences that hold a control — the worst kind

What is absent	Screens	Decision	Reason, and who ruled it
Adjust — "Adjustments are billing rows, and billing is not built. There is no endpoint to post one to."	02	**A SPECIFICATION ACC-S24**	**No ruling defers these.** Nothing in this repository dates billing or statements, so *out of scope* here was a reading of the build order rather than a decision anybody recorded. A specification.
Send statement — "Statements are not built yet."	02	**A SPECIFICATION ACC-S24**	Same, and *permanently* was the word that gave it away — no ruling says so. A specification.
Print bill — "No bill has been issued yet." · **Issue credit** — "A credit needs an issued bill."	02	**NOT AN ABSENCE**	**Not a build gap at all — a state gate.** Both navigate once a bill exists. See the correction below.
Upload a document — "Nothing stores a document yet: there is no upload endpoint and no table behind it."	02	**ACC-S8**	No ruling defers it; BR-CUS-036 names the table and it was never built. A specification.
Update payment method — "…belong to payments, which keeps none for	02	OUT OF SCOPE	BR-CUS-059 rules autopay capture-only in v1. Ruling quoted, thing deferred.

an account in this version."

Move-out / Move-in / Change plan / Payment plan / Activate / Close out, each disabled on the wrong account state	02	**NOT AN ABSENCE**	Not absences at all — correct state gates, each naming the rule that refuses (BR-CUS-017, 018, 030, 430). Listed so the count is honest.
Reopen a finished import run — "Reopening a finished run is not switched on yet."	15	**ACC-S9**	No ruling. A specification.
Restrictor instead of a full cut — "This product knows cut and not-cut, and a restricted service is neither… What a restricted service is charged has not been ruled, and that price is the blocker."	12	**A SPECIFICATION ACC-S25**	**An open question is not a ruling.** This was recorded as out of scope because a PO ruling has not been made — which is the definition of a specification that is blocked, not of something deferred.
The earliest lawful cut date — "…is not computed anywhere in this product… so this screen cannot stop an unlawful date being chosen here."	12	**ACC-S10**	No ruling defers it, and the consequence is legal rather than cosmetic. A specification.

Correction, applied in place · the icon rail is not what its own docstring says

~~WAS: four of the seven rail glyphs are dead — Send statement, Print bill, Issue credit, Disconnect notice — and three are live.~~
NOW: **six of seven are reachable.** Print bill and Issue credit are *state gates* that navigate once a bill exists (`accountRailReadiness.ts:227, :257`); Disconnect notice navigates to `/disconnects/new?account=<id>` (`:291`). Only Send statement is permanently dead.

The docstring is the stale part. `AccountIconRail.tsx:59` still reads "*Three are LIVE (Change plan · Payment plan · Add note)*", while `accountRailReadiness.ts` — added by `DEF-CUS-4631` — moved the refusals to state gates. Hard-won law 1: a comment claiming a guarantee is not the guarantee. **This audit's own first pass repeated the docstring** before reading the readiness module; the row is struck rather than deleted so the next reader sees why.

Dead copy — 14 sentences no screen shows

Each is present in all eleven catalogues and referenced by no non-test source file. The condition each described was resolved and the wording was never removed.

Key	What it says	Why it is dead
`customers.accounts.arrives.requests` `…moveIns · …moveOuts` `…newConnects · …transfers` `…disconnects`	Six sentences saying each worklist tab "arrives later".	**All six tabs were built.** `AccountsListPage.tsx:179` records the milestone in its own words — "*`ArrivesWith` IS NO LONGER IMPORTED, AND ITS ABSENCE IS THE MILESTONE… every tab on this screen renders its contents rather than a note about itself*" — and the six strings stayed in the catalogue.
`customers.accounts.arrives.requestsBuilt`	"Showing that list inside this tab is still to come; the button takes you straight to it."	The list is embedded in the tab now (DEF-664).
`customers.account.arrives.customer` `…customerTitle`	Two sentences about the shared customer record.	The customer entity was built; the panel renders live links.
`customers.accounts.awaits.billing` `…billingTitle · …other · …otherTitle`	Four sentences about what the list is waiting on.	Superseded by the per-cell absences the KPI strip and the cells now carry.
`customers.moveOut.shortfall.absent`	"…None of them is offered yet, because nothing accepts the	**Both unrendered and no longer true.** The four shortfall paths were mounted — `POST`

	because nothing accepts the answer."	`/accounts/{id}/settle-shortfall` — and the wizard renders `shortfall.unread` instead.

Rotting holds — the refusals with a clock in them

A hold is correct the day it is written and rots on the day the thing it refused arrives, because landing a feature and releasing the sentence that pointed at it are two acts and only the first feels like the work.

The hold	Its clock	Status
`customers.account.note.customerVisibleInert`	"there is no customer portal **in this version**"	EXPIRED AND STILL ON SCREEN — **172** files under Closed by ACC-S3 `src/portal/`. Rendered at `AccountActions.tsx:516`.
`customers.account.audit.portalActorWhy`	"There is no customer portal **in this version**"	EXPIRED AND STILL ON SCREEN — rendered at Closed by ACC-S3 `accountDetailTabs.tsx:1180`.
`customers.moveOut.impact.notServed`	"arrives with the close-impact read, **which is not built yet**"	**EXPIRED** — the read is mounted Closed by ACC-S26; `GET /accounts/{id}/close-impact` answers.

`customers.account.pill.autopayOnWhy`
`…newAccount.preferences.autopayHint`
`…moveOut.impact.payments.autopayExplicit`
	"nothing collects on it **in this version**" × 3	STILL TRUE — BR-CUS-059 rules autopay capture-only in v1.

`customers.moveIn.send.absent`
`customers.paymentPlan.queueOnly`
`customers.waitingOn.remindersNote`
	"in this release" × **3**, not four. ⚠ **Two keys this row used to name — `customers.disconnect.step3.channelBlocked` and `…step5.sendBlocked` — are in no catalogue**, and a third that is (`customers.waitingOn.remindersNote`) was missing. Measured 2026-09-13.	STILL TRUE — notifications has no tables. Closed by ACC-S27

`customers.newAccount.deposit.arrives`	"arrive with **the deposit work**"	STILL TRUE — names a wave with no date and nothing re-checking it. Closed by ACC-S28

Commitments in this section

Three absences carry no ruling that defers them, so each is a specification naming what it waits on. Everything else in the tables above is out of scope with its ruling quoted.

ACC-S8 NEW BUILD

An account can hold a document

STATUS Unverified

WAITS ON The table BR-CUS-036 names and an upload endpoint. The product's own words are the blocker: *"Nothing stores a document yet: there is no upload endpoint and no table behind it."*

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN The Documents tab lists *Tenancy agreement · Contract · 12/03/2026 · S. Miller · 214 KB* instead of drawing headings over a stated absence, and **UPLOAD** is not disabled.

CLOSES §08 · Upload a document, absent and unruled

ACC-S9 NEW BUILD

A finished import run can be reopened to fix its rejected rows

STATUS Unverified

WAITS ON Nothing ruled. The copy says only "*Reopening a finished run is not switched on yet. Correct the file and import it again.*"

SCREENS 15

WHAT DONE LOOKS LIKE ON SCREEN On a run reading *1,966 loaded · 34 rejected*, a **FIX ROWS** action opens those 34 with their reasons; correcting and re-committing moves the run to *2,000 loaded · 0 rejected*.

CLOSES §08 · Reopen a finished import run, absent and unruled

ACC-S10 NEW BUILD

A cut cannot be scheduled before it is lawful

STATUS Unverified

WAITS ON The notice date plus the statutory period, rolled forward past weekends and public holidays. The screen says nothing performs that roll: "*…so this screen cannot show it and cannot stop an unlawful date being chosen here.*"

SCREENS 12

WHAT DONE LOOKS LIKE ON SCREEN Disconnect step 3 shows *Earliest lawful cut date: 05/14/2026*, and the picker refuses anything before it with the reason visible on the disabled cells.

CLOSES §08 · the earliest lawful cut date is computed nowhere

ACC-S18 BLOCKED

A company customer is opened under the master account that owns its building

STATUS Unverified

WAITS ON A search that narrows the account list to master accounts and answers on company name, account number and service address — all of which the published list already takes. Nothing is waiting on a rule: the second half is a decision, not a gap, and it is named in the row below.

SCREENS 03 · step 1

WHAT DONE LOOKS LIKE ON SCREEN Choosing *Company* opens a search under it, and picking a row fills the association. A company that rents its premises shows *Not associated with a master account* pre-selected with the reason beside it, and the account opens normally — an empty result reads differently from a company that has none at all.

THE OPEN HALF, STATED RATHER THAN ASSUMED Where the association is STORED was never decided. It is drawn as a choice a clerk makes and the product has no column for it, so this commitment covers the search and the screen, and not the writing.

CLOSES §11 · R8, a company customer names no master account

ACC-S19 EXISTS BEHIND

A clerk is told, while they are typing, that this customer is already on file

STATUS Unverified

WAITS ON A read that judges a block of details WITHOUT writing anything. The criteria are ruled, the evidence is stored and encrypted with a one-way token beside it, and one function already resolves the party for four doors and answers *linked*, *created* or *none* — but it answers at SAVE, and drops the word before any screen sees it. Nothing here needs a matcher built.

SCREENS 03 · step 2 · 04 · step 2 · 06 · step 1

WHAT DONE LOOKS LIKE ON SCREEN One panel, headed *This looks like somebody you already have*, on all three doors, with the candidates, what agreed and what did not, and a dialog that opens over the form showing the accounts, the deposit and the history. Nothing is preselected. On the service request the link button is greyed with its reason, because that door creates no customer.

WHAT IT IS WORTH One landlord in this system holds three customer numbers. A customer who has been here before is asked for a second $150.00 deposit while the utility is already holding theirs.

CLOSES §11 · R9, a customer already on file is not flagged

ACC-S42 NEW BUILD

The icon rail stops refusing things the product can do

STATUS Unverified

WAITS ON Nothing. Two of the refusals name questions the Product Owner closed on 2026-08-12 and both structural blockers behind the disconnect notice were built afterwards. Three test cases pin the false sentences word for word, so the suite defends them.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN The rail offers what the product can do; the tests assert the CAPABILITY rather than the sentence, so the day a blocker lands the suite fails and names it.

CLOSES §08 · DEF-CUS-4631, open — three of the rail's four refusals are false

WITHOUT IT TODAY A clerk is told on the screen that they cannot start a disconnect notice, and they can.

ACC-S25 BLOCKED

A restricted service is a third state, and its price is the blocker

STATUS Unverified

WAITS ON A PO ruling on what a restricted service is charged. That is an open question, not a recorded deferral, so this is a specification and the screen may not call it out of scope.

SCREENS 12

WHAT DONE LOOKS LIKE ON SCREEN Disconnect step 4 offers *Restrict* beside *Cut*, the consequence panel prices it, and the account's status reads *Restricted* rather than borrowing the word for cut.

CLOSES §08 · a restrictor is neither cut nor not-cut

ACC-S27 BLOCKED

Four screens stop refusing to send, or say what they are waiting for

STATUS Unverified

WAITS ON An unanswered question: notifications has no tables, and no ruling in this repository says whether they land in this release. Four refusals rest on that silence — the move-in's send, the payment plan's queue-only note and both of the disconnect's.

SCREENS 04 · 12 · 14

WHAT DONE LOOKS LIKE ON SCREEN Each of the four names the wave it waits on instead of the release, and a clerk queuing a notice on the disconnect sees the queue row it made rather than a sentence about what this version cannot do.

CLOSES §08 · four “in this release” refusals about sending

ACC-S24 BLOCKED

The rail’s billing actions say which module they wait for, and when

STATUS Unverified

WAITS ON An unanswered question rather than a build: nothing in this repository dates the billing module or statements, so *out of scope* here rests on a reading of the build order and not on a ruling anybody made.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN Adjust and Send statement stay disabled and each names the wave it arrives with, so a clerk reading the rail learns a date rather than a dead end — and the day that wave lands, a test fails naming both.

CLOSES §08 · Adjust and Send statement, deferred with no ruling

ACC-S28 BLOCKED

The deposit fields arrive, or the step stops promising them

STATUS Unverified

WAITS ON An unanswered question. *“arrive with the deposit work”* names a wave, not a date, and nothing re-reads it — which is **ACC-S6**’s failure with no clock in it at all, so no test could fire.

SCREENS 03

WHAT DONE LOOKS LIKE ON SCREEN New account step 4 either collects a deposit and shows it on the review, or says which release it arrives in — and a test fails on the day that release ships.

CLOSES §08 · the deposit step names a wave with no date

ACC-S26 NEW BUILD

The move-out stops saying the close-impact read is not built

STATUS Unverified

WAITS ON Nothing. `GET /accounts/{id}/close-impact` is mounted and answers; the sentence promising it is still rendered on step 3. Removing it is the work, and **ACC-S12** is what makes the panel fill.

SCREENS 08

WHAT DONE LOOKS LIKE ON SCREEN Move-out step 3 shows the settlement figure with no sentence under it about what has not been built, and a grep for `moveOut.impact.notServed` returns nothing outside the git history.

CLOSES §08 · the close-impact refusal expired and is still drawn

09

Where the screens depart from the rules

Judged against B14 first, r10 second, in that order. One row per violation, never per screen. **Most of B14 is ratified and unenforced** — no gate in this

repository reads rendered output — so a green suite is evidence of nothing here, and the last column is the point of the table.

Screens	Rule	What it says	What the screens do	Where	Enforced?
03 · 04 · 08 · 10 · 11 · 12 · 13 · 14	**UI-RULES 7**	"Every date uses `.date-input` (calendar affordance, MM/DD/YYYY keyed entry, Today shortcut). Never a bare text input."	**There is no `.date-input` component or class anywhere in `07-frontend`** — a grep returns nothing outside test files. Every date in these flows is a native `<input type="date">`: **no Today shortcut**, and the displayed format follows the browser locale rather than the tenant's, while `DateCell` everywhere else formats per tenant. Closed by ACC-S4	`UI-RULES.md:16` `CloseOutPage.tsx:218` `+ 7 more`	RATIFIED, UNENFORCED

In fairness to the screens: a native date input is timezone-free, so the hazard that usually bites date fields — a timestamp rendered in the browser's zone showing the previous day for every user west of the server, which on a billing product is a bill dated a day early — **does not bite here**. The violation is the missing Today shortcut and the locale-dependent format, not a wrong date. And the rule is repo-wide rather than an Accounts failing: the component it names was never built.

Checked and found compliant

Rule	Verdict	Evidence
UI-RULES 14 column selector	PASS	Show/hide, **bidirectional** reorder, Reset, and persisted per user **server-side** under `table.<screen>.columns`. The identity column can never be hidden. `DataTable.tsx:120, :381, :742`
UI-RULES 16 pagination footer	PASS	On the response. `core/pagination.py:34` — but see the NFR-3 finding: the response pages and the *work* does not.
UI-RULES 17 empty state	PASS	All ten tabs render a real list with an empty state and a CTA. None renders a note about itself.
UI-RULES 11 consequence preview	PASS	Move-out step 5 (nine panels) · Disconnect step 4 ("What this will do / will not do") · Close-out ("What this will write") · New account step 6 ("What this create will not write").
B14 rule 6 danger tier	PASS	Close-out and Schedule the disconnection both take the danger tier; the ⚡ rail glyph carries it too.
B14 rule 31 no database id on screen	PASS	Every identity cell renders `account_no`, not the UUID. The account header composes its locality by walking to the premises rather than reading a retired address kind.

Exempt — not violations

Screen	Rule	Why it is exempt
01	UI-RULES 19 · search placeholder	`OQ-600`, **open**. B14's own amendment names this exact case and the reason: the sentence is served verbatim by the server as `search.hint`, and rewriting it by lane fiat would put the drawn prompt and the served hint into disagreement about one box. `14-ui-conventions.md:205-211`
02	UI-RULES 15 · row actions	The seven-glyph rail is not a row-actions cell. `RowActions` is `flex-nowrap` for a table column (DFF-352); this is a wrapping rail under a rule, and the

	capped at two	divergence is stamped in the file.

Commitments in this section

One commitment. The other violation in this section is closed by ACC-S4, which sections 03–06 already carry.

ACC-S41 NEW BUILD

Every ruling this document quotes also exists in the repository

STATUS Unverified

WAITS ON Nothing but the writing. Forty-one rulings — every one of the screen-shaping decisions taken between 2026-09-10 and 2026-09-12 — are quoted here and in no decision log, business-rules file or change request. They cannot be grepped, nothing counts what depends on them, and if this document is lost they are lost.

SCREENS None — this one changes no screen, and says so.

WHAT DONE LOOKS LIKE ON SCREEN Every row in §14K reads a repository path instead of *nowhere*, and a lane that never opens this document builds the same screens from `02-decision-log.md` and the customers module's `02-business-rules.md`.

CLOSES §14K · 41 of the 52 rulings this document quotes exist nowhere else

WITHOUT IT TODAY NOBODY BUT THIS DOCUMENT KNOWS WHAT WAS DECIDED. Hard-won law 9 says a ruling goes in the repository the turn it is made; law 13 says the cost of not doing it is that the Product Owner is asked again and answers differently.

BLAST RADIUS BLAST RADIUS: 41 rulings, 4 repository files (`02-decision-log.md`, the customers module's `02-business-rules.md`, `11-change-requests.md` and `14-id-reservations.md` for the ids). No code changes.

ACC-S23 NEW BUILD

The account sub-type reads as English, not as a database value

STATUS Unverified

WAITS ON Nothing but a catalogue key per value, in all eleven catalogues. B14 rule 31 is ratified and this is the one place in the flow that breaks it.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN The Account panel reads *Residential · owner-occupied* where it reads `RES_OWNER_OCC` today, and a test refuses any cell whose text matches an upper-case underscore enum.

CLOSES §09 · B14 rule 31, the account sub-type is a raw enum

10

The remedies, drawn


Every element numbered, every number given a line: **what it is · where its data comes from · which rule it satisfies · new, changed or unchanged.** That last field is what makes the drawing diffable against the screen it replaces — without it a reader cannot tell the fix from the redraw, and a remedy nobody can diff gets built whole.

Two constraints that bind every drawing below

Rule 21. `AccountsListPage.tsx`, `AccountDetailPage.tsx`, `NewAccountWizard.tsx`, `ChangePlanWizard.tsx`, `PaymentPlanWizard.tsx`, `AccountActions.tsx` and `customersShared.tsx` are **not** on `07-frontend/src/styles/route-b-migrated.txt`. A Tailwind utility written in any of them renders as **nothing at all**, and `tsc`, eslint and every `toContain("flex")` assertion pass on it. **So R1 below reuses classes `customers.css` already declares, or lands in a sibling file that is on the list** — which is exactly how `accountDetailHeader.tsx`, `accountDetailTabs.tsx` and `AccountIconRail.tsx` came to exist.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12.

R1 · An Edit form on the Account panel EXISTS BEHIND ACC-S1

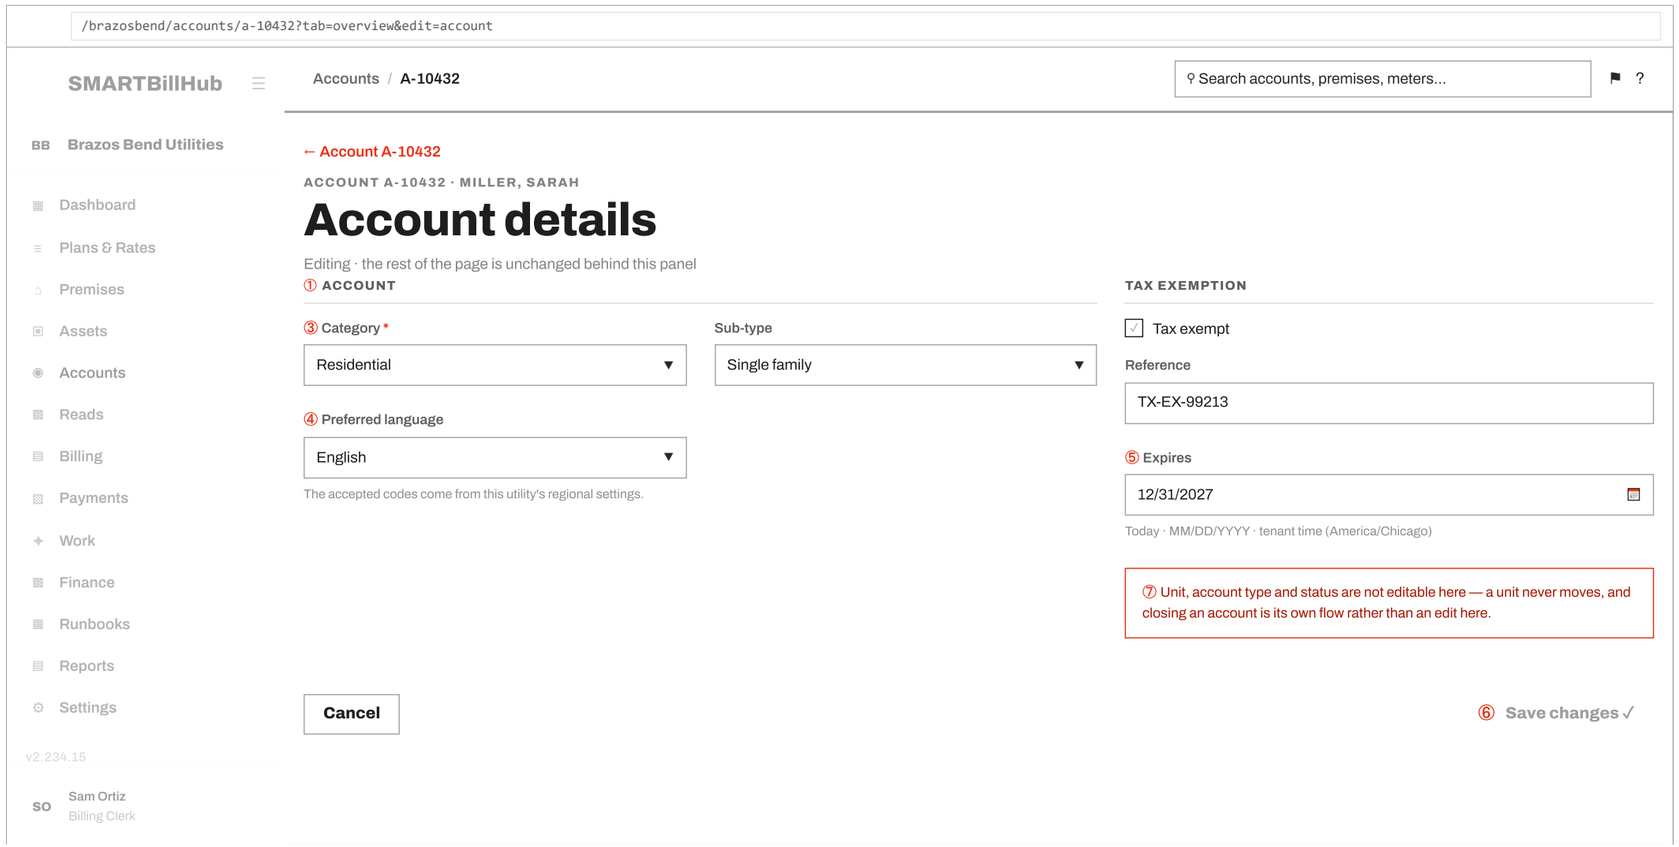


REDESIGN — PUBLISHED 2026-09-10, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the Account panel has no edit control and `PATCH /accounts/{id}` has no caller.
R1 · An Edit form on the Account panel · `/brazosbend/accounts/a-10432?tab=overview&edit=account` · the control, the form, and the audit row it writes

1. ① Account panel heading · unchanged · `customers.css` panel class · **UNCHANGED**
2. ② Edit control · opens the form in place · UI-RULES 4 (`Verb →` grammar; here a pencil per rule 15's icon vocabulary) · **NEW**
3. ③ Category select · value ← `accounts.account_type`; options ← the fetched platform catalogue (`useAccountCategories`, already on this screen for the list filter) · UI-RULES 8 · **NEW**
4. ④ Preferred language select · value ← `accounts.preferred_language`; options ← NOT SERVED — the copy already admits it: "*No screen lists them yet, so the server checks what you type.*" **This one line makes R1 a back-end change wearing a wireframe** · UI-RULES 8 · **NEW**
5. ⑤ Tax-exempt expiry · value ← `accounts.tax_exempt_expires` · **UI-RULES 7** — drawn as the `.date-input` the rule names, with the Today shortcut, *not* the native input the rest of the flow uses · **NEW** (and depends on ACC-S4)
6. ⑥ Save · `PATCH /accounts/{id}` → `services.update_account`, already built, audited and tested · UI-RULES 4 (`Verb ✓` commits) · **NEW WRAPPER, EXISTING ENDPOINT**

7. ⑦ Read-only notice · states which fields the server refuses and why · BR-SHL-025 · **NEW**

Where this lands. `AccountDetailPage.tsx` is legacy CSS, so the form goes in a sibling on the migration list — the same move `accountDetailHeader.tsx` made — or reuses `customers.css`'s existing classes. Drawn either way, it must not introduce a utility into the parent file.

R2 · A list footer that is honest about what it sorted BLOCKED ACC-S2

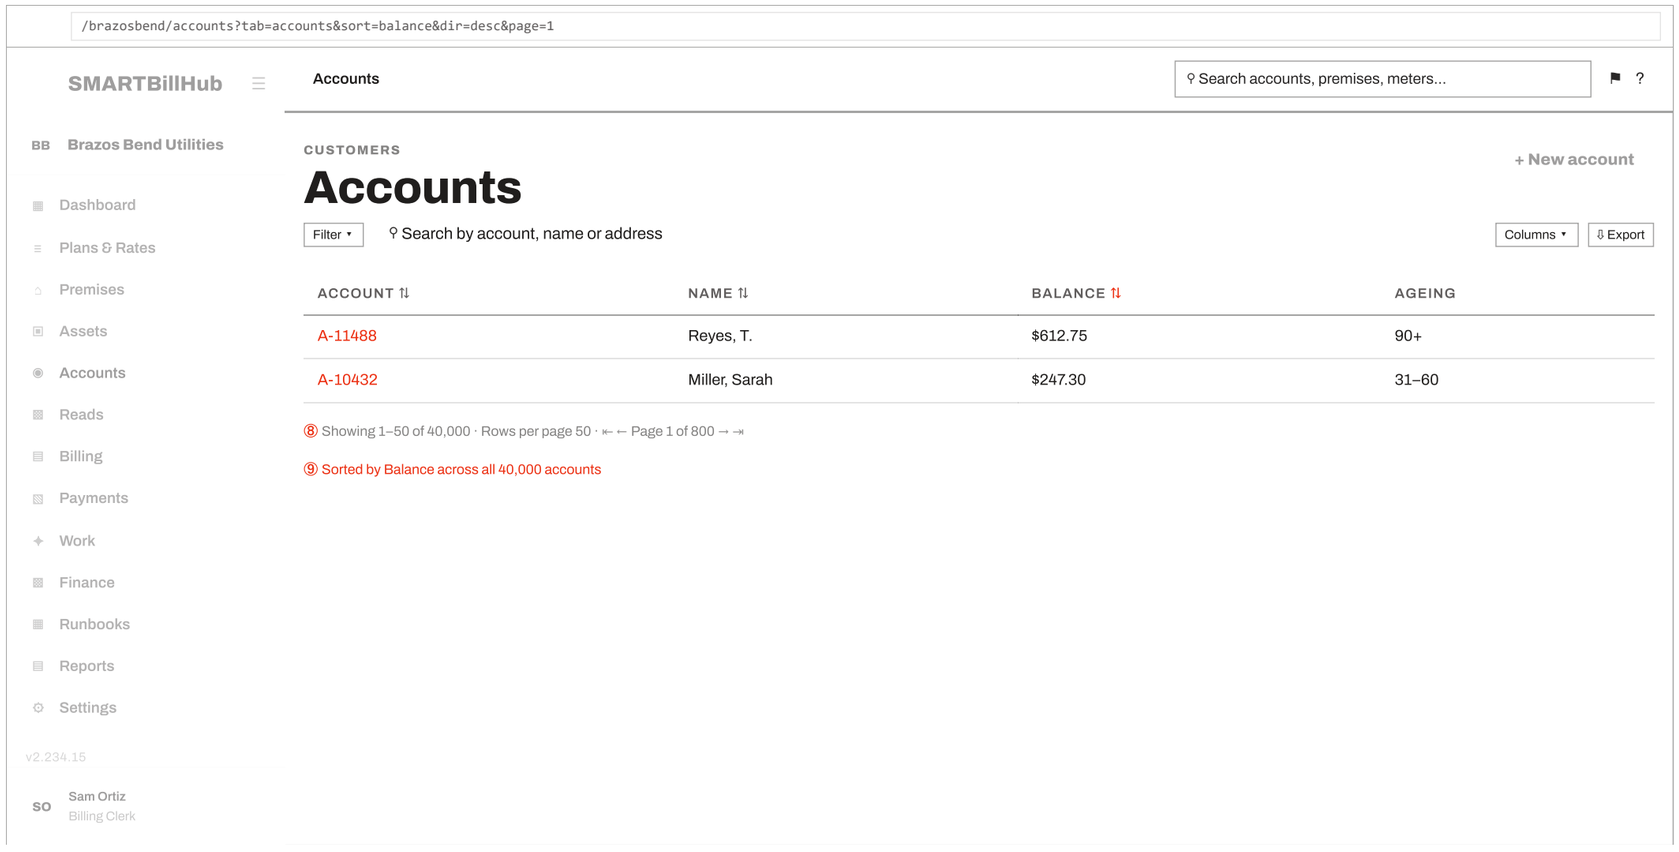


> **REDESIGN — PUBLISHED 2026-09-10, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the list footer states a count and never says what the ordering was over.
> **R2 · A list footer that says what it sorted** · `/brazosbend/accounts?tab=accounts&sort=balance&dir=desc&page=1` · the footer, and the sort-scope line under it

1. ⑧ Pagination footer · `count` from the DRF envelope · UI-RULES 16 · **UNCHANGED**
2. ⑨ Sort scope line · states whether the ordering is over the whole result set or only the page · **no rule covers this — it is stated only in this document**, and appendix A counts it as a NO HOME · **NEW**

Why the remedy is one sentence and not a redesign. The real fix is server-side and is a decision, not a drawing: either the derived positions get materialised somewhere sortable, or the list sorts in SQL on the four stored columns and says so. Drawing a new toolbar here would be a redesign wearing a fix's clothes — the maintenance process names that case explicitly, and it has already gone wrong once on the property Overview. ⑨ **is the only element this remedy adds.**

R3 · One date control, everywhere NEW BUILD ACC-S4

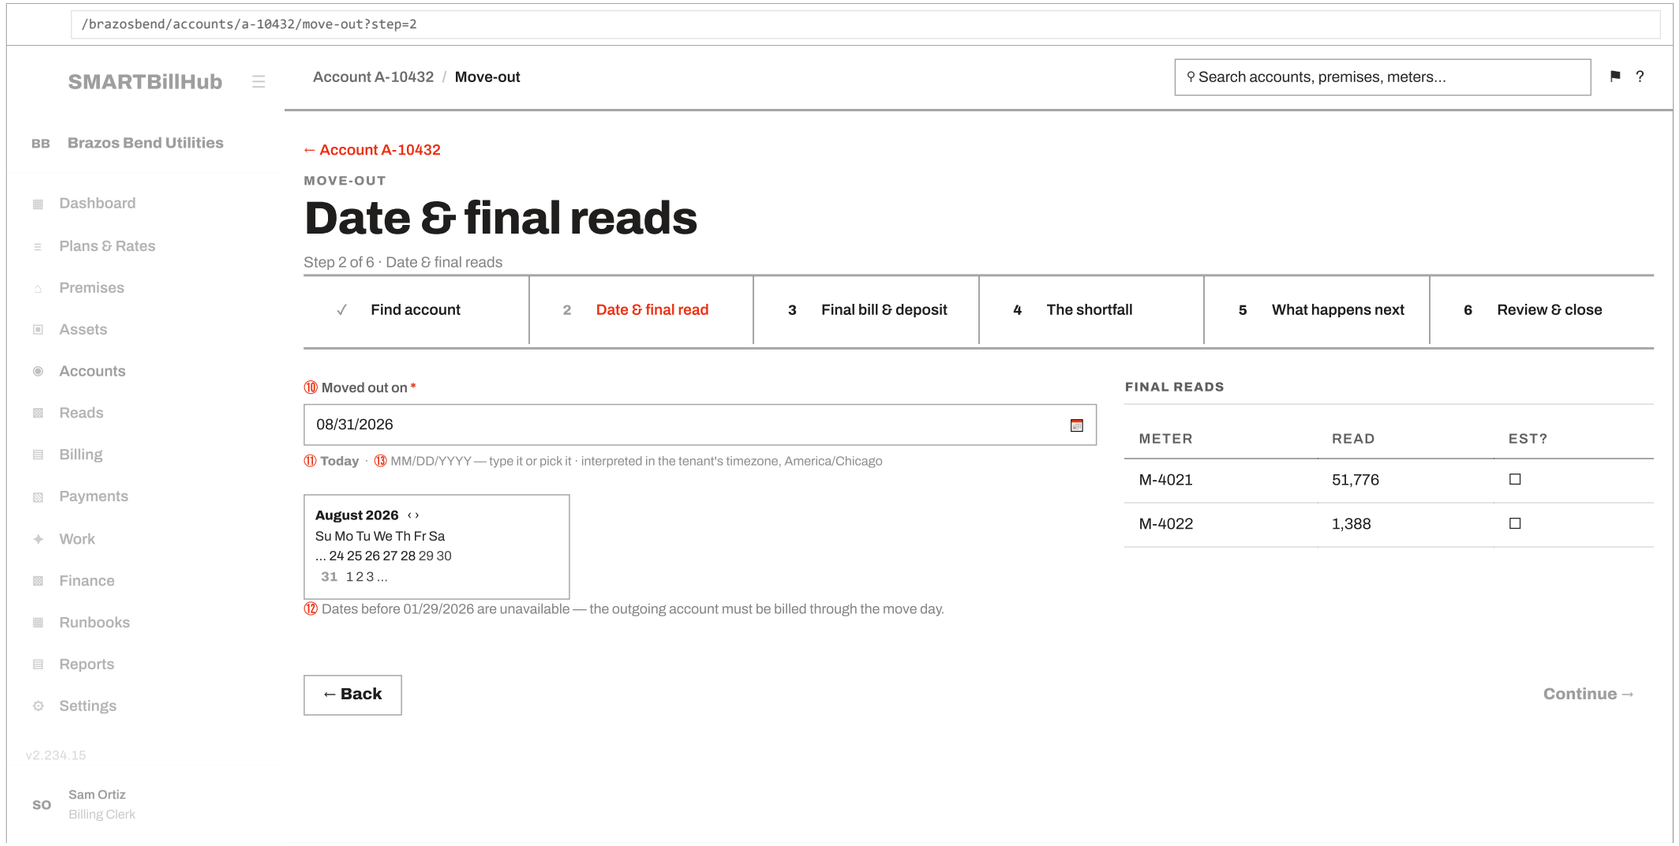

> **REDESIGN — PUBLISHED 2026-09-10, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** every date field in the flow is a bare text input.
> **R3 · One date control, everywhere** · `/brazosbend/accounts/a-10432/move-out?step=2` · the shared control, drawn once on the step that needs it

1. ⑩ The `.date-input` itself · value ← the wizard's own draft state · **UI-RULES 7** · **CHANGED** — replaces a native `<input type="date">`
2. ⑪ Today shortcut · the tenant clock, not the browser's · **UI-RULES 7**, the clause the current control misses entirely · **NEW**
3. ⑫ Disabled dates *with a visible reason* · min ← the served `earliest_start` · BR-CUS-056 · **NEW** — a cell that will not click and does not say why is a support call
4. ⑬ Format and timezone, stated · format ← the tenant's regional settings, already published by `ShellWithSession` and read by `DateCell` · **UI-RULES 7** · **NEW**

One honest note on ⑬. The current native input is timezone-free, so this remedy must not *introduce* a timezone bug while fixing a format one. A date field whose source is a plain date stays a plain date; the tenant zone is stated so a reader knows which clock **Today** means, and for no other purpose.

ACC-S11 · The list opens on the alphabet, and the clerk's own work is what they came for

Seen, not reasoned. Opening `/accounts` with nothing chosen sends `?sort=name&dir=asc` before the clerk touches a control. On the seeded tenant that puts *Ana Alvarez* first and an account created a minute ago wherever its customer's surname happens to fall — for half the alphabet, that is page 2.

The ruling, verbatim, PO 2026-09-10: "*Whenever any account is created or any entry is created in the system, it automatically sorts it by the alphabetical order. It should always sort it by the creation order. The new newly created entries should always show on the top.*"

It is not one list. The sentence says *any entry*, so the same default is owed by the seven sibling tabs on this screen — Requests, New connects, Move-ins, Move-outs, Transfers,

Disconnects, Imports — and by every list in the product that opens on a name. This document can only speak for the Accounts menu; the rest needs the same walk.

What it costs to build, and the trap in it. The default becomes `created_at` descending, and the clerk's chosen sort must still win and still survive a refresh. ⚠ **The sort happens in Python today** — `account_list` materialises every matching row with `list(qs.order_by("id"))` (`selectors.py:2751`) and then sorts the list (`:2803–2814`), so a new default is one more branch in the same in-memory sort rather than an `ORDER BY`. It will work at 72 accounts and it is the fifth `NFR-3` breach either way — see §04. **Fix the default and the ordering together, or the fix makes the breach a little worse and hides it behind a feature.**

Routing. Ambiguous between a defect and a change, and `13-change-process.md` §1 settles ambiguity the same way every time: **it is a defect** — "*filing our misunderstanding as a 'change' quietly converts our error into the customer's new requirement*".

⚠ **This ruling is not in the repository.** It exists in this document and in the chat that produced it, because the session was scoped to analysis with no repository writes. Law 9 wants it in `12-governance/02-decision-log.md` and in `04-docs/05-modules/08-customers/02-business-rules.md` *the turn it was made*. Until it is there, the next agent will not find it.

ACC-S12 · One missing slash, two dead paths — and it is a one-character fix

`closeOutEndpoints.ts:131` and `MoveOutWizard.tsx:1166` each build an API path with no leading slash, so `apiPath()` welds it to the tenant segment and the request 404s. Both were proved against the running server in §07: the as-built path returns Django's 404 page, the same path with one slash added returns 200 and real JSON.

The fix is `/accounts/…` in two files. The part worth more than the fix is the guard: nothing in this repository can currently fail on a malformed path, because a unit test mocks the client and `tsc` sees a well-typed string. **A check that every literal handed to `client.get/post/patch/delete` begins with `/` or resolves to a constant that does** is a grep, it would have gone red on the day either line landed, and it is the thing to build alongside the two-slash fix — hard-won law 7: prove it red on these two lines first.

ACC-S13 · Six decimals of money on the screen that takes money

Seen, not reasoned. The Record payment modal shows **158.100000 USD** and pre-fills the amount box with `158.100000`. Hard rule 2 is not ambiguous — money is stored to 4 decimals and **displays 2**, re-signed by the PO on 2026-08-22 in the words "*MOney 4 decimal, percentage 6 decimal, display both 2 decimal*".

It is not a missing feature. The formatter exists, is shared, and is used by every other money surface in the product — `MoneyCell.tsx:168`, whose own comment reads "*BR-TEN-080: exactly 2 dp on screen*". The very same balance renders correctly as `$158.10` in the accounts list and in the account header. Two lines in one file bypass it: `AccountActions.tsx:321` interpolates the raw string, and `:234` seeds the input from it.

⚠ **The reason it reads as deliberate.** `formatMoney`'s fallback for an amount it cannot parse is `return \`${amount} ${currency}\`` — byte-identical to what line 321 hard-codes. The modal permanently renders the formatter's *error path* in place of its normal one, so a reviewer reading the code sees a shape the codebase genuinely contains elsewhere and moves on.

The consequence is not cosmetic. The pre-filled value is what a clerk submits when they accept the default, so a six-decimal string is what reaches `POST /accounts/{id}/payments` on the common path. The fix is `formatMoney(balance, currency)` for the display and a 2-dp value for the input default. **The guard worth more than the fix** is a check that no money-carrying JSX interpolates an amount without going through the shared formatter — it would have gone red the day this line landed, and hard-won law 7 says prove it red on this line first.

R4 · Every quick action as a modal form, open over the account NEW BUILD ACC-S14

Thirteen quick actions, thirteen dialogs, every field on one surface. Asked for directly: "*build the modal form for the quick actions. And the wireframe show the full screen, and in the screen show the model form open. Show all the form*

details. each and every quick action should show in the model form with proper fields and details."


Why a dialog rather than a page, and it is one reason. Nine of the thirteen take the clerk off the account today — four to a wizard of their own, three to another module, two to a page that replaces the screen. The clerk is usually on the phone. What is behind the form is half of what they are being asked about — the balance, the status, the plan, the tabs — so the page below is dimmed and still readable rather than replaced, and closing the dialog costs nothing. **Issue credit is the clearest case:** as built it leaves for another module and drops the account on the way, so the clerk is asked to paste a bill id they were one click from.

Every drawing carries the whole form, not a first step. Where an action has steps the rail stays for orientation and the fields are all shown at once under the step each belongs to, ending in the recap. Six of the thirteen are multi-step today and a reader of the as-built drawings can only see step 1 of each; these show the other forty-one fields.

What is drawn here that the product does not do yet, each named on its own drawing: a confirmation on **Activate account**, which today commits on the click; a **unit search** on Move-in, which today has no picker at all; the **late fee, the credits, the allocation and the outstanding remainder** on Record payment, which today shows none of the four; the **bill carried across** to Issue credit; and on every one of the thirteen a **last step that recaps what was entered**. A control the deployment cannot honour keeps its form and disables its commit with the reason on it — Adjust, Send statement and Payment plan are all drawn that way.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12 — `ACC-S14` below is that card.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.
>
> **Quick action 1 of 13 · Adjust** · `/brazosbend/accounts/a-11812` · the form the product needs before the endpoint exists — commit disabled, with the reason on it

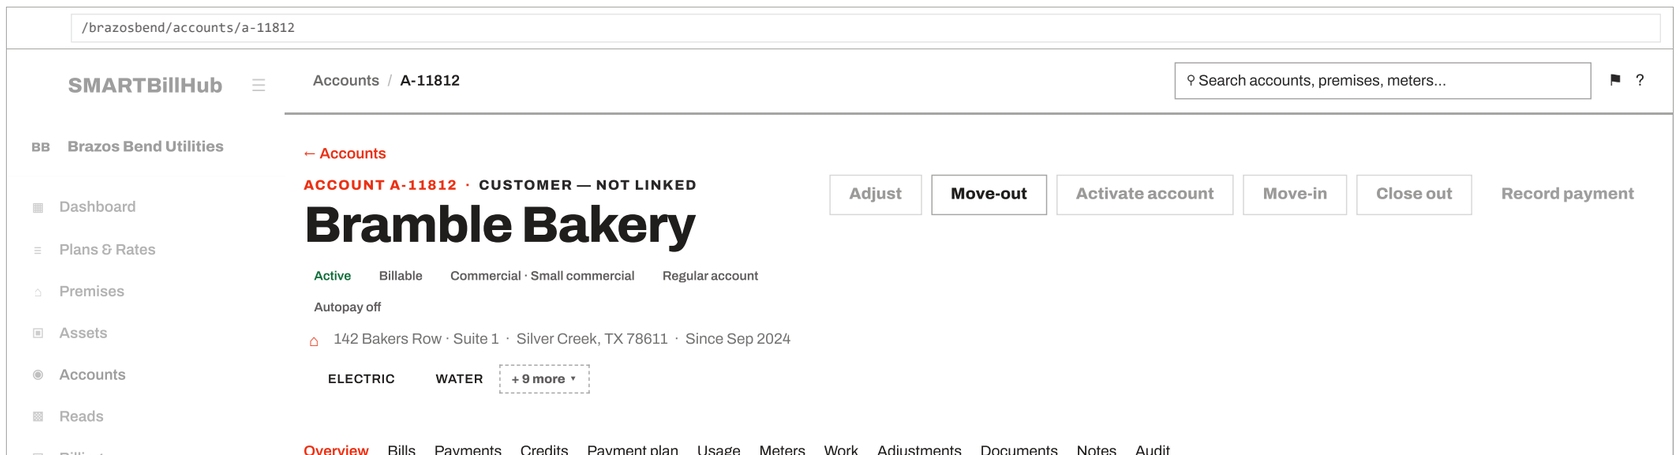

Overview · Bills · Payments · Credits · Payment plan · Usage · Meters · Work · Adjustments · Documents · Notes · Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Adjust this account

Bramble Bakery · A-11812 · balance $2,410.00

WHAT IS BEING ADJUSTED

Adjust what *
This account's balance ▾
This account's balance · A specific bill · One line of a bill.

Which bill
Not applicable
There are no bills on this account to adjust.

THE MONEY

Which way *
Credit the customer ▾
A credit reduces what they owe; a debit increases it.

Amount *
410.00
Cannot exceed the balance of $2,410.00.

Tax
No tax ▾
Follow the original line · No tax · Tax at today's rate.

Effective date *
09/11/2026
The day this counts from.

WHY

Reason *
The opening balance was wrong ▾
The opening balance was wrong · Billed in error · Meter fault · Goodwill · Leak allowance · Rate applied wrongly · Missed charge · Theft restated

Case or reference number
Whatever the customer can quote back.

Note to the file
Kept with the adjustment and read by anyone asking why later.

APPROVAL

Raised by
Sam Ortiz · Billing Clerk

Approved by
Needs a supervisor ▾
An adjustment over $100.00 cannot be posted by the clerk who raised it.

What this does to the account

Balance now	$2,410.00
Where it came from	An opening figure, not a bill
This adjustment	–$410.00 credit
Days past due	62 — unchanged by a credit
Balance after this adjustment	**$2,000.00**

Every money action writes the audit log.

Cancel · Post adjustment

SO Sam Ortiz
Billing Clerk

ACC-Q01

This is the account that shows why it matters. The $2,410.00 was carried in as an opening figure with no bill behind it. If any of it is wrong — and two dunning notices have already gone out on it — there is no way to correct it from anywhere in the product.

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 2 of 13 · Move-out · `/brazosbend/accounts/a-11812` · six steps, every field on one surface — including the one the product cannot ask for here

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	$0.00
posting basis, from the ledger	past-due is not worked out here	v1 · since 06/01/2026	no deposit received

Move this account out

Bramble Bakery · A-11812 · 142 Bakers Row · Suite 1

1 Who & when | 2 Final read | 3 Bill & deposit | 4 The shortfall | 5 Address & unit | 6 Review

1 · WHO IS LEAVING, AND WHEN

Account: **A-11812 · Bramble Bakery**
Fixed by the account you came from.

Move-out date *: 09/30/2026
The last day they are responsible for service at this address.

2 · THE FINAL READ

THERE IS NO METER TO READ
Two services have been open at this unit since September 2024 and no meter has ever been fitted. A final read cannot be taken, and the wizard must say so rather than ask for a number nobody can supply.

Instead of a read *

Services close on

Close the services without one

09/30/2026

Close the services without one · Raise a job to fit and read a meter first · Estimate the period

Defaults to the move-out date.

3 · THE FINAL BILL AND THE DEPOSIT

Final bill

Do not raise one

Raise it on the next run · Raise it now · Do not raise one.

Deposit on file — $0.00

Nothing to settle

Apply it to the final bill · Refund it in full · Hold it

4 · WHAT IS STILL OWED

Balance today

$2,410.00

An opening figure.

How old

62 days past due

Served by the account and shown nowhere on the detail screen.

What happens to the shortfall *

Send it to collections

Keep chasing it · Send it to collections · Write it off (needs a supervisor)

Payment in flight

$500.00 · Processing

PY-260911-0076 has no clearing date, so it has met nothing.

5 · WHERE THE LAST LETTER GOES, AND WHAT HAPPENS TO THE UNIT

Forwarding address

Leave it blank to keep sending to the service address.

Town or city

State

ZIP

The unit becomes

Vacant

Vacant · Handed straight to a named next occupant

Letters to send

Close-out letter only

Final bill and deposit statement · Close-out letter only · None

6 · REVIEW — EVERYTHING ABOVE, ONCE MORE

What pressing the button will do

Move-out date	09/30/2026
Final read	None — the unit has no meter
Final bill	Not raised
Deposit	$0.00 — nothing to settle
Shortfall	$2,410.00 — sent to collections
Payment in flight	$500.00 stays in Processing
Disconnect case DSC-26-0003	Still open
The unit	Becomes vacant on 10/01/2026
Account status after this	**Closed**

Save & exit

Cancel

Move this account out

v2.234.15

SO Sam Ortiz
Billing Clerk

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 3 of 13 · Activate account · `/brazosbend/accounts/a-11812` · the confirmation the product is missing, and it names the partial failure **before** the click

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Activate this account

Kwan, Michael · A-12048 · 88 Pine Vista · Unit 2

Today this commits the moment it is clicked, with no dialog and no way back.

WHEN SERVICE STARTS

Activation date *
09/11/2026
The day the account starts being billable.

Opening read
Use the last read on the meter
Use the last read on the meter · Enter one now · No read needed

Electric starts
09/11/2026

Water starts
09/11/2026

THE PLAN

The unit's plan
SCW-RES · Sample — Residential · v1
In force at this unit since 06/01/2026.

Base charge
$20.00 a month
There is nothing to pick here: a plan belongs to the unit, and the account inherits it.

THE DEPOSIT

Deposit
Charge the scheduled amount
Charge the scheduled amount · Charge a different amount · Waive it (needs a supervisor)

Amount
150.00
From the plan's deposit schedule.

Due
08/22/2026
Falls on the first bill's due date.

Billing cycle
Silver Creek — monthly
Taken from the unit; change it only if this account bills on another round.

TELLING THE CUSTOMER

Send the welcome pack

Send the deposit notice separately

Both are recorded whether or not they can be delivered yet.

REVIEW

What pressing the button will do

Status	Pending activation → Active
Service starts	09/11/2026 · Electric and Water
Opening read	Taken from the meter's last read
Plan	SCW-RES v1, inherited from the unit
Deposit	$150.00, due 08/22/2026
Cycle	Silver Creek — monthly

Two things the server will not manage, and says so now rather than after.
No plan snapshot is recorded — the table that ties an account to a plan version does not exist, so this account will read its plan from the unit.
No deposit is applied — the schedule lookup is not built, so the $150.00 above is recorded as intended and not charged.

Cancel | Activate account


v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q03

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 4 of 13 · Move-in · `/brazosbend/accounts/a-11812` · the unit is **searched and chosen**, and everything held about it is shown before the customer is asked for

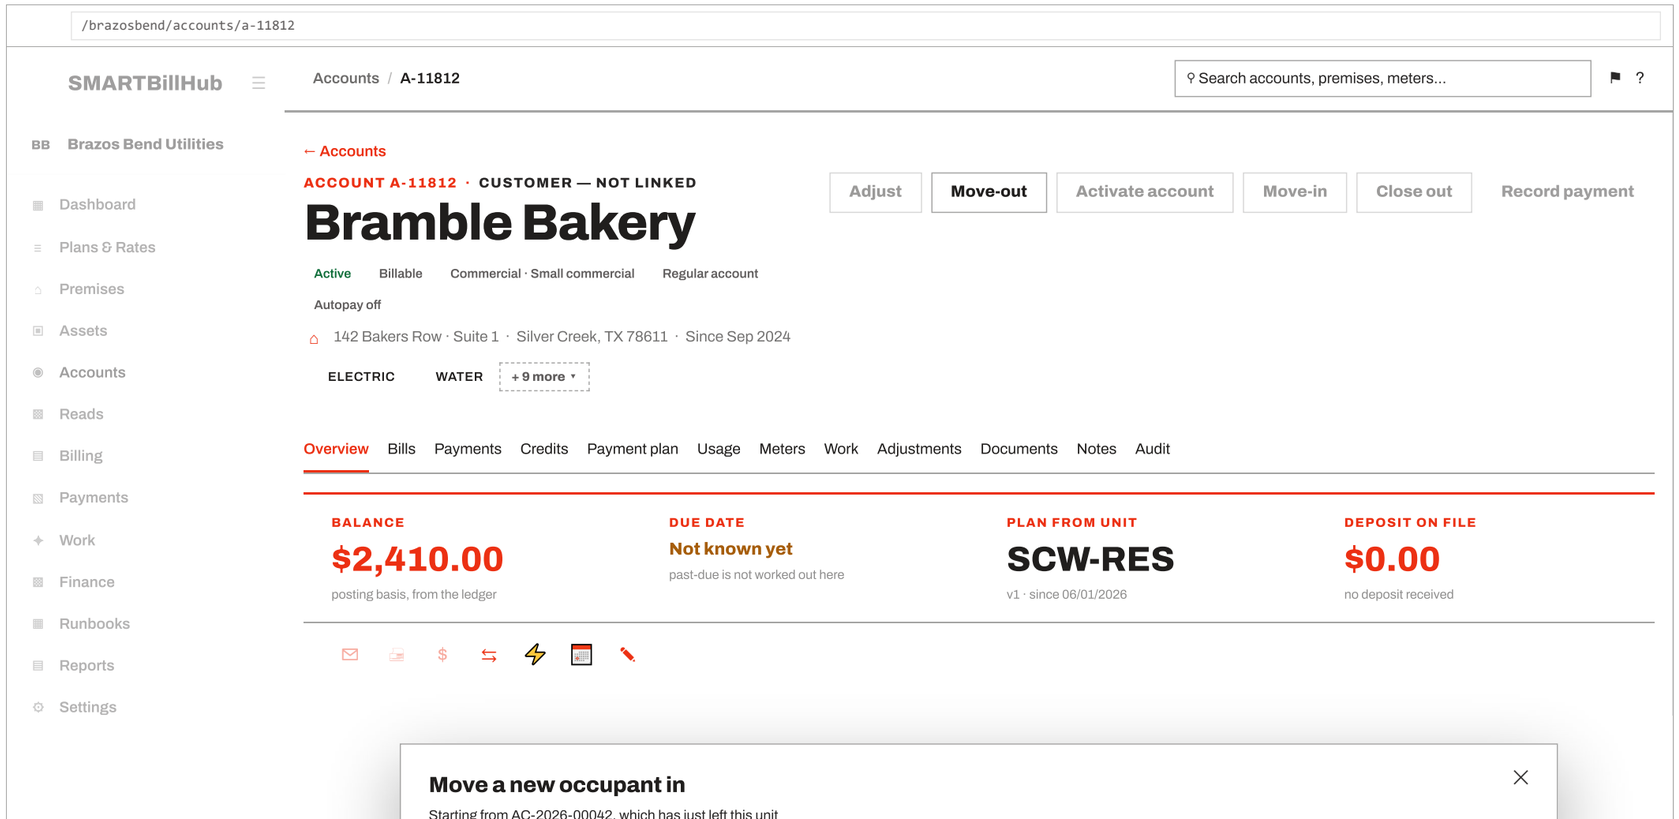

1 Find the unit | 2 Customer | 3 Start & read | 4 Deposit | 5 Review

1 · FIND AND CHOOSE THE UNIT

Search for a unit *

mill pond

Type an address, a unit label or a premises name.

	UNIT	ADDRESS	TYPE	SERVICES	VACANT SINCE
◉	Apt 102	301 Mill Pond Ln	Apartment	ELECTRIC WATER	08/01/2026
○	Apt 104	301 Mill Pond Ln	Apartment	ELECTRIC	07/12/2026
○	Unit 1	88 Mill Pond Ln	Single family	ELECTRIC WATER	06/30/2026

Unit 102, 301 Mill Pond Ln — everything held about it

Unit label	Apt 102	Services available	ELECTRIC WATER
Address	301 Mill Pond Ln, Silver Creek, TX 78611	Meters on the unit	E-6114 · W-6114, both walk-by
Unit type	Apartment	Plan the unit carries	SCW-RES · Sample — Residential · v1
Size	2 bedroom · 940 sq ft	Plan in force since	06/01/2026
Premises	Mill Pond Apartments	Base charge	$20.00 a month
Vacant since	08/01/2026	Previous account	AC-2026-00042, moved out 07/31/2026

The plan, the services and the meters belong to the UNIT — they stay when an occupant leaves, which is why they can be shown before the customer is known.

2 · WHO IS MOVING IN

Customer *

Somebody new ▾

Somebody new · A customer we already have

Search existing customers

By name, email, phone or customer number.

Full name *

Rosa Pemberton

Email

rosa.pemberton@example.com

Where the bill goes if they choose email.

Phone

+1 (512) 555-0188

Date of birth

Used to tell two customers of the same name apart.

Identification seen

Driver's licence ▾

Driver's licence · Passport · State ID · None seen

ID reference

Recorded as evidence; the number itself is not stored.

3 · WHEN SERVICE STARTS, AND THE OPENING READ

Start date

08/01/2026

Fixed to the day after the outgoing account's move-out.

Opening read

Use the outgoing account's final read ▾

Use the outgoing account's final read · Enter one now · Send someone to read it

Meter E-6114 · Electric


4,180

The outgoing final read.

Meter W-6114 · Water


902

The outgoing final read.

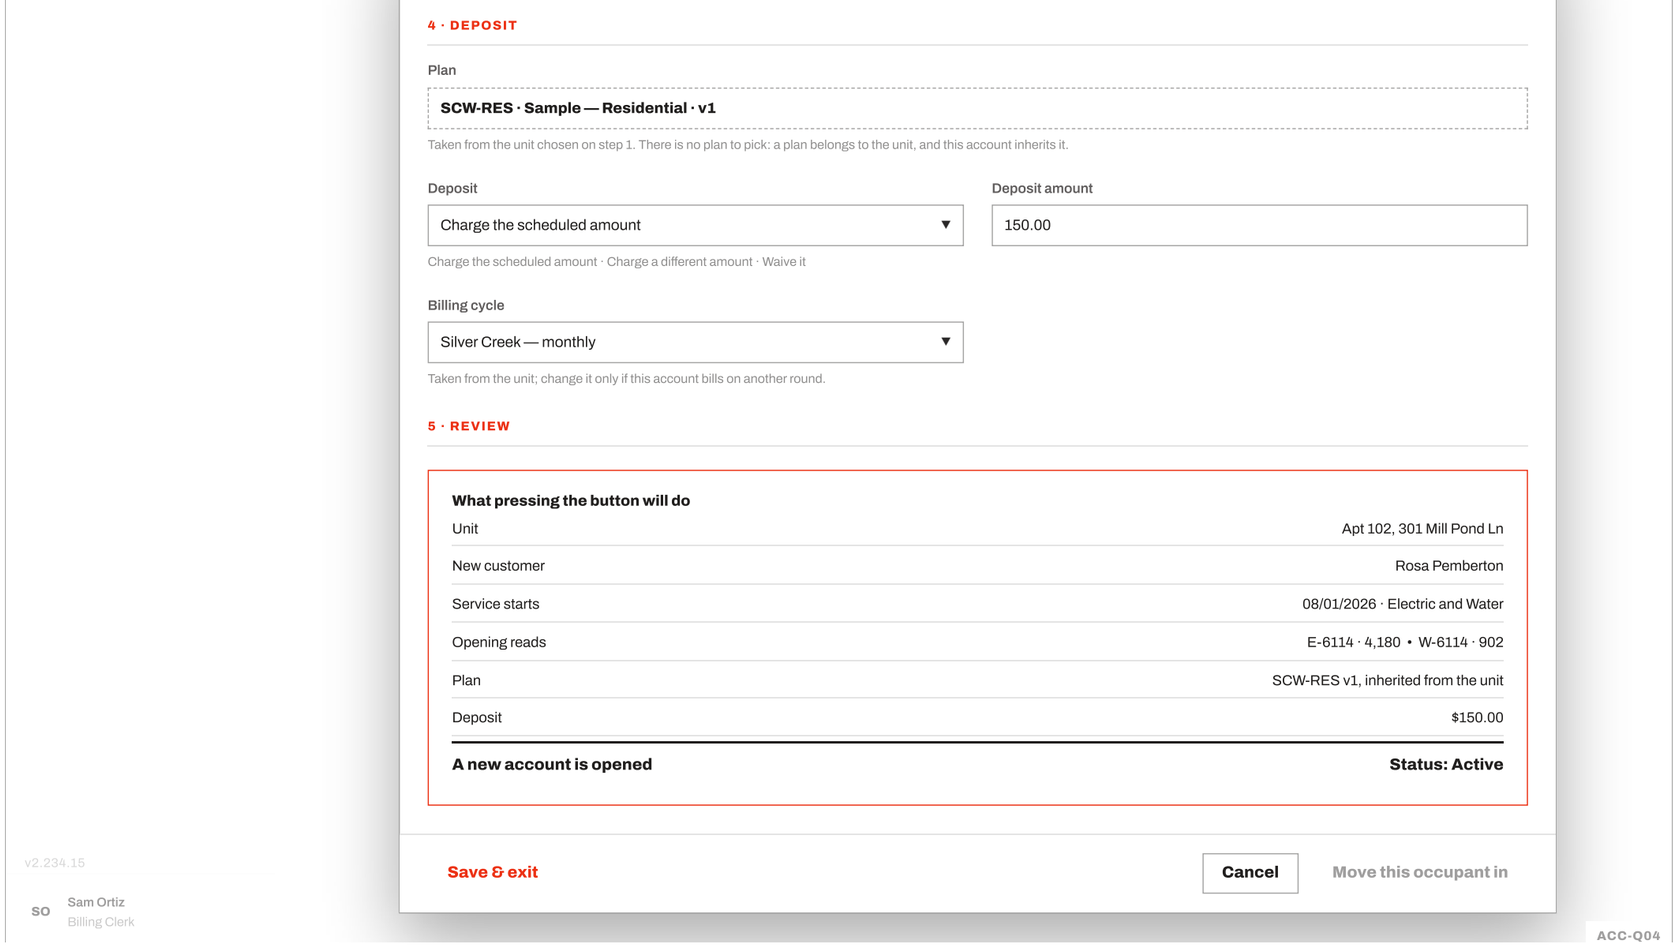

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 5 of 13 · Close out · `/brazosbend/accounts/a-11812` · the destructive one — two approvals and a recap before it commits

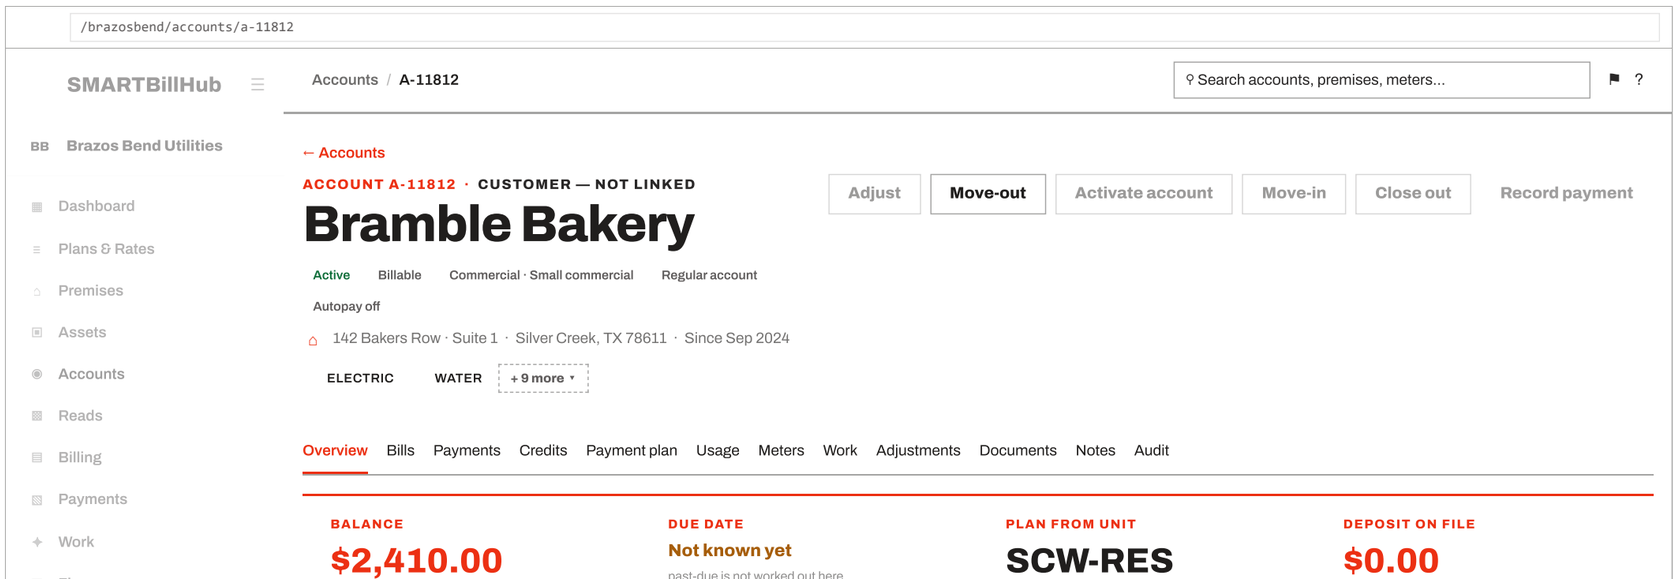

posting basis, from the ledger

v1 · since 06/01/2026

no deposit received

Close this account out

Bramble Bakery · A-11812 · disconnect case DSC-26-0003 is open

Close-out finishes an account whose service has already been cut.

WHEN

Service was cut

Not yet

Case DSC-26-0003 is open and a notice has been sent.

Close-out date *

Cannot be earlier than the day service was cut.

WHAT IS STILL OWED

Balance

$2,410.00

An opening figure; no bill stands behind it.

Oldest unpaid item

62 days past due

What happens to the balance *

Send it to collections

Send it to collections · Write it off · Keep chasing it

Deposit on file — $0.00

Nothing to settle

Apply it to the balance · Refund it · Forfeit it

Write-off reason

Not applicable

Uncollectable · Bankruptcy · Ceased trading · Gone away · Below the chase threshold.

Approved by

Needs a supervisor

A write-off is never approved by the clerk who raised it.

LETTERS AND THE UNIT

Letters to send

Close-out letter and final statement

Close-out letter and final statement · Close-out letter only · None

The unit becomes

Vacant

Vacant · Handed straight to a named next occupant

Note to the file

Why this was closed out rather than moved out.

REVIEW

What pressing the button will do

Close-out date	Not set — service has not been cut
Balance	$2,410.00 — sent to collections
Payment in flight	$500.00 stays in Processing
Deposit	$0.00 — nothing to settle
Letters	Close-out letter and final statement
The unit	Becomes vacant
Account status after this	**Closed**

Cancel

Close this account out

SO Sam Ortiz
Billing Clerk

ACC-Q05

Reachability. On this deployment the button is disabled on every seeded status, and the status it exists for — *disconnected* — has no account at all. Bramble Bakery is the nearest thing to its case: a disconnect notice has gone out and the cut has not happened.

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 6 of 13 · Record payment · `/brazosbend/accounts/a-11812` · the summary, the credits, the allocation and the remainder — on the account that proves why each one is needed

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE	DUE DATE	PLAN FROM UNIT	DEPOSIT ON FILE
$2,410.00	Not known yet	SCW-RES	$0.00
posting basis, from the ledger	past-due is not worked out here	v1 · since 06/01/2026	no deposit received

Record a payment

Bramble Bakery · A-11812

What this account owes today

Opening balance, carried in	$2,410.00
Bills issued	None — nothing has ever been billed here
Late fees	None can exist — a late fee attaches to a bill's due date, and there is no bill
Credits available to use	$0.00
Already taken and not yet cleared	$500.00 · Processing
Total due now	**$2,410.00**

THE MONEY

Amount *

500.00

What this money is for *

Against bills

Starts at the total due and can be changed.

Against bills · Deposit · Plan down payment · Prepayment

Posting date *

09/11/2026

The day this payment counts from.

Clearing date

09/11/2026

The day the money actually arrived.

Method *

Check

ACH · Card · Cash · Check · Lockbox · Money order · Wire.

Reference or cheque number

4471

Whatever the customer can quote back.

WHERE IT GOES

THERE IS NO BILL FOR THIS MONEY TO MEET

Every allocation choice on this form assumes an open bill. This account has none, so the money reduces the opening balance directly.

Apply to *

Reduce the opening balance

Reduce the opening balance · Carry the whole thing as account credit.

Credit available

$0.00

Credit is spent before money is.

WHAT IT MEETS	OWED	THIS PAYMENT	LEFT AFTER
Opening balance, 62 days past due	$2,410.00	$500.00	$1,910.00

Edit the third column to change the split.

Memo

Kept with the payment and read by anyone asking why later.

REVIEW — WHAT THIS PAYMENT LEAVES BEHIND

After this payment

Total due before	$2,410.00
Credit applied	$0.00
Money taken now	−$500.00
Still in Processing from before	$500.00, not counted above
Dunning	Two notices issued; a part payment does not stop the ladder
Disconnect case DSC-26-0003	Still open
Still outstanding after this	**$1,910.00**

A part payment must say what is left, on this screen, before it commits. The form as built takes the money and shows nothing.

Cancel | Record payment

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q06

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 7 of 13 · Send statement · `/brazosbend/accounts/a-11812` · disabled, and the form still drawn — the refusal is five words, the design is not

/brazosbend/accounts/a-11812

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

← Accounts

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Send a statement

Bramble Bakery · A-11812

WHAT PERIOD

Period *: Since the account opened

The last 12 months · This year · Since the account opened · Between two dates

Covers: 09/10/2024 — 09/11/2026

From: 09/10/2024

To: 09/11/2026

WHAT TO INCLUDE

- [x] Bills issued
- [x] Payments received
- [x] Credits and adjustments
- [x] The opening balance
- [ ] Usage for each period

On this account only the opening balance and one payment would appear.

HOW IT GOES OUT

Send it *: By post

By email · By post · Download it now

To: 142 Bakers Row · Suite 1, Silver Creek, TX 78611

No email address is on file, so email is not offered.


Message to put on it

Appears above the first line.

REVIEW

What pressing the button will do

Period 09/10/2024 — 09/11/2026

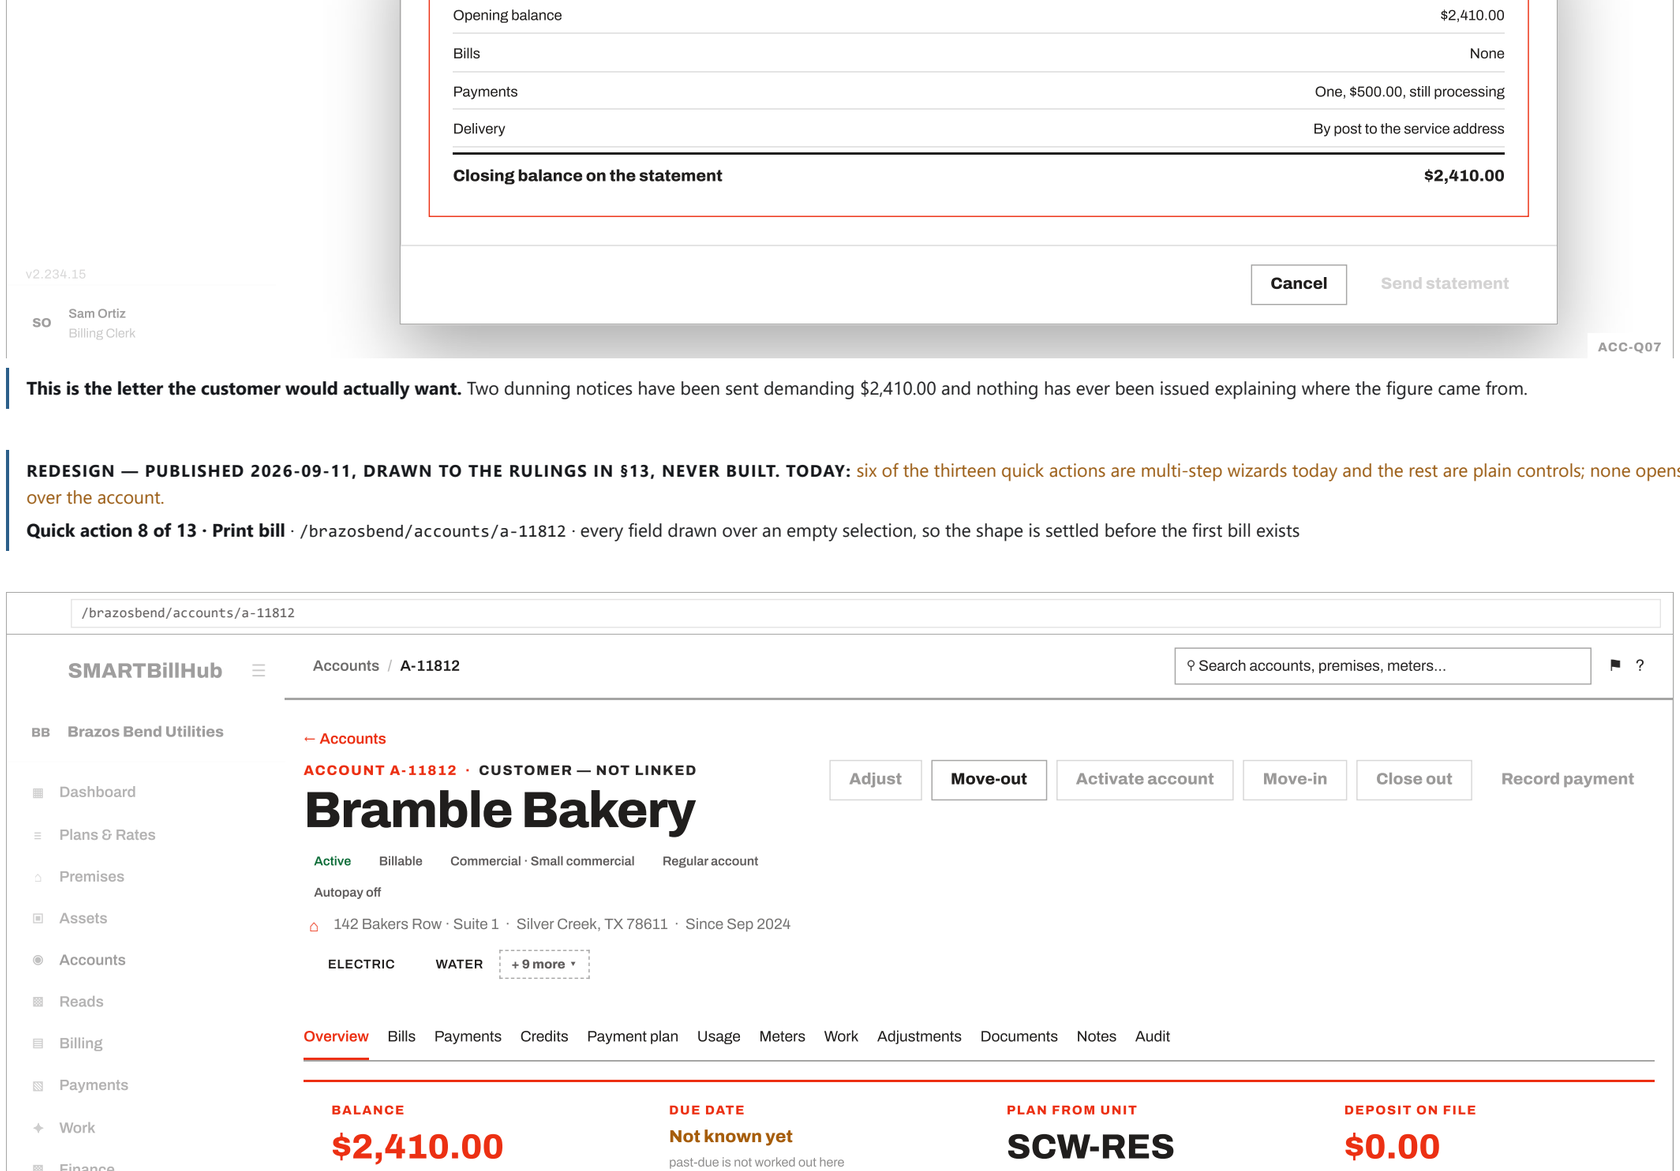

This is the letter the customer would actually want. Two dunning notices have been sent demanding $2,410.00 and nothing has ever been issued explaining where the figure came from.

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 8 of 13 · Print bill · `/brazosbend/accounts/a-11812` · every field drawn over an empty selection, so the shape is settled before the first bill exists

Layout

Standard letter

Standard letter · Large print · Two-sided

Copies

1

- [x] The payment slip
- [x] Messages for this cycle
- [ ] The usage chart
- [ ] A summary of the tariff

The usage chart cannot be included: no meter is fitted to this unit.

WHERE IT GOES

Output

Download a PDF

Download a PDF · Send to a printer · Email it to the customer

Printer

Not applicable

Only when sending to a printer.

REVIEW

What would be printed

Account	A-11812 · Bramble Bakery
Service address	142 Bakers Row · Suite 1
Bill	None selected — there are none
Stored file	Not applicable

Where a bill does exist this opens the stored file — the bill as it was sent, with its name, size and checksum, rebuilt below for reading.

Cancel

Print bill

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q08

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 9 of 13 · Issue credit · `/brazosbend/accounts/a-11812` · the bill would be carried across, and the reasons are in a clerk's words

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters…

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Credit a bill

Bramble Bakery · A-11812

A bill that is wrong is corrected, never edited.

WHICH BILL, AND WHAT WENT WRONG

Bill

There are no bills on this account

This account's bills would be listed here, newest first, carried across from the screen you came from.

What went wrong *

Choose a reason

The wrong rate plan was used · The reading or the read dates were wrong · The period or the service was wrong · A charge was missed · The customer's name is wrong · The address is wrong · The wrong template or language · Theft restated · Goodwill

HOW MUCH

Credit *

The whole bill

The whole bill · Part of it

Amount

Cannot exceed the bill's total.

Replacement bill

Raise it on the next run

Raise it now · Raise it on the next run · Do not raise one

Case number

Optional, and searchable afterwards.

What to tell the customer

Printed on the credit note.

REVIEW

What pressing the button will do

Bill to credit	None selected
Credit note	—
Replacement bill	—
Balance now	$2,410.00
Balance once the credit posts	**$2,410.00**

Two separate problems, and this account only has the first.
Here the icon is correctly refused: a credit corrects a bill and there is none. The $2,410.00 came in as an opening figure, so nothing in the product can reduce it — not this, and not Adjust.
Where the icon *is* live it leaves the account for Billing › Fix a bill with an **empty bill box**, asking the clerk to paste an id they were one click from, and lists its eleven reasons as stored values rather than sentences.

Cancel | Issue the credit

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q09

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 10 of 13 · Change plan · `/brazosbend/accounts/a-11812` · the same three steps in one dialog, with the six internal strings the live screen shows a clerk rewritten into English

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE $2,410.00 — posting basis, from the ledger

DUE DATE Not known yet — past-due is not worked out here

PLAN FROM UNIT SCW-RES — v1 · since 06/01/2026

DEPOSIT ON FILE $0.00 — no deposit received

Change this account's plan

Bramble Bakery · A-11812 · on SCW-RES since 06/01/2026

1 The new plan | 2 When & cost | 3 Why & who to tell

A commercial account is on a residential plan. The plan follows the unit and the account's category is its own fact; nothing reconciles the two, and no screen warns that they disagree.

1 · THE NEW PLAN

Plan now: **SCW-RES · Sample — Residential · v1**

Read from the unit, not held on the account.

This account's category: **Commercial · small commercial**

Set on the account when it was opened in September 2024.

	PLAN	BASE PER MONTH	WHAT IT WOULD MEAN HERE
○	Industrial	$180.00	Drops water at this unit
○	Residential Standard	$20.00	—
◉	Sample — Commercial	$63.00	Matches the account's category
○	Sample — Industrial	$195.00	—
○	Sample — Residential	$20.00	The plan now
○	Small Commercial	$15.00	Drops electric at this unit

2 · WHEN, AND WHAT IT COSTS

When it takes effect *

New plan starts on *

On a date I choose ▾

Only a date can be used today.

10/01/2026

A date inside a period already billed is refused.

What it costs

Base charge on the plan now	$20.00
Base charge on the new plan	$63.00
Part period on the old plan, 17 days	$11.33
Part period on the new plan, 13 days	$27.30
Difference on the next bill	**$43.00**

TWO THINGS THIS FIGURE LEAVES OUT

A customer moving between categories may owe a different deposit, and the rule for working that out has not been settled. Usage is priced day by day too, and pricing usage for a period that has not happened needs a forecast nobody has chosen.

Neither gap bites here: no deposit is held and no meter has ever been read, so there is no usage to prorate.

3 · WHY, AND WHO TO TELL

Reason

Kept with the change history and read by anyone asking why later.

☑ Email the customer about this change

☐ Record that proof of eligibility was seen

Written to the trail as evidence.

REVIEW

What pressing the button will do

From	SCW-RES · Sample — Residential v1
To	SCM-COM · Sample — Commercial
Starts	10/01/2026
Effect on the next bill	$43.00 more
Customer told	Not possible — no email on file

Cancel | Change the plan

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q10

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 11 of 13 · Disconnect notice · `/brazosbend/accounts/a-11812` · five steps, four protection questions that can each stop it, and the case that is already open

/brazosbend/accounts/a-11812

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active Billable Commercial · Small commercial Regular account

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview Bills Payments Credits Payment plan Usage Meters Work Adjustments Documents Notes Audit

BALANCE $2,410.00 — posting basis, from the ledger

DUE DATE Not known yet — past-due is not worked out here

PLAN FROM UNIT SCW-RES — v1 · since 06/01/2026

DEPOSIT ON FILE $0.00 — no deposit received

Cut service at this address

Bramble Bakery · A-11812 · nothing is cut until the scheduled date

1 Why | 2 Protections | 3 Notice & date | 4 Fees | 5 Review

A case is already open on this account. DSC-26-0003 was opened on 09/10/2026 and a notice has been sent, after a reminder and a ten-day notice. The form as built says nothing, so a clerk can raise a second one.

1 · WHY

Owed: $2,410.00
62 days past due, carried in as an opening figure.

Open case: DSC-26-0003 · notice sent · opened 09/10/2026
Two dunning tiers ran before it: a reminder, then a ten-day notice.

Reason *: Non-payment — the ladder has run and they have not paid
Unsafe installation · Tampering or theft · Premises abandoned · The customer asked.

What is done at the meter *: Leave connected
Full disconnection · Fit a restrictor or limiter · Leave connected.

2 · PROTECTIONS — EVERY ONE MUST BE ANSWERED

Anyone on life-support equipment *: No
A yes stops this outright and raises a welfare visit instead.

A medical hold on file *: No
Checked against the customer record and asked again here.

A weather moratorium today: No — none in force
Read from the utility's own calendar.

Is this a landlord's meter: No
A tenant behind a landlord's meter is notified separately.

3 · THE NOTICE AND THE DATE

How they are told *: Letter only
Letter and email · Letter only · Email only · Hand delivered.

Notice goes out *: 09/12/2026

Service is cut on *: 09/26/2026
At least 14 days after the notice.

Time of day: Working hours
Working hours · First thing · Any time

4 · FEES AND WHAT IT WILL COST THEM

Disconnection fee

45.00

Charged on the day service is cut.

Reconnection fee

65.00

Charged when they ask for it back.

Extra deposit to reconnect

150.00

Held before service is restored.

Waive any of these

No

No · Waive the disconnection fee · Waive all three (needs a supervisor)

These three would be the first charges ever raised on this account.

5 · REVIEW

What pressing the button will do

Existing case	DSC-26-0003 — updated, not duplicated
Reason	Non-payment
At the meter	Leave connected — there is no meter
Protections	All four answered: none in force
Notice	Letter on 09/12/2026 to the service address
Service cut on	09/26/2026, working hours
Fees	$45.00 now, $65.00 and a $150.00 deposit to come back
Nothing is cut before	**09/26/2026**

Cancel

Schedule the disconnection

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q11

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 12 of 13 · Payment plan · `/brazosbend/accounts/a-11812` · the schedule is worked and shown before anyone agrees to it — and it says what happens to the disconnection

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account

Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Settings

Set up a payment plan

Bramble Bakery · A-11812

This is the account a payment plan is for: $2,410.00 outstanding, 62 days past due, two dunning notices sent and a disconnect notice out.

WHAT IS BEING SPREAD

Arrears

$2,410.00

All of it.

Down payment

500.00

Taken today.

Down payment taken on

09/11/2026

Left to spread

$1,910.00

HOW IT IS SPREAD

Number of instalments *

6

2 · 3 · 4 · 6 · 12. More than six needs a supervisor.

How often *

Monthly

Weekly · Every two weeks · Monthly · On each bill's due date

First instalment due *

10/11/2026

Each instalment

$318.34

#	DUE	INSTALMENT	RUNNING BALANCE
1	10/11/2026	$318.34	$1,591.66
2	11/11/2026	$318.34	$1,273.32
3	12/11/2026	$318.34	$954.98
4	01/11/2027	$318.34	$636.64
5	02/11/2027	$318.34	$318.30
6	03/11/2027	$318.30	$0.00

The last instalment carries the rounding.

WHAT IT DOES TO THE COLLECTIONS THAT ARE ALREADY RUNNING

The open disconnect case DSC-26-0003 *

Hold it while the plan is kept

Hold it while the plan is kept · Close it · Leave it running

The dunning ladder

Pause it

Pause it · Leave it running

A missed instalment restarts both, whatever is chosen here.

THE AGREEMENT

How they agreed *

On the phone

On the phone · In person · By letter · Through the portal

Who agreed

The person who gave the agreement.

- [x] The terms were read out and accepted
- [x] They were told the disconnection is on hold, not cancelled

REVIEW

What pressing the button will do

Arrears spread	$2,410.00
Down payment	$500.00 today
Instalments	6 monthly, from 10/11/2026
Each	$318.34, last one $318.30
Ends	03/11/2027
Disconnect case	DSC-26-0003 held while the plan is kept
Dunning	Paused
Plan total	**$2,410.00**

Cancel | Set the plan up

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-Q12

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: six of the thirteen quick actions are multi-step wizards today and the rest are plain controls; none opens as a single form over the account.

Quick action 13 of 13 · Add note · `/brazosbend/accounts/a-11812` · a kind, a follow-up date and a recap — three things the built form does not have

/brazosbend/accounts/a-11812

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE
$2,410.00
posting basis, from the ledger

DUE DATE
Not known yet
past-due is not worked out here

PLAN FROM UNIT
SCW-RES
v1 · since 06/01/2026

DEPOSIT ON FILE
$0.00
no deposit received

Add a note


Bramble Bakery · A-11812

THE NOTE

What kind *
Collections ▼
General · Collections · Dispute · Field visit · Correspondence · Complaint

Title
Disputes the opening balance
Fill in a title, a note, or both.

Note

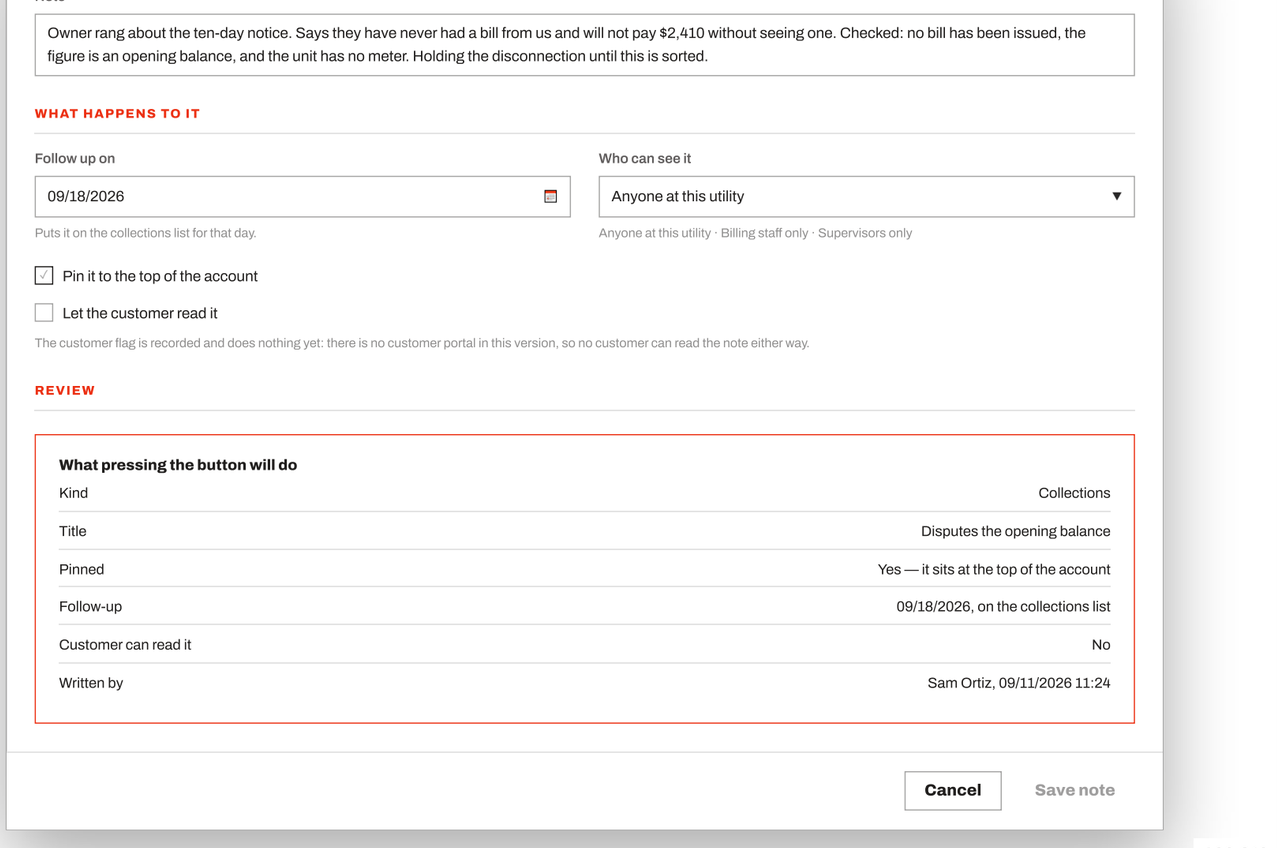

> **The shortest of the thirteen, and on this account the most overdue.** Two dunning notices and a disconnect case, and not one word on the record saying why.

R5 · An edit control on every group of the Overview tab NEW BUILD ACC-S15

Twelve groups, twelve controls. Asked for directly: "*in the account details, in the overview tab, give edit icon for the account service, customer plan, mailing address, these all sections and edit option.*"

The rule, and it is one sentence. Every group heading on the Overview tab carries an edit control, and a group whose contents cannot be changed carries it **disabled with the reason on it** — never blank, never missing. That is `BR-SHL-025` applied one level below the header, where it already governs the six action buttons and the seven rail icons.


The product already agrees, in exactly one place. The Payment method panel ships a `→ Update method` control that is drawn and disabled with its reason. R5 is that decision made general instead of made once.


Six are live, one opens a wizard, five are disabled. Plan does not get a form at all — changing a plan is priced, dated and recorded, and a wizard for it already exists and already works, so the control opens that rather than a second way of doing the same thing. And **two of the twelve need no new server work**:

Account is a wrapper around `PATCH /accounts/{id}`, which is served, tested and has no caller, and Plan is a link to a route that already runs. The other three live controls each need one endpoint, and none of the three exists.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12 — `ACC-S15` below is that card.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no group on the Overview tab can be corrected from the panel showing it.
> **R5 · The pattern, on the whole Overview tab** · `/brazosbend/accounts/a-11812?tab=overview` · eleven groups, eleven controls — five live, one that opens a wizard, five disabled with their reason

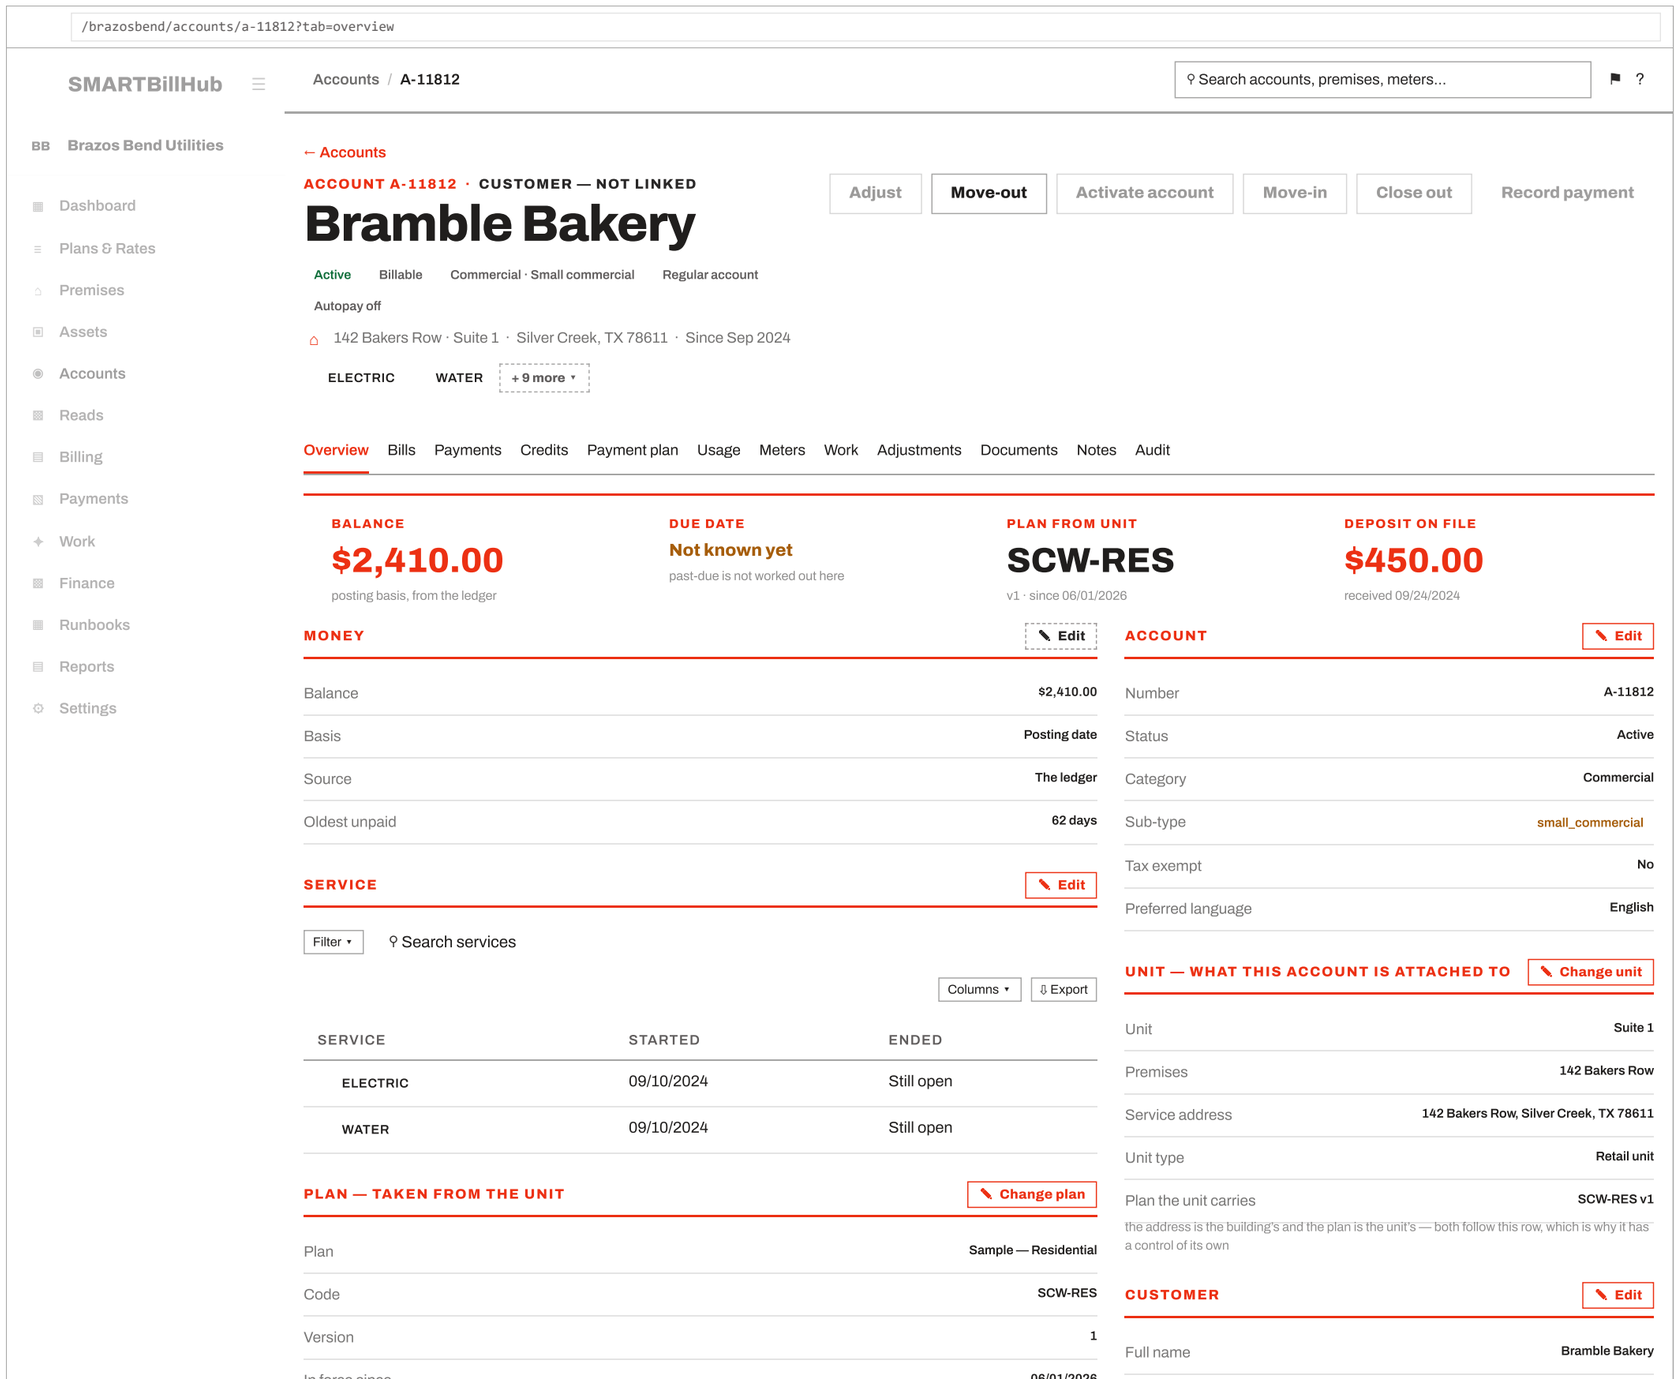

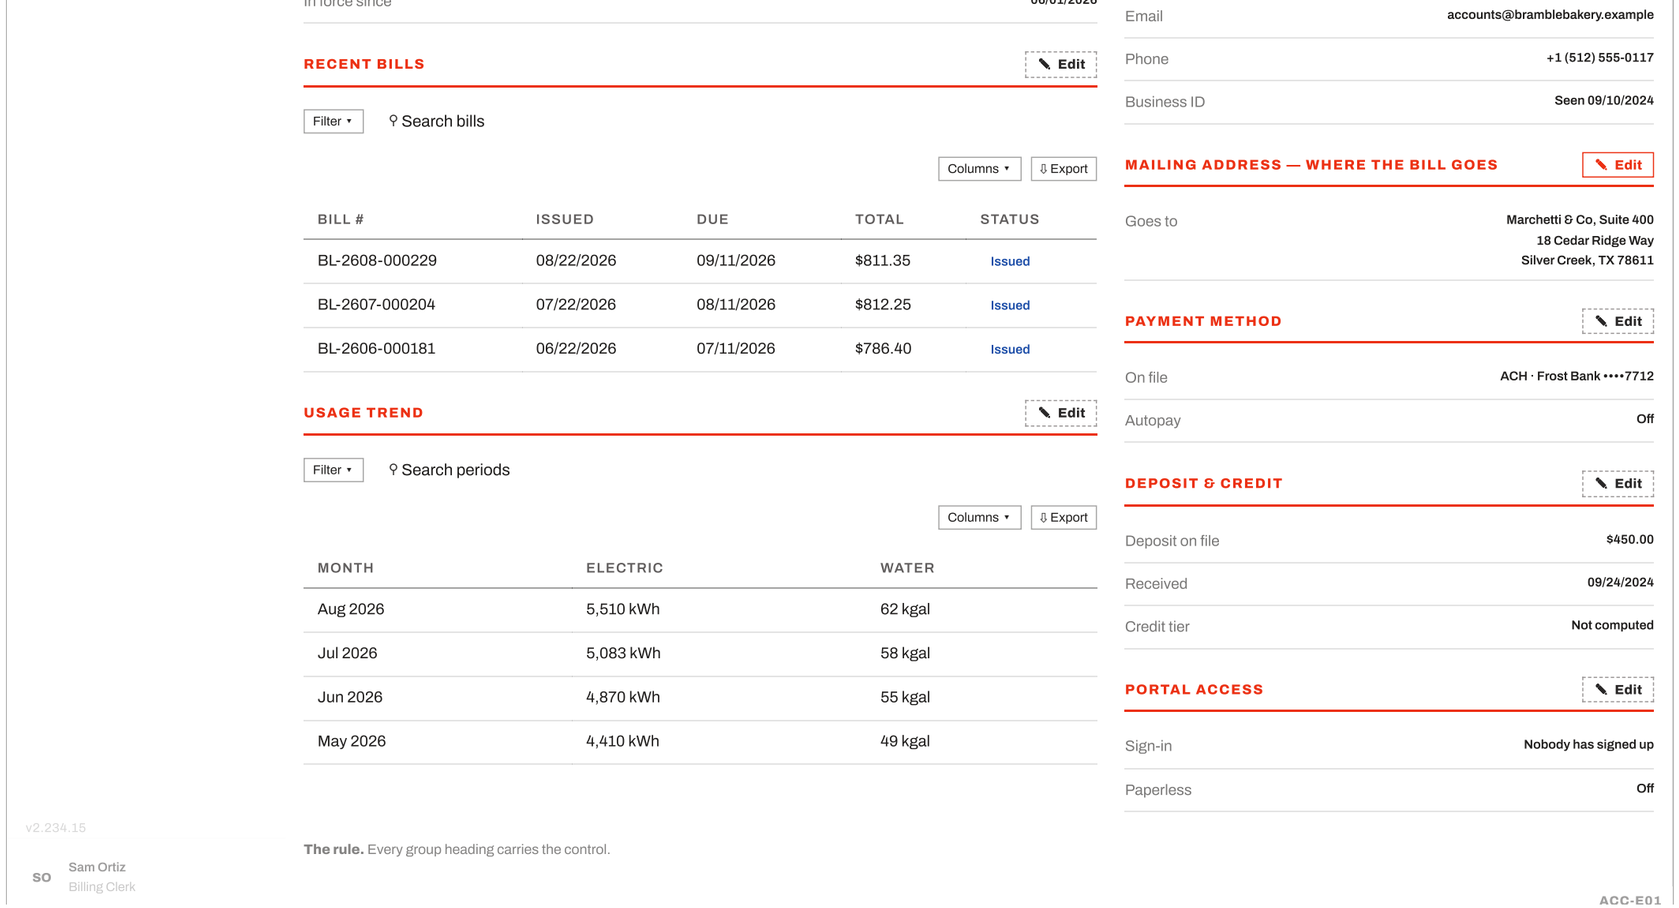


What each control does, and what it waits on

Group	Control	Opens	What it waits on
Account	Live	A form in a dialog	**Nothing.** PATCH /accounts/{id} is served and tested and has no caller in the front end. This is ACC-S1 / R1.
Unit	Live	A form in a dialog	**A PO ruling, not an endpoint.** The server refuses unit by name — create-only, never patched. E07 draws it: the rule is protecting a customer who MOVED; what has no path at all is a record that named the wrong unit.
Service	Live	A form in a dialog	An endpoint. No route starts, ends or amends an account’s service agreements.
Plan	Live	**The Change plan wizard**	**Nothing — it works today.** POST /accounts/{id}/plan-changes is served and wired. The control opens what already exists rather than a second form.
Customer	Live	A form in a dialog	An endpoint. GET /customers/{id} is read-only and there is no contacts route at all.
Mailing address	Live	A form in a dialog	An endpoint. Note the constraint: an address lives on premises, and the mailing address is the one deliberate exception to that.
Money	Disabled	—	Nothing. It is worked out from the ledger; the way to change it is an adjustment.

Recent bills	Disabled	—	Nothing. An issued bill takes no UPDATE: it is credited and replaced.
Usage trend	Disabled	—	Nothing. It is measured; the read is what gets corrected.
Payment method	Disabled	—	The payments module. **Already shipped this way** — the one panel that proves the pattern.
Deposit & credit	Disabled	—	Nothing. It is written when a deposit payment clears.
Portal access	Disabled	—	A customer portal. There is none in this version.

Two of the twelve need no new server work at all. Account is a wrapper around a route that is already served and already tested, and Plan is a link to a wizard that already runs. The other three live controls each need one endpoint, and none of the three exists.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no group on the Overview tab can be corrected from the panel showing it.
> **R5 · Edit the account** · `/brazosbend/accounts/a-11812` · the one form of the five that needs no new server work

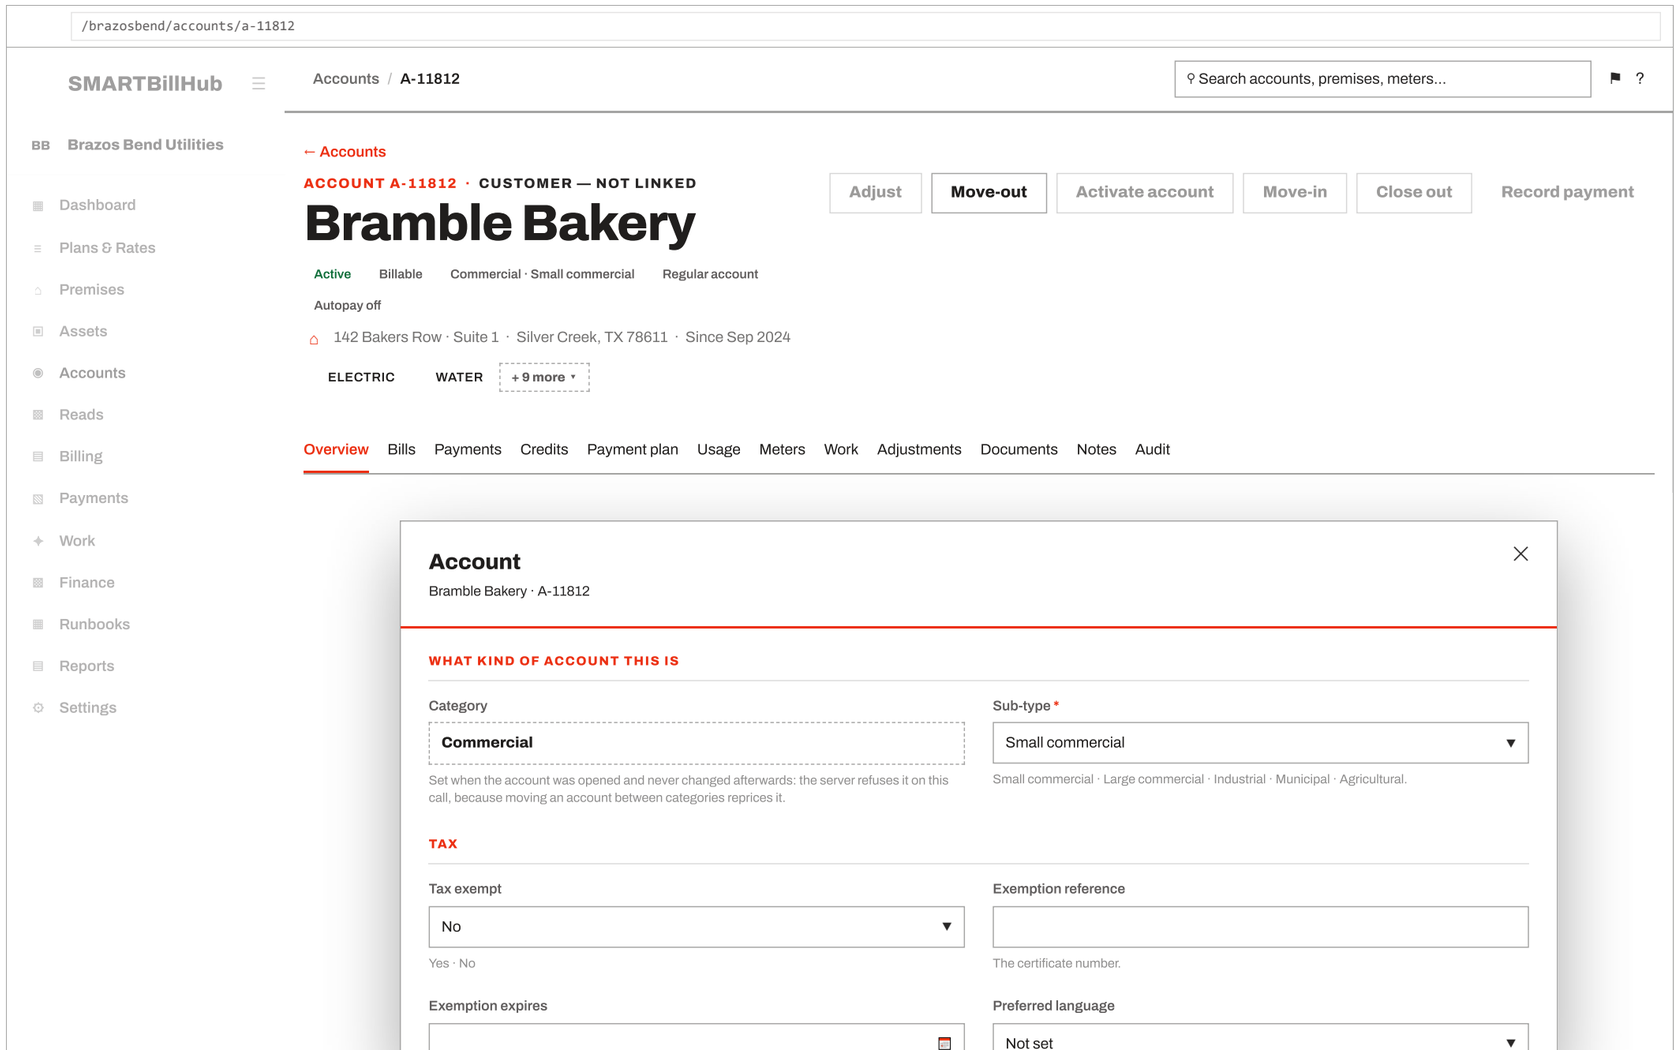

The account starts being taxed again the day after.

The codes come from this utility's regional settings.

DELIVERY AND CONTACT PREFERENCES

☐ Paperless

Bills are always printed as well.

☐ Text reminders

☐ Autopay

Recorded on the account.

NOT EDITABLE HERE, AND EACH FOR ITS OWN REASON

Unit — an account never moves between units; a new occupant is a move-in.
Category — create-only on the server, as above.
Status — closing an account is the move-out flow, not an edit.
Returned payments and **bad address** — written by the returned-mail workflow, which is not built.

REVIEW

What pressing the button will change

Sub-type	small_commercial → Small commercial (display only)
Tax exempt	No — unchanged
Paperless	Off — unchanged
Everything else	Unchanged
Written to	**The account, with one audit row**

Cancel | Save changes

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-E02

> **The route is already there.** `PATCH /accounts/{id}` is served, validates its payload, saves only what changed and writes an audit row, and it is covered by tests. What is missing is a wrapper in the front end, so there is no button. Every attribute on this screen is read-only today for that reason alone.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** no group on the Overview tab can be corrected from the panel showing it.
> **R5 · Edit the services** · `/brazosbend/accounts/a-11812` · the form, and the endpoint it waits on

/brazosbend/accounts/a-11812

SMARTBillHub

Accounts / A-11812

⚲ Search accounts, premises, meters...

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery


Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024


ELECTRIC WATER + 9 more

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

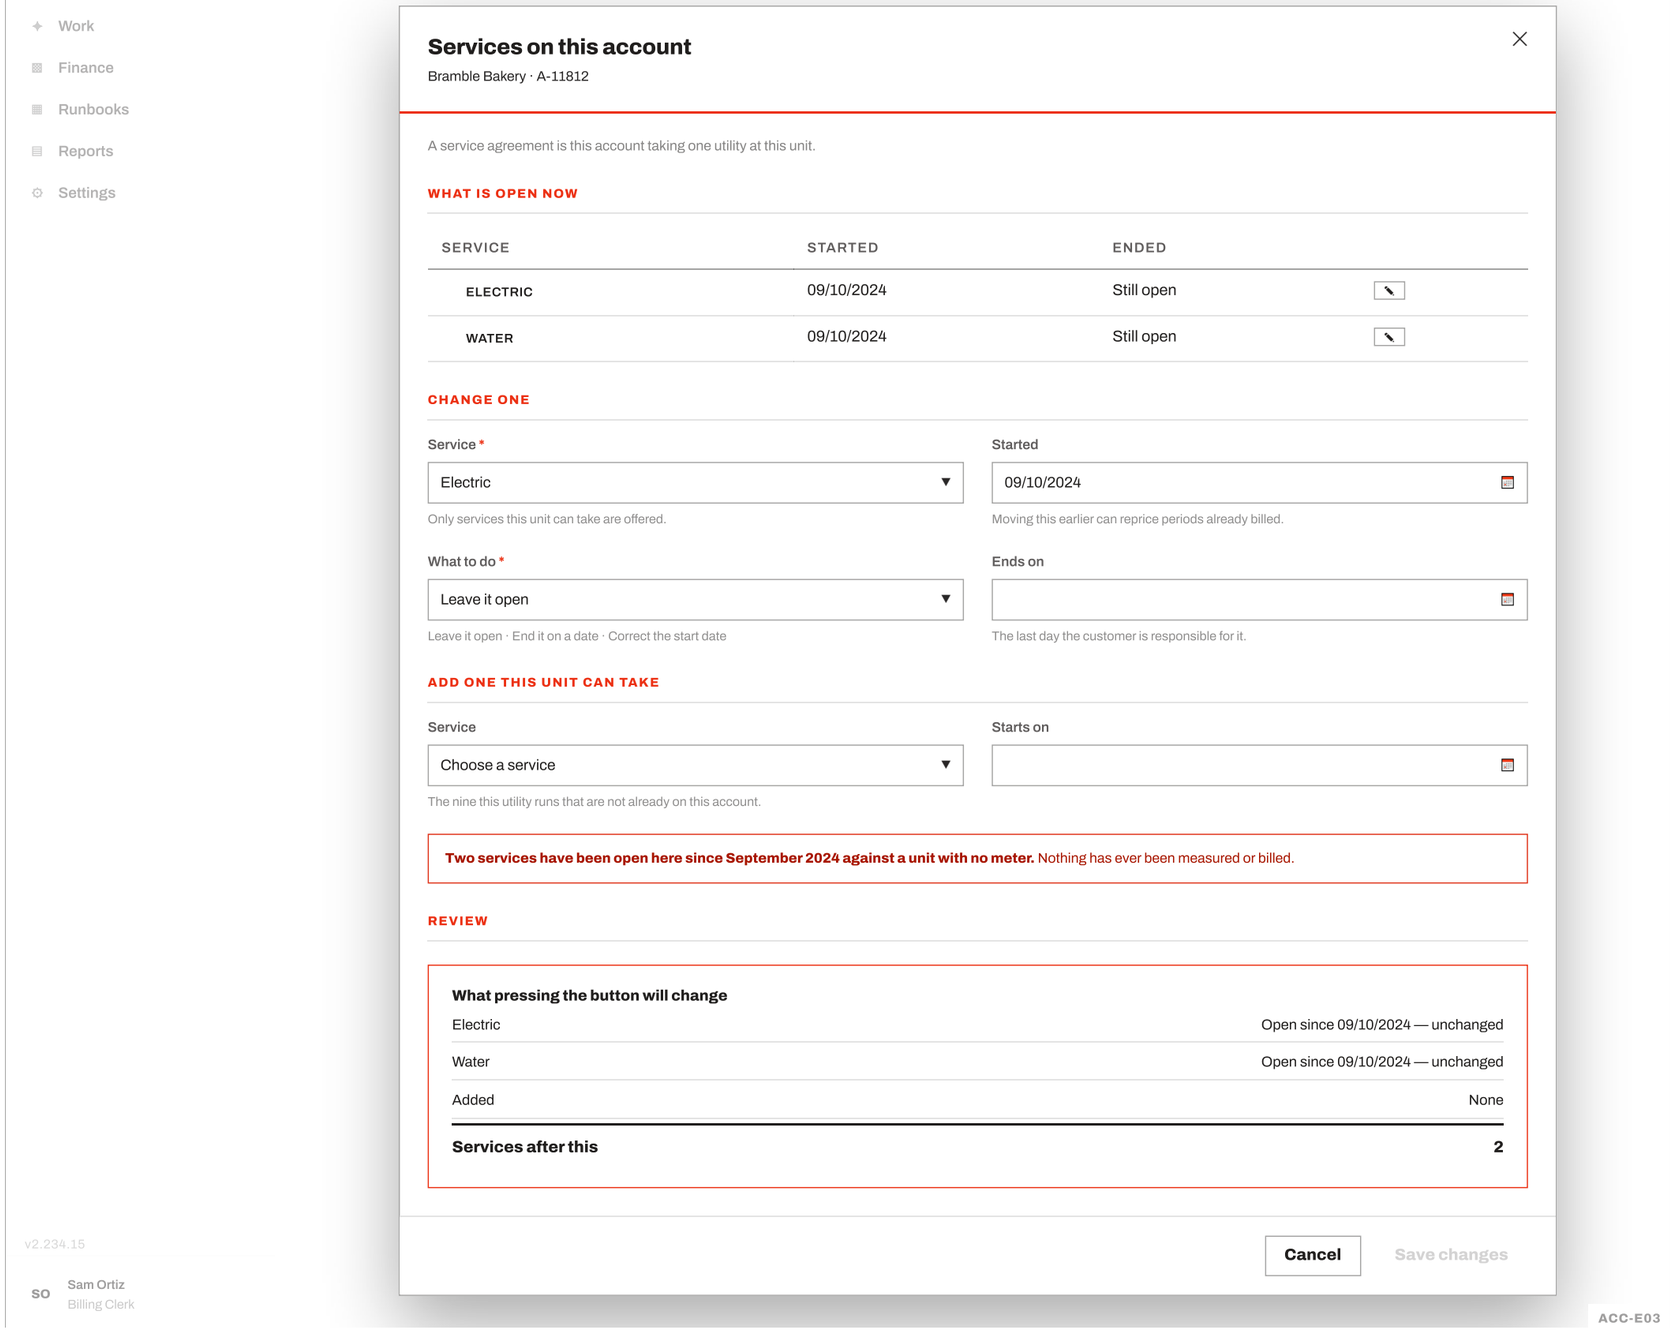

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no group on the Overview tab can be corrected from the panel showing it.


R5 · Edit the plan · `/brazosbend/accounts/a-11812` · an edit control that routes to a wizard rather than duplicating it

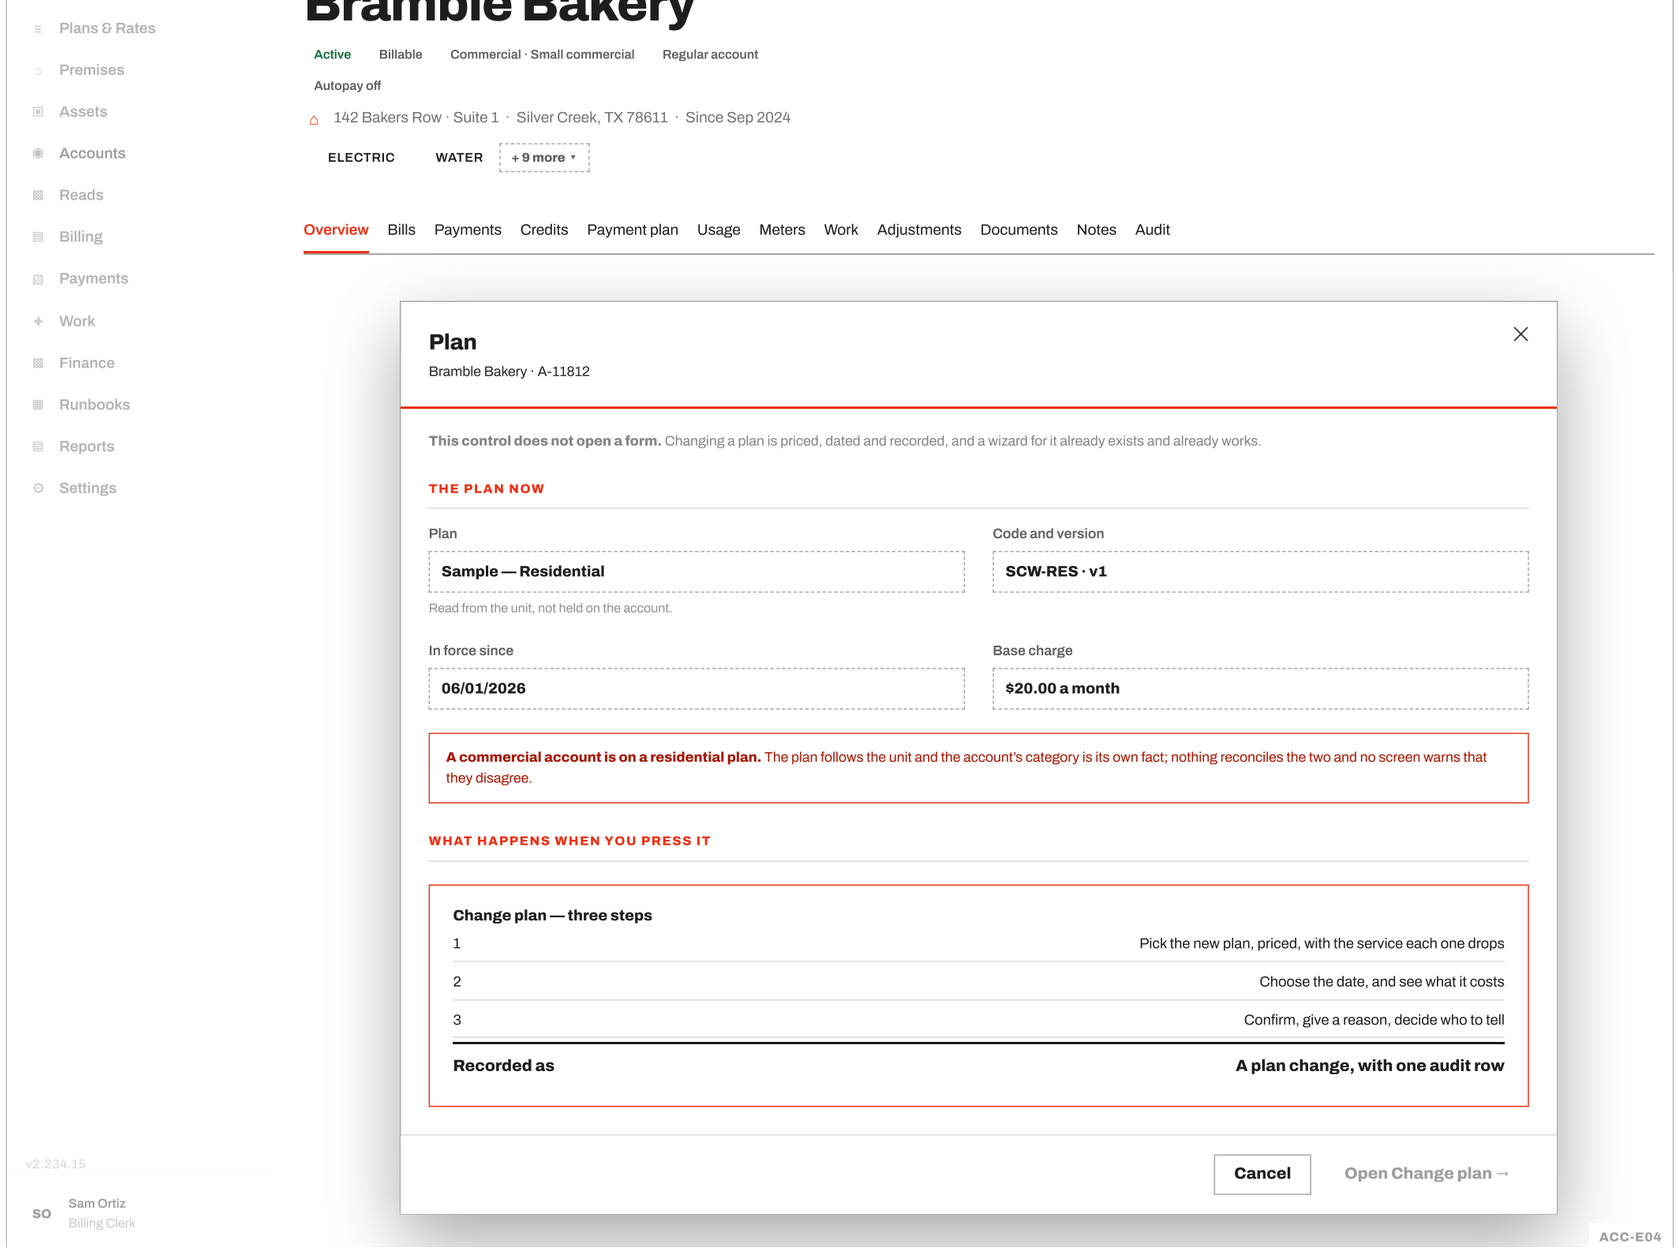


Nothing is waiting on the server here. The preview and the commit are both served and both wired; this control is a second door to a room that is already built.

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no group on the Overview tab can be corrected from the panel showing it.

R5 · Edit the customer · `/brazosbend/accounts/a-11812` · the contact a clerk actually needs to correct, and the route that does not exist

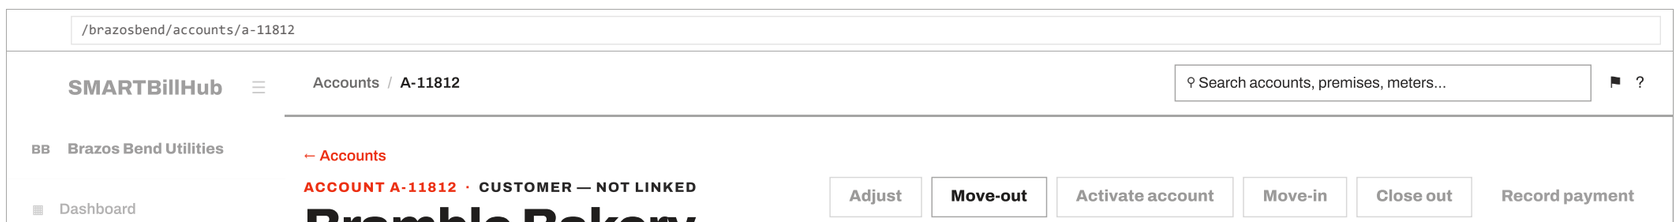

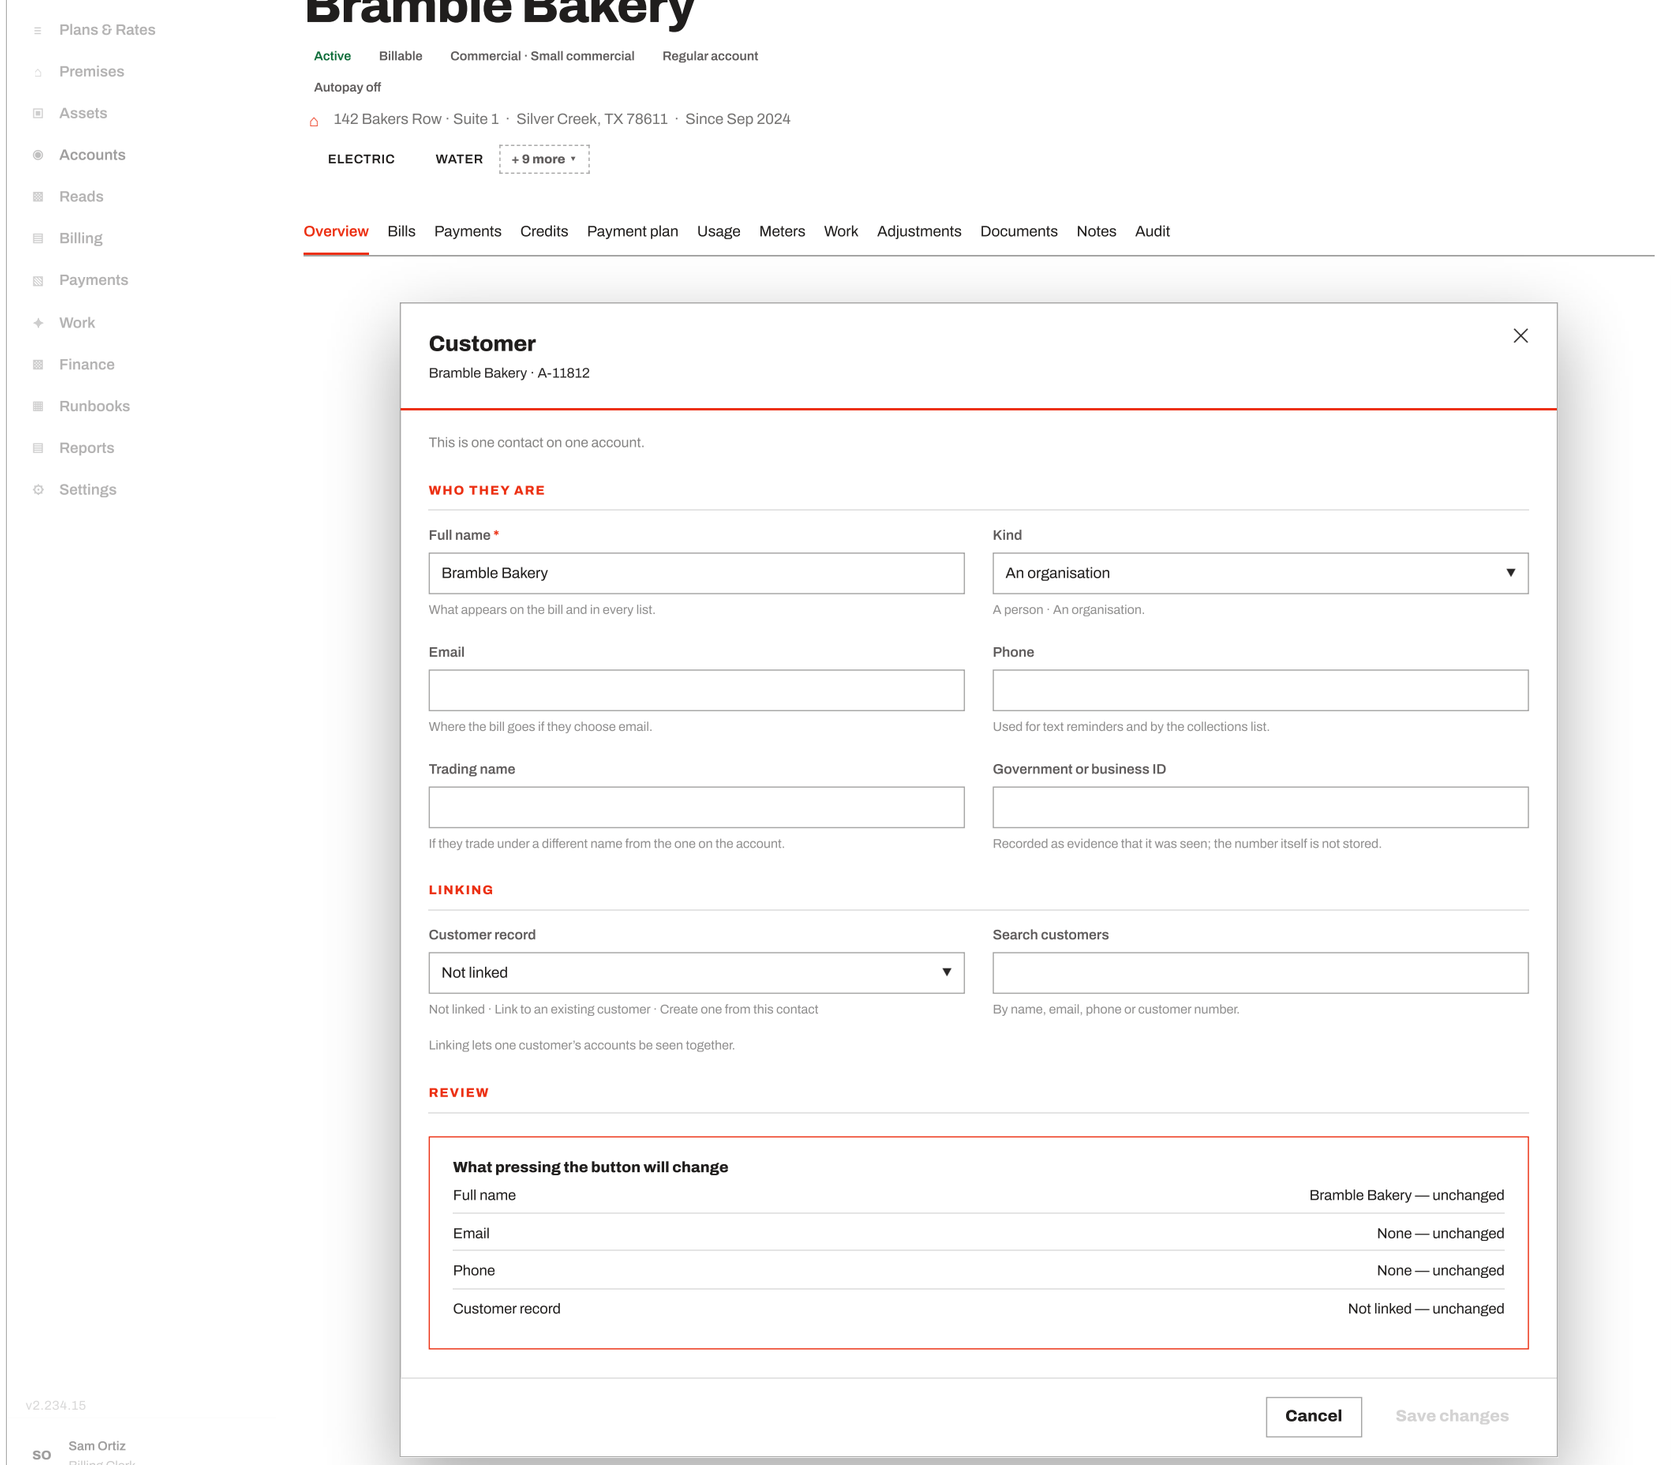

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no group on the Overview tab can be corrected from the panel showing it.

R5 · Edit the mailing address · `/brazosbend/accounts/a-11812` · the one address that is allowed to differ, and why the other one is not here

`/brazosbend/accounts/a-11812`

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance
Runbooks
Reports
Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more

Adjust · Move-out · Activate account · Move-in · Close out · Record payment

Overview · Bills · Payments · Credits · Payment plan · Usage · Meters · Work · Adjustments · Documents · Notes · Audit

Mailing address

Bramble Bakery · A-11812 · where the bill goes

The service address is a property and belongs to the premises.

WHERE THE BILL GOES NOW

Currently

142 Bakers Row · Suite 1, Silver Creek, TX 78611

The service address, used because no separate mailing address is on file.

A MAILING ADDRESS OF ITS OWN

Send the bill to *

The service address

The service address · A different address

Addressee

If the bill should be addressed to somebody other than the account name.

Street

Second line

Suite, floor, care-of.

Town or city

State

ZIP

☐ Send notices here too

Dunning notices and disconnect notices, not only the bill.


NOT EDITABLE HERE

The service address is not on this form. It is the property's, not the account's, and every screen that shows one walks to the premises to get it.

REVIEW


What pressing the button will change

Bill goes to	The service address — unchanged
Notices go to	The service address — unchanged

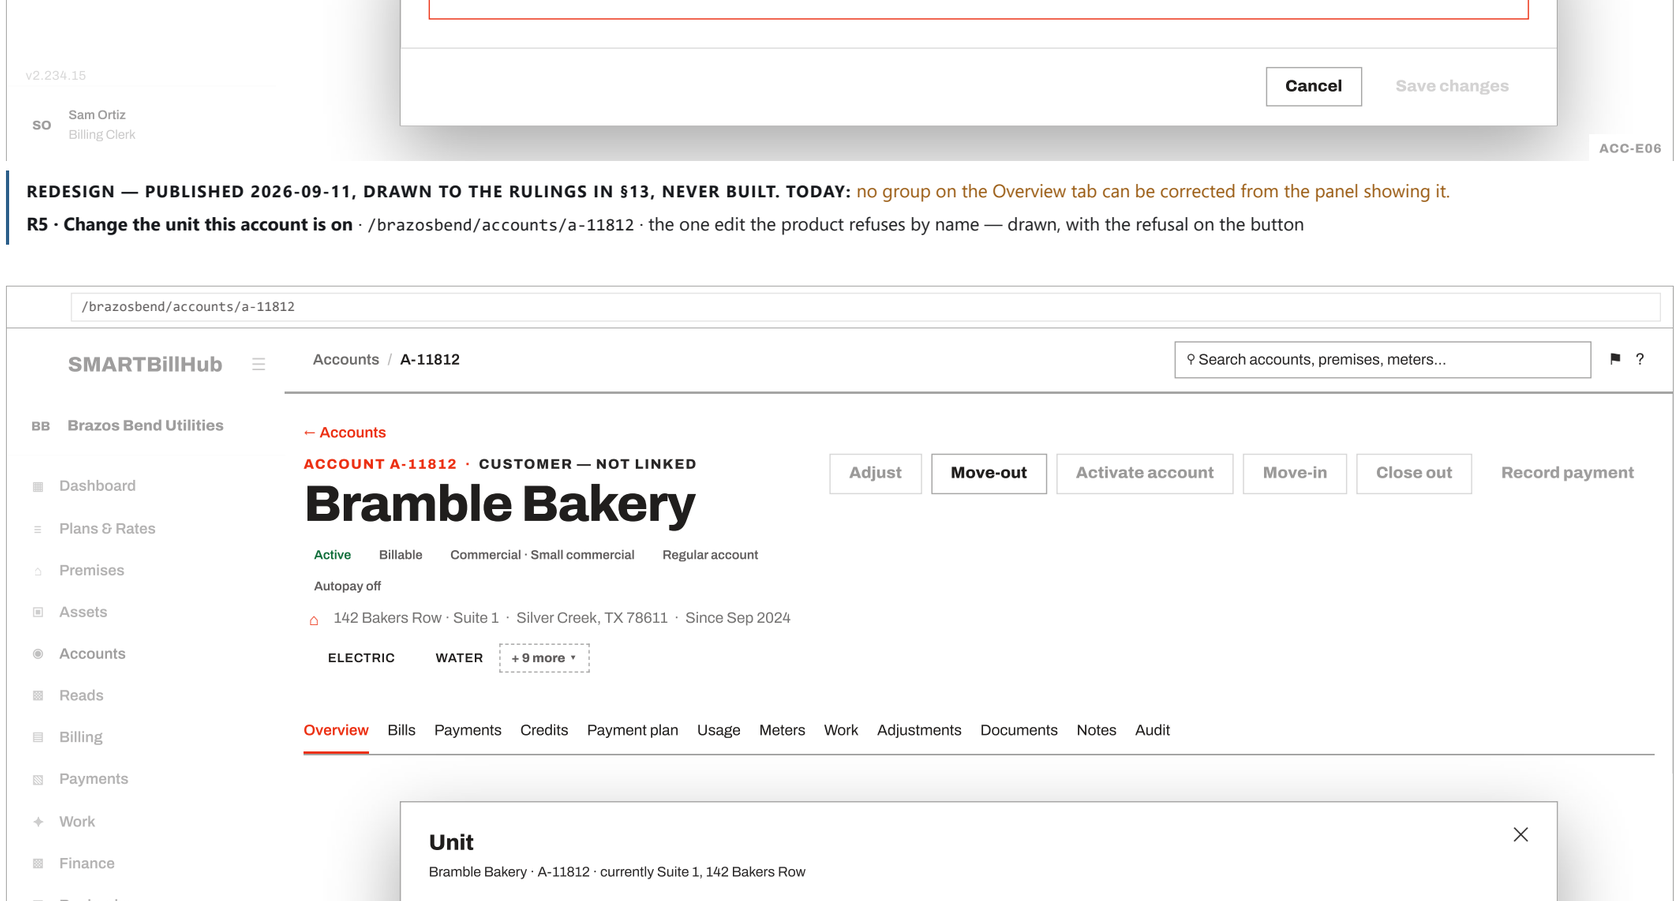

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: no group on the Overview tab can be corrected from the panel showing it.

R5 · Change the unit this account is on · `/brazosbend/accounts/a-11812` · the one edit the product refuses by name — drawn, with the refusal on the button

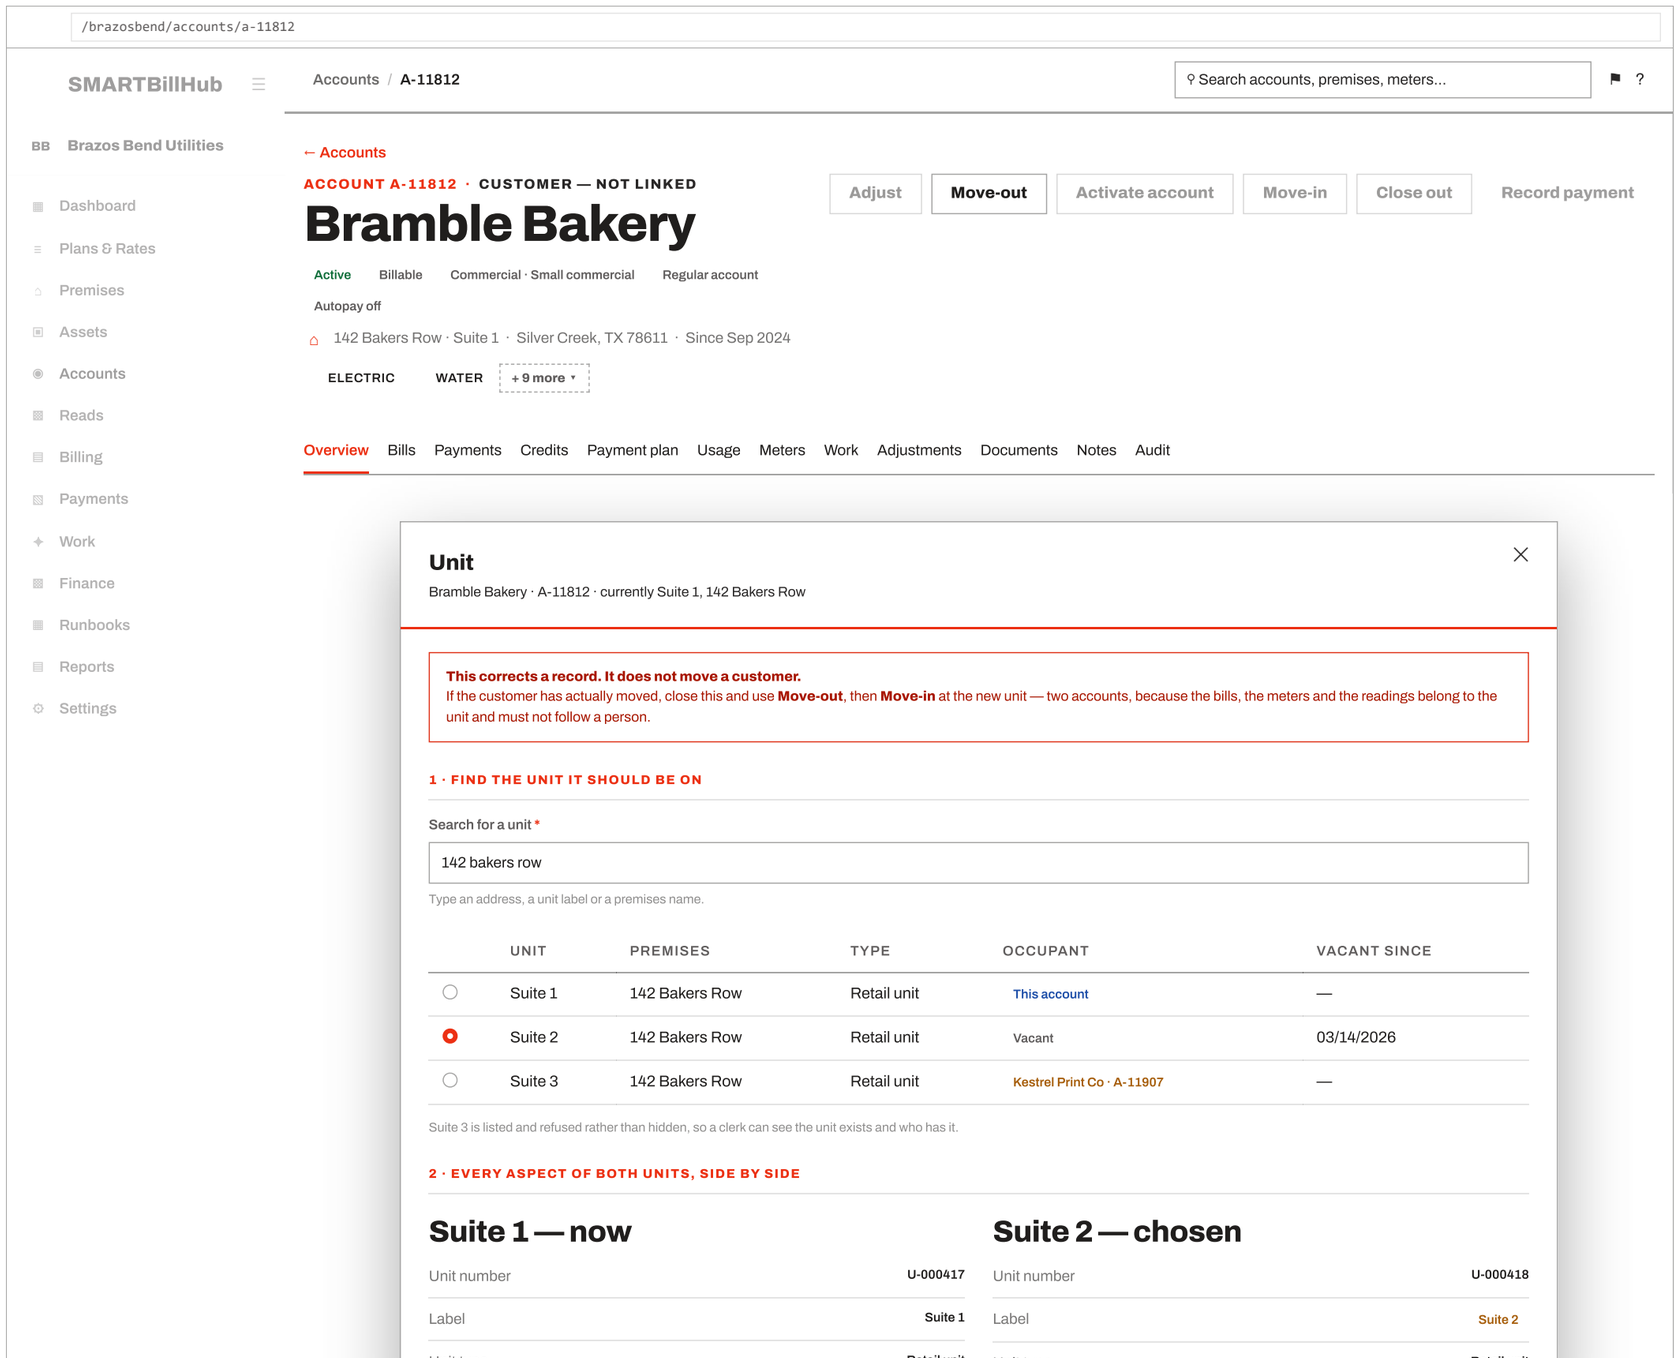

Floor	Ground
Floor area	1,840 sq ft
Premises	142 Bakers Row · PR-0188
Service address	142 Bakers Row, Silver Creek, TX 78611
Map point	Reads the building's
Parcel	—
Plan	SCW-RES · Sample — Residential · v1
Plan in force since	06/01/2026
Plan locked	No
Bill the owner when vacant	No
Meters	E-4417 · W-4417
Services available	ELECTRIC WATER

Floor	First
Floor area	2,260 sq ft
Premises	142 Bakers Row · PR-0188
Service address	142 Bakers Row, Silver Creek, TX 78611
Map point	Its own — rear entrance
Parcel	TR-4417-02
Plan	SCW-COM · Sample — Commercial · v2
Plan in force since	01/01/2026
Plan locked	Yes
Bill the owner when vacant	Yes
Meters	E-4418 · W-4418
Services available	ELECTRIC WATER

Every value that would change is marked.

3 · WHAT THIS DOES TO THE ACCOUNT

What changes

Service address	Unchanged — it is the building's, not the unit's
Plan	SCW-RES v1 → SCM-COM v2, and it is LOCKED on the new unit
Base charge	$20.00 → $63.00 a month
Meters	E-4417/W-4417 → E-4418/W-4418
Reading history	Stays with Suite 1 — it does not follow
Billing cycle	Unchanged — both units are on Silver Creek monthly
Route	Changes — the new meters sit on a different walk
Effect on the next bill	**$43.00 more a month**

Two of those deserve saying out loud.
The address does not move. An address belongs to the building, and both suites are in it.

4 · WHAT IS ALREADY BILLED, AND CANNOT BE UNDONE

FIVE BILLS HAVE BEEN ISSUED AGAINST SUITE 1

An issued bill is a permanent record and is never reissued, so those five keep the unit and the charges they were sent with. Correcting the account from today does not correct them — a bill that was wrong is credited and replaced, which is its own flow.

5 · WHY, AND WHO SAYS SO

Reason *

The account was opened on the wrong unit ▼

The account was opened on the wrong unit · The units were relabelled · An import put it in the wrong place

Approved by

Needs a supervisor ▼

Nobody moves an account between units on their own signature.


Note to the file

What went wrong, and how it was found.

☐ Tell the customer the suite on their bill has changed

The address is the same, so the envelope is unchanged; the suite line on the bill is not.

6 · REVIEW

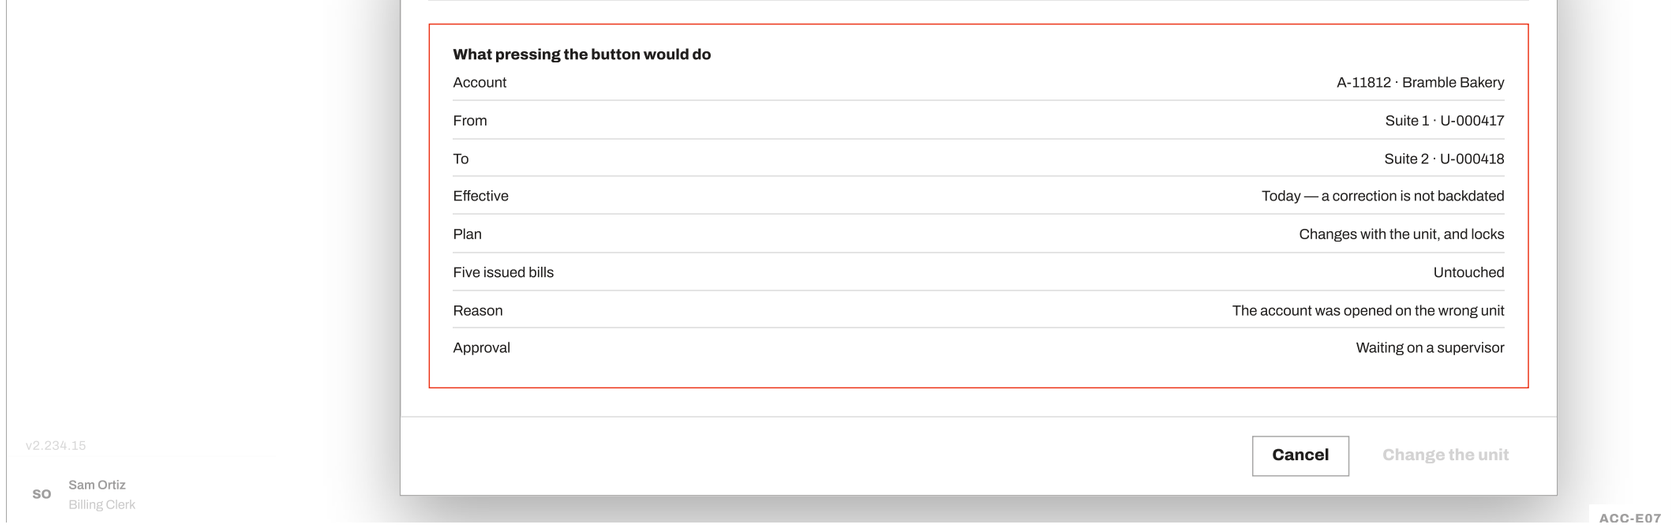

> **This collides with a signed rule and needs a ruling rather than a build.** `services.update_account` refuses `unit` by name — *create-only, never patched* — citing `BR-CUS-017`. That rule is protecting the right thing: **a customer who has moved** must leave by move-out and arrive by move-in, because the bills, meters and reads belong to the unit and must not follow a person. But it also blocks a different case the product has no path for at all: **a record that named the wrong unit**. Nobody moved; the account has simply been billing against the wrong meters. Today the only way out is to close the account and open another, which loses its history to fix a typo. **What is being asked of the PO is narrow:** may an account be re-pointed at another unit as a CORRECTION, with a reason, a supervisor and issued bills left alone? Everything else about BR-CUS-017 stands.

R6 · A Communication action on the account NEW BUILD ACC-S16

An eighth icon on the quick-action rail, and the dialog behind it in two views. Asked for directly: "*add a communication action to the quick action sections. here the user can send quick communication to the customer.*"

Two views, because a collections call has two halves. *Write a message* composes one. *What has already gone out* answers the question a customer actually asks first — and on this account the answer is three notices in one fortnight, one of which failed.

> **Three product rules shaped this form rather than decorating it**
>
> **Nothing is ever sent from a screen.** `BR-NOT-005`: the output of every notice path is queue rows, and there is no SMTP, ESP, Twilio or print-vendor call anywhere in the module. So the commit reads **Queue the message**, not Send, and the dialog says where it goes next. A wireframe with a Send button would promise an architecture this product has deliberately refused.
>
> **Free text does not exist on a regulated step.** `BR-PAY-035` fixes the tone to the tier — friendly is the due+3 reminder, firm is the ten-day, final is the 5-day/48h — and `BR-NOT-008` renders the disconnect class whatever tone was picked. So the message box is live for a courtesy note and refused, with its reason, the moment a ladder step is chosen. What a customer was told has to be provable later.
>
> **A text message supplements a letter and never replaces it** (A19 rule 3). On a regulated kind the postal channel is ticked and cannot be unticked.
>
> None of those ids appears on the dialog itself. B14 rule 32 keeps them out of clerk-facing copy, and unlike the Change plan quote there is no product behaviour here to reproduce faithfully — this is a proposal, so it is written the way it should ship.


What already exists and what does not. The outbound queue, its search and filters, its *failed and bounced first* sort, and **Resend** and **Requeue** are all served today. What does not exist is composing a message from an account: there is no

ad-hoc send path anywhere in the module, which is the one thing ACC-S16 is asking for.

One question this raises and does not answer. *Send statement* is already a rail icon and is also a communication. If R6 is built, that icon is arguably one *kind* inside this dialog rather than a control of its own. Left as it is here, because collapsing a control a clerk already knows is a decision for the PO and not for a drawing.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12 — ACC-S16 below is that card.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** there is no way to write to the customer from an account, and no view of what has already gone out.
> **R6 · Write a message** · /brazosbend/accounts/a-11812 · the compose view — free text, because this one is a courtesy message

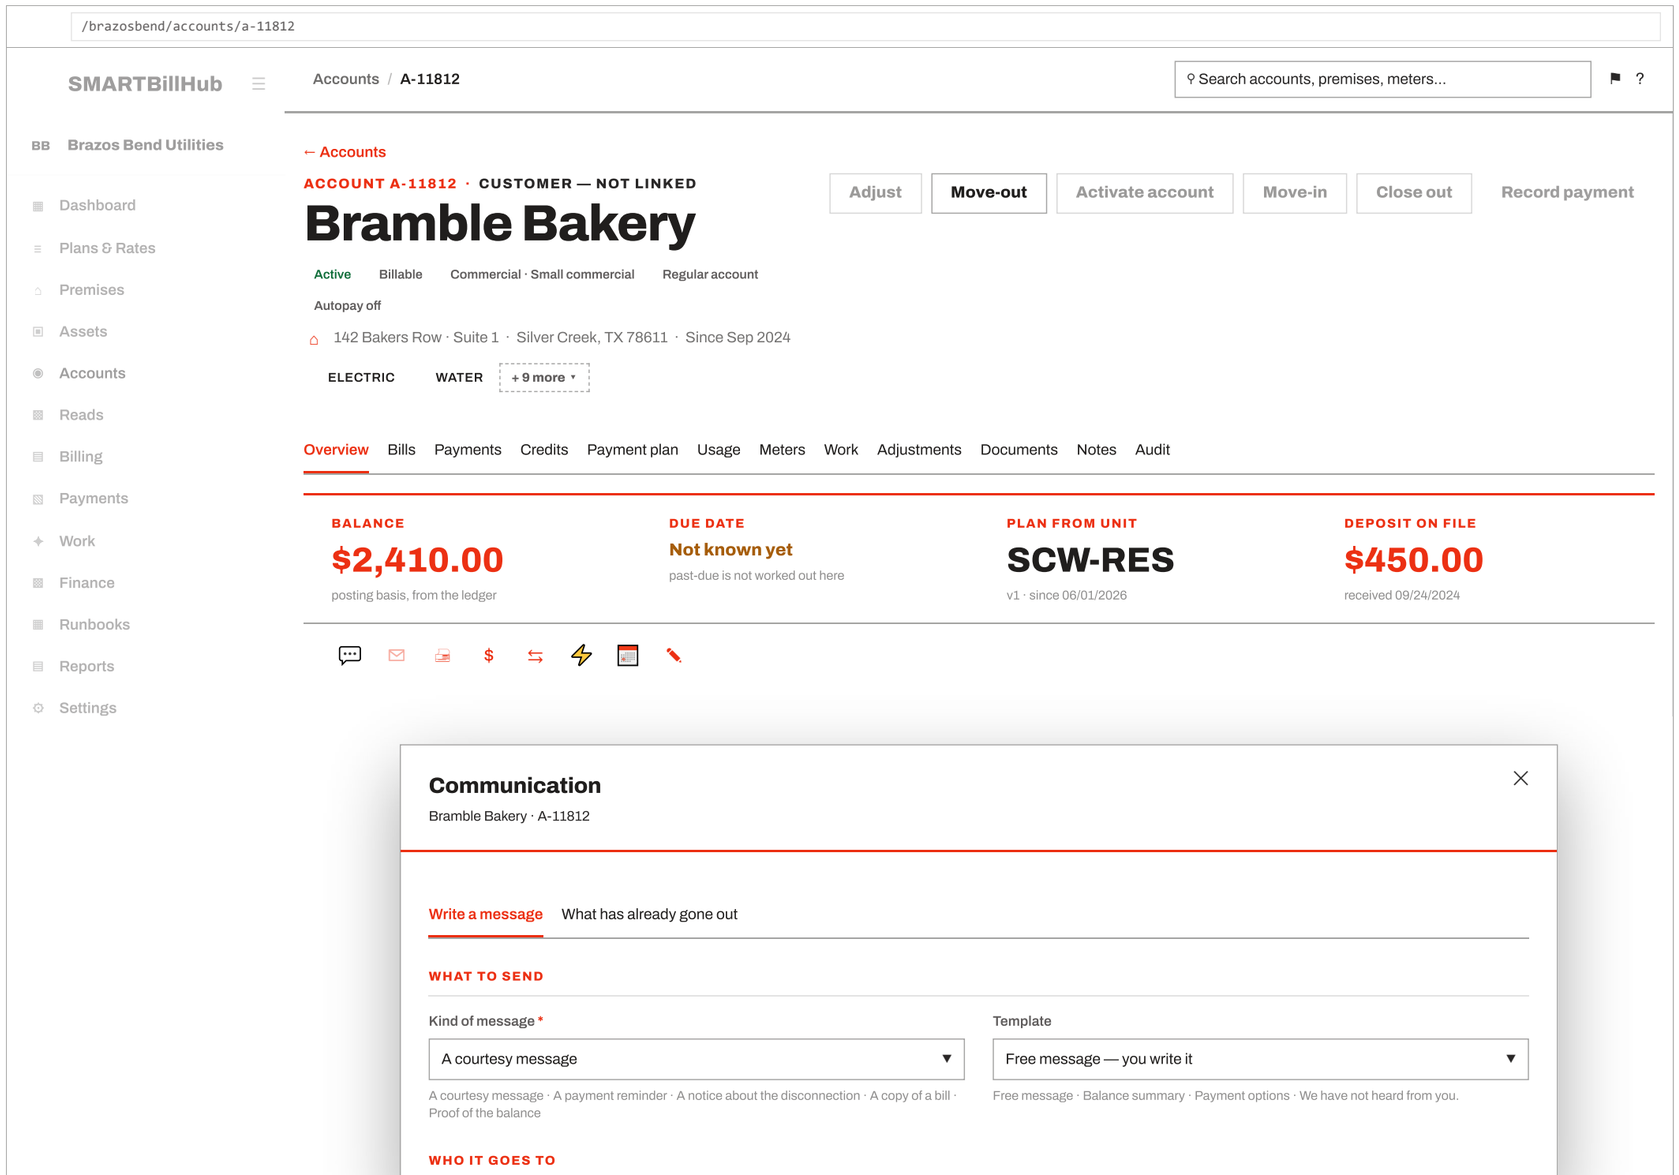

Customer

Bramble Bakery · one contact, no customer record linked

Language

English

From the account.

	CHANNEL	GOES TO	ON FILE?
✓	Email	accounts@bramblebakery.example	Yes
	Text message	+1 (512) 555-0117	Yes
	Post	142 Bakers Row · Suite 1, Silver Creek, TX 78611	Yes

A channel with nothing on file is shown and cannot be ticked, so a clerk can see what is missing rather than wonder why an option vanished.

THE MESSAGE

Subject

About your account balance

Shown on email only.

Sign it as

Brazos Bend Utilities ▾

Brazos Bend Utilities · Sam Ortiz, Billing · The billing team

Message

Hello, following our call today: the $2,410.00 on your account is an opening balance carried over, and no bill has been issued for it. I am looking into where it came from and will call you back by Friday. The disconnection is on hold until then.

Live for a courtesy message.

☐ Attach the balance as a statement

Attaches what the statement screen would produce.

WHEN

Queue it *

Now ▾

Now · On a date I choose

On

Nothing leaves before this date.

REVIEW

What pressing the button will do

Kind	A courtesy message, written by you
Goes to	accounts@bramblebakery.example
Channels	Email only
Signed	Brazos Bend Utilities
Queued	Now
It is queued, not sent	**The outbound queue delivers it**

This screen does not send anything. It writes a row on the outbound queue, and the queue delivers it.

Save as a draft

Cancel

Queue the message

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-C01

Three product rules shaped this form rather than decorating it. `BR-NOT-005`: output is queue rows and nothing is ever sent inline, so the commit queues. `BR-PAY-035` and `BR-NOT-008`: the tone of a ladder step IS the tier and free-text tones do not exist, so the message box is refused the moment a reminder or a notice is chosen. A19 rule 3: a text message supplements a mailed notice and never replaces it, so on a regulated kind the postal channel is ticked and cannot be unticked. None of the three ids appears on the dialog — B14 rule 32 keeps them out of clerk copy.

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: there is no way to write to the customer from an account, and no view of what has already gone out.

R6 · What has already gone out · `/brazosbend/accounts/a-11812` · the history view — what was sent, on which channel, and what came back

/brazosbend/accounts/a-11812

SMARTBillHub ☰ Accounts / A-11812 ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

ACCOUNT A-11812 · CUSTOMER — NOT LINKED

Bramble Bakery

Adjust | Move-out | Activate account | Move-in | Close out | Record payment

Active · Billable · Commercial · Small commercial · Regular account · Autopay off

⌂ 142 Bakers Row · Suite 1 · Silver Creek, TX 78611 · Since Sep 2024

ELECTRIC · WATER · + 9 more ▾

Overview | Bills | Payments | Credits | Payment plan | Usage | Meters | Work | Adjustments | Documents | Notes | Audit

BALANCE $2,410.00 — posting basis, from the ledger

DUE DATE Not known yet — past-due is not worked out here

PLAN FROM UNIT SCW-RES — v1 · since 06/01/2026

DEPOSIT ON FILE $450.00 — received 09/24/2024

💬 ✉ 🖨 $ ⇆ ⚡ 📅 ✎

Communication

Bramble Bakery · A-11812 ✕

Write a message | What has already gone out

The first thing a customer asks on a collections call is what they have already been sent.


Filter ▾ ⚲ Search by subject, template or reference — Filter ▾ Columns ▾ ⇩ Export

SENT ▼	WHAT	CHANNEL	GOES TO	STATUS	
09/10/2026	Disconnect notice — ten day	Certified post + Email	Suite 1 · accounts@...	Delivered 09/12	☰ Open
09/10/2026	Payment reminder — firm	Post + Email	Suite 1 · accounts@...	Delivered 09/12	☰ Open
08/27/2026	Payment reminder — friendly	Text message	+1 (512) 555-0117	Failed — number not reachable	↻ Resend
08/27/2026	Payment reminder — friendly	Email	accounts@bramblebakery.example	Delivered	☰ Open
12/08/2025	Payment plan agreement	Email	accounts@bramblebakery.example	Delivered	☰ Open

1–5 of 5 · failed and bounced first, then newest · Rows per page 50 100 ‹ ›

The failed text message is the row that matters, which is why the list puts failures first. The friendly reminder reached them by email and not by text, and nothing on the account screen says so today — a clerk telling a customer "we texted you" would be wrong.

WHAT A SENT MESSAGE DOES NOT TELL YOU

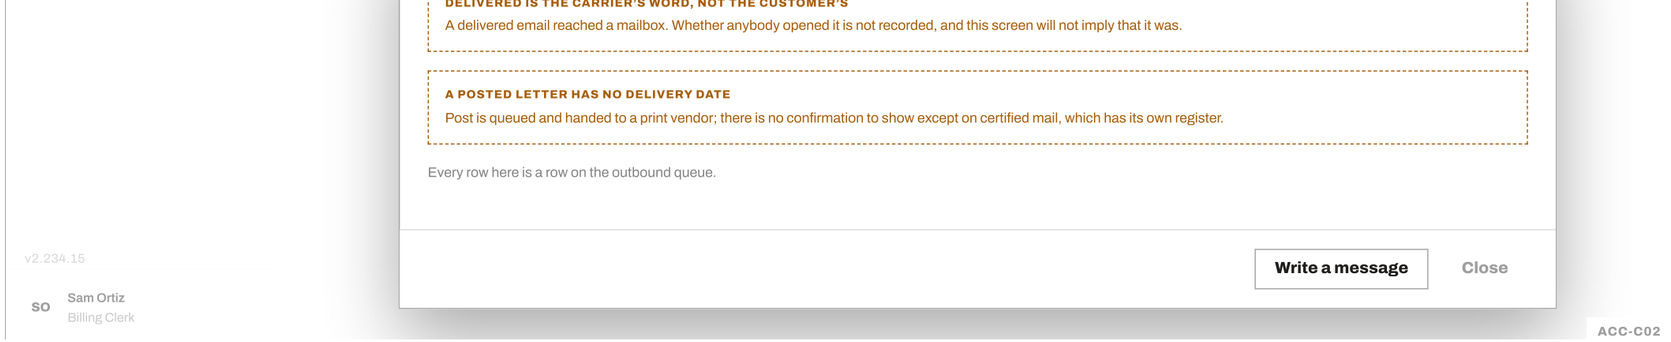

> **Drawn from what the outbound queue really serves:** search on recipient, account and reference, filters on type, channel, status and date range, and the ratified default sort — *failed and bounced first, then queued*, so the handful of failures are not buried under rows that are fine. **Resend** and **Requeue** are real endpoints; composing a new message from an account is the part that does not exist.

R7 · A master account lists the accounts at its address EXISTS BEHIND ACC-S17

A thirteenth tab, shown only when the account's kind is master, sitting immediately after Overview. Ruled: "*change the premises tab to accounts tab. And in that, show only one table with all the accounts that are associated with this master account and with their account status.*"

> **"Associated" is by ADDRESS, and the tab says so rather than letting a list imply otherwise**
>
> `BR-CUS-068`: a master account is **an ordinary account row with its kind set to master**. The payer is the premises' owner or manager, and it is attached to the premises' common-area units. There is **no `parent_account_id`, no child accounts and no rolled-up balance**. So the accounts on this tab are the accounts at the same address — which is what a clerk ringing about a building actually needs — and the drawing states plainly that a tenant's account is its own and so is its money.
>
> **There is deliberately no total under the balance column.** The six accounts sum to $810.95 and that figure means nothing: two of the rows are $0.00 and one of them is this account, so what it really adds up to is the owner's own $69.60 plus $741.35 owed by three different tenants who have nothing to do with each other. Printing it where an owner can see it invites exactly the wrong conclusion, and the drawing says why it is absent rather than leaving a gap somebody helpfully fills in.


The master is in the list, marked as the one you are on. It is an ordinary account row, so leaving it out would be the odd choice — and its unit column reads *common areas ×2*, because one master covers several by hanging off the ADDRESS and reaching every one of them through its own service agreements. That read exists because billing once priced the anchor unit and nothing else: right for an ordinary account, and **two-thirds right for a master** (`DEF-571`, whose worked case is this very address — 1408 Elm, $41.20 + $28.40 = $69.60). What those units add up to belongs on the account's **Bills** tab, not here.


Status is on every row, across the five the rest of this document tests against, and the toolbar filters on it — which is the point of the tab: one of these six is in collections and one is on a vacation hold, and neither is visible from anywhere else in the building.

Nothing here needs a new table and none of it needs a new relationship. It is an account list with a premises filter and a status column. What is missing is the tab.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12 — `ACC-S17` below is that card.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** a master account has no tab listing the accounts at its address; `sub_accounts` is served and reaches no screen.
> **R7 · The Accounts tab, on a master account** · `/brazosbend/accounts/a-10001?tab=accounts` · shown only when the account's kind is master, immediately after Overview

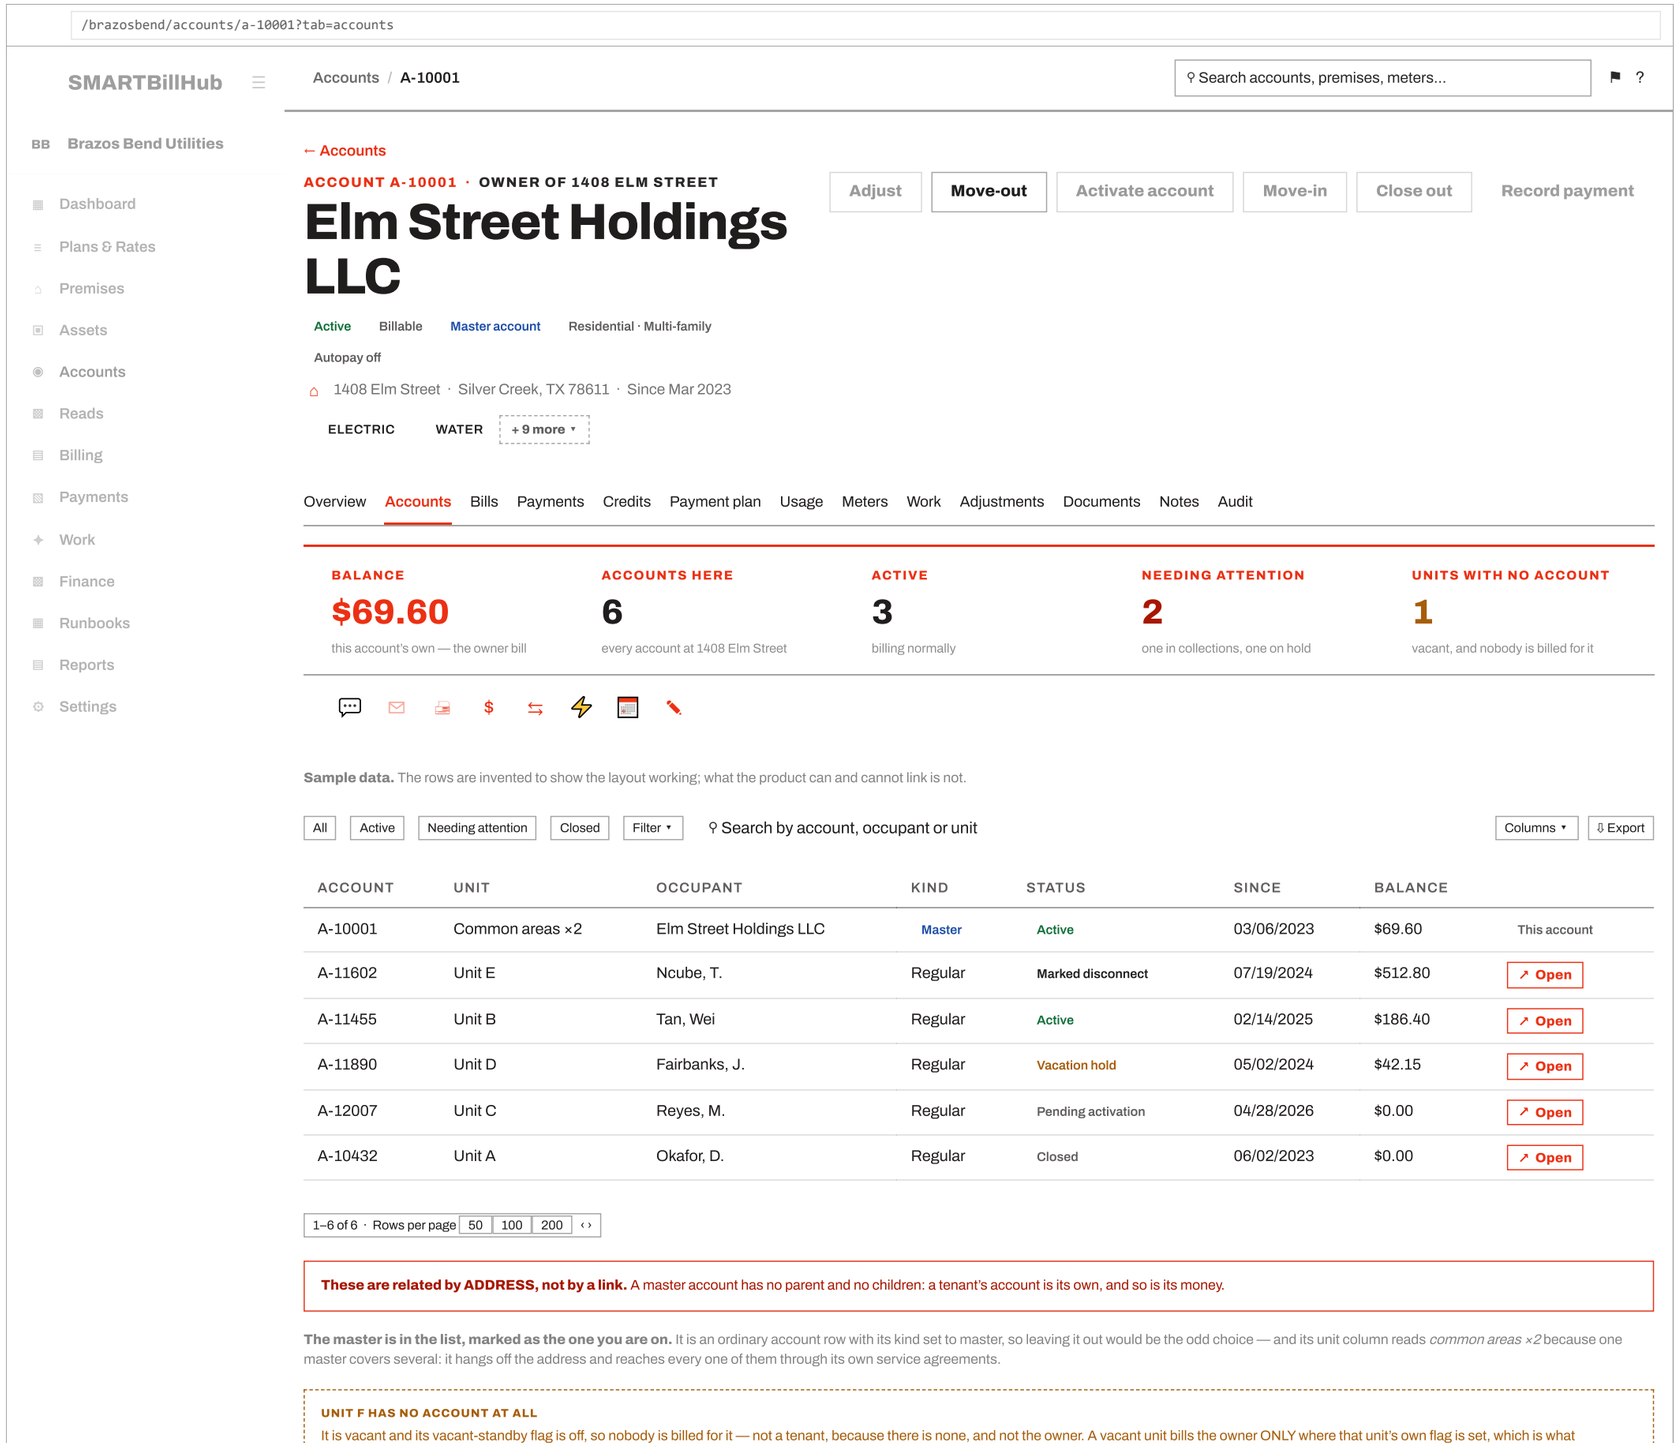

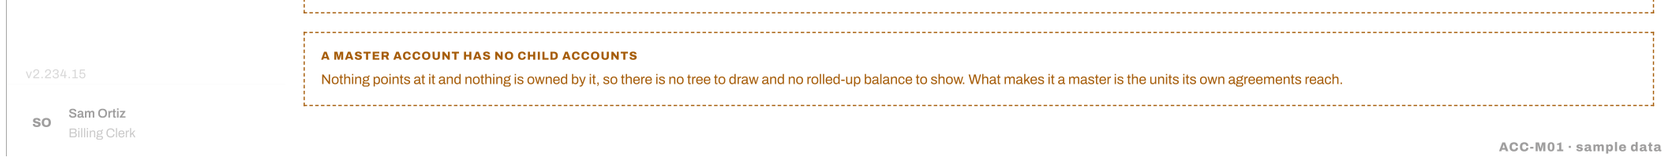

What the tab links, and what it deliberately does not

On the tab	How it is linked	Where it comes from
Every account at the address, the master among them	**By address only.** No parent, no children, no rolled-up balance and no total under the balance column	`A filtered account list, scoped to the premises. A tenant account is its own account and so is its money.`
Status, on every row	Each account's own	`The same five statuses the rest of this document tests against — active, marked disconnect, vacation hold, pending activation, closed.`
The master's unit column, reading *common areas ×2*	A real, direct linkage — this account's own open service agreements	`covered_unit_ids(account). It answered anchor + the agreement units until 2026-09-01 and answers the agreement units now — same units, same $69.60. What those units add up to belongs on Bills, not here.`
The tab itself	Shown only when `kind = master`	`An ordinary account row with one column set. The only door to it is the create-a-master path; every other account route refuses the field by name.`

Nothing here needs a new table and none of it needs a new relationship. It is an account list with a premises filter and a status column. What is missing is the tab.

One thing left off on purpose: there is no total under the balance column. The six rows sum to $810.95 and that number means nothing — it is the owner's own $69.60 plus $741.35 owed by three different tenants who have nothing to do with each other. Printing it where an owner can see it invites exactly the wrong conclusion, so the column has no foot.

R8 · A company customer and the master account it belongs under BLOCKED ACC-S18

Ruled, and it withdraws the chooser drawn in version 41: "*Don't add any account selection there. Just keep the customer kind only. If the user selects company, then ask user to select the associated company master account. where user can search and select it.*"

The first half is simple and is done. The wizard asks no account-kind question at all — the three-way chooser, the master branch and the second-master refusal are withdrawn. Customer kind is the only branch on the step, and every account this screen opens is a regular account, which the server already enforces.

> **⚠ The second half collides with a ruling of yours, and the collision is worth more than the field**

There IS a parent-child link between accounts, it is called a sub-account, and you ruled it. `BR-CUS-171`, 2026-08-27, closing `OQ-531`: *an occupying account is a child of the premises' owner account*. A master answers its children and every other account answers its master. It is live in the product today, under that name, on the account read and on the move-out screen. **This document told you last version that there was no such thing. That was wrong, and this section is the correction.**

The link is DERIVED and stored nowhere — which is why no column exists, and it is a design rather than a gap. It needs no maintenance: "occupying" keys off the status's behaviour class and never its label, so a closed tenant drops out of the list on the day they close and a pending one never appears. Nobody has to remember to unlink anything.

⚠ **And the way the owner is found was superseded the same day, for the exact reason a free picker reopens.** It used to be worked out geometrically — walk the common areas, treat whoever pays for the hallway as the owner. You replaced all of it (`DEF-650`, decision 4), verbatim: "*the premises names its owner, the owner is the master, and nothing is inferred from hallways.*" The old reading was **retired rather than kept as a fallback**, and the reason given was that "*a fallback that disagrees with the declared owner would silently bill a different party.*"

`BR-CUS-097` says it again from the money side: a transfer cannot be built against an ambiguous target, so the move-out screen takes its master **resolved from the server** and has no free-text account field at all — a forged transfer is unrepresentable rather than merely rejected.

So the association you want the clerk to pick is already answered, and the thing that answers it is the service address — step 2 of this very wizard.

So both are drawn: the picker as asked, and the check that keeps it from reversing your own ruling by accident

`ACC-K01` to `ACC-K03` are the field exactly as you described it — under Company, search and select, with the three states a clerk actually meets. `ACC-K04` and `ACC-K05` are the review step, where both answers are in hand for the first time.

A pick that AGREES with the address costs nothing and reads as a confirmation (`ACC-K04`). **A pick that DISAGREES is the silently-bill-a-different-party case** (`ACC-K05`): the address names one owner, the picked account belongs to another, and the screen cannot tell which is wrong. It is stopped rather than saved with a warning, because the consequence surfaces months later as a debt pointed at a company that never had anything to do with the tenant. Three ways out are offered and one of them is not on this screen at all — if the building's declared owner is wrong, that is fixed on the premises, which is precisely what your ruling says.

The check needs nothing new. Both answers are already available by the review step: the clerk's pick, and `master_account_for`, which has been on the account read since the day the rule was built.

The search half needs nothing built. The storing half needs a decision first.

Searching master accounts is already served. The account list takes `f.kind=master` — a filter added so a screen could "list the owner accounts without a second endpoint" — and its search already covers account number, customer number, company name, service address and meter. `ACC-K02` is a screen over a query that exists.

Storing a hand-picked master is the part with a cost, and it is not the column. Adding a field is easy; deciding *which of the two answers wins when they differ* is the real question, and the retired mechanism was retired for exactly that reason. **The cheaper answer may be that the clerk never picks at all** — the address already decides it, and the field becomes a shown, derived fact with the picker reserved for correcting it. That is a ruling, and it is yours; the drawing shows what you asked for rather than quietly substituting it.


It records a relationship. It moves money in exactly one place.

`ACC-K04` says on screen what the association does not do: nothing is rolled up and no balance is combined. The shop's own supply is billed here, the hallway lighting and irrigation are billed there, and they stay two bills for two different things.

The one place a master association ever moves money is a move-out, where a departing tenant's unpaid residue can be tied back to the landlord — and your own ruling made that a clerk's deliberate act rather than a consequence: "*if U1 leave and dont pay $500 then $500 Debt is shifted to Owner A, if clark tied back to A during move out process*". Nothing is preselected there, and the consequence — that the reminder ladder then points at the landlord — is shown before the click, not after.

A drawing is not a commitment. These are descriptions until they appear in a commitment card in §12 — `ACC-S18` below is that card.

> **REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** the new-account wizard asks a company for no master account, and stores none.
> **Step 1 · company picked, and the master account it belongs under** · `/brazosbend/accounts/new?step=1` · ACC-K01 · proposed · customer kind is the only branch

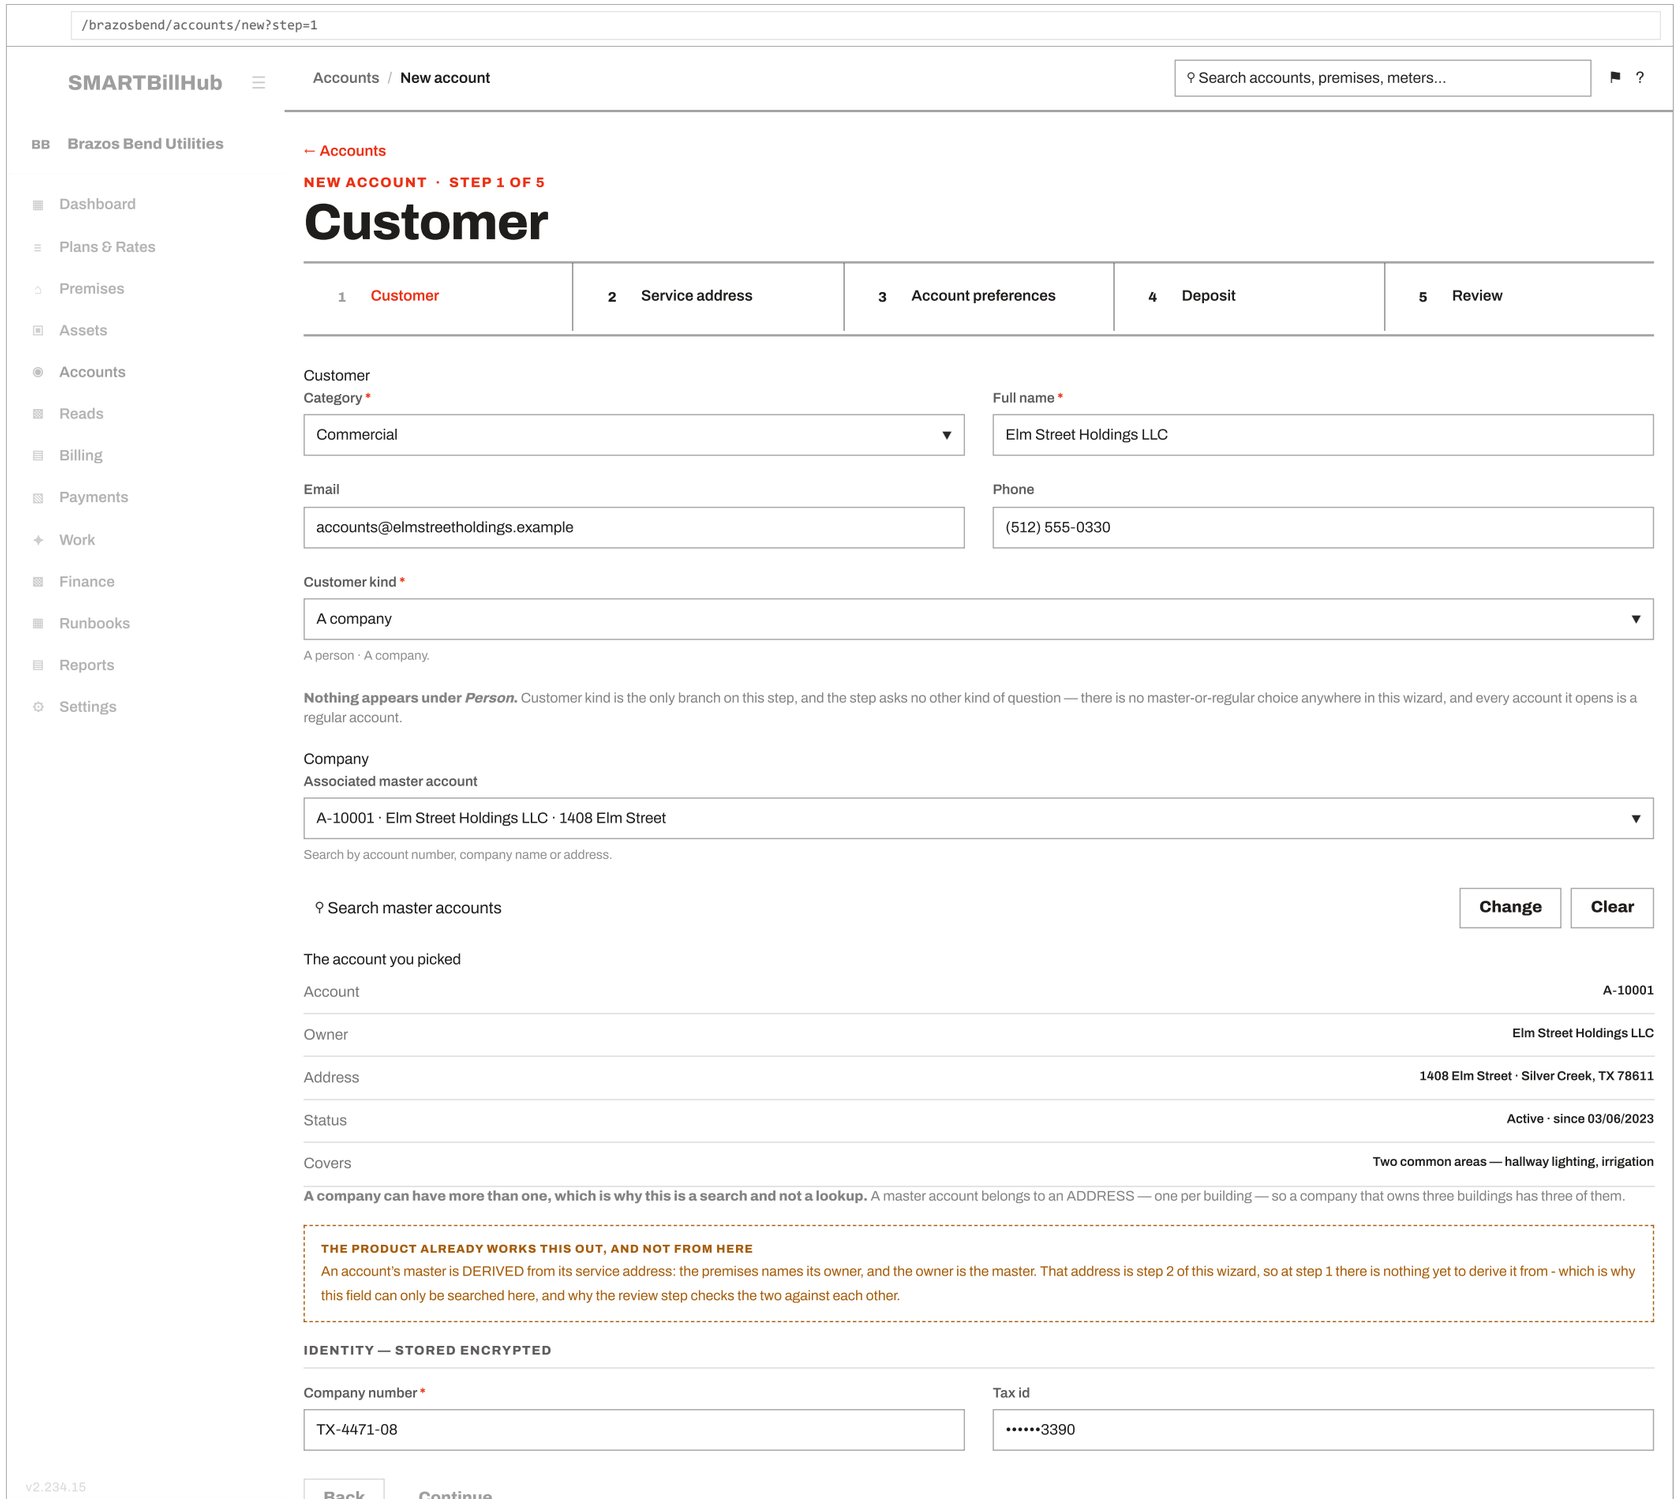

SO Sam Ortiz
Billing Clerk

Back Continue

ACC-K01

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the new-account wizard asks a company for no master account, and stores none.

The picker, open · search and select over the company's master accounts · `/brazosbend/accounts/new?step=1` · ACC-K02 · proposed · three results, and an explicit none

`/brazosbend/accounts/new?step=1`

SMARTBillHub

Accounts / New account

⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

- Dashboard
- Plans & Rates
- Premises
- Assets
- Accounts
- Reads
- Billing
- Payments
- Work
- Finance
- Runbooks
- Reports
- Settings

← Accounts

NEW ACCOUNT · STEP 1 OF 5

Customer

1 Customer | 2 Service address | 3 Account preferences | 4 Deposit | 5 Review

Customer

Category *: Commercial ▾

Full name *: Elm Street Holdings LLC

Email: accounts@elmstreetholdings.example

Phone: (512) 555-0330

Customer kind *: A company ▾

A person · A company.

Select the associated master account

Elm Street Holdings LLC · three master accounts

SEARCH

⚲ elm street ×

Account number, company name or address.

This company | All companies | Active | Filter ▾ | ⚲ Search this list


Columns ▾ | ⇩ Export

	ACCOUNT	COMPANY	ADDRESS	STATUS	COVERS	SINCE
◉	A-10001	Elm Street Holdings LLC	1408 Elm Street	Active	2 common areas	03/06/2023
○	A-10044	Elm Street Holdings LLC	77 Cedar Court	Active	2 common areas	11/20/2024
○	A-10071	Elm Street Holdings LLC	310 Marigold Way	Pending activation	1 common area	08/02/2026

1–3 of 3 · Rows per page 50 100 200 ‹ ›

○ **Not associated with a master account**
A company that rents its premises has none.

This list is already served. The account list takes a filter that narrows it to master accounts, and its search covers account number, company name and service address.

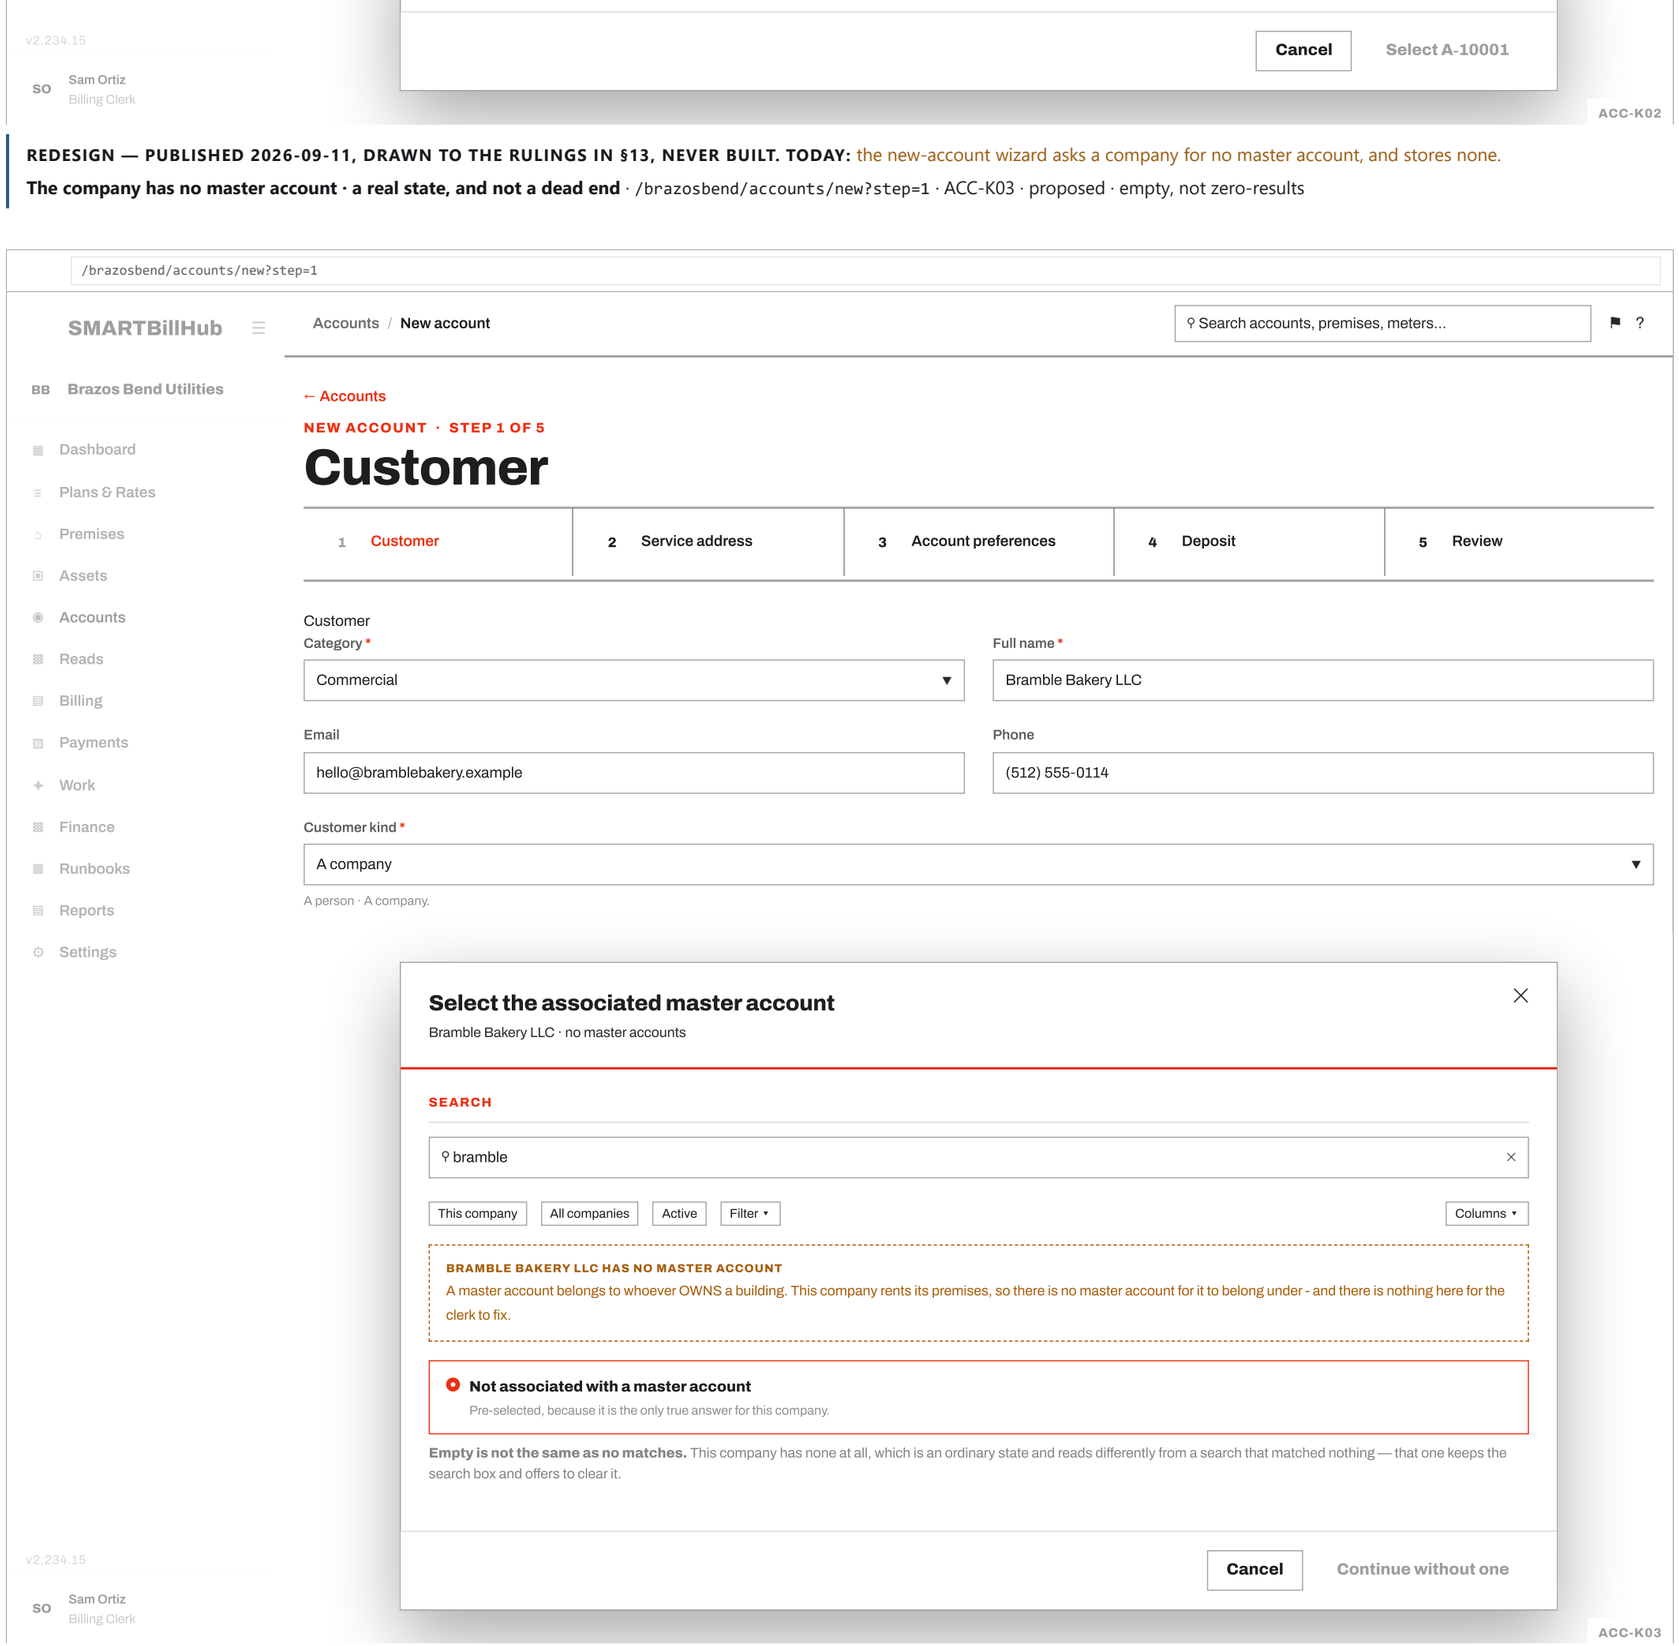


REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the new-account wizard asks a company for no master account, and stores none.

The company has no master account · a real state, and not a dead end · `/brazosbend/accounts/new?step=1` · ACC-K03 · proposed · empty, not zero-results

ACC-K03


REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the new-account wizard asks a company for no master account, and stores none.

Step 5 · the pick agrees with the address, so it is a confirmation · `/brazosbend/accounts/new?step=5` · ACC-K04 · proposed · and what it does not do

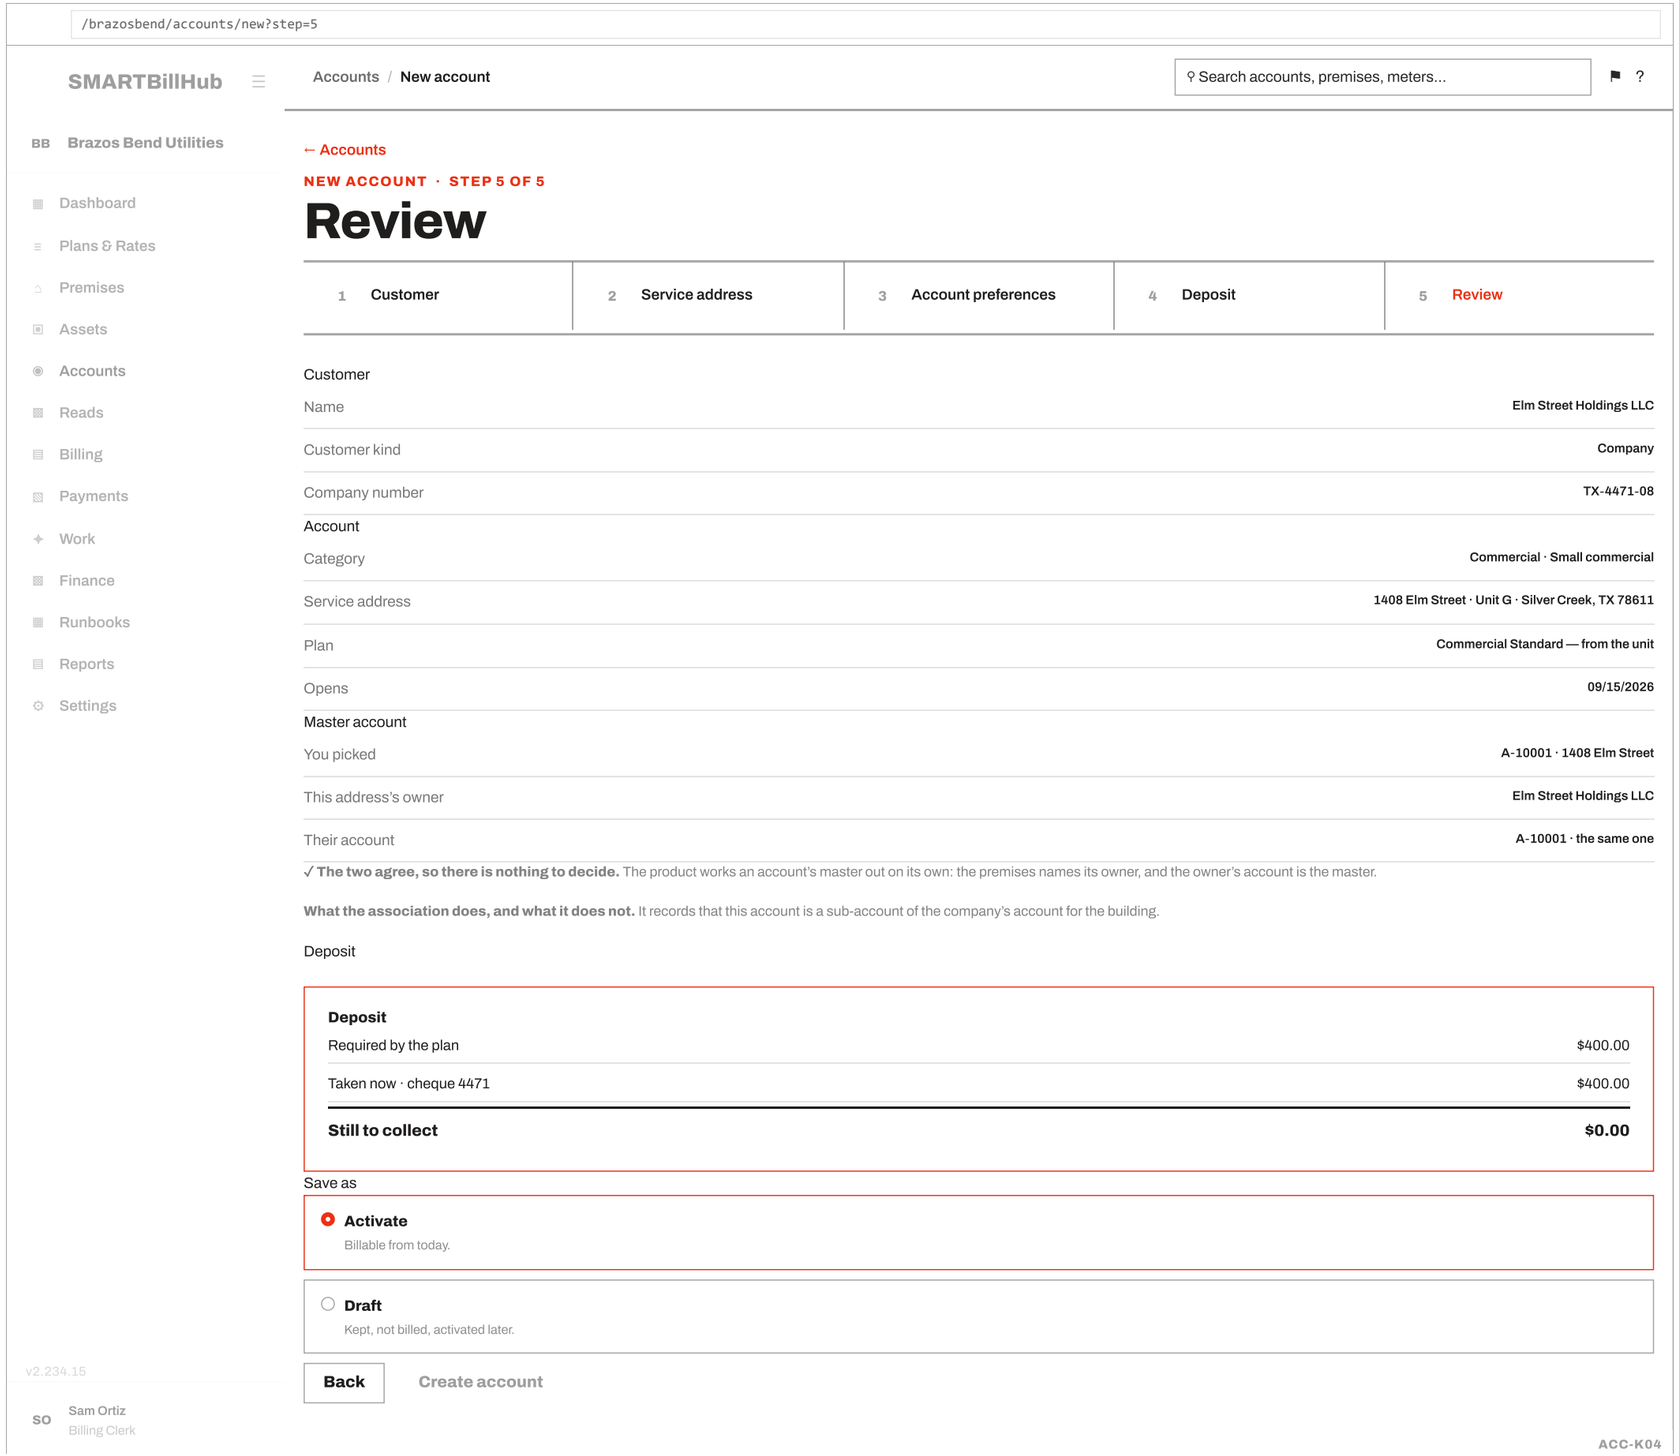

REDESIGN — PUBLISHED 2026-09-11, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: the new-account wizard asks a company for no master account, and stores none.

Step 5 · the pick disagrees with the address — the case the picker adds · `/brazosbend/accounts/new?step=5` · ACC-K05 · proposed · two owners, and the screen cannot choose

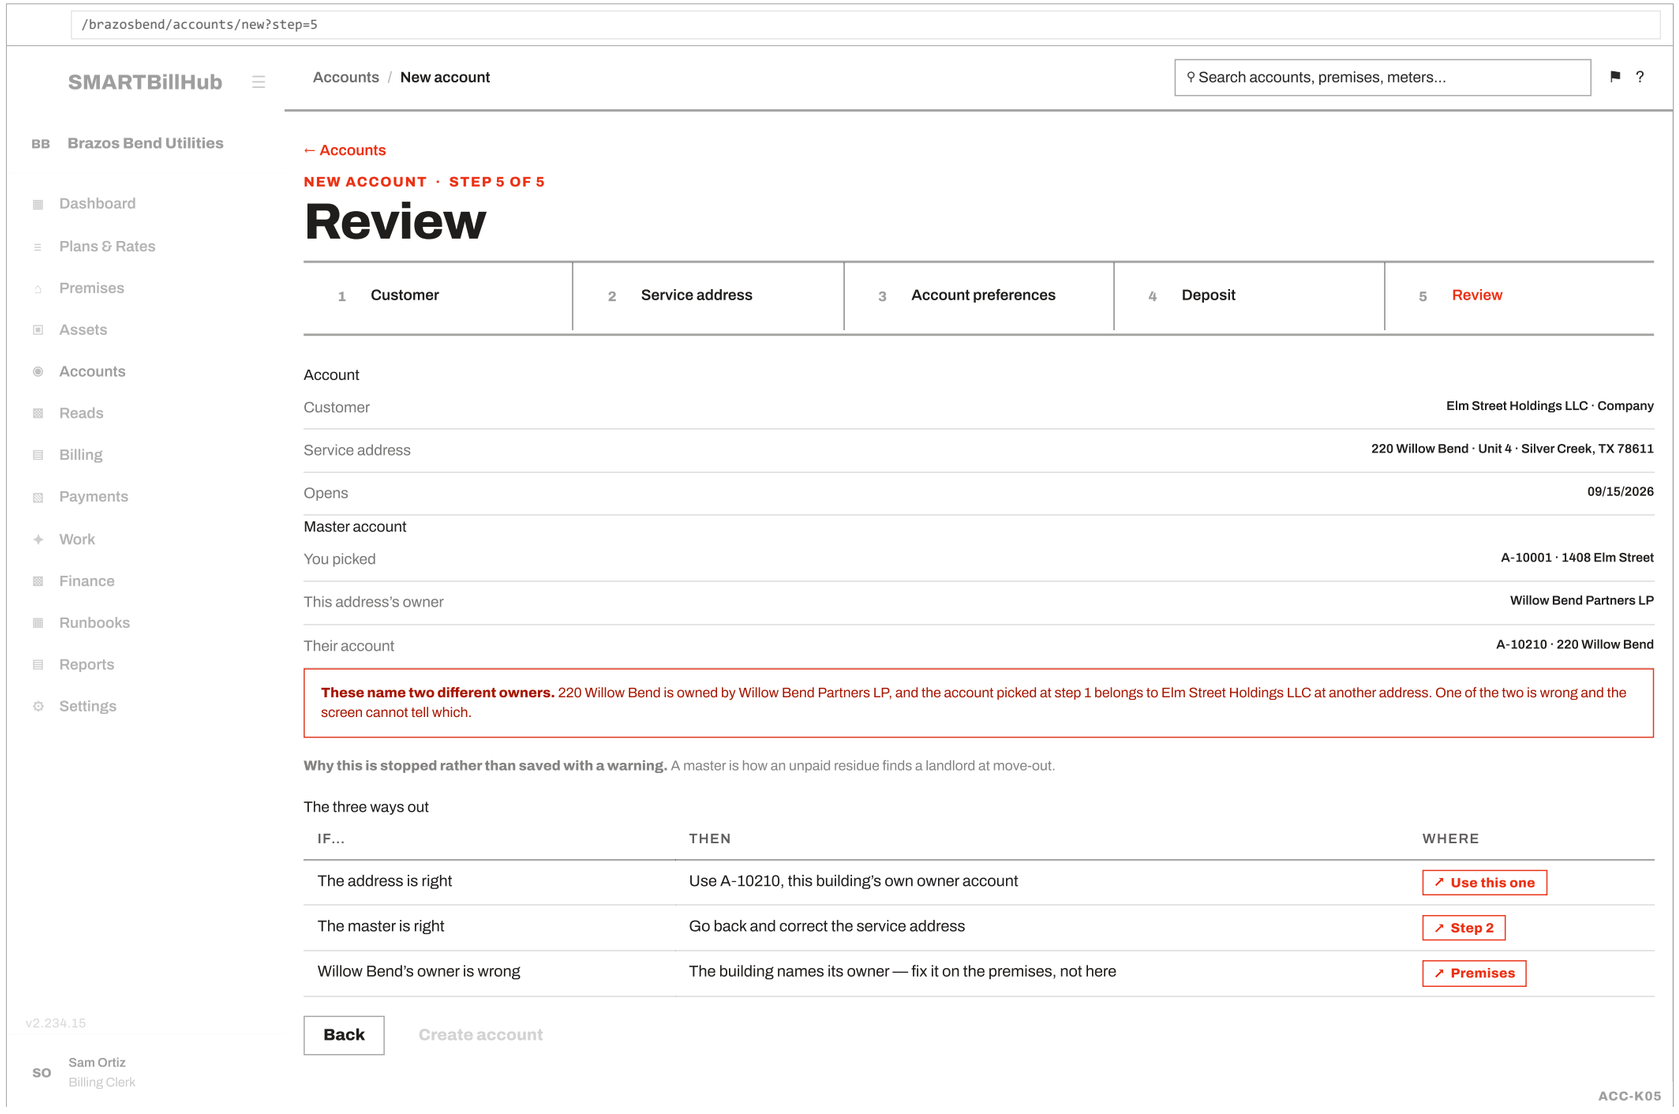

The piece	Where it stands today	What it costs
Customer kind — person or company	Built, and unchanged by any of this. It is the only branch on the step.	Nothing.
Searching master accounts	Already served. The account list takes f.kind=master — added so a screen could list owner accounts without a second endpoint — and its search covers account number, customer number, company name, service address and meter.	The picker screen. No endpoint, no query, no index.
The account's master	**Already answered, and already on the account read.** master_account_for(account) resolves premises → declared owner → that owner's account (BR-CUS-171, BR-MET-400), and sub_accounts_for_master runs it the other way.	Nothing — it is the thing the picker would be duplicating.
Storing a hand-picked master	**No column, on purpose.** The link is DERIVED and stored nowhere, so it needs no maintenance: a closed tenant drops out on the day they close and a pending one never appears.	A ruling before a column. Storing a second answer means deciding which of the two wins when they differ — and the retired mechanism was retired for exactly that reason.

A company with several	`Expected. A master belongs to an ADDRESS, one per building (BR-CUS-1011), so a company owning three buildings has three.`	Why it is a search. Nothing extra.
A company with none	Ordinary. A company that rents owns no building and so has no master account.	`An explicit not associated answer, so the field can be asked of every company without blocking the ones it cannot apply to.`
The pick disagreeing with the address	`The case the picker ADDS, and the only one with a cost. The move-out tie-back resolves its target from the server precisely so a transfer cannot be built against an ambiguous one (BR-CUS-097).`	`The check in ACC-K05, which needs nothing new — both answers are already in hand by the review step.`

R9 · The customer you already have, flagged where the details are typed EXISTS BEHIND ACC-S19

Ruled: "*the system should flag if the details were already attached to any of the accounts in the system and should show the details of the customer account with the proper customer details. This is very important scenario.*"

⚠ **Most of this is built, and what is missing is the screen — which changes what the remedy costs from a matcher to a panel.** The criteria were ruled on 2026-08-25, verbatim "*Name + date of birth + one government ID*", the strictest of the three readings offered: the Product Owner took refusing some genuine returners over the risk of handing a stranger somebody else's deposit. The evidence exists — a date of birth, a Social Security number, a driving licence and a phone, each identifier encrypted with a one-way token beside it, so a match is computed without anybody reading the number. And **one function resolves the party for four doors** and answers in a single word: **linked**, **created** or **none**.

That word reaches no screen. The door's own note says why it matters: "*The server has always known whether it linked or created; it recorded the fact in the audit row and dropped it from the response, so no screen could tell a clerk which of the three things had happened.*" **The cost is already on the register: one landlord holding three customer numbers.**

> **The three doors do not behave the same, and the drawings say which is which.** The new account and the move-in both resolve a customer through the same function — the move-in requiring an identifier outright, on the ruling "*You either create new Customer ID or you link existing customer ID here*". **The service request creates nothing at all**, deliberately and by a pinned rule, so its flag can only ever be advice. Drawing one panel across all three would have been the easiest possible mistake.



Step 2 of 5 · The customer

✓ The unit | 2 The customer | 3 Account preferences | 4 Deposit | 5 Review

The customer

Customer kind: A person

Full name *: Okonkwo, Adaeze

Date of birth *: 03/14/1991

Email: a.okonkwo@example.com

Identity — one of these is enough to open an account

Social Security number: •••-••-2208

Driving licence: Not given

Phone: (512) 555-0164

This looks like somebody you already have

	CUSTOMER	NUMBER	ACCOUNTS	MATCH
○	Okonkwo, Adaeze · born 03/14/1991	C-00412	2 · 1 open	Strong

Name	Agrees
Date of birth	Agrees · 03/14/1991
Social Security number	Agrees
Phone	Different — (512) 555-0910 on file
Email	Different

Three things agree and two do not, and both halves are shown. A person moves and changes their number; that is not evidence they are somebody else.

Open C-00412 and see what they hold →

What linking them would carry over

Held under C-00412 today

Deposit on the closed account	$150.00
Deposit interest	— not recorded
Payment history	4 years, no arrears
Deposit you would take today	**$0.00**

This is why the flag is a money feature and not a convenience. Left unlinked, this customer is a stranger: they are asked for a fresh $150.00 while the utility is already holding theirs, and four clean years of history counts for nothing against their deposit band.

What you choose

○ **Link to C-00412**
One customer, two accounts.

○ **Create a new customer anyway**
Needs a reason, recorded against your name.

○ **Go back and check the details**

Nothing is preselected, on purpose. The check is advice and the clerk decides.

What the server already answers

Outcome	linked · created · none
A reuse reads	linked, with *reused* beside it
Where it is recorded	The audit row, every time
Where it is shown	Nowhere, today

The matching is built; the panel above is not. Four doors already resolve a customer this way and every one of them knows in a single word whether it linked or created — and drops it before any screen sees it.

← Back | Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-S19

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: `resolve_customer_for_account` already computes whether a customer was reused and drops that answer before any screen sees it.

R9 · the new account wizard, matching as you type · `/brazosbend/accounts/new?step=2` · Name, date of birth and one government ID — the criteria the PO chose

`/brazosbend/accounts/new?step=2&match=c-00412`

SMARTBillHub ☰ Accounts / New account ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

← Accounts

NEW ACCOUNT

Who the customer is

Save & exit

Step 2 of 5 · The customer

Okonkwo, Adaeze · C-00412

What this customer already holds

THE CUSTOMER ON FILE

Customer number	C-00412
Name	Okonkwo, Adaeze
Kind	Person
Date of birth	03/14/1991
Social Security number	•••-••-2208
Driving licence	— not held
Phone	(512) 555-0910
Email	adaeze.o@example.com
First seen	04/02/2021

Only the last four digits are ever shown, on every screen in the product. The number itself is encrypted and the thing that matched it is a one-way token beside it — so the match was computed without anybody, including this dialog, reading the identifier.

WHAT MATCHED, AND WHAT DID NOT

EVIDENCE	YOU TYPED	ON FILE	AGREES?
Name	Okonkwo, Adaeze	Okonkwo, Adaeze	Yes
Date of birth	03/14/1991	03/14/1991	Yes
Social Security number	•••-••-2208	•••-••-2208	Yes
Driving licence	—	—	Neither held
Phone	(512) 555-0164	(512) 555-0910	No
Email	a.okonkwo@example.com	adaeze.o@example.com	No

A phone will never make this a strong match, and it can open an account on its own. A person is identified for CREATION by a Social Security number, a driving licence *or* a phone — and is RECOGNISED only by the first two.

THE ACCOUNTS THEY HOLD

ACCOUNT	ADDRESS	OPENED	CLOSED	STATE	BALANCE
A-10744	219 Poplar Ave	04/02/2021	11/30/2025	Closed	$0.00
A-11907	44 Willow Bend · Unit 3	12/04/2025	—	Active	$38.10

Deposit held	$150.00 · on the closed account
Deposit interest	— not recorded
Payments in four years	48 · none late

Ever disconnected	No
Open complaints	None
Deposit band this earns	Waived — on this history

And the figure shown is not the figure agreed. The signed arithmetic for a deposit held this long is $153.50 — $150.00 with $3.50 of interest.

IF YOU LINK THEM

WHAT	WHAT HAPPENS
The customer number	Stays C-00412 — never a second one
This new account	Becomes their third
The deposit	Offered to carry, not moved automatically
Their history	Counts against the deposit band
The old accounts	Untouched — nothing is merged

The $150.00 is the whole argument. It is sitting on a closed account under this customer number and can follow them onto the new one instead of being refunded and re-taken.

Linking adds a row to a link table and changes nothing else. No account is merged, no bill is reissued and no history is rewritten — which is what makes it safe to do.

UNLINKING, IF THIS TURNS OUT TO BE WRONG

Nothing in the product does it. A link made by mistake is corrected by pointing the account at the right customer, which exists; there is no screen that simply removes one and leaves the account with nobody.

Not the same person | Link to C-00412

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-S19

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: `resolve_customer_for_account` already computes whether a customer was reused and drops that answer before any screen sees it.

R9 · the candidate, opened over the new account · `/brazosbend/accounts/new?step=2&match=c-00412` · One dialog, opened from the panel, on whichever screen you are on

/brazosbend/accounts/a-10432/move-in?step=2

SMARTBillHub ☰ Account A-10432 / Move-in ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets
Accounts
Reads
Billing
Payments
Work
Finance

← Account A-10432

MOVE-IN

Who is moving in

Save & exit

Step 2 of 6 · Customer

✓ Find unit | 2 Customer | 3 Start & read | 4 Account preferences | 5 Deposit | 6 Review

The customer

Customer kind: A person ▼

Full name *: Miller, Sarah

Date of birth *: 04/11/1988

Phone: (512) 555-0142

What weak means here, and what it does not

	STRONG	WEAK
Shown to the clerk	Yes	Yes

Runbooks
Reports
Settings

04/11/1988 (512) 555-0142

Identity

Social Security number: •••-••-4417

Driving licence: TX ••••882

One of these is required here, and that is a ruling rather than a form's preference. On the move-in, verbatim: *"You either create new Customer ID or you link existing customer ID here".*

This looks like somebody you already have

	CUSTOMER	NUMBER	ACCOUNTS	MATCH
○	Miller, Sarah · born 04/11/1988	C-00655	1 · closed	Weak
○	Miller, S. · born 09/22/1990	C-00801	1 · open	Weak

C-00655 — Name and birthday agree · no identifier on file

C-00801 — Name agrees · birthday does not

The same panel, and neither row is offered as the answer. The first was opened on a phone number four years ago and holds no Social Security number or licence to compare against — so nothing can raise it to strong, however obviously it is the same person.

Open C-00655 and see what they hold →

Can be linked by hand	Yes	Yes
Carries a deposit across	Yes	No
Earns a deposit band	Yes	No

Money moves on a strong match and on nothing else. A clerk may still link a weak one — and should, when they can see it is the same household — but the $150.00 does not follow a guess.

So what should the clerk do

- ○ **Link to C-00655 anyway**
  They know this household.
- ○ **Ask for the licence and try again**
  One field turns this weak match strong, and the deposit follows on its own.
- ○ **Create a new customer**

The middle option is the one worth putting first in training. A driving licence taken at the counter is thirty seconds, and it is the difference between a customer being recognised and being charged a second deposit.

Two tiers reach this screen, not three

***PROBABLE* IS IN THE VOCABULARY AND IS NEVER PRODUCED**
The matcher emits *strong* or *weak* and nothing in between — *probable* is described in the code as a human's word. A screen that drew three bands would be offering a middle one nothing can ever fill.

NOTHING SEARCHES FOR A NEAR-MISS ON THE ADDRESS
Two people at the same address with different birthdays are not compared at all. The criteria are the name, the birthday and a government identifier; an address is not among them and adding it would be inventing a threshold nobody agreed.

← Back Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-S19

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: `resolve_customer_for_account` already computes whether a customer was reused and drops that answer before any screen sees it.

R9 · the move-in, and the match that cannot be strong · `/brazosbend/accounts/a-10432/move-in?step=2` · A phone opens an account and never recognises anybody

`/brazosbend/requests/new?step=1`

SMARTBillHub Requests / New request ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets

← Requests

SERVICE REQUEST

Who is asking

Save & exit

Step 1 of 6 · Who is asking

1 Who is asking | 2 Address & property | 3 Connection | 4 Documents | 5 Fees | 6 Check & submit

Who is asking

Applying as: A person

Full name *: Okonkwo, Adaeze

Email: a.okonkwo@example.com

Phone: (512) 555-0164

How they came to us: At the counter

This looks like somebody you already have

	CUSTOMER	NUMBER	ACCOUNTS	MATCH
○	Okonkwo, Adaeze	C-00412	2 · 1 open	Not judged

Name	Agrees
Email	Agrees
Date of birth	— this form does not ask
Government identifier	— this form does not ask

The same panel, and the verdict column is the one thing it cannot fill. A request form asks for neither a date of birth nor a government identifier, so the criteria that decide a match cannot be assessed here at all.

Open C-00412 and see what they hold →

And nothing is created either way

WHAT THIS DOOR WRITES	
One numbered request	Yes
A customer	No
An account	No
A link between them	No

That is deliberate and it was confirmed rather than assumed. A service request is an ASK, not a party and not an account.

So the linking happens later

WHEN	WHERE	WHO
The request is reviewed	The request record	A clerk
It is approved and fulfilled	Whichever door it becomes	That door resolves the customer properly

A request can be pointed at a customer on its own record, as the clerk's act, with the tier they judged. What it may not do is mint one at the moment somebody fills in a form at the counter.

The flag still earns its place here. Knowing that an applicant already has two accounts changes how the request is handled — whether a deposit is needed at all, whether there is a debt on another address, whether this is the third property of a landlord who should be on a master account.

WHAT IT MUST NEVER BECOME

A convenience that quietly creates the customer once somebody clicks the row. The rule that this door writes one request and nothing else was pinned precisely so a later change could not widen it by accident, and a screen is the easiest place for that to happen.

← Back Continue →

v2.234.15

SO Sam Ortiz
Billing Clerk

ACC-S19

REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY: `resolve_customer_for_account` already computes whether a customer was reused and drops that answer before any screen sees it.

R9 · the request capture, advisory only · `/brazosbend/requests/new?step=1` · A door that creates nothing can only ever hint

/brazosbend/requests/new?step=1&match=c-00412

SMARTBillHub Requests / New request ⚲ Search accounts, premises, meters... ⚑ ?

BB Brazos Bend Utilities

Dashboard
Plans & Rates
Premises
Assets

← Requests

SERVICE REQUEST

Who is asking

Save & exit

Step 1 of 6 · Who is asking

1 Who is asking | 2 Address & property | 3 Connection | 4 Documents | 5 Fees | 6 Check & submit

Okonkwo, Adaeze · C-00412

What this customer already holds

THE CUSTOMER ON FILE

Customer number	C-00412
Name	Okonkwo, Adaeze
Kind	Person
Date of birth	03/14/1991
Social Security number	•••-••-2208
Driving licence	— not held
Phone	(512) 555-0910
Email	adaeze.o@example.com
First seen	04/02/2021

Only the last four digits are ever shown, on every screen in the product. The number itself is encrypted and the thing that matched it is a one-way token beside it — so the match was computed without anybody, including this dialog, reading the identifier.

WHAT MATCHED, AND WHAT DID NOT

EVIDENCE	YOU TYPED	ON FILE	AGREES?
Name	Okonkwo, Adaeze	Okonkwo, Adaeze	Yes
Date of birth	03/14/1991	03/14/1991	Yes
Social Security number	•••-••-2208	•••-••-2208	Yes
Driving licence	—	—	Neither held
Phone	(512) 555-0164	(512) 555-0910	No
Email	a.okonkwo@example.com	adaeze.o@example.com	No


A phone will never make this a strong match, and it can open an account on its own. A person is identified for CREATION by a Social Security number, a driving licence *or* a phone — and is RECOGNISED only by the first two.

THE ACCOUNTS THEY HOLD

ACCOUNT	ADDRESS	OPENED	CLOSED	STATE	BALANCE
A-10744	219 Poplar Ave	04/02/2021	11/30/2025	Closed	$0.00
A-11907	44 Willow Bend · Unit 3	12/04/2025	—	Active	$38.10

Deposit held	$150.00 · on the closed account
Deposit interest	— not recorded
Payments in four years	48 · none late
Ever disconnected	No
Open complaints	None
Deposit band this earns	Waived — on this history

And the figure shown is not the figure agreed. The signed arithmetic for a deposit held this long is $153.50 — $150.00 with $3.50 of interest.

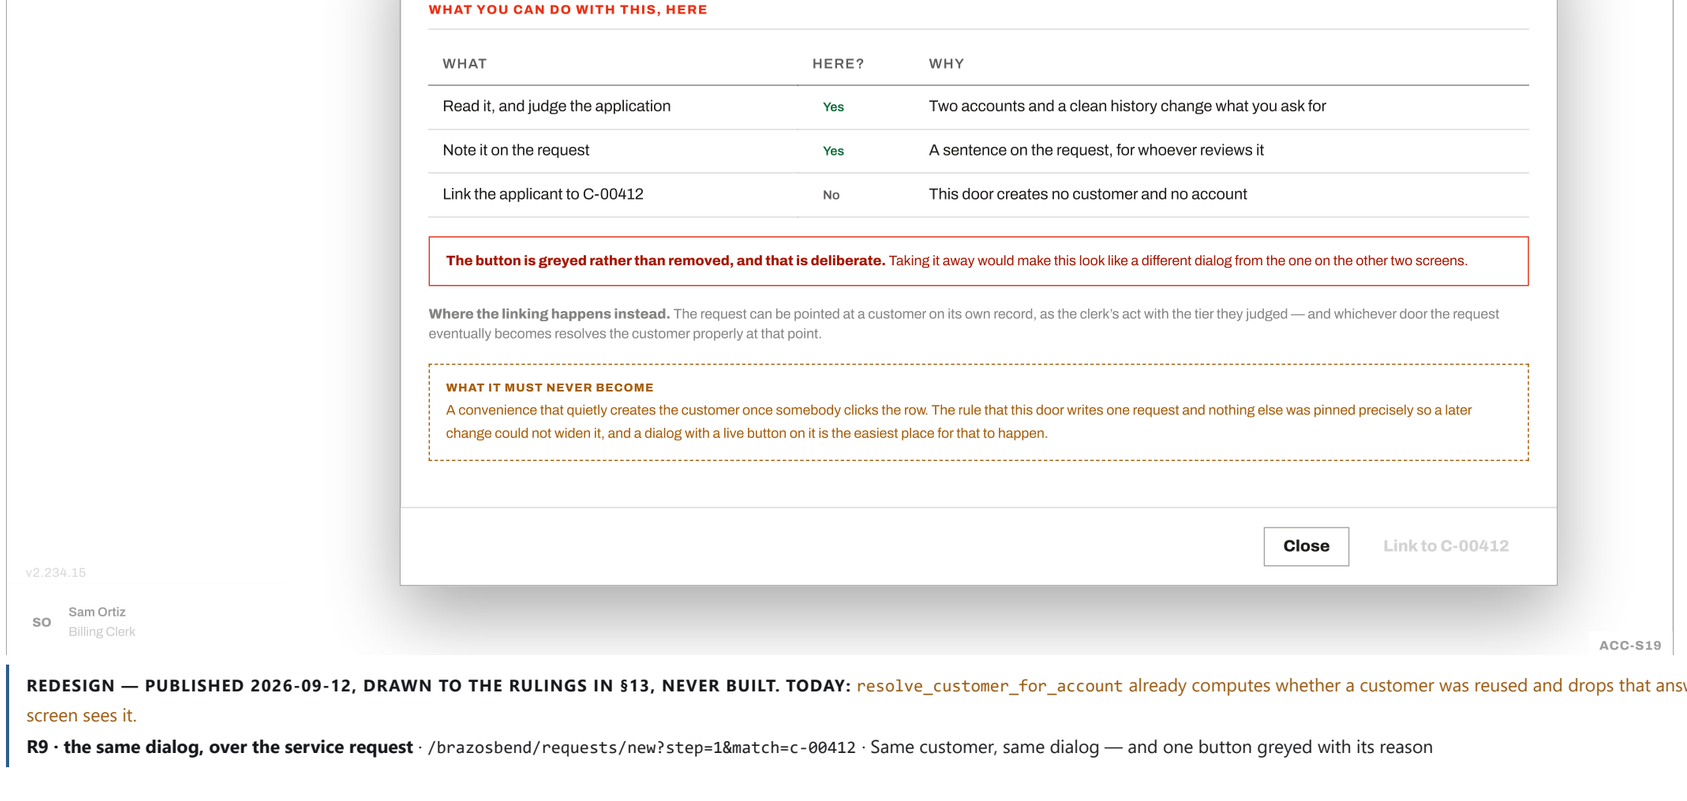

> **REDESIGN — PUBLISHED 2026-09-12, DRAWN TO THE RULINGS IN §13, NEVER BUILT. TODAY:** `resolve_customer_for_account` already computes whether a customer was reused and drops that answer before any screen sees it.
>
> **R9 · the same dialog, over the service request** · `/brazosbend/requests/new?step=1&match=c-00412` · Same customer, same dialog — and one button greyed with its reason

The piece	Where it stands today	What it costs
Judging a match	Built. The ruled criteria, computed against encrypted identifiers through a one-way token.	Nothing.
Resolving the party at four doors	Built, and it already names the outcome *linked* / *created* / *none*.	Nothing.
Showing the clerk any of it	`Not built.` `The outcome is dropped from the response before a screen sees it.`	The panel drawn above, and the key it reads already exists.
Offering candidates BEFORE the commit	`Not built.` `Today the resolution happens at save; these drawings show it while the clerk is still typing.`	A read endpoint that judges a block without writing anything — the same criteria, no side effects.
The deposit that follows a strong match	Built, and gated on *strong* alone.	Nothing — it needs the clerk to have linked them, which needs the panel.
⚠ A phone opens an account and recognises nobody	Both halves are rules and both are correct. A person is created on a Social Security number, a licence *or* a phone, and recognised only by the first two.	A decision, not code: whether a customer holding only a phone should be prompted for more at the next contact.
⚠ *Probable* is never emitted	The vocabulary has three tiers and the matcher produces two, which its own note states.	Nothing, as long as no screen draws a band nothing can fill.
Unlinking a mistake	`Not built.` `An account can be pointed at a different customer; nothing removes a link and leaves the account with nobody.`	A decision about whether that state should exist at all.

Where the modules meet

Built from the ⇄ rows of the field tables above — the real cross-module surface of this flow, from what the screens actually read rather than from what the module map says they should. **13 cross-module facts** reach these screens across **6** boundary crossings.

The four questions, and which of them found nothing

Question	Finding
1 · Does the handoff land?	**One gap, and it is stated rather than silent.** The move-out assembles a final-bill handoff for a bill run to read, and `MoveOutWizard.tsx:1384` says where it goes: "*it is assembled and returned, and it is stored nowhere: no table, queue or outbox exists for it, so it lives in this answer and in the audit row.*" Billing is the intended reader and cannot read it. Closed by ACC-S29
2 · Does any module write another's tables?	**Yes, once, mediated.** See the seam table below.
3 · Does one fact have two homes?	**Yes, once — the ageing vocabulary.** Every account row carries `ageing_segment` (customers' four bands, derived from opening buckets, served) beside `aging` (billing's three-state display vocabulary, still null). Two names for one question about a customer's money. The backend lane reported it on 2026-08-24: when billing publishes its version, one vocabulary has to win, and that is a ruling rather than a merge. Closed by ACC-S30
4 · Does the same thing have two names?	**Nothing found in this flow.** B14 rule 34 settles the one pair that used to drift — **Recorded** and **In the books** — and both appear consistently. Said explicitly rather than left to be inferred from an absent heading.

Every crossing, graded on what the seam hands back

From	To	The shared fact	What it returns	Grade
customers	portal	Portal sign-in count, lockouts, last sign-in — the S21 Portal panel	A plain dict of derived scalars: `{logins, locked, last_sign_in, unreadable}`. Reads only. `portal_seam.py:85`	HEALTHY
customers	ledger	Opening balances and deposits at cutover	Frozen `@dataclass` DTOs handed to ledger's own posting path. **Clean boundary, but no seam file** — a direct `from apps.ledger import`, unlike `apps/work/seams/`. `import_writer.py`	HEALTHY, NO SEAM FILE Closed by ACC-S31
customers	**metering**	An interruption raised from a service request	**It writes.** `service_request_api.py:907` calls `interruption_service.create_interruption(...)`, and `metering/interruption_service.py:165` does `Interruption.objects.create(...)`. Customers does *not* call the manager — it calls metering's own service, so metering's rules run — but the boundary is crossed by a direct import with no declared seam, and a customers request handler is what causes a metering row to exist.	LEAKY · writes by effect Closed by ACC-S31
customers	metering	`STORABLE_KINDS`, the tenancy service catalogue	Imports metering's models module directly rather than through a seam. Reads only. `service_request_service.py`	LEAKY Closed by ACC-S31

		catalogue		
customers	tenancy	Lookup handler registration	`register_lookup_handler(...)` — registration into tenancy's own extension point, which is what it is for. `lookups.py`	HEALTHY
customers	metering + tenancy	Demo fixture seeding	Not a product path. Listed so the count of six is honest rather than quietly six-minus-one.	NOT GRADED

Both modules are named in every row on purpose — a finding filed against one module is a finding the other module's owner never reads. The interruption row belongs to the customers owner *and* to the metering owner, and neither would find it in their own module's audit.

Commitments in this section

Seven commitments — the four remedies drawn above, and the three seam findings. **ACC-S14 to ACC-S17 were withdrawn on the last pass and are reinstated here**, because their register rows never went with them.

ACC-S14 NEW BUILD

Every quick action on an account opens as a form over the account, with all of its fields and a recap before it commits

STATUS Unverified

WAITS ON Waits on nothing server-side for nine of the thirteen. Adjust waits on a billing endpoint to post to; Send statement waits on statements; the Record payment additions wait on an open-bills call that already exists and on a late-fee figure that does not. R4 in §10 draws all thirteen.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN A clerk on the phone presses any of the thirteen, fills the form without losing sight of the balance behind it, reads back a recap, and commits — or reads why it cannot be committed, on the button itself.

CLOSES §02 · thirteen quick actions with no form behind them

BLAST RADIUS BLAST RADIUS: 13 actions, of which **6 ARE MULTI-STEP WIZARDS TODAY** — so six of the thirteen are a flow change, not a dialog.

ACC-S15 NEW BUILD

Every group on the Overview tab carries an edit control, disabled with its reason where the group cannot be changed

STATUS Unverified

WAITS ON Account waits on nothing — `PATCH /accounts/{id}` is served and unwrapped. Plan waits on nothing — it opens the Change plan wizard. Customer, mailing address and service agreements each wait on one endpoint that does not exist. R5 in §10 draws all six surfaces.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN A clerk correcting a tax certificate, a phone number or a billing address does it from the panel showing it, and every group that cannot be corrected says why on the control itself.

CLOSES §02 · no group on the Overview tab can be corrected

ACC-S16 NEW BUILD

A clerk can write to the customer from the account, and see what has already been sent

STATUS Unverified

WAITS ON Waits on one endpoint: composing a message from an account. Everything else is served — the outbound queue, its filters, its failed-first sort, Resend and Requeue. The composer must queue rather than send, refuse free text on a regulated step, and force the postal channel on a notice. R6 in §10 draws both views.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN A clerk on a collections call answers “what have you sent me” from the account in one click, sees that the text message failed and the email did not, and queues a reply without leaving the screen.

CLOSES §02 · there is no way to write to the customer from here

ACC-S17 EXISTS BEHIND

A master account lists every account at its address, with each one’s status

STATUS Unverified

WAITS ON Waits on no new table and, for the most part, no new endpoint: the covered units are already computed for billing, the accounts at a premises are a filtered account list, and the vacant-standby flag is already on the unit. The tab is the work. R7 in §10 draws it.

SCREENS 02

WHAT DONE LOOKS LIKE ON SCREEN A clerk on a call about a building sees what the owner bill prices, who the tenants are, and that a three-month vacancy is costing the owner nothing — without the screen implying the owner answers for a tenant’s arrears.

CLOSES §11 · a master account lists nothing at its address

ACC-S30 BLOCKED

Ageing has one vocabulary, and one of the two names wins

STATUS Unverified

WAITS ON A decision nobody has made. Every account row carries customers’ `ageing_segment` beside billing’s `aging`, which is still null — two names for one question, on the same row.

SCREENS 01 · 02

WHAT DONE LOOKS LIKE ON SCREEN The list and the Account panel read the same word for the same account, the other column is gone, and the decision log says which module owns the vocabulary.

CLOSES §11 · question 3, the ageing vocabulary has two homes

ACC-S29 NEW BUILD

The move-out’s final-bill handoff lands somewhere a bill run can read it

STATUS Unverified

WAITS ON A table or a queue. The wizard assembles the handoff and returns it, and its own code says it goes nowhere — so the last act of a move-out is a value that exists for the length of one response.

SCREENS 08

WHAT DONE LOOKS LIKE ON SCREEN Committing a move-out leaves a row a bill run picks up, and the move-out’s own record shows *Final bill · queued* rather than the wizard being the only place that figure ever existed.

CLOSES §11 · question 1, the final-bill handoff is stored nowhere

ACC-S31 NEW BUILD

Every crossing out of customers goes through a seam file

STATUS Unverified

WAITS ON Nothing ruled — `apps/work/seams/` is the shape and G78 is the gate that already enforces it for one module. Four crossings do not follow it: two import another module's models directly, two have no seam file at all.

SCREENS None — this one changes no screen, and says so.

WHAT DONE LOOKS LIKE ON SCREEN No screen changes, and that is the point — this one is structural. A gate fails a direct cross-module import from `apps/customers/`, and each of the four crossings reads through a named file.

CLOSES §11 · two leaky crossings and two with no seam file

12

The specification register

One row per commitment, no exceptions. Every commitment appears both here and as a card in the section that owns it. **Status starts at Unverified for every row and that is not a hedge** — engineering fills the column in from the code, one row at a time, and several routinely come back already done. Saying so is what makes the column honest rather than decorative.

Why these IDs are new, and what the live series are

`ACC-S1`…`ACC-S44` is a series minted for this document, and every number in it is issued. It is deliberately *not* allocated into the repository's live series — `OQ-`, `DEF-`, `CR-`, `US-`, `BR-` — because an analysis may propose and never allocate, and borrowing a live ID makes work look scheduled when it is not. Allocation in this repo goes through `10-scripts/allocate.py` against the remote, and this document did not run it.

Rank, ID and state	Title, what it waits on, and what it closes	Screens	What done looks like on screen	Status
1 ACC-S41 NEW BUILD	**Every ruling this document quotes also exists in the repository.** Nothing but the writing. Forty-one rulings — every one of the screen-shaping decisions taken between 2026-09-10 and 2026-09-12 — are quoted here and in no decision log, business-rules file or change request. They cannot be grepped, nothing counts what depends on them, and if this document is lost they are lost. Closes §14K · 41 of the 52 rulings this document quotes exist nowhere else **Without it today: Nobody but this document knows what was decided.** Hard-won law 9 says a ruling goes in the repository the turn it is made; law 13 says the cost of not doing it is that the Product Owner is asked again and answers differently. **Blast radius:** 41 rulings, 4 repository files (`02-decision-log.md`, the customers module's `02-business-rules.md`, `11-change-requests.md` and `14-id-reservations.md` for the ids). No code changes.	– none	Every row in §14K reads a repository path instead of *nowhere*, and a lane that never opens this document builds the same screens from `02-decision-log.md` and the customers module's `02-business-rules.md`.	Unverified

2 ACC-S13 NEW BUILD	**Money on the screen that takes money displays two decimals.** Nothing ruled — hard rule 2 already says money stores 4 and displays 2. The modal renders the raw string and seeds its own input from it, so both the balance line and the prefilled amount are wrong from one source. Closes §07 · six decimals of money on the Record payment modal **Without it today:** A clerk taking a payment reads **158.100000 USD** where the balance is **$158.10**, and the amount box is pre-filled with the same six decimals.	02	The Record payment modal on a $158.10 account reads **$158.10** and prefills **158.10**, and a golden test fails if either grows a decimal.	Unverified
3 ACC-S12 NEW BUILD	**The close-out and the move-out stop asking for a path that 404s.** Nothing. One character in each of two files, and the test that proves it — an assertion on the built URL, not on the call, because the call is what looked right all along. Closes §07 · two 404s from one missing slash **Without it today:** A clerk cannot open the close-out at all, and cannot see what a leaver owes: both screens request a path that 404s and show their could-not-load state.	08 · 10	Opening the close-out on an active account shows the eligibility preview and its blocker instead of Django's Page not found, and move-out step 3 shows the settlement figure instead of an empty panel.	Unverified
4 ACC-S39 NEW BUILD	**A transfer reassigns the account instead of creating a second one.** Nothing ruled — **BR-CUS-1030 is one of the eleven rulings this document quotes that IS in the repository**. The product still runs the superseded flow: a new account, a final read and two dates. Closes §04 · seven REDESIGN figures nobody had undertaken **Without it today:** Every property sale makes a second account, so one property accumulates a new account per owner and the ledger splits with it. **This is the only orphan here whose ruling is signed and whose product contradicts it.**	11	`/transfers/new` asks for the account and who is selling, who is buying, the date of sale and what the buyer takes on — and commits one reassignment. The account number, the unit, the meters, the plan and the ledger do not move.	Unverified
5 ACC-S42 NEW BUILD	**The icon rail stops refusing things the product can do.** Nothing. Two of the refusals name questions the Product Owner closed on 2026-08-12 and both structural blockers behind the disconnect notice were built afterwards. Three test cases pin the false sentences word for word, so the suite defends them. Closes §08 · DEF-CUS-4631, open — three of the rail's four refusals are false **Without it today:** A clerk is told on the screen that they cannot start a disconnect notice, and they can.	02	The rail offers what the product can do; the tests assert the CAPABILITY rather than the sentence, so the day a blocker lands the suite fails and names it.	Unverified
6 ACC-S10 NEW BUILD	**A cut cannot be scheduled before it is lawful.** Waits on the notice-date-plus-statutory-period calculation, rolled past weekends and holidays. Nothing performs that roll today. Closes §08 · the earliest lawful cut date is computed nowhere **Without it today:** A clerk can schedule a disconnection for a date earlier than the law allows, and nothing on the screen computes or shows the earliest lawful one.	12	Disconnect step 3 shows *Earliest lawful cut date: 05/14/2026*, and the date picker refuses anything before it with the reason visible on the disabled cells.	Unverified
7 ACC-S19 EXISTS BEHIND	**A clerk is told, while they are typing, that this customer is already on file.** Nothing on the server. `resolve_customer_for_account` already serves all four doors and already returns whether it reused a customer — and then drops that answer before any screen sees it. The work is showing what is already computed.	03 · 04 · 06	Typing a name and a date of birth on the new account wizard, the move-in and the request capture raises the same panel on all three, the candidate opens as one dialog, and the request door says plainly that it has nothing to link to.	Unverified

	Closes §11 · R9, a customer already on file is not flagged **Without it today:** A returning customer is asked for a second deposit while the utility is already holding theirs — one landlord in this system holds three customer numbers.			
8 ACC-S3 EXISTS BEHIND	**No screen tells a clerk the customer portal does not exist.** Waits on nothing — the portal shipped. ⚠ **`DEF-CUS-4625` is OPEN, not fixed**; this row said it was fixed and that was wrong. A filed defect undertakes nothing, which is why this commitment exists. Closes §08 · two expired refusals still on the Notes and Audit tabs **Without it today:** A clerk tells a customer there is no portal, on an account that has a login.	02	Neither the Notes tab's *Customer visible* hint nor the Audit tab's portal-actor hover contains the words *"there is no customer portal in this version"*.	Unverified
9 ACC-S38 NEW BUILD	**The close-out says what closing does, and what the account looks like after.** Nothing on the server. `closed_at` takes the CUT date, the six refusals are already written, and the after state is the account read back. Closes §04 · three REDESIGN figures nobody had undertaken **Without it today:** A clerk closes an account without being shown that the debt survives it.	10	Confirming a close-out shows the account, the unit, the 43 days between cut and close and the debt that outlives all three — and the account afterwards reads *Closed*, still owed, with the ladder restarted at tier 1 collections.	Unverified
10 ACC-S11 NEW BUILD	**The list opens on the clerk's own work, not on the alphabet.** Nothing on the server — `?sort=created&dir=desc` is already a parameter the list handler reads. What is missing is the default, and the ruling behind it is quoted in §10 and is in no repository file yet. Closes §07 · the list opens on the alphabet **Without it today:** The account a clerk created five minutes ago is on page 2 of 2, because the list sorts by surname before the clerk touches anything.	01	Opening `/accounts` with nothing chosen puts the account created five minutes ago in row 1, and the header reads *Newest first* rather than sorting silently by surname.	Unverified
11 ACC-S40 NEW BUILD	**The disconnect prices its protections and collects its fees.** The three fee codes. `CC-RECON` is the only one ever read and none is seeded, so every cut refuses today on the charge-code lookup. Closes §04 · five REDESIGN figures nobody had undertaken **Without it today:** A clerk runs the ladder to the cut and the cut refuses on a charge code, with nothing on the screen having said so.	12	Step 2 shows each protection with the decision it forces, step 3 records how the notice was served, and step 4 prices and collects the disconnection fees on the screen that raises them.	Unverified
12 ACC-S37 NEW BUILD	**The move-out's deposit can be acted on, and the shortfall gets its step back.** Four shortfall paths that are already mounted — `POST /accounts/{id}/settle-shortfall` answers — and a deposit panel that currently states a figure and offers nothing. Closes §04 · six REDESIGN figures nobody had undertaken **Without it today:** A clerk closing a tenancy can see $186.40 is owed and cannot do anything about it on the screen that shows it.	08	Move-out step 3 offers refund, hold or transfer on the deposit with the three that cannot be taken disabled and each saying why, and step 4 puts the shortfall back where the money is.	Unverified
13 ACC-S8 NEW BUILD	**An account can hold a document.** Waits on the table BR-CUS-036 names and an upload endpoint. Neither exists; no ruling defers them. Closes §08 · Upload a document, absent and unruled	02	The Documents tab lists *Tenancy agreement · Contract · 12/03/2026 · S. Miller · 214 KB* instead of drawing headings over a stated absence, and **Upload** is not disabled.	Unverified
14 ACC-S34 NEW BUILD	**The new-account wizard loses its plan step.** Nothing on the server — the unit already carries the plan and the wizard already reads the unit. **The ruling that asked for this exists in no repository file**, which is	03	Opening `/accounts/new` draws five steps, not six; step 2 shows the unit's plan as a fact rather than a question, and the review recaps all five.	Unverified

	ACC-S41. Closes §03 · five REDESIGN figures nobody had undertaken **Without it today:** A clerk opening an account picks a plan that the unit then overrides.			
15 ACC-S35 NEW BUILD	**The move-in wizard takes a read, a read date and a deposit.** A deposit step copied from the new-account wizard, and a read date beside the reading. The product's move-in has five steps and takes no deposit. Closes §03 · six REDESIGN figures nobody had undertaken	04	A move-in collects the opening read with its date or an estimate, takes the deposit in the same flow, and the review recaps all six steps.	Unverified
16 ACC-S44 BLOCKED	**A committed build can be corrected, or says which corrections are refused. A ruling, and it is the reason this one is Blocked rather than New build.** There is no update path on a connection anywhere in the product. Two of the missing ones are a decision rather than a build: **the target activation date** and **how the work is done** are real columns that nothing writes after a commit, and **charge lines** can be added and waived in the wizard and not afterwards. Whether a committed quote is fixed, and whether a slipped inspection may move the target date, are the Product Owner's to answer. Closes §03 · four fields on the Edit dialog with no path behind them **Without it today:** A clerk who mistypes the target activation date cannot correct it. Nothing in the product edits a committed build, so the choice today is to raise a second build or to live with the wrong date on the one that exists.	07	**Edit details** opens over the record and every field on it is either live or disabled with the reason it cannot be honoured — none is hidden. A clerk whose inspection slips a fortnight either moves the date or reads, on the control itself, why they cannot.	Unverified
17 ACC-S14 NEW BUILD	**Every quick action on an account opens as a form over the account, with all of its fields and a recap before it commits.** Waits on nothing server-side for nine of the thirteen. Adjust waits on a billing endpoint to post to; Send statement waits on statements; the Record payment additions wait on an open-bills call that already exists and on a late-fee figure that does not. R4 in §10 draws all thirteen. Closes §02 · thirteen quick actions with no form behind them **Blast radius:** 13 actions, of which **6 are multi-step wizards today** — so six of the thirteen are a flow change, not a dialog.	02	A clerk on the phone presses any of the thirteen, fills the form without losing sight of the balance behind it, reads back a recap, and commits — or reads why it cannot be committed, on the button itself.	Unverified
18 ACC-S36 NEW BUILD	**The new-connect wizard is eight steps, and the premise step makes the address.** Nothing ruled beyond the merge itself. This is the largest orphan this audit found — eighteen figures: a whole wizard redesign, the build record on six tabs and its three actions, on the one screen that carried *No commitment*. Closes §03 · EIGHTEEN REDESIGN figures on a screen carrying No commitment **Without it today:** A developer's six-flat building is connected through nine steps that ask for the address twice, and afterwards there is no one page that says what was built.	07	`/connections/new` draws eight steps; the service address is created on the premise step in the same five boxes the request wizard uses; and an approved build opens onto a record laid out like every other detail view — a header with its actions top right, then Overview, Units and services, Plan and charges, Work orders, Communication and Audit.	Unverified
19 ACC-S15 NEW BUILD	**Every group on the Overview tab carries an edit control, disabled with its reason where the group cannot be changed.** Account waits on nothing — `PATCH /accounts/{id}` is served and unwrapped. Plan waits on nothing — it opens the Change plan wizard. Customer, mailing address and service agreements each wait on one endpoint	02	A clerk correcting a tax certificate, a phone number or a billing address does it from the panel showing it, and every group that cannot be corrected says why on the control itself.	Unverified

	that does not exist. R5 in §10 draws all six surfaces. Closes §02 · no group on the Overview tab can be corrected			
20 ACC-S43 NEW READ	**Two fields the account read serves reach a screen, or leave the payload.** A decision on `template_override_id` only. `sub_accounts` is what ACC-S17's tab renders, so that one is already undertaken; this commitment is the other half and the rule that keeps the payload honest. Closes §14L · two served fields that reach no screen	02	Every key `account_detail_dict` serves is either on a screen or removed from the response, and a test fails on a key that is served and shown nowhere.	Unverified
21 ACC-S16 NEW BUILD	**A clerk can write to the customer from the account, and see what has already been sent.** Waits on one endpoint: composing a message from an account. Everything else is served — the outbound queue, its filters, its failed-first sort, Resend and Requeue. The composer must queue rather than send, refuse free text on a regulated step, and force the postal channel on a notice. R6 in §10 draws both views. Closes §02 · there is no way to write to the customer from here	02	A clerk on a collections call answers "what have you sent me" from the account in one click, sees that the text message failed and the email did not, and queues a reply without leaving the screen.	Unverified
22 ACC-S21 NEW BUILD	**Each queued record opens onto its own page, and the request's five outcomes are the link between them.** The service request detail exists today; the build, the two moves, the transfer and the disconnect case are proposed and drawn from their own tables. Approving a request raises the job and the job names the request it came from, with anything still owed on it travelling along. Closes §02 · a queued record has no page of its own	01 · 02	A clerk can answer *what happened, what is it waiting on, and what has still not been done* from the record itself — including the cases where *completed* does not mean finished.	Unverified
23 ACC-S20 EXISTS BEHIND	**Every wizard's work has a queue, and the register's ten tabs are where they land.** Seven worklists — requests, new connects, move-ins, move-outs, transfers, disconnects, imports — each over a table that already exists, with the columns those screens already declare. What is missing is not data: it is that this document never drew where a clerk goes after pressing Submit. Closes §02 · no screen shows where a committed wizard's work lands	01	A clerk who has just committed a wizard can find the thing they made, and can see at a glance which rows they can actually move — because *waiting on* is a column beside the state and not folded into it.	Unverified
24 ACC-S17 EXISTS BEHIND	**A master account lists every account at its address, with each one's status.** Waits on no new table and, for the most part, no new endpoint: the covered units are already computed for billing, the accounts at a premises are a filtered account list, and the vacant-standby flag is already on the unit. The tab is the work. R7 in §10 draws it. Closes §11 · a master account lists nothing at its address	02	A clerk on a call about a building sees what the owner bill prices, who the tenants are, and that a three-month vacancy is costing the owner nothing — without the screen implying the owner answers for a tenant's arrears.	Unverified
25 ACC-S9 NEW BUILD	**A finished import run can be reopened to fix its rejected rows.** Waits on nothing ruled — the copy says only *"not switched on yet"*. Closes §08 · Reopen a finished import run, absent and unruled	15	On a run reading *1,966 loaded · 34 rejected*, a **Fix rows** action opens the 34 with their reasons, and correcting and re-committing them moves the run to *2,000 loaded · 0 rejected*.	Unverified
26 ACC-S25 BLOCKED	**A restricted service is a third state, and its price is the blocker.** A PO ruling on what a restricted service is charged. That is an open question, not a recorded deferral, so this is a specification and the screen may not call it out of scope. Closes §08 · a restrictor is neither cut nor not-cut	12	Disconnect step 4 offers *Restrict* beside *Cut*, the consequence panel prices it, and the account's status reads *Restricted* rather than borrowing the word for cut.	Unverified

27 ACC-S1 EXISTS BEHIND	**A clerk can correct an account's details without a wizard.** Waits on nothing server-side — `PATCH /accounts/{id}` is mounted, audited and tested. A client wrapper and a form are missing. Closes §02 · the Account panel has no edit control	02	An **Edit** control on the Account panel opens a form; changing Preferred language to *Spanish* and saving shows *Spanish* on the panel and adds one `account.updated` row to the Audit tab naming the field, the old value and the new.	Unverified
28 ACC-S2 BLOCKED	**The accounts list stays fast at forty thousand accounts.** Waits on a decision: materialise the derived positions somewhere sortable, or sort in SQL on the four stored columns and say so. Closes §02 · NFR-3, the list sorts derived positions in Python	01	On a 40,000-account tenant, sorting by Balance descending returns the first fifty rows in under a second and the footer reads *Showing 1–50 of 40,000*.	Unverified
29 ACC-S22 BLOCKED	**The two uncounted tiles get a number or stop being tiles.** A decision nobody has made: PAST-DUE 60+ and CLOSED THIS YEAR both need an ageing position per account that no module publishes, and the same read is what **ACC-S2** waits on. Either one query serves both, or these two tiles come off. Closes §07 · two KPI tiles that read "Not counted yet"	01	The band reads **PAST-DUE 60+ · 2** against a tenant whose table shows two such accounts — or the band shows six tiles and the document says which two were withdrawn and why.	Unverified
30 ACC-S30 BLOCKED	**Ageing has one vocabulary, and one of the two names wins.** A decision nobody has made. Every account row carries customers' `ageing_segment` beside billing's `aging`, which is still null — two names for one question, on the same row. Closes §11 · question 3, the ageing vocabulary has two homes	01 · 02	The list and the Account panel read the same word for the same account, the other column is gone, and the decision log says which module owns the vocabulary.	Unverified
31 ACC-S29 NEW BUILD	**The move-out's final-bill handoff lands somewhere a bill run can read it.** A table or a queue. The wizard assembles the handoff and returns it, and its own code says it goes nowhere — so the last act of a move-out is a value that exists for the length of one response. Closes §11 · question 1, the final-bill handoff is stored nowhere	08	Committing a move-out leaves a row a bill run picks up, and the move-out's own record shows *Final bill · queued* rather than the wizard being the only place that figure ever existed.	Unverified
32 ACC-S27 BLOCKED	**Four screens stop refusing to send, or say what they are waiting for.** An unanswered question: notifications has no tables, and no ruling in this repository says whether they land in this release. Four refusals rest on that silence — the move-in's send, the payment plan's queue-only note and both of the disconnect's. Closes §08 · four "in this release" refusals about sending	04 · 12 · 14	Each of the four names the wave it waits on instead of the release, and a clerk queuing a notice on the disconnect sees the queue row it made rather than a sentence about what this version cannot do.	Unverified
33 ACC-S24 BLOCKED	**The rail's billing actions say which module they wait for, and when.** An unanswered question rather than a build: nothing in this repository dates the billing module or statements, so *out of scope* here rests on a reading of the build order and not on a ruling anybody made. Closes §08 · Adjust and Send statement, deferred with no ruling	02	Adjust and Send statement stay disabled and each names the wave it arrives with, so a clerk reading the rail learns a date rather than a dead end — and the day that wave lands, a test fails naming both.	Unverified
34 ACC-S28 BLOCKED	**The deposit fields arrive, or the step stops promising them.** An unanswered question. *"arrive with the deposit work"* names a wave, not a date, and nothing re-reads it — which is **ACC-S6**'s failure with no clock in it at all, so no test could fire. Closes §08 · the deposit step names a wave with no date	03	New account step 4 either collects a deposit and shows it on the review, or says which release it arrives in — and a test fails on the day that release ships.	Unverified
35 ACC-S18	**A company customer names the master account it belongs under, and the review step refuses a pick that disagrees with the address.**	03	A clerk opening an account for a company picks which of that company's buildings it belongs under, is not blocked when the	Unverified

	BLOCKED Three parts, three sizes. The SEARCH waits on nothing — the account list already filters to master accounts and searches on number, company name and address. The CHECK waits on nothing either: the derived master has been on the account read since 2026-08-27. **STORING a hand-picked master waits on a ruling** — the link is derived and deliberately stored nowhere, so a second answer means deciding which one wins. Closes §11 · R8, a company customer names no master account		company rents and has none, is stopped before recording a master that belongs to a different building, and is told plainly that nothing is rolled up.	
36 ACC-S32 NEW BUILD	**Complaints and Services become tabs on the register.** Screens only. A complaint and a service call are already work orders — *Consumer Complaint* and *Consumer Services* are two of the nine job types, both carry kinds, and a job already stands on an account. What is missing is the list, the form and the record. Closes §02 · neither tab exists, and everything behind both does	18 · 19	A clerk taking a call on Friday opens Complaints, raises one in four steps, sees it in the tab with the date it was promised back, and a second clerk finds it on the account without knowing it is a work order underneath.	Unverified
37 ACC-S33 NEW READ	**The request number is the link, in both copies of the list.** Nothing — the row already links from its eye action, so the address is built and served. The number beside it is plain text, in the standalone list and in the copy the Accounts tab embeds. Closes §06 · the request number is text, so drill-in is the eye icon only	16	Clicking **SR-2026-00418** opens that request from either copy of the list, and the eye icon stops being the only way in.	Unverified
38 ACC-S23 NEW BUILD	**The account sub-type reads as English, not as a database value.** Nothing but a catalogue key per value, in all eleven catalogues. B14 rule 31 is ratified and this is the one place in the flow that breaks it. Closes §09 · B14 rule 31, the account sub-type is a raw enum	02	The Account panel reads *Residential · owner-occupied* where it reads `RES_OWNER_OCC` today, and a test refuses any cell whose text matches an upper-case underscore enum.	Unverified
39 ACC-S26 NEW BUILD	**The move-out stops saying the close-impact read is not built.** Nothing. `GET /accounts/{id}/close-impact` is mounted and answers; the sentence promising it is still rendered on step 3. Removing it is the work, and **ACC-S12** is what makes the panel fill. Closes §08 · the close-impact refusal expired and is still drawn	08	Move-out step 3 shows the settlement figure with no sentence under it about what has not been built, and a grep for `moveOut.impact.notServed` returns nothing outside the git history.	Unverified
40 ACC-S4 NEW BUILD	**Every date field behaves the same way.** Waits on a shared `.date-input` component, which does not exist anywhere in `07-frontend`. Closes §09 · UI-RULES 7, no `.date-input` exists **Blast radius, measured: 35** native `<input type="date">` call sites across **23** files, of which 6 files are in `features/customers`. The eight screens this document draws are a quarter of it. **A repo-wide component swap is a ruling, and this commitment asks for one rather than assuming it.**	03 · 04 · 08 · 10 · 11 · 12 · 13 · 14	Move-out step 2's *Moved out on* shows `08/31/2026` in the tenant's format, accepts `08312026` typed in, and offers **Today** — identically on all eight screens.	Unverified
41 ACC-S6 NEW BUILD	**A hold that has expired goes red instead of going stale.** Waits on a convention: a refusal written with a clock in it gets a test that fails when the clock runs out, in the same commit. Closes §08 · 17 refusals with a clock and nothing reading it **Blast radius, measured: 41** catalogue strings carry a clock, across **10** modules; **15** are `customers.*`. The convention is repo-wide and the decision is not the Accounts lane's to take alone.	01 · 02 · 03 · 04 · 08 · 12 · 14	When the customer portal shipped, the suite went red naming `customers.account.note.customerVisibleInert` — rather than that sentence surviving on the Notes tab for an auditor to find.	Unverified
42 ACC-S31	**Every crossing out of customers goes through a seam file.** Nothing ruled — `apps/work/seams/` is the shape and G78 is the gate that	— none	No screen changes, and that is the point — this one is structural. A gate fails a direct cross-module import from `apps/customers/`, and	Unverified

NEW BUILD	already enforces it for one module. Four crossings do not follow it: two import another module's models directly, two have no seam file at all. Closes §11 · two leaky crossings and two with no seam file		each of the four crossings reads through a named file.	
43 ACC-S5 EXISTS BEHIND	**The catalogue stops carrying sentences no screen shows.** Waits on nothing — every condition described was resolved. Closes §08 · 14 catalogue sentences no screen shows	01 · 02	Nothing changes on screen, which is the point. A grep for `accounts.arrives` returns nothing outside the git history.	Unverified
44 ACC-S7 EXISTS BEHIND	**A close-out has a story that owns it.** Waits on an epic. The act was ruled 2026-08-27, the screen was built the same day, and no epic covers it. Closes §06 · `CloseOutPage.tsx` says no story owns it	10	`CloseOutPage.tsx`'s Story line stops reading *"NO STORY OWNS THIS SCREEN."*	Unverified

This table fills a gap rather than replacing one. This document had no such index before; the repository's own indexes are `12-governance/01-open-questions.md`, `12-governance/10-defect-log.csv` and `12-governance/11-change-requests.md`, and nothing here supersedes them.

13

What this pass changed, line by line

A changelog of the analysis itself, so a reader of an earlier version knows what moved and — more importantly — what deliberately did not.

- **EVERY DRAWING NOW DECLARES ITS OWN STATUS, AND SEVEN WHOLE REDESIGNS TURNED OUT TO BE NOBODY'S.** Ruled: *"Every build component this document asks anyone to build must carry one, and a component with no commitment card means nobody has undertaken to build it."* **158 captions now open with AS-BUILT, AS-BUILT FROM CODE or REDESIGN** — 15, 37 and 106 — each redesign carrying the date it was published and a line saying what the product does instead today. Five drawings had no caption at all and were given one, and the captions had to be matched to their figures **by route rather than by position**, because this document used both conventions: 78 captions sit above their drawing and 75 below. **Ten commitments were minted.** Seven are wizard redesigns — the new account, the move-in, the new connect, the move-out, the close-out, the transfer and the disconnect — **41 figures between them, every one drawn to a ruling and undertaken by nobody.** Six of those seven screens carried a commitment chip the whole time, for something else; screen 07 carried none and twelve figures. ⚠ **AND FORTY-ONE OF THE FIFTY-TWO PRODUCT OWNER RULINGS THIS DOCUMENT QUOTES EXIST IN NO REPOSITORY FILE** — every screen-shaping decision taken between 2026-09-10 and 2026-09-12. ACC-S41 is ranked first in the register because of it. **Four numbers this document repeated were wrong and were measured rather than re-quoted:** the portal is 172 files and not 155; `DEF-CUS-4625` is OPEN and was described as fixed; two catalogue keys named in the rotting-holds table are in no catalogue; and the *17 refusals* heading reproduces from no definition. Appendix D said two rules lived only here; it was wrong by forty-one.
- **EVERY CHIP IS NOW DERIVED FROM THE REGISTER, AND THE REGISTER IS CHECKED IN BOTH DIRECTIONS.** Ruled: *"Five chips exist and no others… The specification register is the single source… no screen carries a commitment its register row doesn't name; no commitment names a screen that doesn't carry it."* **Nine chips outside the five came off:** five severities on the journey table — they describe a finding, so each now reads as a word beside the commitment that closes it — two bare chips carrying A1 screen ids, which are identity rather than state and moved into the routes line, and two the last pass left contradicting themselves. **Twenty-one commitments were minted**, every one for work this document already described and nobody had undertaken: four journey failures, one rule the product itself breaks, five absences whose *out of scope* rested on no ruling, three seam findings, and the tabs, registers and records drawn in §02 and §10. ⚠ **AND ONE RULING OF YOURS IS SUPERSEDED HERE RATHER THAN QUIETLY REVERSED.** Last pass you chose *(b)* for R4–R7 — strip their chips, withdraw `ACC-S14–S17` as never issued. **Their register rows stayed in §12 the whole time**, so the withdrawal was never true and the document contradicted itself in two places at once. Requirement 4 — mint a commitment for every piece of work described and undertaken by nobody — covers those four exactly, so they are reinstated with cards. If you meant them withdrawn

say so and the four register rows go with them; the one thing that cannot stand is a row with no card.

- **THE NEW-ACCOUNT WIZARD'S LANDING GETS A LIST AND A RECORD, AND THE STATE THEY DRAW WAS IN NEITHER.** Ruled: "*in the new account wizard, there should be proper detailed view and list view also.*" This section used to refuse them, and **the refusal was half right**: there is no new-account request object and these two invent no queue — they are the same register tab and the same account page as screens 01 and 02. **What was missing is the STATE.** A new account is created *Pending activation*, and screen 01's table shows three rows of which every one is Active while its own KPI band says *1 pending activation*; screen 02 draws an account active since 2024. So the one state this wizard produces, and the *Awaiting* balance cell that exists for it, were drawn in no table and on no record page in the document. ⚠ **AND CHOOSING WHICH ACCOUNT TO DRAW THEM ON FOUND A DEFECT.** §02's Activate-account figure is drawn on the right account and its header was copied from Bramble Bakery: it read *Active · Billable*, drew Move-out live and **Activate account disabled** — the one control the figure exists to show — over the dialog that activates it. Four of six gates disagreed with the table measured on that same account twelve lines below. **Its band was wrong too**: a *$0.00* balance on an account that cannot be billed — the exact thing BR-CUS-510 exists to forbid — and a *$150.00* deposit tile sitting beside an alert on the same figure saying none was applied. All four are corrected, the figure says so on its own caption, and a check now refuses a currency balance on any account whose header pill reads Pending activation.
- **THE NEW-CONNECT RECORD IS REDRAWN TO THE STANDARD DETAIL LAYOUT, AND IT GAINS A WORK ORDERS TAB AND AN AUDIT TAB.** Ruled: "*Make it according to the standard detail view layout. After the top section, there should be tabs … All the action should be on top right side. Add the audit tab also. There should be a work order tab also where user can see all the created work orders.*" **One drawing becomes six** — Overview, Units and services, Plan and charges, Work orders, Communication and Audit — laid out exactly as screen 02 is: back link, header with every action top right, then tabs. **The KPI band is on Overview and on no other tab** — five figures about the build as a whole, repeated above a unit grid, are furniture a clerk reads past. **No icon rail** either, because the ruling puts every action in one place and a rail would be a second one. Nothing was dropped: all eight wizard steps are still here, under the tab a clerk would look in. The nine work orders are drawn from the job catalogue rather than invented — a survey, seven connections and the routine inspection that is the gate — and the tab carries **+ Add a work order** on the list itself as well as in the header. The two action drawings underneath were redrawn over the same header, tabs and crumb, because a dialog drawn over a screen that no longer looks like that is a picture of two different products. ⚠ **One thing this pass got wrong first and measured second.** The Audit tab was drawn with the raw event names in the clerk-facing column. The account's own Audit tab reads *Payment recorded · $500.00*, and where it has no phrase it degrades to *this event type is not described yet* — which that drawing files as a defect. So the rows are clerk sentences now and the event names moved to the caption. The guard written to catch it **could not fail** on its first version: the pattern required an underscore before the dot, so it could not match the very string that prompted it. It was proved red before being trusted.
- **R5 GAINS THE UNIT, WHICH WAS THE ONE GROUP THE OVERVIEW NEVER SHOWED.** Reported: "*from the edit perspective, I cannot see the unit edit where I want to change unit a to unit b.*" Correct, twice over — the Account group did not carry the unit at all, so there was nothing to hang a control on. It has a row now, and **E07** draws the dialog: search and pick the new unit, then **every aspect of both units side by side** with each changing value marked — number, label, type, floor, area, premises, address, map point, parcel, plan, plan lock, vacant-standby, meters and services. **Two values that do NOT change are worth as much as the ones that do.** The service address is unchanged, because an address belongs to the building and both suites are in it: correcting the unit corrects the meters and the plan, and the envelope looks identical. And the reading history does not follow — two years of reads stay with the old unit's meters, so this account's usage chart starts again, and a clerk asked why should be able to say so. **The commit is drawn disabled, because this collides with a signed rule.** `services.update_account` refuses `unit` by name — *create-only, never patched* — citing `BR-CUS-017`, and that rule is protecting the right thing: a customer who has MOVED must leave by move-out and arrive by move-in, or the bills, meters and reads follow a person instead of staying with the property. But it also blocks a case the product has no path for at all: **a record that named the wrong unit**, where nobody moved and the account has simply been billing against the wrong meters. Today the only way out is to close the account and open another, which loses its history to fix a typo. **The ask to the PO is narrow and is stated on the drawing:** may an account be re-pointed at another unit as a CORRECTION — with a reason, a supervisor, and issued bills left alone? Everything else about BR-CUS-017 stands.
- **THE WORK TAB IS ONE TABLE NOW, AND THE SORT IS THE FINDING.** Ruled: "*show only the work orders table, with all the search and filters.*" The Build table is gone — the jobs that built this service are work orders like any other and were already in the list below it (WO-24-1902 is the meter set); the only thing that was not a work order is the service application, which belongs to the premises rather than the account, and the drawing says so. Drawn against what the dispatch list really does. **Six filters — search, type, status, priority, technician, area — and a seventh comes back as an error rather than being ignored**, which is the opposite of every other list in the product and deliberately so: a dispatcher whose filter was silently dropped is looking at a wider list than they think and ticking rows on it. **The sort is FIXED**: priority rank, then due time, with no column to click — so the list is not in date order and the footer has to say why, and an order with **no priority set sorts LAST**, because a job nobody prioritised is not more urgent than one somebody marked Urgent. There is a **Columns** chooser because dispatchers and clerks want different

halves of the same row.

- **EVERY TAB'S PRIMARY ACTION IS RIGHT-ALIGNED NOW.** Reported against Adjustments, Documents and Notes: "*the action buttons must be on the right align.*" They were not, and not by accident of those three tabs — `.pw-tools` is a plain flex row with no justification, so the toolbar's second argument simply sat after the first. **New adjustment**, **Upload document** and **Add note** were wedged against the filter chips instead of at the end of the row. Fixed once in the shared toolbar rather than three times, so all **seven** right-hand slots in the document moved with them — including *All bills*, the usage window, the meter sort and the work Columns chooser.
- **THE READ LOG THE METERS TAB POINTS AT IS DRAWN.** The row action now has the dialog it opens: one meter's reads over the tab it was opened from, with the meter's own facts at the top, a period and source filter, a search, and the log itself newest first. **It is built from what `GET /assets/{id}/reads` actually serves** — a calendar date (never the raw instant), the channel, the register reading, the consumption with its explicit unit, the export half of a net-metering pair, the source and the status. **That payload carries no reader and no note**, so neither is drawn, and the drawing says so rather than leaving a reader to wonder: an earlier cut of this document had a *Notes* column on its read-log tables that nothing in the product fills. "Side gate locked" belongs to the work order, not to the read. **The register chains.** Each reading less the one before it is the usage printed beside it, and the build refuses if it does not — so this log cannot disagree with the chart on the Usage tab. The estimated read of 05/19/2026 ties to WO-26-3980 on the Work tab, and the note explains why the following month looks ordinary: the next real read absorbs the difference.
- **THE METERS TAB IS ONE TABLE NOW.** Ruled: "*So only one table. That is the meters of this unit. Don't show any other tables. And for the read log, just put an action there to view the read log for the particular meter. Build the search and filters for the meter table.*" It had carried four tables — the account's services, the unit's meters, then a read log per meter, which on a unit with six meters would push the list itself off the screen. Now: **one table**, with a search box, service and status chips, a filter menu and a sort control, and **Read log as a row action** served by `GET /assets/{id}/reads`. The services this account holds are a different fact and already have their own group on Overview. **Two columns that look alike are now both shown**, because the codebase keeps them apart and a clerk needs both: **meter type** is what the meter IS, **read method** is how the reading is COLLECTED. A row makes the point — W-4417 is an AMR meter still being read on foot. The filters are the ones the asset register really filters on (`service`, `status`, `meter_type`, `type`, `test_due`), not invented ones.
- **Every paginated table in the document gained breathing room.** Found while drawing the meters table: `.pw-pg` shares its border and padding with the filter chips, which are inline things carrying no block margin — so on every tab the row count sat flush against whatever note followed it. One rule at the end of the sheet, and all of them are fixed.
- **USAGE: A TABLE ON THE OVERVIEW, A REAL CHART ON THE USAGE TAB.** Two instructions, and they pull in opposite directions on purpose. On the **Overview** the Usage trend group is now a plain month-by-month table — six months, electric and water side by side — because a summary panel a third of a screen wide is a poor place for a graph and a good place for figures a clerk reads out. On the **Usage tab** it is a proper bar chart: twelve months, an axis, a labelled value on every bar and the month beneath it. **The chart computes its own geometry from the data**, so a bar and the number printed on it cannot disagree, and the stats beside it — average 5,140 kWh, highest 6,820 in Dec 25, lowest 3,960 in Feb 26 — are worked out from the same twelve numbers rather than typed in.
- **The chart was built twice, and the first way was wrong twice over.** Worth recording because neither fault announces itself. It was first drawn as inline SVG, with colours in presentation attributes — `fill="var(--p-n600)"`, which is **not valid**: `var()` is a CSS value function and a presentation attribute is not CSS. Every label laid out correctly, reported a sensible `getBBox()`, and painted nothing. Moving colour into `style` fixed the paint and revealed the second fault: **every drawing in this document is transform-scaled to fit the page, and SVG text inside a scaled subtree renders shifted and clipped while the shapes around it stay put** — labels landed beside the wrong bar, cut mid-glyph, while the bars themselves were perfectly placed. It is built from HTML elements now, which scale with the transform like everything else. **A screenshot found both; no check in this document could**, because a label painting nowhere still passes every geometry probe it has.
- **ALL TWELVE TABS ARE NOW DRAWN WITH A FULL ACCOUNT BEHIND THEM.** Reported: "*I can see in the wireframe that there is no data on that screens... So please add the data there. All screens should show data properly. If there is no data available, then add mock data properly according to the fields.*" Fair — A-11812 has almost nothing on it in the seeded database, so eleven of the twelve tabs were an empty state, and an empty state shows a reader nothing about the layout. **The rule they are drawn to is: mock the data, keep the behaviour.** Rows, amounts, dates and references are invented and every drawing carries *sample data* in its corner, so no figure is ever quoted back as a finding. What the product can and cannot work out is NOT invented. The five bills carry real tax arithmetic, the three unpaid ones total exactly the $2,410.00 in the header — and every one still reads **Issued** rather than **Overdue**, because past-due is not computed on this deployment and drawing it would promise a build that cannot be delivered. Every absence no amount of data would fix stays: adjustments have no endpoint, documents have no upload, an audit row has no link back, usage behind a bill is not summed. The rows on those tabs are drawn and labelled **the shape, not the state**.
- **R4 — EVERY QUICK ACTION AS A MODAL FORM, 13 MORE WINDOWS.** Asked for directly: "*build the modal form for the quick actions ... show the full screen, and in the screen show the model form open ... each and every quick action should show in the model form with proper fields and details.*" Each drawing is a whole desktop

window with the account dimmed but readable behind the dialog, and each carries **every** field rather than a first step — six of the thirteen are multi-step today, and the as-built drawings can only show step 1 of each. **Five things are drawn that the product does not do:** a confirmation on Activate account, which commits on the click; a unit search on Move-in, which has no picker at all; the late fee, the available credits, the bill-by-bill allocation and the outstanding remainder on Record payment; the bill carried across into Issue credit; and a recap as the last step of all thirteen. Registered as `ACC-S14`.

- **A rail that was drawing nothing.** The step rails added with the action drawings used `<span class="st"><i>1</i>…` where this document's stylesheet declares `.bdg` and `.lb` — so the numbered badges rendered as bare digits and the labels did not wrap. It is the same shape as the product bug this document files against B14 rule 21: a class no sheet declares is not an error anywhere, it is simply nothing on the screen.
- **THE EDIT CONTROLS WERE BUILT AND COULD NOT BE FOUND, AND THAT IS TWO FAULTS.** Reported: "*The edit icon is not visible in the account details overview tab.*" Both were mine. **Placement:** the drawing existed, in R5, one section away — and the signpost pointing at it had been dropped in after the **Audit** tab, eleven drawings past the Overview it describes, which is no signpost at all. The Overview tab with its edit controls is now the drawing immediately after the as-built Overview, where a reader meets it without being told. It is shown in both places from one source: here where you look, and in R5 where the commitment card owns it. **Visibility:** the control was drawn as a plain accent link. At 12px, in a heading already full of accent-coloured text, a link reads as decoration — and the disabled ones at 45% opacity read as nothing at all. It is a bordered control now, with a hit area: solid edge where it is live, dashed where it is refused, same size and same place either way.
- **R5 — AN EDIT CONTROL ON EVERY GROUP OF THE OVERVIEW TAB, 6 MORE WINDOWS.** Asked for directly: "*in the account details, in the overview tab, give edit icon for the account service, customer plan, mailing address, these all sections and edit option.*" Eleven groups get the control; five are live, Plan opens the Change plan wizard rather than duplicating it, and five are disabled with their reason. **The product already ships this pattern in exactly one place** — the Payment method panel's `→ Update method`, drawn and disabled with its reason — so R5 is that decision made general. **Two of the eleven need no new server work at all:** Account wraps `PATCH /accounts/{id}`, which is served, tested and has no caller, and Plan links to a route that already runs. Registered as `ACC-S15`.
- **THE ACCOUNT HEADER IS NOW DEFINED ONCE AND USED EVERYWHERE.** Reported: "*please ensure on all these tab header is same - the way we have shown on 02*". The tab, action and modal drawings each carried their own shortened copy — two pills instead of five, the address as a bare icon, and no service overflow — so one screen was drawn three ways. All 32 now render the ratified header: kicker, name, the five state pills, one address line carrying the premises glyph, the service chips with `+ 9 more`, then the six actions. It is a single function in the drawing library rather than three copies, because a header copied is a header that will disagree with itself — which is exactly what happened.
- **R6 — A COMMUNICATION ACTION ON THE ACCOUNT, 2 MORE WINDOWS.** Asked for directly: "*add a communication action to the quick action sections. here the user can send quick communication to the customer.*" An eighth rail icon, and the dialog behind it in two views: **write a message**, and **what has already gone out** — the second because the first thing a customer asks on a collections call is what they have already been sent, and on this account that is three notices in one fortnight, one of which failed. **Three product rules shaped the form rather than decorating it.** Nothing is ever sent from a screen — the output of every notice path is queue rows and there is no SMTP, ESP or print-vendor call in the module — so the commit reads **Queue the message**, not Send. Free text does not exist on a regulated step, because the tone IS the tier, so the message box is refused with its reason the moment a reminder or a notice is chosen. And a text message supplements a letter rather than replacing it, so on a regulated kind the postal channel is ticked and cannot be unticked. **What already exists:** the outbound queue, its search and filters, its ratified *failed and bounced first* sort, Resend and Requeue. **What does not:** composing a message from an account — there is no ad-hoc send path anywhere in the module, and that single endpoint is what `ACC-S16` asks for.
- **THE NEW-ACCOUNT WIZARD LOSES ITS PLAN STEP: SIX STEPS BECOME FIVE.** Ruled: "*after selecting a unit on the service address, there should not be any step to select a plan as plan is already attached on the unit itself. So whenever the unit is selected, show all the details.*" **The product already agrees with the premise and draws the wrong conclusion from it.** Its Plan step carries no input at all, displays one derived value, and says so in its own copy — "*the plan is read from the unit and is not stored on the account*", "*shown, not stored*" — then warns "*pick a unit first if this reads empty*". A whole step of six whose content depends entirely on the step before it. It is a panel on the unit step now, and that step carries the unit's **whole record**: number, label, type, floor, area, premises, service address, map point and which of the two points it is showing, parcel, plan with its version and lock, base charge, vacant-standby billing, meters and services. The clerk sees what the account will inherit **before** committing to the unit rather than two clicks later. Rails renumbered, `?step=` addresses shifted, and the section now says on its face that these five drawings are the wizard as it should be rather than as it is. **The same ruling was applied to the two dialogs that still offered the choice** — Move-in's step 4 is *Deposit* now rather than *Plan and deposit*, and Activate account shows the plan and its base charge as facts. In both, the plan is read from the unit and there is nothing to pick.
- **BILLING PREFS BECOMES ACCOUNT PREFERENCES, WITH PAPERLESS ON IT.** Ruled: "*Make it as account preferences in that user can also select paperless billing. that*

should also be available." The columns were already there and already read — `paperless` and `sms_reminders` are on `accounts`, are in the wizard's own create set, and are resolved by `delivery_channel_election_for_account`. What was missing was the control. The step is now grouped under four headings — how the bill is delivered, paying, tax, language — instead of one ungrouped column. **And one fact on it is the reason it needs words rather than a tickbox.** `BR-BIL-036` makes **print the floor**: paperless and text reminders are channels elected ON TOP of the paper, and neither can switch a bill's print row off. A clerk who ticks paperless and tells the customer "no more paper" is wrong, and nothing on the screen would have told them — so the form says it in those words. Both default to off because, in the model's own words, not electing is the safe answer. One thing corrected in passing: the tax-exempt expiry read `31/12/2027` on a screen whose every other date is MM/DD/YYYY in the tenant's own timezone. It reads 12/31/2027 now. A rendering fault found while drawing it and fixed everywhere: a ticked box was being emitted as an empty `.bx.on`, which the sheet paints as a solid block with nothing in it — it reads as a filled square, not a ticked box. The tick is a character the markup has to supply. **Twenty-three checkboxes across the document were drawing wrong;** a screenshot found it and no structural check could, because an empty span is perfectly well-formed.

- **THE DEPOSIT IS TAKEN INSIDE THE NEW-ACCOUNT FLOW NOW.** Ruled: "*if there are deposits, then there should be a proper flow to accept those deposit also … you figure it out where … but it should be in the same flow.*" The deposit step collected **nothing at all** before this — its own caption said so: "*nothing on this step is collected.*" **Where it goes has only one answer.** A payment posts against an account, and the account does not exist until the last step commits it. So the money cannot be TAKEN on step 4 — but it can be CAPTURED there, beside the deposit it pays, and WRITTEN on the commit. Step 4 now asks whether a deposit is due, how much and why, and whether the customer is paying today, with method, reference, posting and clearing dates. Step 5 shows the three writes **in order** — create the account, activate it if chosen, then post the deposit through the same path Record payment uses — and says what to do when the third one fails: the account stands, the deposit is unpaid, and the clerk lands on Record payment with the details already filled in rather than being asked to retype them. **And it carries the trap this document has already caught live.** A deposit reaches the deposit register only when its payment CLEARS. Leave the clearing date blank and the new account reads a deposit of $0.00 while the cash is in the drawer — correct, and it looks wrong. That is the same fault as PY-260911-0076, $500.00, still *Processing* on Bramble Bakery with the balance unmoved. The form says it where the clerk is about to do it.
- **THE REVIEW STEP RECAPS ALL FOUR STEPS, AND THE ACTION MOVED TO THE BOTTOM.** Ruled: "*each and every details properly from each and every step. The deposit details also show properly. The payment of deposits also show properly … and move the save as actions, draft and activate at the bottom.*" It had been recapping eight facts out of roughly forty, with the Save-as chooser sitting at the TOP of the step — the first thing read and the last thing decided. Now: five groups, one per step plus the deposit and its payment split apart, every field carried across, each group linking back to the step that owns it, and a closing summary of what will be on the account the moment it exists. The chooser is at the bottom, as a dropdown per the standing radio-to-dropdown ruling, with the consequence of each option written beside it — draft occupies nothing, activate takes the unit — and the commit button names what it will do. **It also repairs something this pass introduced.** The unit panel added to step 2 described Bramble Bakery's Suite 2 while this wizard's account is Miller, Sarah at 1408 Elm Street · Unit A — a sample lifted from another drawing and never reconciled. It describes the right unit now, and keeps the meters the step already named. Worth recording rather than quietly fixing: nothing in the document would have caught it, because both panels were internally consistent and only disagreed with each other.
- **THE MOVE-IN WIZARD'S FIRST STEP GETS A REAL SEARCH, AND THE UNIT'S WHOLE RECORD.** Ruled: "*there should be a proper search and select field. And after selecting, show the unit details below the field. All the unit details should be visible clearly.*" **Asked for three times**, and until now it had only been built in R4's move-in DIALOG — the wizard itself still opened on five read-only facts with no field to type in at all. Mine to own: the ruling named the wizard and I had fixed the dialog. The step now searches vacant units, lists them with a taken one shown and refused rather than hidden, and opens the chosen one into four groups — the unit, what it is billed on, its services and meters with their last reads, and who was here before. **Two things on that panel earn their place:** the meters' final reads are what become the new occupant's opening reads on step 3, and the vacancy length is called out, because nothing has been read at this address since January and the opening reads are three months old. **Why the product has no picker, so this is not mistaken for a bug fix:** the account-scoped move-in takes the unit from the account in the address bar, and sending a unit with that call would be a second answer to a question that already has one. This step is the OTHER door — a clerk starting from Move-in has no outgoing account to inherit from. Both reach the same wizard, so the step says which one it is on. Dates on the section were also DD/MM on a screen that is MM/DD everywhere else.
- **R7 — A MASTER ACCOUNT SHOWS WHAT IT COVERS.** Ruled: "*if the account is of master account, then after the overview tab, it should show the accounts that are connected to that master account.*" A thirteenth tab, shown only when the kind is master, immediately after Overview. **"Connected" is not what it sounds like, and the obvious drawing would have invented a relationship the product does not have.** A master account is an ordinary account row with one column set; the payer is the premises' owner and it is attached to the common-area units. There is **no parent, no children and no rolled-up balance**. So the tab keeps two things apart rather than drawing a tree: the **units it covers** — a real linkage through its own service agreements, and what one owner bill prices — and the **other accounts at the**

address, related by address only. The tenant on the drawing owes $186.40 and the owner does not, and the screen says so, because a tree would quietly imply otherwise. **The figures are the product's own:** 1408 Elm, $41.20 + $28.40 = $69.60 on one owner bill — and the read behind it exists because billing once priced the anchor unit and nothing else, which is right for an ordinary account and **two-thirds right for a master**. **The third block is the one clerks get wrong:** a vacant unit bills the owner only where that unit's own vacant-standby flag is set. Unit A has been empty ninety-four days and costs this owner nothing. Registered as ACC-S17.

- **R8 — A COMPANY CUSTOMER AND THE MASTER ACCOUNT IT BELONGS UNDER.** Ruled: "*Don't add any account selection there. Just keep the customer kind only. If the user selects company, then ask user to select the associated company master account. where user can search and select it.*" **The account-kind chooser drawn in version 41 is withdrawn** — the three-way selection, the master branch of the wizard and the second-master refusal are all gone. Customer kind is the only branch on the step. ⚠ **AND THE CORRECTION THAT MATTERS MORE THAN THE FIELD: version 41 told the PO there is no such thing as a sub-account. THAT WAS WRONG.** There is a parent-child link between accounts, it is called a sub-account, and the PO ruled it on 2026-08-27 — an occupying account is a child of the premises' owner account. It is live under that name on the account read and on the move-out screen. What is true is narrower and was stated as if it were the whole thing: there is no sub-account KIND and no stored link. **The link is DERIVED and stored nowhere, which is why no column exists — a design, not a gap:** a closed tenant drops out of the list the day they close and a pending one never appears, so nobody has to remember to unlink anything. **That makes the requested picker a collision rather than an addition.** The same day the link was ruled, the way the owner is found was superseded — it used to be inferred from who pays for the hallway, and the PO replaced all of it: the premises names its owner, the owner is the master, nothing is inferred. The old reading was retired rather than kept as a fallback, and the stated reason is the exact hazard a free picker reopens: a fallback that disagrees with the declared owner would silently bill a different party. The move-out screen follows the same rule from the money side — its master arrives resolved from the server and there is no free-text account field, so a forged transfer is unrepresentable rather than merely rejected. **So both are drawn:** the picker exactly as asked, with the three states a clerk meets — a company with several master accounts, which is why it is a search; a company with none, because a company that rents owns no building; and the picker open. Then the review step, where both answers are in hand for the first time: a pick that AGREES with the service address reads as a confirmation, and a pick that DISAGREES is stopped, with the two owners named and three ways out — one of which is not on this screen at all, because a wrong declared owner is fixed on the premises. **The search half needs nothing built** and neither does the check. **Storing a hand-picked master is the part that waits on a ruling**, and the open question is not the column but which of the two answers wins when they differ. Registered as ACC-S18.
- **TWO CORRECTIONS TO R7, BOTH MINE.** The callout said the six balances were "*five separate debts owed by five separate people*". They are not: two rows are $0.00 and one of the six IS the master, so the $810.95 is the owner's own $69.60 plus $741.35 owed by **three** tenants. The corrected wording had been written into the generator and the wrong sentence left standing in the callout, so **the document was carrying both at once** — worse than either. And R7 described a master as anchoring on the first common-area unit; that was superseded on 2026-09-01, when the row began hanging off the ADDRESS with no unit at all and reaching the common areas through service agreements like any other covered unit. **The money is identical either way** — $41.20 + $28.40 = $69.60 — which is exactly why no figure check could have caught it.
- **THE MOVE-IN'S STEP 3 TAKES A READING, A READ DATE, OR AN ESTIMATE — DRAWN IN §04 ITSELF.** Asked: "*On the third step, start and read. The user can add the read and read date. And if not, then he can estimate it.*" Then, on where it goes: "*update those wireframes only. Do not add any r nine.*" So the move-in's own step-3 drawing is updated in place and no section was added — the drawing count is unchanged. **Two of the three are already built.** The READING has been collected since 2026-08-26, one row per readable register, each box pre-filled with that meter's last reading and its age; anything left blank sends no row at all rather than a zero. The ESTIMATE is built too — "*the meter could not be read*" per register, which clears the value and locks the box, because a meter cannot have both a reading and be unreadable. **The READ DATE is the one that is missing, and it is missing entirely** — the draft row is a meter number, a value and the tick, with no date field anywhere, so every reading takes the service start date. **The door has taken a per-row date all along** and falls back to the event date when none is sent, so the column costs no endpoint, no contract and no migration. **The cost is a GUARD, not the column**, and the drawing says so as a stated absence: the locked rules catch a duplicate reading and a negative period, but nothing checks a read date against the previous occupant and no rule refuses one dated after today — while the start date directly above it has both, on the screen and again on the server. **An estimate can also refuse**, in five named ways, and the drawing shows the demand register doing it: a demand peak is never estimated, because the charge it drives would be disputed. ⚠ **AND TWO SENTENCES ON THIS STEP ARE FALSE TODAY** — "*the date is the whole of what this step stores*", rendered directly above the capture table, and "*no reading is taken from them here*", rendered directly below it. A third, shared with move-out, tells a move-in clerk that "*the figure you leave is the one that closes the account*". The step's title was rewritten when the capture landed; the hints under it were not. Three string edits, worth making whether or not the date column is ever built.
- **§04'S MOVE-IN STEPPER: FIVE STEPS BECOME SIX.** Ruled: "*on the plans and deposit step, change the plans and deposit step to account preferences … and add one more step of deposit into the move in stepper and copy the deposit step also. from the new account.*" The rail now reads **Find unit · Customer · Start & read · Account**

preferences · Deposit · Review, and all six drawings carry it. ⚠ **AND IT CLOSES A CONTRADICTION THE DOCUMENT HAD BEEN CARRYING.** Step 1 already said the plan is inherited from the unit and is not a choice on any later step, while step 4 was called *Plan & deposit* in the rail and *Plan & preferences* in its own heading — three names for one step, one of them promising a choice the wizard does not offer. Renaming it settles all three, and the plan now appears on that step only as a stated absence saying where it really lives. **The two copied steps do NOT have the same standing, and the drawings say so.** Every account preference is genuinely writable on a move-in — the move-in payload is the create payload minus the unit, so paperless, text reminders, autopay, tax exemption and language are all the same columns a counter sign-up writes. **The deposit is writable on no path at all:** every deposit field is a refused input naming its own rule, so this step stands exactly where the new-account wizard's does and carries the same absences rather than implying the move-in path is further along. It is not. **One question is a move-in's own**, and it moved here from the old step 4 rather than being invented: a mover may have held an account with this utility before, so their own deposit could follow them — and carry-forward rides the customer linkage, so there is nothing to read a prior position from. The drawing also says plainly that this is the CUSTOMER's prior account and not the one being moved out of, whose deposit settles on its own close-out. **The review recaps what the two new steps collect** — the delivery elections, the language, the deposit and the payment taken — since a wizard that takes $150 and then reviews nothing about it would be the obvious hole.

- **§04'S REVIEW RECAPS EVERY FIELD FROM EVERY STEP.** Ruled: "*update the review step. Each and every details should be visible on the review step. Each field details from each step should be visible.*" The recap now carries the unit and everything it carries, the customer with their identity and mailing address, the start date with all three register rows, the five preference elections, the deposit and the payment taken, and what the commit will and will not write — each block naming the step it came from. ⚠ **AND PUTTING EVERY FIELD ON ONE SCREEN IS WHAT EXPOSED FOUR CONTRADICTIONS BETWEEN THE STEPS — three of them this document's own.** A recap is a consistency check: values that had never met each other now sit four lines apart. **(1) The same date written two ways in one wizard** — step 1's *vacant since 01/29/2026* against step 3's *earliest start 29/01/2026*. The previous pass read this backwards and "converted" a copied deposit date to match the stray; section 04 is month-first like the rest of the document, which its own *vacant for 94 days* confirms, so both the stray and the conversion are corrected. **(2) A third meter that does not exist** — step 1 lists two meters on the unit and step 3 had grown an M-4023 for the demand register. A demand peak is a CHANNEL on the electric meter, so it is M-4021 · demand. **(3) Readings that contradicted the prior reads they continue** — step 1 states the outgoing finals, 41,607 electric and 8,902 water, and says in its own words that they become the opening reads on step 3; step 3 carried 48,209 and 1,204. The first implies 6,602 kWh drawn through an empty flat and the second runs the register BACKWARDS, which is the negative-usage integrity rule this document described one pass earlier. Now 41,680 and 8,902 — ninety-four empty days of standby and not a drop of water. **(4) A note describing a date it no longer named. The lesson is the recap itself:** none of the four was visible while each value sat on its own step, and no structural check can see any of them.
- **§05'S SERVICE-REQUEST CAPTURE: FIVE OF ITS SIX STEPS REBUILT.** Ruled: services on the connection step, a structured service address and a unit count under it, the plot removed from the property step, documents actually attachable, the fee taken on the fees step with its payment summary, and a check step that shows everything. **Most of it is already built, which is the useful half of the answer.** SERVICES are a table per request, each with its own requested start — so the connection step is a MULTISELECT over the eleven this utility runs, with the picked ones listed underneath carrying their own start dates. Each also has an *available* flag whose NULL means NOT YET ASKED, a real third state that is neither yes nor no; nothing on this wizard sets it, so a service picked here is a request and never a promise. DOCUMENTS have a real attach path recording the type, name, size, uploader and time against a closed vocabulary of eight designed types plus *Anything else* — with two deliberate gates: a missing document never blocks CREATION, and attaching a file is not verifying it. FEES AND THEIR PAYMENT are ruled: quoted, settled by an invoice, collected at the counter, and outstanding = quoted − settled − collected, signed and never clamped at zero. Collection takes cash, card or cheque, REFUSES without a receipt number — *cash with no receipt is cash nobody can reconcile* — snapshots the quote so a later line cannot retro-change what a receipt was handed over for, and is idempotent on that receipt. The worked case is the one that raised the defect behind the rule: quoted $130.00, collected $25.00 cash on RCP-26-4471, outstanding $105.00. ⚠ **AND THE FEE STEP TAKES MONEY AND POSTS NOTHING** — no journal line, no invoice, no account, because there is no account yet. The counter accepts it and finance reconciles it, which is the ruling in the PO's own words and the reason this screen can exist before an account does. **Two things are NOT built and the drawings say so instead of implying otherwise.** The service address is ONE verbatim field today, not five, kept exactly as the applicant gave it and never overwritten by whatever the resolver matches — five boxes is five columns. And NOTHING holds a unit count. There is also no file STORE: the attach path records a reference to a file this product does not hold, so the old wireframe's "*no file upload path yet*" was wrong in one direction and right in the other. **The service address and the unit count sit on the ADDRESSES & PROPERTY step**, captured once and nowhere else: what the applicant wants is asked first, where they want it second. The register match is shown beside the address there — evidence, never a decision, and never written over what they said. **And the plot leaves the SCREEN while keeping its COLUMN:** removing a control is not dropping a column, and the drawing says which of the two happened.
- **§06'S NEW-CONNECT WIZARD: NINE STEPS BECOME EIGHT, AND THE PREMISE STEP CREATES THE SERVICE ADDRESS.** Ruled: "*merge the first and second step. On the premise step, there should be the premise step and below the address of that premise will service address. Use the same service address fields only.*" The rail now

On the premise step, there should be the premise step and below the address of that premise will service address. Use the same service address fields only." The rail now reads **Owner & scope · Premise · Units · Map services · Plans & work orders · Charges · Communication · Review & confirm**, and all eight drawings carry it. The merge reads as one question rather than two: the scope decides how many units the later steps ask for, and the owner is who they are created against. Step 1's own alert — "*this build has no home yet, the premise arrives at step 3*" — moved with the renumbering. ⚠ **AND THE PREMISE STEP IS THE ONE SCREEN IN THE PRODUCT WHERE TYPING AN ADDRESS CREATES THE RECORD EVERYTHING ELSE DERIVES FROM.** An address is kept on the premise and nowhere else; every meter, account, route, cycle, bill and work order reaches it by walking back. So these five boxes are the same SHAPE the request wizard asks for, and not the same KIND of fact: a request keeps what the applicant said, verbatim and never overwritten, because it is not a premise yet. This one is. ⚠ **ONE OF THE FIVE CANNOT BE HONOURED HERE AND IS DRAWN DISABLED RATHER THAN DROPPED.** A unit refines its building by LABEL and never by an address of its own — typing a unit onto the building record is exactly the second home for an address the rule exists to prevent — and the units are created on the very next step. A control a screen cannot honour renders disabled with its reason and is never hidden, so the box stays, greyed, saying where units are named. Dropping it would have made the address set silently different from the one it was told to match.

- **§06'S MAP-SERVICES, CHARGES, COMMUNICATION AND REVIEW STEPS, REBUILT.** Ruled: services pickable per unit as well as for all units, the charges payable on their own step with every field, a communication step where the clerk chooses what goes out and searches for the template, and a review showing every field plus what happens next. **Per unit is not an alternative shape — it is THE shape.** One row per unit per service is what the product stores, each with its own state and activation date. *Apply to all units* writes exactly those rows, faster. The grid is drawn with it UNTICKED because that is the case the PO says is missing, and **the common area is why it matters**: it takes electric and water and no sewer, which "all units" cannot express — a build that used it would raise a service point, a meter and a work order for a drain a car park will never need. **The charges step can take money because of a ruling that made one money path.** Charges are tagged to an account number; the step offers three debtors and only the owner's account names a party that exists at confirm. A charge floating on the build would have needed a second, parallel money path — a payable that is not an invoice, settled by a payment referencing no account. ⚠ **AND THE ONE THING BLOCKING IT IS A REASON THAT EXPIRED.** The path that attaches a payer refuses because *an account must name a unit, and the owner's account is for the whole build*. On 2026-09-01 an account stopped having to name a unit: a Master Account hangs off the ADDRESS with no unit at all, which is exactly the owner's account for a whole build. **The blocker is stale, not the requirement** — and it is the only part of this step that is a code change rather than a screen. **Communication is queued and never sent**, which the step says rather than implying otherwise, and a template is chosen along three axes — the class of letter, the customer category and the language — falling back to the default variant on the last two. Draft versions are LISTED and cannot be picked: hiding one sends a clerk looking for something they can see exists; offering it would queue a letter nobody approved. **The review's seven counts are a CONTRACT, not a summary** — the commit must produce exactly them — and the step ends with what happens next, including the three things this build will NOT do: it opens no accounts, sends nothing, and energises nothing. ⚠ **AND IT RECONCILES A CONTRADICTION THE DOCUMENT HAD GROWN.** Section 06 said this build has TWELVE units while the record drawn for it says SIX, and the request that raised it says six too. Six wins — six places against two — and every derived figure is recomputed from it: 20 service points, 20 meters, 7 plan assignments, $3,030.00 quoted.
- **WHERE EVERY FLOW'S WORK LANDS — THIRTEEN DRAWINGS, EACH BESIDE THE WIZARD THAT MAKES IT.** Asked first for the missing list and detail views, then: "*these wireframes should be in their respective process section … So a user who is reading this document will read this with a flow.*" So there is no section of their own. Each pair sits immediately after its wizard, and the document now reads the way the work happens: **the steps a clerk fills in, the queue it joins, the record it became. The gap was structural.** Every wizard here ended at its commit step — twenty-nine wizard screens across six flows, and not one drawing of the queue the work joins, so the document could not answer the first question a clerk asks after pressing Submit. **They all land in ONE screen:** the accounts register has ten tabs and seven of them are these worklists. Every one has a real table behind it and the columns drawn are the ones those screens already declare. ⚠ **AND THE SEVEN ARE NOT SEVEN UNRELATED QUEUES.** A service request carries an outcome, and the five job outcomes are exactly the other five flows. **Requests is the front door; the other five are what a request BECOMES** — approve SR-26-0001 and a build appears on the next tab, naming the request it came from, with the $105.00 still outstanding travelling along. That idea is placed with the Requests pair, where a reader meets it, rather than repeated at all seven. **The new account wizard is the one flow whose landing was already drawn:** what it creates is an ACCOUNT, landing in the register's first tab and opening on screens 01 and 02. There is no separate "new account request" object, and inventing a queue for one would be drawing a table the product does not have. **Only one of the six records exists today** — the service request detail, three tabs, and the drawing follows it. **A move-in's record is deliberately short and says why:** a move-in is the record of an act and the thing it produced is an account, so this page answers the day itself — and that *completed does not mean finished*, since one register opened with no figure at all. **A closed move-out can still be waiting on a decision:** $186.40 owed by somebody who has left, nothing preselected, because a default would be the product deciding whose debt it is. Registered as `ACC-S20` and `ACC-S21`.
- **THE BUILD'S RECORD IN FULL, AND WHAT EVERY RECORD'S ACTIONS DO — EIGHT NEW DRAWINGS.** Ruled: "*Please add everything that is captured in the new*

connect form. Each and everything should be visible ... Also on that actions, what will happen? That wireframes should also be available below that screens only." **The build's record now carries every field the eight steps collected** — owner and scope, the premise with its full address and parcel, the per-unit service grid, plans and work orders, the three charge lines with what was taken and what is outstanding, every queued communication with its template and version, where it came from, and its live state. One page, not tabs, because the point is that it is all visible. **Eight actions are real and TWO RECORDS HAVE NONE — which is itself the answer.** A move-in and a transfer are records of acts that have already happened; there is nothing left to decide, so the only controls are doors to the accounts they produced, and drawing a button would invent a decision the product does not offer. **Every action drawing says what will happen, in a table, before the button.** APPROVE resolves a request to one of five outcomes with *nothing preselected* — the resolver's match is evidence, not the decision — and is held while two required documents are unchecked. REFUSE is terminal and reopenable, and says plainly that it does not undo the $25.00 already taken. ASK FOR MORE keeps the request open and moves *waiting on* to the applicant. ACTIVATE UNITS shows why each unit cannot go live — a gate not passed is a different job from no meter at all — and states two things a clerk needs: that **activation is terminal**, and that **the gate is not the same order for every service — gas gates on the LIGHT-UP, not the meter set**, because gating gas on the meter set energises and bills a customer who has no gas. ADD A WORK ORDER raises an ad-hoc job that gates nothing unless somebody says so. TIE THE SHORTFALL BACK has **no account box at all**: the target is resolved by the server, so a forged transfer is unrepresentable rather than merely refused — and the consequence, that the reminder ladder starts pointing at the landlord, is on the screen before the button rather than in a letter afterwards. MARK AS CUT re-asks the four protections **on the day**, because an answer from when the notice went out is five days old — and says what it is not: the account does not close, the debt does not move, and billing keeps running.

- **INTERNAL REFERENCES OFF THE SCREENS, AND THE PROSE CUT TO A BUDGET.** Ruled: "*look for internal data references, content sizes - it should be reduce and meaningful*", then "*fix all*". **Seventeen internal references were leaking onto eight screens**, almost all of it in the two wizards this pass never rebuilt. Rule ids and question ids printed as **field values**; a module path handed to a clerk as the explanation of a figure; source files with line numbers in a screen's own copy; endpoint paths in a dialog footer. None of it was a database id as a value — that rule has held everywhere — this was the other one, no rule id or internal code in clerk-facing copy. Each is rewritten into the clerk's language and **the citation moves below the drawing**, to the caption, where every other screen already cites. A guard now refuses any of the six patterns inside a drawing. ⚠ **THE CONTENT SIZE WAS THE REAL PROBLEM: 945 prose blocks, 28,694 words, and 633 of the 945 over the one-sentence budget.** 255 ran to three sentences or more. The cause is a habit rather than an accident — nearly every note states a fact, then explains why it matters, then names what would go wrong without it. **Three sentences where a screen needs one**, and the second and third are the DOCUMENT's argument rather than the clerk's instruction. **The budget, and the second line is what keeps it readable.** A note, an alert or a hint keeps ONE sentence — **except where it opens with a bolded claim, which is a headline and not a sentence**. Cutting "*Print is the floor. Paperless and text reminders are channels on top of the paper...*" to one sentence leaves four words that tell a clerk nothing, so those keep the claim and the sentence that carries it. **A stated absence keeps TWO**, ruled: naming the gap AND what it waits on is the whole point of one. ⚠ **WHAT IS NOT CLAIMED.** The removed sentences are not relocated one by one. They were elaboration, and this document already argues at length in its captions, its section intros and this log — which is where a reader looks and a clerk never does. Saying they *moved* would be tidier and would not be true.
- **THE STATE CHIPS BROUGHT BACK TO THEIR OWN VOCABULARY, AND SIX CHIPS THAT CLAIMED A COMMITMENT NOBODY HAD WRITTEN.** Ruled: "*you should doble check whether these tags are corerctly applied on each anvery scren and section*", then "*Im okay with your recommendation - please fix it*". **Three labels were outside the vocabulary. [SUPERSEDED — the vocabulary is five, and derived rather than typed; see the first entry above.]** The rule was four state chips and only four — *Exists behind*, *New read*, *New build*, *Blocked* — plus *No commitment* where no specification covers the screen. In use were also *Second address* twice, *No story owns it* once, and *No screen, real data* twice. **Every one of the three was true and none of them was one of the four**, and a vocabulary with exceptions is one a reader has to learn twice. *Second address* becomes **Exists behind** — what makes it a second address is in its routes line, where it reads as a fact rather than a state. *No story owns it* becomes **No commitment**, which is the word this document already has for that sentence. And *No screen, real data* — mine — becomes **two** chips, *New build* and *No commitment*, because it was one invented label carrying two separate facts: the screen does not exist, AND nobody has undertaken to build it. ⚠ **SIX CHIPS CLAIMED A COMMITMENT THAT WAS NEVER WRITTEN.** Ten cards exist, `ACC-S1` to `ACC-S10`. Nine chips cite an id and **six cite S14, S15, S16, S17, S18 and S19 — none of which had a card**. By this document's own rule, *if a thing is not in a commitment card, nobody has undertaken to build it* — so those six were claiming an undertaking that did not exist. **That is precisely the failure the rule was written to prevent, and the most recent one was mine:** I minted ACC-S19 for R9 and wrote no card for it. **Two cards written, four ids withdrawn.** R8 and R9 were both ruled explicitly, so each now carries a real specification — what it waits on, the screens it changes, and what a person could do and see once it is done. **[SUPERSEDED — their register rows never went with them, so all four are reinstated with cards.] R4 to R7 were not ruled**, so their chips come off and read *No commitment*: they are descriptions, and the document now says so. **[SUPERSEDED — issued,**

with cards.] S14 to S17 are WITHDRAWN rather than reserved — they were never issued, and a gap in a register suggests work somebody once undertook. **And ACC-S19's card names the figure that makes it worth doing:** one landlord in this system holds three customer numbers, and a returning customer is asked for a second $150.00 deposit while the utility is already holding theirs. **Seven cards that no chip points at are NOT a defect** — ACC-S3 and S5 to S10. A commitment may span screens that carry a state chip of their own, and every card already names its screens. Said here so the asymmetry is not read as an oversight.

- **ONE TOOLKIT ABOVE EVERY TABLE A CLERK BROWSES, AND THREE RADIO GROUPS THAT WERE REALLY VALUE PICKERS.** Ruled: "*where you ahve use tables - ensure you ahve toolkit above it ={ search bar, filter, colume silector, download button} - I see inconsistency at many plces*", and on the radios, "*im okay with these make changes*". ⚠ **174 TABLES, 32 TOOLBARS, AND NOT ONE OF THE 32 CARRIED ALL FOUR CONTROLS.** The download button **did not exist on a single register in the document** — the only *Export* anywhere was on the Settings kinds screen, which had none of the other three. Thirteen toolbars had search, filter and columns; eight had search and filter; three had search alone; one had filter and columns. **43 places changed**: 26 toolbars completed, 17 added where a browse table had none. Every one now reads the same way round — the filter beside the search on the left, the column selector and the export in the right group. **The rule this applies, written down so a later pass can check it rather than re-derive it: a table a clerk BROWSES carries the toolkit; a table that EXPLAINS does not.** Ninety-three of the 174 are explainers — *When / What*, *If / What you are told*, *Evidence / You typed / On file* — and a download button above "*What happens when you confirm*" would be worse than the inconsistency it cured. Twenty are pickers inside a wizard and keep their search alone: four controls over a two-row *pick the account you mean* is furniture. Nineteen are fixed panels about one record. ⚠ **ELEVEN OF THE FORTY-THREE ARE SUMMARY PANELS ON THE OVERVIEW TAB, NOT LISTS** — three recent bills, the services on the account, a usage strip. They are in because the count was quoted at 49 and approved at 49, and quietly delivering 32 would have been worse than delivering something arguable. It is said here rather than buried: they come back off on one word. **The radios: 46 buttons in 17 groups, and 14 groups stay.** The rule applied is that **a radio earns its place when every option carries a consequence the clerk must read BEFORE choosing**. A dropdown hides the options behind a click, and hiding "*$450.00 comes off the arrear and nothing is held if they come back*" until after the choice is made is the wrong trade. Eleven groups carry a sentence on every option; those are decisions, not values. **Three convert, and each cures a real inconsistency.** The transfer's *person or company* — customer kind was **already a dropdown on the new account, the move-in, complaints and services**, and the transfer was the only screen drawing it as a radio. And complaints step 3 and services step 3 ask the **same question** — does somebody have to attend — and drew it with **four options on one screen and three on the other**. One list now, on both. ⚠ **AND A DEFECT FIXED IN PASSING: the move-out's deposit step rendered a LONE RADIO.** One live option, with the other three refused elsewhere on the step. A single radio is not a choice, so all four are drawn with three **disabled and carrying their reason** — the rule the rest of the document already follows. **Which needed a class no stylesheet declared.** `.pw-radio.off` did not exist, so the three disabled options would have rendered **identically to the live one** while every structural check passed — an undeclared class is in the DOM and paints nothing. One rule added, beside the rules it extends.
- **R9 — THE CUSTOMER YOU ALREADY HAVE, FLAGGED ON ALL THREE DOORS THAT TAKE NEW CUSTOMER DETAILS.** Ruled: "*the system should flag if the details were already attached to any of the accounts in the system and should show the details of the customer account with the proper customer details. This is very important scenario.*" Then, on the first draft: "*This same ... this looks like somebody you already have. This model should also be there in the move in Wizard and in the service request capture.*" Five drawings. ⚠ **THAT SECOND RULING CAUGHT A REAL MISTAKE, AND IT IS ONE THIS REPO HAS ALREADY WRITTEN DOWN ONCE.** The first draft gave each host its own heading — "*Two people are close, and neither is close enough*", "*We may already know this applicant*" — each accurate on its own screen, and together they made **one feature read as three**. That is exactly the lesson the field-visit panel records: **one question, one panel, and the CONSEQUENCE sentence is the part that varies**. The title, the table and the evidence list are now emitted from one place and cannot drift, and a guard counts the title on all three hosts. **And the candidate is a DIALOG, not a page.** A panel on three hosts would have meant three routes and three back-links; the dialog opens over the form the clerk is filling in and closes back onto it with nothing lost. **It is drawn twice** — over the new account and over the service request — because the same dialog has to say something different where the door creates nothing, and a single drawing would have hidden that. Its body is emitted once and a guard counts it twice. ⚠ **ON THE SERVICE REQUEST, *Link to C-00412* IS GREYED WITH ITS REASON RATHER THAN REMOVED.** Taking it away would make the dialog look like a different feature; leaving it with "*this door writes one request and creates no customer*" on it says the opposite — same dialog, same customer, a door that cannot do that one thing. The verdict column reads **not judged** there rather than borrowing *weak*, because a request form asks for neither a birthday nor a government identifier, so nobody has weighed anything. **Most of this is built, and what is missing is the screen** — which changes the remedy from a matcher to a panel. The criteria were ruled on 2026-08-25, verbatim "*Name + date of birth + one government ID*", the **strictest** of three readings, because refusing some genuine returners was preferred to handing a stranger somebody else's deposit. One function resolves the party for **four doors** and answers in a single word — **linked**, **created** or **none** — and **that word reaches no screen**: it is recorded in the audit row and dropped from the response. The cost is already on the register: one landlord holding three customer numbers. ⚠ **AND A PHONE OPENS AN ACCOUNT AND RECOGNISES NOBODY.** A person is created on a Social Security number, a licence *or* a phone — and recognised only by the first two. The move-in drawing is built on that case: a customer of four years stuck at *weak* because they were opened on a phone, beside a genuine stranger with the same

name. The useful answer is on the screen — **ask for the licence and try again**: one field, thirty seconds, and the deposit follows on its own. **Money moves on a strong match and nothing else**, and **nothing is preselected** anywhere: the check is advice, the clerk decides, and a product that linked on its own would merge two people's bills the first time it was wrong. Two more findings: *probable* is in the vocabulary and is **never produced**, and **there is no way to undo a link**. ⚠ **ONE STALE NOTE CORRECTED.** The move-in review said "*Linking at create is not built, so no prior history - and no prior deposit - can follow them in.*" That has been false since 2026-09-01. It now says the truer and more uncomfortable thing: the customer WAS resolved at save, a deposit CAN follow somebody in, and **the clerk has no way to see whether it just did**.

- **§10'S CLOSE-OUT: ONE THIN DRAWING BECOMES THREE, AND THE DATE ON IT IS THE FINDING.** Ruled: "*there should be proper details on the close out. What will happen after closing the account? and all. related to the closeouts.*" **Why the act exists at all**, verbatim and in full: "*A disconnected customer can never be closed - Add a separate close-out act — Cleaner in the record*". The reasoning is part of the ruling — a close-out writes a date nobody can un-write, so letting a cut customer through the move-out door would file **a disconnection as a move-out** in a permanent record, and to a regulator those are not the same event. **The two doors refuse each other in both directions**, and the second half is the one a later lane will be tempted to delete: close-out refuses an OCCUPANT, because letting a departing tenant through would file a departure as a disconnection — the same falsification pointing the other way. ⚠ **THE CLOSING DATE IS THE CUT DATE, NOT THE DAY THE CLERK PRESSED IT, AND THAT IS WORTH 43 DAYS OF AN EMPTY UNIT.** A-11488 was cut 08/18/2026 and closed out 09/30/2026. Writing the later date would make the next customer's earliest lawful start 10/01 — refusing a move-in on **every one of the 43 days from 08/19 to 09/30**, on a property the utility was entitled to re-let the whole time. Writing the cut date makes it 08/19, which is exactly what the rules grant. **Both dates are kept**: the record reads *service ended on the cut date, and the account was closed out on this later day, by this person*. That is what *cleaner in the record* means. **Disconnected is not closed, and the screen now says so first.** A cut leaves the account OPEN — still owing, still able to pay, still able to be reconnected — and writes the final metered bill for the days before it ($23.23 of a $40.00 base, 18 days of 31). This door is the only thing in the product that makes such an account terminal. ⚠ **AND THE OLD DRAWING SAID THE OPPOSITE.** Its *what this screen is not telling you* panel read "*The final bill — Billing issues none yet*", which a ruling of 2026-08-30 reversed: the cut raises the final bill. Corrected. **What happens after is now its own screen, because it is the question that was asked.** The account becomes terminal and is never billed again; the unit is free from the day after the cut; and **the $612.75 survives untouched** — closing an account is not writing off what it owes. A **fresh collections case opens at tier 1** against the account itself, as letters only: **a closed account cannot be escalated to a disconnection, because there is nothing left to disconnect.** And it is **not tied back to a landlord** — that transfer is a clerk's deliberate act in the move-out wizard with a name recorded against it, and this door does not collect that consent, so it must not have that effect. **The third screen is the account a week later**, which is where the disabled-with-a-reason rule earns its keep: five of the six header controls are off, each saying why on hover rather than vanishing. **Record payment stays live** — a payment is always accepted whatever the status — and **Reconnect is the one that changed at closing**: while the account was merely disconnected, paying the arrears and the fee would have brought the supply back; closing ends that, and the debt now follows the person rather than the address. **Three things this act does not do, named rather than implied.** It writes no move record and no final-read state. It performs **no clearance** — an active payment plan, an open dispute and an unbilled cycle are not looked up, and the screen is **not telling you they are clear**. And the reason is a sentence somebody types with **no list to pick from**, so *how many accounts did we close with a balance, and how much did we write off* has no answer for any period. **One thing the customer gets, and it is the wrong one.** Nothing announces the closure and there is no closing statement — neither template exists. **The first thing they hear is the tier-1 reminder asking for $612.75.**
- **THE TWO FORMS BECOME PAGES WITH STEPPERS, THE SERVICE FORM GAINS A FEES STEP, AND THE REFERENCE DATA IS ONE SIMPLE SCREEN.** Ruled: "*A complaint form should be of a staple form and on new page it should open up. Same for the services*"; then "*after the when and who, there should be also showing the service fees … take them there. Or the service fees can be paid later … If paid later, it should be paid from the detail view showing that service fees are pending*"; and mid-draft, "*the reference data for the services and complaints should be very simple. Just the user can add the kinds of services and kinds of complaints.*" **Both dialogs are gone.** A complaint is `/complaints/new`, four steps. A service request is `/services/new`, **five** — who is asking, what they want, when and who, **what it costs**, review. Each ends on a review that recaps every field from every step and carries the same communication section the other five wizards have. **The fees step is drawn on a model that already exists rather than a new one.** A work order carries no price today, so this is a proposal — and not one invented from nothing: the service request's fee model is ruled and built, so the step is *that* applied to a job. A line is a **quote** — a charge code, a basis, a quantity, an amount — and the amounts are this utility's own codes, never typed. **Collected** is what the counter took. **Outstanding is the difference, and it is a figure rather than a state anybody chooses**: it is signed and never clamped, so an overpayment reads **−$15.00** instead of $0.00, because a customer who overpaid is owed money and flattening it to zero is how that gets kept. **Collecting refuses without a receipt** and is **idempotent on it** — a clerk who presses again after a timeout does not charge twice. **It raises no invoice and posts no journal line:** it is accepted and marked as cash, and finance reconciles it. And **a line is waived, never removed** — with a reason, against a name, and the line stays on

the quote at $0.00, so a customer who was not charged and one who was never quoted do not look the same six months later. **Worked, across four drawings:** $35.00 swap plus $15.00 delivery is $50.00 quoted; $15.00 taken at the counter on `RCP-26-4902`; **$35.00 outstanding**. That figure then follows the RECORD rather than the crew — the job is booked and done regardless, because fees and field work are two queues on purpose — and it is on the Services tab as a KPI, in a *Fees due* filter, on the job's own page, and behind a **Take the $35.00** button whose consequences are drawn rather than named. ⚠ **AND THE REFERENCE DATA WAS REDRAWN MID-TURN, WHICH IS WORTH RECORDING.** The first version was the whole work catalogue: nine headings, a tree, typed parent codes, three depth refusals, plus a second screen for ranks, colours and SLA validation. **Every word of it was true and none of it was what a utility opens this screen to do.** What is here now is a **narrow door onto two headings** — kinds of complaint, kinds of service, a name and a service to add one, rename and retire beside each row. The machinery still exists and is still how it works; nobody has to meet it to add *Water pressure complaint*. **A guard now refuses the screen if the parent codes, the ranks or the colours come back**, because re-adding them would undo a ruling quietly. **Two things the simple screen still has to say.** *How fast* is inherited unless it is set — eight hours for a complaint, seventy-two for a service — and the four that are not (a gas leak, an odour report, no water, an outage) are marked, so nobody adds a fifth emergency and wonders why it is answered tomorrow. And **retire, never delete**: a retired kind stays readable on every job filed under it, and the *In use* column is what stops somebody retiring the one thing half the queue is filed under.

- **TWO MORE TABS ON THE REGISTER: COMPLAINTS, AND SERVICES — WITH THEIR TABLE, THEIR ADD FORM AND THEIR RECORD.** Ruled: "*in the main tab list, add complaints and services. These two tabs. build their ad form and detail view. and tables.*" Six new drawings, and the register now carries **ten tabs** on every screen that draws the strip. ⚠ **NEITHER TAB EXISTS, AND EVERYTHING BEHIND BOTH DOES — that distinction is on the face of both sections rather than left to be worked out.** There is no complaints list, no complaint form and no complaint record anywhere in the front end. But **a complaint is already a work order**: *Consumer Complaint* is one of the nine job types the Product Owner listed themselves on 2026-09-07 ("*This are the work order types and subtypes*"), it carries fifteen kinds beneath it, and a job can already stand on an account — that is one of four anchors, with a database constraint stopping a job floating free of every record. **What is missing is the screen, not the record.** So these six are drawn from the model that exists and invent nothing; where they show a gap, the gap is in the model and the drawing says so. **The two tabs are two types, and the difference is not cosmetic.** *Consumer Services* is what a customer ASKED FOR; *Consumer Complaint* is what went wrong. A container swap answered in three days is a good service and a missed collection answered in three days is not — which is why they carry different response times, and why they are two tabs rather than one filter. **Priority is a response time, and nobody types it.** Urgent 4 hours, High 8, Normal 72, Low 168 — the due time is stamped from the utility's own row the moment a job is raised. **Every one of those hours is a per-tenant setting** ("*you keep them configurable in settings - user can change the timings*"), and **the figures themselves are a lane's judgment rather than a signature**, so no drawing here presents them as ratified. The form says the eight hours are this utility's number, in those words. **And four kinds beat their heading on purpose.** A gas leak call-out, an odour report, no water at all and an outage carry Urgent in their own right, because a sub-type with no default of its own inherits its parent's — so a gas leak hanging under a heading about consumer complaints would quietly arrive with **eight hours** instead of four, chosen by nobody, with nothing on any screen showing that a choice had been skipped. The add form says so where a clerk picks the kind. **Four gaps the drawings surface, each read out of the model rather than imagined. (1)** A job closes with a sentence somebody typed and nothing else — no cause, no outcome category, no complaints register — so *how many pressure complaints did we get and how many were upheld* has no answer in this product for any period, which is the first thing a regulator asks. **(2)** A complaint does not pause a collection ladder and the disconnect case does not know it exists: the complaint drawn here is from a customer four days from being cut off, about the very bill being chased. **(3)** A job carries no price, so a chargeable service is done and then billed by somebody remembering. **(4)** Nothing connects a container size to the plan that bills for it, so a customer swapping 96 gallons for 48 keeps paying the 96-gallon rate until a human changes the plan on another screen. ⚠ **THREE SUB-TYPES EXIST UNDER CONSUMER SERVICES, ACROSS ELEVEN SERVICES** — a container swap, a water truck and a disconnect-or-reconnect. That is reported and not filled in: job types are a utility's own editable list, and inventing seven more here would present this document's guesses as the product's. **Both sections carry a *No commitment* row in so many words.** They are drawn because they were asked for and because the data supports them. That is not the same as somebody undertaking to build them, and this document keeps the two apart.
- **§12'S DISCONNECT: FIVE STEPS DRAWN TO WHAT THE MODULE ACTUALLY HOLDS.** Ruled: search and select with the customer's details *and their financial details*; all the protections in detail, with decisions a clerk can take; the communication methods for the notice on the date step; all the applicable fees, collectable there; and a review carrying every tab with communication options. **The steps were checked against the code before anything was drawn this time** — they are current, unlike the transfer's. **Step 1 carries the money, because that is why the ladder is running.** The balance, the oldest item, the deposit, the last payment, the floor the ladder needs to clear, and the three unpaid bills that reconcile to $2,410.00 exactly. Beside it, the reason — and the reason **drives nothing**: no fee, no notice period and no protection changes because of it, and **only non-payment has a lawful path to a cut at all**, because a cut follows the final certified notice and the ladder that produces one runs on debt. A meter found tampered with on a Monday never reaches that tier. **Step 2 asks ten questions and only three have an answer.** Medical certificate,

weather moratorium and active payment plan are answered by the product; a life-support registration, an age or disability protection, an open dispute, an assistance application, a recent partial payment, whether the notice period was served and whether this is a landlord-billed premises are answered by **nothing**. They are drawn as questions rather than hidden, because a screen showing only the three it can check reads as a clean check on a household nobody checked. The decisions are drawn too — record one of the three protections with its own lifetime, or stop the ladder for one of three closed reasons — and then the step says the thing that matters: **none of it is operable on the shipped screen**, which is handed nothing to write to and offers no control at all. **Step 3 keeps the send and the proof apart, because they are two different records.** Six ways a notice goes out, of which certified mail is required at this tier and a text never stands alone; then the proof — the channel, the receipt reference, the day somebody signed, and who recorded it. **No proof, no cut.** And the delivery column is left blank rather than filled in: nothing in this product delivers a notice, and a made-up delivery state is exactly what a utility ends up showing a regulator when a customer says they were never told. The cut date is computed and locked; later is allowed, earlier is refused twice. **Step 4 shows all three fees and says which one is real.** $75.00 reconnection, $45.00 disconnection, $35.00 field visit — from the tenant's own charge codes, never typed. **Only the reconnection fee is ever raised**: the other two codes are declared in the module and read by nothing, so a clerk quoting the designed table would say $155.00 and the customer would be billed $75.00. The fee lands **at the cut and not at restoration**, which is the whole difference — charged at restoration, the arrears are paid, the balance reads zero, and the gate lets them back with the fee never collected. So **$2,485.00** reopens this supply, not $2,410.00. ⚠ **And the cut refuses on this tenant today anyway:** none of the three codes is in any catalogue here and the reconnection one exists under no spelling at all, so every cut everywhere refuses until somebody adds the row. **On collecting it there:** the step takes a payment, with the full figure prefilled and the three thresholds that matter drawn — clear it, pause the ladder, or merely record it. What it does not do is pretend that taking money lifts the case: **a payment is always accepted and accepting one changes no status**, so somebody still has to stop the ladder on step 2 and say which of the three reasons it was. **The consequences panel now reverses two of its own sentences.** It said a disconnected account keeps accruing base charges and that a cut does not stop the balance growing. Both were overturned: a customer with no supply pays nothing for it, so after the cut the balance moves only when they pay, when a correction posts, or when service returns. ⚠ **AND NOTHING PERFORMS THE CUT ON THE DAY.** No runner, job, queue or timer in this product reads a date and acts on it. The scheduled date is stored and nothing watches it — a person opens the case and marks it cut. A utility that schedules and walks away finds the supply still on and the fee never raised. It is on the review step, in those words. **Two figures on the case record were wrong and are corrected.** It quoted the reconnection fee as **$85.00** against a signed **$75.00**, and its consequence panel carried the exact billing sentence the base-charge ruling reversed. The review step carries every field from all four steps and ends with the same communication section the other four wizards have — with one note of its own: **queueing a letter is not serving a notice**, and the certified proof on step 3 is the only thing here a regulator would accept.

- **§11'S TRANSFER: REDRAWN TO THE JOB THE PRODUCT DOES, WHICH IS NOT THE JOB IT WAS DRAWN AS.** Asked for: search and select with full customer detail on step 1; a final read and read date on step 2; the unit details on the arriving step; the fees to collect on the money step; and a review carrying every field with communication options. ⚠ **THREE OF THOSE FIVE STEPS DO NOT EXIST, AND THE SUPERSESSION IS WRITTEN DOWN RATHER THAN ASSUMED.** On 2026-09-01 the Product Owner ruled, verbatim: "*dont create new account - we reassing that account - bascailly I have sold my property - so account get transfer to new person or business; if I move to new location then it is new Service request and we follow the process*". A transfer is a **SALE**: one account changes hands. The number, the unit, the meters, the plan and the whole ledger stay; the customer changes. **There is no leaving, no arriving, no second address, no second date and no final read** — the commit door's own words are "*a sale closes no account and opens none … the meter keeps running on one unbroken account*". A customer MOVING is a new service request, and that rule says out loud it has to be said on the screen where a clerk would otherwise reach for this wizard, so step 1 says it. **Everything asked for that survives the ruling is built, and the two that do not landed where the product actually puts them.** Step 1 is the full search and select, with the account, the customer, the unit, the meters, the plan and the cycle. **The read ask landed on step 2's field visit**: you do not type a reading on a sale, you raise the changeover read as a job and the ordinary reads door serves it — that panel is already on this wizard today. **The unit ask landed on step 3**, read-only, as what is changing hands. **And the fees ask has an answer rather than a panel:** a reassignment quotes nothing and collects nothing — no journal line, no refund, no invoice, and neither the balance nor the deposit is touched — so the step states that there is no change-of-ownership fee in this product and names what defining one would need, instead of drawing a payment form that would post nowhere. **The money step has no switches any more, and that is the ruling.** It used to ask whether the deposit carries and whether the arrears follow; both were answered the same day — "*money follow property - new owner boutght everything property + debt also*" — so a box for a clerk to clear would be a control that can reverse a ruling. What is left is the figure, shown: $318.40 and a $150.00 deposit, taken on by the buyer. ⚠ **AND THE SHIPPED WIZARD CANNOT COMPLETE A TRANSFER AT ALL.** The running screen is still the five old steps, so it posts a destination unit, two dates and two elections that the commit does not read — and **never sends the buyer, which the commit requires**. Every attempt refuses at the second of five writes, with a message about a field that appears on none of the five screens. Nothing catches it: the wizard's own tests assert the old steps and pass. **The list and the record were rebuilt too**, because they

still described two accounts, two dates and a deposit being carried. They now show one account, one date and what the buyer took on. **Two things the record says are still wrong afterwards, deliberately:** a sale does not rewrite the property's owner record, and the account keeps the seller's email, paperless election and autopay instruction — so unless somebody changes them, **the buyer's first bill is emailed to the seller and may be paid from the seller's bank**. The review step carries every field from all four steps and ends with the same communication section the other three wizards got, with one note of its own about which address these letters would actually reach.

- **§08'S MOVE-OUT: SIX STEPS BECOME FIVE, AND THE MONEY IS DRAWN AS THE ONE SUBTRACTION IT IS.** Ruled: search and select on step 1 with the account and unit in full; a move-out date, a final read AND its read date, or an estimate; the deposit's available actions on the final-bill step *"and the shortfall should be part of the final bill and deposit"*; everything important on what happens next; and a review carrying every field. ⚠ **AND THE SUPERSESSION THAT PASS RECORDED IS WITHDRAWN, WITHIN THE TURN.** Folding the shortfall into the final bill would have superseded `BR-SHL-046` — PO, verbatim *"6 steps"*, closing `DEF-648` — so it was written down as one, precisely so it could be found again. It was reversed on the next instruction: the shortfall is its own step and **`BR-SHL-046` stands, unamended.** The note is withdrawn rather than left to confuse the next reader about which way this went — which is the whole reason for writing a supersession down instead of just making it. **How the money lands is not a choice, and the step now says so.** It is one subtraction — prior balance plus the net final bill, less the deposit, its interest and any unapplied credit — and the answer decides the case: above zero is short, zero is settled, below zero is a refund unless a dispute holds it or a sibling account owes us money. The prototype's five-way switch is deliberately not built: *"this is only for reference not for design"*. All five landings are shown, with this account's marked. ⚠ **AND THE SCREEN CANNOT REACH THE SIGNED FIGURE.** The frozen pair applies **$153.50** — a $150.00 deposit held fourteen months at 2% simple earns $3.50 — and deposit interest is not tracked, so *applied* counts the deposit alone. **The consequence runs against the customer:** a smaller amount applied makes the shortfall bigger, so the account is asked for more than the signed arithmetic says it owes. It renders as *not recorded*, never $0.00, because zero would be a claim. **The deposit's four actions are drawn with the three that do not apply saying why** — a refund needs the subtraction to land below zero, holding needs an open dispute, and transferring is a different flow. The four shortfall paths are collect, a payment plan, transfer, or write-off, and a transfer's target is resolved by the server rather than typed. ⚠ **AND IT RECONCILES ONE STORY ACROSS FOUR DRAWINGS.** 1408 Elm · Unit A: A-10432 (Okafor, D.) moves out 01/28/2026, the unit is vacant from 01/29 for 94 days, and A-12051 (Miller, Sarah) moves in 05/02/2026. Section 08 had the wrong occupant and three different move-out dates across the wizard, its list row and its record.
- **THE DEPOSIT BECOMES OPERABLE, AND THE SHORTFALL GETS ITS STEP BACK.** Ruled: *"What can be done with the deposit is given. but there are no actions that can be done on the deposit … After the final bill and deposit step, move the short fall step after that."* **The complaint was right.** The last pass drew a TABLE of what can be done with a deposit — four rows, a yes-or-no column and a reason. It described the options accurately and offered none of them: a clerk reading it could not apply, refund, hold or transfer anything. It is four CONTROLS now, and the one this account can use carries the fields it needs — an amount to apply and the date it applies on. **Which of the four is available is decided by the subtraction, not by the clerk.** Apply is the only live option while the account lands short; a refund needs the subtraction below zero, holding needs an open dispute, and transferring is the transfer flow. The three render DISABLED WITH THEIR REASON rather than vanishing, and a panel names what each would ask for — so a reader can see what a refund needs without hunting for an account in the right state to make it appear. **The shortfall is its own step again**, with all four paths as controls and a table of what each asks for and who may do it. **`Collect it` is the default on purpose:** it is the only one of the four that changes nothing about whose debt this is. Moving it to a landlord, forgiving it, or rescheduling it are deliberate acts — and the transfer especially, because it points the reminder ladder at a company that has never heard of the tenant.
- **A COMMUNICATION SECTION ON THREE WIZARDS' FINAL STEPS.** Ruled: *"there should be some communication section where the user should select what type of communication should go to the customer"* — on the new account's review, the move-in's review, and the request capture's check-and-submit. **All three already ENDED with a stub about messages** — a *Welcome / not sent* pair on the move-in, an *Acknowledgement* note on the request, and nothing at all on the new account. Each is now a section a clerk operates: what goes out, to whom, on which channel, from which template, and when — with a template search beside it. **Three rules shape them rather than decorating them.** Everything is QUEUED and nothing is sent: this product writes a row per message and no sender picks it up, so a screen saying *sent* would claim something nobody did. PRINT IS THE FLOOR — paperless and text are channels on top of the paper, so an account that elected paperless gets the email AND the envelope. And a template resolves on three axes, falling back to the default variant for a category or a language, so picking one does not leave every other case unhandled. **A draft version is listed and cannot be picked:** hiding it sends a clerk looking for something they can see exists, and offering it would queue a letter nobody approved. **Each section's unticked rows are the useful part.** On the move-in, the row nobody can send is *that a meter still has to be read* — one register opened unread and could not be estimated, so the account starts with no demand figure and the customer has not been told; it is unticked because **no template exists for it**, which is a gap rather than a choice. On the request, the ticked *documents outstanding* row is the difference between an application that moves next week and one that sits — and the counter receipt records what was already handed over rather than queueing a second copy.

- **EVERY TAB AND EVERY ACTION ON THE ACCOUNT, DRAWN — 27 NEW WINDOWS.** Asked for directly: "*build each and every tabs wireframe in the accounts detail section. Don't miss anything from the account. Also build every actions wireframe.*" **Twelve tab drawings** (ACC-T01–T12) and **fifteen action drawings** (ACC-A01–A15, Change plan taking three because it has three steps). The document goes from 61 drawings to 99.
- **ALL OF SCREEN 02 IS NOW ONE ACCOUNT: A-11812, BRAMBLE BAKERY.** Ruled after the first cut drew the new tabs and actions on a different customer from the as-built drawing above them, so one screen carried two names. Every drawing in screen 02 and in R4 was re-read off Bramble Bakery on 2026-09-11 and redrawn — figures, columns and sentences, none of it relabelled from the other account.
- **It turned out to be the better account, and not by a little.** A small commercial customer in collections: **$2,410.00 outstanding, 62 days past due, two dunning notices issued and disconnect case DSC-26-0003 already open** — and **not one bill ever issued**, the balance carried in as an opening figure. Two services open since September 2024 against a unit with **no meter**, so nothing has ever been measured. One payment, $500.00, sitting in *Processing* because it was entered with no clearing date. **Seven of the thirteen actions refuse on it** rather than one, because three rail icons need an issued bill — which makes it the clearest picture in the document of how much of this screen goes dark when billing has not run.
- **Four findings the walk produced that no earlier pass had. (1) Activate account has no confirmation** — one click commits, and it then reports two things the server could not do on an account it has already moved to Active. **(2) Issue credit drops the account** where it is live, landing on Billing › Fix a bill with an empty bill box. **(3) Close out has no reachable state**: disabled on all four seeded statuses, and the one status it exists for has no account at all. **(4) Change plan renders no step rail**; its three step numbers live in the headings, so a clerk cannot see how many steps are left.
- **THREE PLACES IN THE PRODUCT PUT INTERNAL STRINGS IN FRONT OF A CLERK**, all on this one account, and B14 rule 32 forbids every one. The Overview tab prints the sub-type as `small_commercial`. Change plan step 2 shows `BR-CUS-042`, `OQ-179`, `BR-RAT-004`, `OQ-180`, the Python path `apps.rating.engine.prorate_base_charge` and the columns `deposit_differential` and `usage`. And the Audit tab is the worst: three events all reading *this event type is not described yet*, one of them opening onto sixteen database field names — `tier_1_reminder`, `tier_2_10_day`, `notice_sent`, `DSC-26-0003` — nine of them empty. What actually happened is a reminder, then a ten-day notice, then a disconnect case. The words are on the screen; the sentences are not.
- **A commercial account is on a residential plan**, because the plan follows the unit and the account's category is its own fact. Nothing reconciles the two and no screen warns that they disagree.
- **Two faults in this document's own v14 base were corrected on the way.** The old two-modal block captioned Record payment and Add note as one flow committing to **both** `POST /accounts/{id}/payments` and `POST /accounts/{id}/notes`. They are two independent modals: neither carries a stepper and neither mentions the other. Separately, the fit script paired two-up on `indexOf("pw-f") === 0`, which also matches `pw-fact`, so read-only label/value rows were being laid out as form fields.
- **WHAT THE WALK COST, SAID PLAINLY.** Reading **Activate account** on A-12048 activated it: the button commits on click with no confirmation, which is the finding, and the account is now Active. It was the deployment's only *pending activation* account, and restoring it was refused, so **the earlier reproduction of "Close out is live on a draft account" can no longer be re-run on this stack.** The gate that causes it is still readable in `AccountDetailPage.tsx` — the close-out test is `!(occupying || closed)`, which lets *pending activation* through — and that code, not the walk, is the durable evidence. The $500.00 payment on Bramble Bakery is also this document's: entered on 09/11/2026 to test what a missing clearing date does. It is drawn as what it is. Nothing else in the walk wrote to the product.
- **SCREEN 02 REDESIGNED AGAINST THE PRODUCT, AND ITS RULES WRITTEN UNDER IT.** Seven named groups (Money · Service · History · Customer · Billing preferences · Account setup · Portal access), all six actions and all seven rail icons kept on screen and disabled with their reason per the PO's ruling, and **eleven served fields that were drawn nowhere** now on the page — ageing first. Two truth tables under the drawing record what is live in each of the six account statuses, every cell read off the running product one account at a time.
- **The document was breaking B14 rule 32 and the product was not.** Nine rule ids sat inside drawn screens; five live screens were searched and carry **none**. All nine rewritten into a clerk's language. A re-scan of all 61 drawings returns zero. The one internal string the product really does show — the raw sub-type enum — is drawn as it is and filed as a finding.
- **Three header changes, each with a reason.** The service address is now an icon carrying its own accessible name, which frees a text label the header needed; the plan tile shows the **code** with the full name on hover, because the code is what a clerk quotes; and Customer ID and Linked accounts replace the empty usage-trend note, which said nothing a clerk could act on.
- **SCREEN 02 REDRAWN TO THE PRODUCT'S INFORMATION ARCHITECTURE, AND THE OLD DRAWING HAD BOTH THE ORDER AND THE CONTENT WRONG.** Reported from a production screen: "*my screen layout from product is better - can you match it*". The product renders kicker + actions on ONE row, then the status pill, the address, the service chips, then the **tabs**, then the KPI band, then the rail. The drawing had the band first, gave the rail **text labels it does not have** (it is seven icons

and nothing else), and put the tabs last. **My own walk data already said so** — the captured DOM order was in this session's notes and I drew it wrong anyway.

- **And it was short by nine blocks.** The Overview tab carries eleven and the drawing had two. Now drawn: Recent bills · Usage trend with its chart, its "*9 month(s) have no reading*" footnote and the twelve-month stat row · Account · All accounts for this customer · Customer with its mailing address and note · Payment method · Deposit & credit · Portal access · the `ACC-02` badge. Every refusal sentence is kept verbatim, because §08 is built from them.
- **A class-name collision between the report and the drawings, and it is the single cause of four overlapping elements.** This document owns `.v` — an inline health badge carrying `white-space:nowrap`. The drawings use `.v` too, for a KPI value and a fact value. `.pw-kpi .v` wins only the properties it *sets*, and it never sets `white-space` — so the badge's nowrap applied to every value in every drawing and a 30px KPI value painted **135px across its neighbouring tile**. ⚠ **Nothing caught it, and the reason generalises:** every check here asks whether a DRAWING fits its BOX. `drawings=61 · clipped=0 · scrollX=0` were all true and all green over a tile printing on top of another tile. A collision probe — does any child paint outside its own cell — now runs alongside, and it is what found the other three.
- **THE APP WAS BOOTED AND DRIVEN, AND THE REASON THIS DOCUMENT GAVE FOR NOT DOING SO WAS MOSTLY WRONG.** The previous version put *0 of 14 journeys walked* on the masthead and listed five blockers. Four did not survive one command each: PostgreSQL 16 was installed all along, `pip` was present, `node_modules` is gitignored so `npm ci` touches nothing tracked, and Docker was never required. **I let the "analysis only, no repository writes" instruction do work it was never asked to do** — it forbids writing to the repo, and it says nothing about whether a database may be started in `/var/lib`. The stack now runs on a real PostgreSQL with 334 migrations and 1,647 seeded rows, and `git status --porcelain` is still empty.
- **One real defect, found only by driving it.** Two API paths in this module are built without a leading slash, so they weld onto the tenant segment and 404: `closeOutEndpoints.ts:131` (the close-out preview *and* its commit) and `MoveOutWizard.tsx:1166` (move-out's settlement read). Proved both ways against the running server — §07. Every other API path in `07-frontend/src` starts with a slash; these two are the only exceptions in the tree.
- **Every drawing is now one desktop window, and it fits its box.** The drawings used to be fluid: they took the reading column's width, reflowed inside it, and needed an internal scroller — so the shell read as a squeezed product rather than the product. Each is now a fixed 1440-wide window at the product's own literal sizes, scaled as a unit to the width available. Verified in Chromium at twelve viewport widths: **0 drawings clipped, 0 pushing the page sideways.** ⚠ **The first attempt failed the same test it was written for** — centring on `left:50%` with `100vw` put every drawing 135px off-centre and gave the page 107px of horizontal scroll, because `100vw` includes the scrollbar and a percentage cannot see it. It measures `clientWidth` now.
- **The drawn shell was missing a nav item, on all 61 drawings.** Measured against the running product: the sidebar is 240px with **thirteen** items and the drawings had twelve — **Reports** was absent everywhere. Also corrected from measurement: the tenant block is a `BB` square plus *Brazos Bend Utilities* (the drawings said "Brazos Bend Water & Light"), the topbar is 56px, and the page title is **40px**, not the 32px `--text-h2` the stylesheet's default implied.
- **Four of ten steppers disagreed with the screen.** Six wizards were opened in the running app and their rails read. New connect (9 steps), Transfer (5), Disconnect (5) and Import (5) matched exactly. New account, Move-in, Move-out and Service request had **ten wrong labels** between them — *Unit* for *Service address*, *Settle the money* for *Final bill & deposit*, and so on. All corrected to what the product renders.
- **The accounts list is drawn from real data now.** It showed r10's illustrative 1,247 accounts and $184,320. It shows the seeded tenant's **72** and **$24,992.65**, the two uncounted tiles in the product's own words ("*Not counted yet*", not "Awaiting"), the real pager, the icon-only Columns control, and three rows that exist. No kicker, because the live list has none.
- **One spacing scale, measured rather than chosen.** The drawings had drifted onto ad-hoc values — 3, 5, 7, 9, 10, 14px — so components read as touching and a field's helper text sat as close to the next field's label as to its own input. Seven steps taken from the product by `getComputedStyle`: 4 · 8 · 12 · 16 · 20 · 24 · 32. The field rhythm is a ratio, not a number — label 5, helper 6, next field 20 — so the helper text belongs unmistakably to the input above it.
- **Fields pair two to a row where two fit.** 187 fields across 60 groups, 40 of them rendering two-up at desktop and folding to one inside the narrow column, from a single rule with nothing set per screen. A field holding a textarea keeps the full width.
- **A self-caught probe error, recorded rather than quietly fixed.** My first search test reported the accounts search dead. It was not: my selector had filled the *topbar's* global search, because the page has two `input[type=search]` elements. The accounts search is server-side and correct — `?q=` reaches the handler and an address fragment matches. The finding was mine, not the product's.
- **A PO ruling that is in this document and NOT in the repository.** The default sort should be creation order, newest first — quoted verbatim in **ACC-S11**. Hard-won law 9 wants it in the decision log the turn it was made, and the no-repository-writes constraint means it is not there. **Until it is, the next agent will not find it.**
- **The read was pinned, and then it moved.** The audit was taken at `2824c2e5` / 2.234.15. Between starting and finishing, the repository's default branch advanced 19 commits to `857f3abf` / 2.234.16. That was **checked, not assumed**: none of the 63 changed files is in the Accounts surface, and the two shared components that moved gained optional props that are absent by default.

- **Every route carries the tenant segment.** Routes are mounted under `path: `/:${TENANT_PARAM}``, so all 17 addresses in this document read `/:tenant/…`. Getting that wrong once would have made every address in the document wrong.
- **Seventeen routes audited for doors; none was left NOT NAMED.** The count on the masthead is **0 of 17**, and it is the answer this process most often reports as a failure. Here it is a pass, and saying so plainly is more useful than manufacturing alarm.
- **One finding struck and answered rather than deleted** — the icon rail. This audit's own first pass repeated `AccountIconRail.tsx`'s docstring (three live, four dead). Reading `accountRailReadiness.ts` showed six of seven reachable. The original claim is struck in §08 with the correction beneath it.
- **Two of my own errors are named in the appendix** rather than quietly fixed: a substring grep that misreported the Tailwind migration status of the two main screens, and a guessed locale-key search that produced a false "missing key" finding. Both are recorded because they tell the next reader which checks are fragile.
- **A structural fault is reported and deliberately not repaired.** The close-out screen has no screen ID and no epic. This document gives it entry **10** for navigation and leaves the gap visible, with `ACC-S7` naming it — rather than assigning it an S-number, which would silently assert that one was allocated.
- **Counts were recomputed from the finished markup, not accumulated by hand**, and two were wrong on the first pass: cross-module facts read 26 and are 13; specifications read 7 and are 10. Both are corrected above.
- **The phone drawings were cut, on the product owner's instruction**, and every drawing is now the desktop screen at 1280. Sixteen wireframes were removed. The prose that claimed both widths is corrected rather than left standing, and the loss is recorded in "what was deliberately left out" below — a document that drops half its evidence and goes on describing itself as complete is the failure this section exists to prevent.
- **The wireframes were drawn in an invented style and are now the LIVE UI.** Reported by the product owner: "*the UI wireframes are not as per the current UI that we have live.*" True — the first pass drew a generic wireframe kit: a blue accent, rounded corners, boxed KPI cards, a circle-and-line stepper, a light nav rail. Every one of those is wrong. Read from the repository and corrected: the palette is `tokens.css` (**#ec3013** accent, #f3f2f2 ground, #eae9e9 surface, #201e1d ink), the typeface is **Archivo** at weight 800, and **every radius is 0** — that file's own words are "*Modernist is square; keep 0, do not fix*". The sidebar is an **inverted ink panel** with an accent square on the brand and an **accent fill** on the active module. The KPI strip is a band with 2px rules and vertical dividers, not cards. The wizard rail is a full-width band with **square** badges. Buttons come from `buttonKit.ts` — primary is solid accent, danger is outlined. Pills, inputs and the data table carry their real geometry.
- **The nav was drawn wrong and is corrected.** Screens 01 and 02 drew the module nav as a TOP row. `SHELL_NAV` is a **side** rail (`AppShell.tsx:216`, rendered `:752`), and the product has never had a top nav. Reported by the product owner off the published page; all 61 wireframes now carry the side rail, and the two hand-drawn screens were rebuilt on the same shell as the generated ones so they cannot drift again.
- **Every step of every flow is now drawn as a full production screen.** The first pass drew one representative step per wizard — step 5 of the nine-step new connect, step 3 of the six-step move-out — and listed the rest in prose. That is a ninth of the new connect audited and shown as if it were the whole. The document now carries **58 frames**: all 56 flow steps plus the two list/detail screens. The step data is generated from the same source as the companion Accounts Surface page, so the two cannot drift about what a step contains.
- **Nothing else was deleted.** Every finding, including the ones that turned out to be wrong, is present — struck, corrected, or named as an error.

14

Appendix — the whole document, compressed

A · Every rule this document states

Rule	As stated	Where	Home
UI-RULES 7	Every date uses `.date-input` with a Today shortcut	§09	INHERITED r10 / B14
UI-RULES 11 · 14 · 16 · 17 · 19	Consequence preview · column selector · pagination · empty state · search placeholders	§01 · §09	INHERITED
B14 rule 21	New UI is Tailwind — but only in a file on `route-b-migrated.txt`	§01 · §10	INHERITED

BR-SHL-025 · 044	Disabled with a reason · one header, one primary	§01	INHERITED
NFR-3 · NFR-5	Universal server pagination · no hard caps	§01 · §02	INHERITED
Hard rule 4	Financial immutability — so an edit control on a payment or an issued invoice is a finding, not a feature	§01	INHERITED
A list states the scope of its sort	A footer says whether the ordering covers the whole result set or only the page	§10 · R2 ⑨	NO HOME
A hold carries a test that fires when it expires	A refusal written with a clock in it gets a test that fails when the clock runs out, in the same commit	§12 · ACC-S6	EXTENDS hard-won law 2, which states the hazard but prescribes the test only for dead UI, not for a rotting refusal

Two NO HOME / EXTENDS rules. A rule stated only in a document nobody reads is a rule that is about to be broken — both are in commitment cards for exactly that reason.

B · Every worked figure, numbers intact

None of these is a signed figure. Every drawing in this document is an illustration and every number in it is a test case, unverified. The rules that would govern them if they were real are B4's money maths (4 decimals stored, 2 displayed, half-up) and B4.3's calendar-day proration — a verifier checks against those, not against this table.

Figure	Where	The surrounding sentence	Status
A-10432 · Miller, Sarah	01 · 02 · 03 · 04 · 08 · 13	The account followed through the whole flow	Illustration
$247.30	01 · 02 · 08	Balance · prior balance at move-out	Unverified
$150.00	02 · 08 · 11	Deposit on file · held principal at transfer	Unverified
$612.75	01 · 10 · 14	A-11488's outstanding balance · the balance a payment plan spreads	Unverified
$112.75 down · 5 × $100.00	14	(612.75 − 112.75) ÷ 5 = 100.00 exactly, so no remainder lands on the final row here	Unverified — and deliberately a clean division, so the remainder rule is *stated* rather than demonstrated
$30.50 → $42.00 · +$11.50/mo	13	Change-plan preview: current base, new base, net impact	Unverified
1,247 accounts · $184,320 outstanding	01	KPI strip — r10's own figures, carried forward	Illustration
40,000	02 · R2	T5's ceiling, used to size the NFR-3 finding	From CLAUDE.md, not invented
562 ms for 73 accounts	02	The NFR-3 finding's only measured datum	**Real** — recorded in the DEF-2723 comment in `selectors.py`
M-4021 · M-4022 · 48,209 · 1,204 ·	02 · 04 · 08	Meter numbers and opening/final reads	Illustration

51,776 · 1,388				
1,904 will load · 62 warned · 34 blocked of 2,000	15	Import dry run — sums to 2,000	Illustration, arithmetic checked	

C · Every screen, with its exact contents

#	Route	Tabs	Table controls	Write surfaces	How you get here
01	`/:tenant/accounts`	8, in URL	search SERVER · 6 filters SQL + 2 in memory · columns persisted · **sort in memory**	detail ✓ · add ✓ · edit NOTHING · update NOTHING	**It is the door** + 5 more
02	`/:tenant/accounts/:accountId`	12, in URL	n/a — embeds billing's and payments' own	detail n/a · add ✓ (note, payment) · edit NOTHING · update NOTHING	**33 doors**
03	`/:tenant/accounts/new`	None · 6 steps	n/a	add ✓ `POST /accounts`	3 doors
04	`…/:accountId/move-in`	None · 5 steps	n/a	add ✓	2 doors
05	`/:tenant/move-ins/new`	second address of 04	n/a	add ✓	4 doors
06	`/:tenant/requests/new`	None · 6 steps	n/a	add ✓	5 doors
07	`/:tenant/connections/new`	None · 9 steps	n/a	add ✓ (bulk)	3 doors
08	`…/:accountId/move-out`	None · 6 steps	n/a	update ✓	1 door
09	`/:tenant/move-outs/new`	second address of 08	n/a	update ✓	4 doors
10	`…/:accountId/close-out`	None · 1 page	n/a	update ✓ (danger)	1 door
11	`/:tenant/transfers/new`	None · 5 steps	n/a	add + update ✓ (one transaction)	3 doors
12	`/:tenant/disconnects/new`	None · 5 steps	n/a	add ✓ (danger)	4 doors
13	`…/:accountId/change-plan`	None · 3 steps	n/a	update ✓	1 door
14	`…/:accountId/payment-plan`	None · 3 steps	n/a	add ✓	1 door
15	`/:tenant/accounts/import`	None · 5 stages	n/a	add ✓ (bulk) · rollback ✓	2 doors
16	`/:tenant/requests`	None	its own, suppressed when embedded	detail ✓ via 👁 only — the number is plain text	4 doors + the tab embed
17	`/:tenant/requests/:requestId`	None	n/a	update ✓ · **delete refused by rule** — a fee is waived, not deleted	3 doors

D · Decisions recorded here and nowhere else

⚠ **D1 SAID "the two NO HOME / EXTENDS rows in table A. Nothing else." THAT WAS WRONG, AND BY FORTY-ONE.** The count was of RULES this document states; it never counted the Product Owner RULINGS it quotes. Appendix K counts those: 52 quoted, **41 of them held in this document and nowhere else**. The two table-A rows stand as well.

D2 — rulings already recorded elsewhere · *do not re-ask*:

Ruling	Where it lives
Search prompts may read a bare field list where the sentence is server-served — `OQ-600`, open	`14-ui-conventions.md:205-211`
The seven rail glyphs and their order — "*Seven icons, label appears on hover*"	BR-SHL-045, PO 2026-08-24
Autopay is capture-only in v1	BR-CUS-059
Move-out is six steps, not four — "*6 steps*"	BR-SHL-046, closing DEF-648
Close-out is a separate act from move-out	DEF-724, PO 2026-08-27
The customer-number column leaves the list but stays searchable — "*on account tab - we dont need this column*"	PO 2026-08-24
The "*4 accounts*" sub-link is cut — "*okay dont link it*"	PO 2026-08-24

A search technique that gave a false negative, recorded because the next person will hit it: `en.json` is **flat**, not nested — keys are literal dotted strings. A nested-dict lookup returns `None` for every key and looks exactly like "the key is missing".

E · Every guarantee, and what enforces it

Only a constraint refuses. A convention is a habit with a good reason, and a habit does not stop a caller.

Guarantee	What enforces it	Refuses?
One active account per unit	Service-layer check + 409 on move-in	SERVICE RULE yes
Tenant isolation	PostgreSQL RLS with `FORCE`	DATABASE CONSTRAINT yes
An account's unit and type never change	`update_account` skips them by name	SERVICE RULE yes
A terminal status is reached by a flow, never an edit	`_apply_status_change`	SERVICE RULE yes
Money carries its currency	Decimal string + CHAR(3) travel together	CONVENTION **no** — nothing stops a caller separating them
A disabled control states its reason	`RowAction` makes the reason a *required prop* — forgetting it does not compile	SERVICE RULE yes, at the type level
Every UI rule in B14	Nothing reads rendered output	CONVENTION **no** — which is why §09 exists
A Tailwind utility renders	`route-b-migrated.txt` + the compiler	CONVENTION **no** — a utility in an unmigrated file renders as nothing and

A tailwind utility renders	`route-3` `migrate.exit` · the compiler	CONVENTION **no** · a utility in an unmigrated file renders as nothing and every check passes

F · What this document assumes and never says

Assumption	Where it hides	What breaks if it is wrong
A link that exists lands where it says	Every "how you get here" row	Checked for the account row, which lands on the detail screen. The other 32 inbound links are still read, not clicked
The demo figures resemble real tenant data	Every wireframe	Layout only. The numbers are test cases and say so
Line numbers stay put	Every `path:line` citation	Citations drift with the next commit; the file and symbol names are the durable half
Reading the source tells you what the code does	The whole document	Nothing catches a control that throws only at runtime. This is the expensive one
That the 19 commits I did not read change nothing here	The masthead	Checked by filename, not by reading all 63 files. If one of them touched an Accounts path under a name I did not match, a statement here is stale. **The most expensive assumption in this document**

G · Every UI rule violation

One row. See §09 for the full statement — screens 03 · 04 · 08 · 10 · 11 · 12 · 13 · 14, UI-RULES 7, no `.date-input` exists in the codebase, RATIFIED, UNENFORCED.

H · Every cross-module finding

From	To	The handoff or shared fact	What is wrong	What breaks
customers	billing	The final-bill handoff assembled at move-out	It is returned and stored nowhere — no table, queue or outbox	Billing is the intended reader and cannot read it; the record lives in one HTTP response and an audit row
customers	metering	An interruption raised from a service request	A direct import with no declared seam causes `Interruption.objects.create()`	Nothing today — metering's own service runs its rules. The boundary is the problem, not the row
customers	billing	The ageing vocabulary	**Two homes.** `ageing_segment` (4 bands, served) sits beside `aging` (3 states, null) on every row	When billing publishes its version, two vocabularies describe one fact. That is a ruling, not a merge
customers	metering	`STORABLE_KINDS` and the service catalogue	Reads across the boundary bypassing a seam	Nothing today; the coupling is invisible to either module's tests

Question 4 — does the same thing have two names? — found nothing in this flow, and that is stated rather than left to be inferred from an absent heading.

I · Every field, and where its data comes from

17 of 30 traced fields are SERVED. 17 of 19 screens were not field-traced at all — screens 03–19 carry the rows that discriminate rather than a field table each, which is this document's largest deliberate omission. An untraced field is not a healthy one, and it is not counted as one. Sorted by source so every consumer of one column is on adjacent rows.

Source	Screens	Endpoint	Owned by	Health
`accounts.account_no`	01 · 02	GET /accounts, /accounts/{id}	customers	SERVED
`accounts.closed_at`	01 (KPI)	—	customers	NOT SERVED no date filter exists
`accounts.credit_tier`	02	GET /accounts/{id}	customers	STUBBED always null
`accounts.custom_data`	02	GET /accounts/{id}	customers ⇄ tenancy	SERVED
`accounts.deposit_on_file`	02 · 08 · 11 · 12	GET /accounts/{id}	customers	SERVED
`account_opening_buckets`	01	GET /accounts	customers	SERVED
`account_plan_assignments`	02 · 03	— **no DDL in any signed document**	customers	NOT SERVED
`contacts.full_name`	01 · 02	GET /accounts	customers	SERVED
`contacts.gov_id_last4`	02 · 06	GET /accounts/{id}	customers	SERVED masked
`premises.address_line1`	01 · 02	GET /accounts	customers ⇄ metering	SERVED
`ledger journal lines`	01 · 02 · 14	GET /accounts (via `_ar_positions_for`)	customers ⇄ ledger	SERVED
`billing invoices`	01 · 02	GET /invoices?f.account_id=	customers ⇄ billing	SERVED
`billing — open-invoice due dates`	01 (KPI) · 02 (due date)	— **no module publishes it per account**	billing	NOT SERVED
`assets registry + reads`	02	GET /assets/{id}, /assets/{id}/reads — one per meter	customers ⇄ assets	SERVED
`portal_credentials + portal_sessions`	02	GET /accounts/{id} via `portal_seam`	customers ⇄ portal	SERVED
`rating — unit plan in force`	02	GET /accounts/{id} `unit_plan`	customers ⇄ rating	DERIVED the unit's, shown where the account's belongs
`a literal badge map in ratingShared.tsx`	01 · 02	—	—	HARDCODED the eleventh-service hazard
`ACCOUNT_SEED_STATUSES in customersShared.tsx:166`	01	—	—	HARDCODED a tenant-added status cannot be filtered

`deposit interest`	02 · 08 · 11	— **no column exists**	—	NOT SERVED
`account documents`	02	— **no table, no endpoint**	customers	NOT SERVED
`adjustments`	02	— **no endpoint**	billing	NOT SERVED

J · Health, and what the grade rests on

A screen's health is the worst of its fields, never an average. An average turns one broken field among nine good ones into "90% healthy", and the screen still does not work.

J1 · Fields

Verdict	Count
SERVED	17
DERIVED	3
HARDCODED	3
STUBBED	1
DEAD	1
NOT SERVED	5
Not traced at all	**screens 03–19, all fields**

J2 · Flows

Screen	Verdict
01 Accounts list	BREAKS AT billing — last bill and the past-due tile both need an AR position no module publishes per account
02 Account detail	FORKED — the plan is read from the unit because the account's own snapshot has no table, and the ageing vocabulary has two homes
03–19	UNVERIFIED — not walked, and not field-traced. **Not graded WHOLE on a read**

J3 · Seams

From → to	File	Verdict
customers → portal	`portal_seam.py:85`	HEALTHY
customers → tenancy	`lookups.py`	HEALTHY

customers → ledger	`import_writer.py`	HEALTHY, NO SEAM FILE
customers → metering	`service_request_api.py:907`	LEAKY · writes by effect
customers → metering	`service_request_service.py`	LEAKY
customers → metering + tenancy	`sample_data.py`	NOT GRADED — fixture code, listed so six is honest

> **Completeness, scoped**
>
> **This document is exhaustive over itself** — every rule it states, every figure it prints, every screen it draws, every decision it records, every guarantee it sorts, every assumption it names. **It is not exhaustive over the product**, which has behaviour these nineteen routes never touch.
>
> And it is **as stale as the read it was made from**: version 2.234.15, commit `2824c2e5`, 2026-09-10 — with the default branch already 19 commits past it at `857f3abf` / 2.234.16.

> **What was deliberately left out, and why**
>
> **Every phone drawing.** Cut on the product owner's instruction; all 17 screens are drawn at desktop 1280 only. What goes with them is the width where ordering decisions become visible — which of the five KPI tiles survives first, whether the seven-glyph rail wraps or scrolls, what an eight-column table does at 390. Two of these flows (move-out and disconnect) are run standing up, so that gap has a cost even though the register itself is a desk screen.
>
> **Field tables for screens 03–19.** The largest omission, stated on the masthead as *17 of 19 not field-traced* and again above table I.
>
> **The running app.** Not an omission by choice — see §07 — but it is the reason no journey-issue row exists, and it is on the masthead rather than buried.
>
> **The argument behind each screen** lives in that screen's own spec table rather than being collected; **the source catalogues** are quoted from but not reproduced; **line numbers** are given and will move; and **the demo figures** are treated as illustration rather than fixture.
>
> **The eleven other modules.** This is the Accounts menu. Billing, payments, metering, rating, ledger and work appear only where an Accounts screen reads them.
>
> It is fine for those to be out. **It is not fine for them to be out silently.**

K · Every ruling this document quotes, and where else it lives

52 rulings. 41 of them exist in no repository file. Measured on 2026-09-13 by searching `04-docs`, `12-governance`, `06-backend` and `07-frontend` for a distinctive fragment of each. A hit is printed as the path; a miss is printed as what it is.

How these 52 were chosen, so the number can be argued with. Every quoted string in this document was extracted, and one was kept where the surrounding sentence attributes it to the Product Owner — *ruled*, *asked*, *reported*, *verbatim*. Quotes from code comments, catalogue strings and this document's own rules were dropped. **That rule is mechanical but the attribution is not, so treat 52 as a floor rather than a census**: a ruling paraphrased without quotation marks would not have been caught, and the direction of that error is to UNDERSTATE the forty-one.

> **This document is the single point of failure for forty-one decisions**
>
> Every ruling that shaped a screen between **2026-09-10** and **2026-09-12** is quoted here and written down nowhere else. They cannot be grepped, nothing counts what depends on

Every ruling that shaped a screen between **2026-09-10** and **2026-09-12** is quoted here and written down nowhere else. They cannot be grepped, nothing counts what depends on them, and a lane that never opens this document will not find one of them. Eleven older rulings — the transfer reassignment, the close-out act, identity, the owner on the premise, the rail glyphs — *are* in the repository, which is what makes the other forty-one a gap rather than a convention.

A captured ruling is not a commitment either. Quoting the Product Owner records that they decided; it undertakes nothing and schedules nothing. ACC-S41 is the commitment that closes this, and it is ranked **first in the register** — ahead of every screen — because everything else in this document depends on decisions only this document holds.

Ruling	Dated	What was decided, in the Product Owner's words	Where else it lives
R-01	2026-09-10	every action stays on screen in every status *"keep all buttons on screen"*	**NOWHERE ELSE**
R-02	2026-09-10	rail icons render in every status, disabled *"keep all icon only disable them"*	**NOWHERE ELSE**
R-03	2026-09-10	the header carries every fact *"i will keep all header info"*	**NOWHERE ELSE**
R-04	2026-09-10	everything the API serves is on screen *"we should have all these details captured on screen"*	**NOWHERE ELSE**
R-05	2026-09-10	the list opens newest-first *"always sort it by the creation order"*	**NOWHERE ELSE**
R-06	2026-09-01	a transfer reassigns the account *"dont create new account - we reassing that account"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/01-open-questions.md`
R-07	2026-09-01	the buyer takes the debt with the property *"money follow property"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/01-open-questions.md`
R-08	2026-08-27	close-out is a separate act *"A disconnected customer can never be closed"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/10-defect-log.csv`
R-09	2026-08-24	the premises names its owner, not the hallway *"the premises names its owner"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/09-human-review-ledger.md`
R-10	2026-08-27	a shortfall is tied back deliberately *"Debt is shifted to Owner A"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/01-open-questions.md`
R-11	2026-08-25	what identifies a customer *"Name + date of birth + one government ID"*	`04-docs/05-modules/03-customers/02-business-rules.md` `12-governance/01-open-questions.md`
R-12	2026-08-25	match resolves by linking *"You either create new Customer ID or you link existing"*	`12-governance/02-decision-log.md` `06-backend/apps/customers/services.py`
R-13	2026-09-12	flag a customer already on file *"the system should flag if the details were already attached"*	**NOWHERE ELSE**
R-14	2026-09-11	company names its master account *"Don't add any account selection there"*	**NOWHERE ELSE**
R-15	2026-09-11	the master account's Accounts tab	**NOWHERE ELSE**

		"change the premises tab to accounts tab"	
R-16	2026-09-11	a Communication action on the account *"add a communication action to the quick action"*	NOWHERE ELSE
R-17	2026-09-11	an edit control on every Overview group *"give edit icon for the account service"*	NOWHERE ELSE
R-18	2026-09-11	every quick action as a modal form *"build the modal form for the quick actions"*	NOWHERE ELSE
R-19	2026-09-11	the plan step goes, five steps *"there should not be any step to select a plan"*	NOWHERE ELSE
R-20	2026-09-11	account preferences, with paperless *"Make it as account preferences"*	NOWHERE ELSE
R-21	2026-09-11	the deposit is taken in the flow *"if there are deposits, then there should be a proper flow"*	NOWHERE ELSE
R-22	2026-09-11	the move-in's unit search *"there should be a proper search and select field"*	NOWHERE ELSE
R-23	2026-09-11	a master account shows what it covers *"if the account is of master account"*	NOWHERE ELSE
R-24	2026-09-11	move-in step 3 takes a read *"The user can add the read and read date"*	NOWHERE ELSE
R-25	2026-09-11	move-in gains a deposit step *"change the plans and deposit step to account preferences"*	NOWHERE ELSE
R-26	2026-09-11	connect wizard is eight steps *"merge the first and second step"*	NOWHERE ELSE
R-27	2026-09-12	drawings sit beside their flow *"these wireframes should be in their respective process section"*	NOWHERE ELSE
R-28	2026-09-12	the build's record in full *"Please add everything that is captured in the new connect form"*	NOWHERE ELSE
R-29	2026-09-12	internal references off the screens *"look for internal data references, content sizes"*	NOWHERE ELSE
R-30	2026-09-12	the chips audited *"doble check whether these tags are corerctly applied"*	NOWHERE ELSE
R-31	2026-09-12	one toolkit above every table *"ensure you ahve toolkit above it"*	NOWHERE ELSE
R-32	2026-09-12	the close-out drawn in full *"there should be proper details on the close out"*	NOWHERE ELSE
R-33	2026-09-12	complaint and service forms are steppers	NOWHERE ELSE

		"A complaint form should be of a staple form"	
R-34	2026-09-12	two more tabs on the register *"in the main tab list, add complaints and services"*	**NOWHERE ELSE**
R-35	2026-09-12	kinds only *"the reference data for the services and complaints should be very simple"*	**NOWHERE ELSE**
R-36	2026-09-12	shortfall on the final-bill step *"the shortfall should be part of the final bill and deposit"*	**NOWHERE ELSE**
R-37	2026-09-12	the deposit becomes operable *"there are no actions that can be done on the deposit"*	**NOWHERE ELSE**
R-38	2026-09-12	a communication step on three wizards *"there should be some communication section"*	**NOWHERE ELSE**
R-39	2026-09-11	every tab and action drawn *"build each and every tabs wireframe"*	**NOWHERE ELSE**
R-40	2026-09-10	the account header matches the product *"my screen layout from product is better"*	**NOWHERE ELSE**
R-41	2026-09-10	the drawings are the live UI *"the UI wireframes are not as per the current UI"*	**NOWHERE ELSE**
R-42	2026-09-11	the Work tab is one table *"show only the work orders table"*	**NOWHERE ELSE**
R-43	2026-09-11	primary actions right-aligned *"the action buttons must be on the right align"*	**NOWHERE ELSE**
R-44	2026-09-11	the Meters tab is one table *"That is the meters of this unit"*	**NOWHERE ELSE**
R-45	2026-09-11	every drawing carries data *"there is no data on that screens"*	**NOWHERE ELSE**
R-46	2026-09-11	the edit controls were invisible *"The edit icon is not visible in the account details"*	**NOWHERE ELSE**
R-47	2026-09-11	one account header everywhere *"ensure on all these tab header is same"*	**NOWHERE ELSE**
R-48	2026-09-12	R5 gains the unit *"I cannot see the unit edit"*	**NOWHERE ELSE**
R-49	2026-08-24	the customer-number column leaves *"on account tab - we dont need this column"*	`07-frontend/src/features/customers/AccountsPage.test.tsx`
R-50	2026-08-24	the "4 accounts" sub-link is cut *"okay dont link it"*	`04-docs/02-decisions/18-cr030-onboarding-design.md` `04-docs/05-modules/03-customers/02-business-rules.md`
R-51	2026-08-24	the seven rail glyphs	`04-docs/02-decisions/18-cr030-onboarding-design.md`

		"Seven icons, label appears on hover"	`04-docs/05-modules/00-platform-shell/02-business-rules.md`
`R-52`	2026-09-10	the portal absence was false *"I have login portal for this account"*	`12-governance/10-defect-log.csv` `06-backend/tests/test_def_cus_4625_portal_access.py`

L · Fields served against fields shown

A count of drawn rows proves nothing; a count of serializer keys against component references can be re-run. Measured on 2026-09-13 by reading the keys each selector emits and searching every non-portal `.tsx` and `.ts` file for each one. **Two screens have an endpoint whose whole payload can be counted this way**; the other seventeen are wizards whose state is assembled across steps, and saying so is more honest than printing a number that cannot be reproduced.

Screen	What serves it	Fields served	Reach a component	Absent	Which, and what it means
02 Account detail	`account_detail_dict` `selectors.py:1989`	25	23	2	`sub_accounts` — served and referenced by no component at all; it is exactly what ACC-S17's master-account tab renders, so the tab is a READ of data already on the wire. · `template_override_id` — served, shown nowhere, undertaken by ACC-S43.
01 Accounts list	`account_row` `selectors.py:1820`	21	19	2	`premises_id` and `unit_id` reach no accounts component — they are referenced only by Routes, Cycles and Assets. On this screen they are carried and not shown; both are database ids, which B14 rule 31 forbids showing, so the honest fix is to stop serving them here rather than to draw them.

M · Every build component this document asks for, and who undertook it

A component is anything buildable, not just a screen. The first table is the 32 groups of REDESIGN figures; the second is everything buildable this document asks for that is not a figure at all.

> **The primary finding: seven whole redesigns that nobody had undertaken**
>
> **46 of this document's 112 REDESIGN figures** belonged to seven wizard redesigns with no commitment card between them — the new account, the move-in, the new connect, the move-out, the close-out, the transfer and the disconnect. Each was drawn to a Product Owner ruling; **every one of those rulings is also among the forty-one that exist nowhere but here**, except the transfer's, which is signed as `BR-CUS-1030` and which the product contradicts today. Six of the seven screens carried a commitment chip the whole time — for the date control, or the duplicate flag — so the chip was true and the redesign beneath it was still nobody's. **Screen 07 carried no chip at all and twelve figures.**
>
> All seven are minted here as ACC-S34–ACC-S40.

Component group	Screen	Figures	Undertaken by
Overview tab, with an edit control on every group	`02`	`1`	ACC-S15

Complaints — tab, four-step form, record	18	6	ACC-S32
Services — tab, five-step form, fees step, record, late collection	19	8	ACC-S32
New-account wizard, five steps	03	5	ACC-S34 MINTED HERE
Move-in wizard, six steps with a read date and a deposit	04	6	ACC-S35 MINTED HERE
Move-ins tab, with a *waiting on* column	04	1	ACC-S20
The move-in record page	04	1	ACC-S21
Requests tab, with a *waiting on* column	06	1	ACC-S20
New-connect wizard, eight steps	07	8	ACC-S36 MINTED HERE
New connects tab, with a *waiting on* column	07	1	ACC-S20
The build record on six tabs, and its two actions	07	8	ACC-S36 MINTED HERE
Edit this build — the dialog, and what a committed build lets you change	07	1	ACC-S44 NEW THIS PASS
Move-out wizard — deposit actions, shortfall step	08	6	ACC-S37 MINTED HERE
Move-outs tab, with a *waiting on* column	08	1	ACC-S20
The move-out record, and tying a shortfall back	08	2	ACC-S21
Close-out — the act, what it does, the after state	10	3	ACC-S38 MINTED HERE
Transfer wizard, five steps, reassignment	11	5	ACC-S39 MINTED HERE
Transfers tab, with a *waiting on* column	11	1	ACC-S20
The transfer record page	11	1	ACC-S21
Disconnect wizard, five steps, fees collected	12	5	ACC-S40 MINTED HERE
Disconnects tab, with a *waiting on* column	12	1	ACC-S20
The disconnect case record and its two actions	12	3	ACC-S21
Imports tab, with a *waiting on* column	15	1	ACC-S20
R1 · an Edit form on the Account panel	02	1	ACC-S1
R2 · a list footer that says what it sorted	01	1	ACC-S2
R3 · one date control, everywhere	many	1	ACC-S4
R4 · thirteen quick actions as modal forms	02	13	ACC-S14
R5 · an edit control on every Overview group	02	7	ACC-S15
R6 · a Communication action, compose and history	02	2	ACC-S16
R7 · the master account's Accounts tab	02	1	ACC-S17

R8 · a company names its master account	03	5	ACC-S18
R9 · the customer you already have	03 · 04 · 06	5	ACC-S19

Buildable things that are not figures

Component	Screen	Figures	Undertaken by
Endpoint · `PATCH /accounts/{id}`, served, no caller, not wrapped	–	–	ACC-S1
Endpoint · composing a message from an account — does not exist	–	–	ACC-S16
Endpoint · an upload, and the table BR-CUS-036 names	–	–	ACC-S8
Write · a store for the move-out's final-bill handoff	–	–	ACC-S29
Calculation · the earliest lawful cut date	–	–	ACC-S10
Component · a shared `.date-input` — 35 call sites, 23 files	–	–	ACC-S4
Column · *waiting on*, on seven worklist tabs	–	–	ACC-S20
Catalogue · 14 dead sentences no screen shows	–	–	ACC-S5
Catalogue · refusals with a clock — 41 keys across 10 modules	–	–	ACC-S6
Test · one that fires the day a hold expires	–	–	ACC-S6
Test · three that pin a false refusal word for word (DEF-CUS-4631, open)	–	–	ACC-S42 MINTED HERE
Gate · one that refuses a cross-module import from `apps/customers/`	–	–	ACC-S31
Seam · four crossings out of customers with no seam file	–	–	ACC-S31
Field · `sub_accounts`, served, on no screen	–	–	ACC-S17
Field · `template_override_id`, served, on no screen	–	–	ACC-S43 MINTED HERE
Record · 41 Product Owner rulings held only in this document	–	–	ACC-S41 MINTED HERE
Defect · `DEF-CUS-4625`, open — a refusal that outlived its cause	–	–	ACC-S3
Defect · `DEF-352`, open — the exemption the seven-glyph rail rests on	–	–	NO COMMITMENT — left open, see below

One is deliberately left without a commitment, and it is the only one. `DEF-352` is open, and this document leans on it to exempt the seven-glyph rail from UI-RULES 15. The defect is on `RowActions.tsx` rendered on Premises and Units — another module's screens. **Whether the Accounts rail is exempt on its own merits, or exempt only until somebody fixes a defect on a shared component, is a question for the Product Owner and not one this document may answer.** It is listed rather than minted for exactly that reason.